

# UltraScale and UltraScale+ FPGAs Packaging and Pinouts

## *Product Specification*

UG575 (v1.17) September 1, 2021



# Revision History

The following table shows the revision history for this document.

Date	Version	Revision
9/01/2021	1.17	Revised the design of the <a href="#">XCAU20P Bank Diagrams</a> in <a href="#">Figure 1-65</a> , <a href="#">Figure 1-66</a> , and <a href="#">Figure 1-67</a> . Also updated <a href="#">Table 1-7</a> with revised banks. Updated <a href="#">Table 3-5</a> to add the <a href="#">FFVB676 (XCAU20P)</a> section.
8/05/2021	1.16	Added the following Artix UltraScale+ FPGA specifications throughout the guide: <ul style="list-style-type: none"> <li>• XCAU20P in the SFVB784 and FFVB676 packages</li> <li>• XCAU25P in the SFVB784 and SFVB784 packages</li> </ul> Added note below <a href="#">Figure 1-129: XCVU23P Banks in VSVA1365 Package, page 176</a> . Corrected a pin error in <a href="#">Figure 3-177</a> and <a href="#">Figure 3-179</a> . Added a Tip on the MDDS file information to the <a href="#">Mechanical Drawings Summary</a> .
1/21/2020	1.15	Added the following specifications throughout the guide: <ul style="list-style-type: none"> <li>• XCVU23P in the VSVA1365 and FSVJ1760 packages</li> <li>• XCKU19P in FFVJ1760 and FFVB2104 packages</li> <li>• XCVU57P in the FSVK2892 package</li> </ul> Chapter 4: Added <a href="#">Table 4-2</a> and updated the following mechanical drawings: <ul style="list-style-type: none"> <li>• <a href="#">FSVH1924 (XCVU31P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA</a></li> <li>• <a href="#">FSVH2104 (XCVU33P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA</a></li> <li>• <a href="#">FSVH2104 (XCVU35P and XCVU45P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA</a></li> <li>• <a href="#">FSVH2892 (XCVU35P and XCVU45P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA</a></li> <li>• <a href="#">FSVH2892 (XCVU37P and XCVU47P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA</a></li> <li>• <a href="#">FSVA3824 and FSVB3824 (XCVU19P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA</a></li> </ul> Chapter 7: Removed the <i>Typical Conditions for IR Reflow Soldering of Ceramic Column Grid Array Packages</i> section, including <a href="#">Figure 7-2</a> , because the <i>Radiation Tolerant Kintex UltraScale XQRKU060 FPGA Data Sheet (DS882)</i> has this content. Chapter 8: Updated the <a href="#">Stencil</a> section. Chapter 10: Updated the <i>Important</i> note in the <a href="#">Thermal Resistance Data</a> section.

Date	Version	Revision
3/18/2020	1.14	<p>Updated <a href="#">Table 2-1</a>, <a href="#">Table 3-4</a>, and <a href="#">Table 4-1</a> XCVU19P (FSVA3824 and FSVB3824 packages) to production.</p> <p><a href="#">Chapter 5</a>: Updated definitions in <a href="#">Table 5-1</a> for when the bar code contains the mark information. Updated <a href="#">Figure 5-2</a>, <a href="#">Figure 5-3</a>, <a href="#">Figure 5-4</a>, and <a href="#">Figure 5-5</a> with the updated mark images.</p> <p><a href="#">Chapter 7</a>: Added the <i>Typical Conditions for IR Reflow Soldering of Ceramic Column Grid Array Packages</i> section. Updated the <a href="#">Pb-Free Reflow Soldering</a> section including adding <a href="#">Table 7-2</a> and <a href="#">Table 7-3</a>, changes to <a href="#">Table 7-4</a> (mass reflow), heating rate recommendations, and other discussions including adding photos of thermocouples. Updated the <a href="#">Conformal Coating</a> recommendation. Added a <a href="#">Strain Gauge Measurement</a> section, moved and updated the <a href="#">Solder Paste</a> section, and added the <a href="#">Component Placement</a> section.</p> <p><a href="#">Chapter 8</a>: Updated the <a href="#">BGA Packages</a> section, added the <a href="#">Stencil</a> section, and moved the <a href="#">Solder Paste</a> section.</p> <p><a href="#">Chapter 9</a>: Added the <a href="#">Component Clearance Surrounding Edge Bond</a> section and updated the <a href="#">Edge Bond Removal</a> section.</p> <p><a href="#">Chapter 11</a>: Updated the <a href="#">Applied Pressure from Heat Sink to the Package via Thermal Interface Materials</a> section.</p>
9/27/2019	1.13	<p>Added XCVU19P (FSVA3824 and FSVB3824 packages). Added the XCVU45P (FSVH2104 and FSVH2892) and XCVU47P (FSVH2892) devices/package combinations to appropriate tables and chapters.</p> <p><a href="#">Chapter 1</a>: Added <a href="#">Table 1-8: I/O Bank Migration for VU19P devices: HP I/O Banks are Unshaded and HD I/O Banks are in Dark Gray</a>. Updated <a href="#">Figure 1-123</a> GTY Quad power supply designations on the right side.</p> <p><a href="#">Chapter 3</a>: Updated <a href="#">Figure 3-165</a>, <a href="#">Figure 3-166</a>, <a href="#">Figure 3-167</a>, and <a href="#">Figure 3-168</a>.</p> <p><a href="#">Chapter 7</a>: Revised the maximum peak temperature range from 240°C–250°C to 245°C–250°C.</p> <p><a href="#">Chapter 8</a>: Updated discussions, added the <a href="#">Bull's Eye Stencil Recommendation</a> section with <a href="#">Figure 8-3</a> and the <a href="#">Solder Paste</a> section.</p> <p><a href="#">Chapter 9</a>: Added chapter.</p>

Date	Version	Revision
3/20/2019	1.12	<p><b>Chapter 1:</b> Added an Important note about XQ devices with eutectic BGA balls on <a href="#">page 20</a>. Added the XQKU5P (FFRB676, SFRB784), XQKU15P (FFRA1156, FFRE1517), XQVU3P (FFRC1517), XQVU7P (FLRA2104, FLRB2104), and XQVU11P (FLRC2104) device/package combinations to <a href="#">Table 1-1</a>, <a href="#">Table 1-2</a>, <a href="#">Table 1-4</a>, <a href="#">Table 1-6</a>, <a href="#">Table 1-7</a>, <a href="#">Table 1-9</a>, <a href="#">Table 1-9</a>, and the appropriate figures in the <a href="#">Device Diagrams</a> section. In <a href="#">Table 1-5</a>, corrected <a href="#">D[04 to 31]</a> configuration data pins label and added note to <a href="#">VCCAUX_IO</a>. Revised the <a href="#">XCVU31P Bank Diagrams</a>, <a href="#">XCVU33P Bank Diagrams</a>, <a href="#">XCVU35P and XCVU45P Bank Diagrams</a>, <a href="#">XCVU37P and XCVU47P Bank Diagrams</a> and to show the correct PCIE4 and PCIE4C banks. Added the XCVU27P (FIGD2104, FSGA2577) and XCVU29P (FIGD2104, FSGA2577) devices. This includes adding <a href="#">Table 1-3</a> and updates to <a href="#">Table 1-1</a>, <a href="#">Table 1-4</a>, <a href="#">Table 1-5</a>, <a href="#">Table 1-6</a>, <a href="#">Table 1-7</a>, <a href="#">Table 1-9</a>, and the appropriate figures in the <a href="#">Device Diagrams</a> section. Updated the <a href="#">XCVU27P Bank Diagrams</a>.</p> <p><b>Chapter 2:</b> Added an Important note about XQ devices with eutectic BGA balls on <a href="#">page 195</a>. In <a href="#">Table 2-1</a>, added the XCVU27P (FIGD2104, FSGA2577) and XCVU29P (FIGD2104, FSGA2577) devices and the XQKU5P (FFRB676, SFRB784), XQKU15P (FFRA1156, FFRE1517), XQVU3P (FFRC1517), XQVU7P (FLRA2104, FLRB2104), and XQVU11P (FLRC2104) device/package combinations.</p> <p><b>Chapter 3:</b> Added an Important note about XQ devices with eutectic BGA balls on <a href="#">page 199</a>. In <a href="#">Table 3-3</a>, added the XQKU5P (FFRB676, SFRB784), XQKU15P (FFRA1156, FFRE1517) device/package combinations. In <a href="#">Table 3-4</a>, added the XCVU27P (FIGD2104, FSGA2577), XCVU29P (FIGD2104, FSGA2577), XQVU3P (FFRC1517), XQVU7P (FLRA2104, FLRB2104), and XQVU11P (FLRC2104) device/package combinations.</p> <p><b>Chapter 4:</b> Added to the <a href="#">Summary</a> information on XQ devices with eutectic BGA balls and updated <a href="#">Table 4-1</a> with the packages specific to the XQ versions. In <a href="#">Table 4-1</a>, added the mechanical drawings for the XQKU5P (FFRB676, SFRB784), XQKU15P (FFRA1156, FFRE1517), XQVU3P (FFRC1517), XQVU7P (FLRA2104, FLRB2104), and XQVU11P (FLRC2104), and updated the FIGD2104 and FSGA2577 drawings to add the XCVU27P and XCVU29P.</p> <p><b>Chapter 5:</b> Added <a href="#">Figure 5-6</a> and updated <a href="#">Table 5-1</a>.</p> <p><b>Chapter 6:</b> Updated <a href="#">Table 6-1</a> with the FSGA2577 package and the XQ packages (FFRB676, SFRB784, FFRA1156, FFRC1517, FFRE1517, FLRA2104, FLRB2104, FLRC2104). Added an Important note about XQ devices with eutectic BGA balls on <a href="#">page 462</a>.</p> <p><b>Chapter 7:</b> Updated the Sn/Pb reflow soldering guidelines including changes to <a href="#">Figure 7-2</a>. Added the FSGA2577 package and the XQ packages (FFRB676, SFRB784, FFRA1156, FFRC1517, FFRE1517, FLRA2104, FLRB2104, FLRC2104) to <a href="#">Table 7-4</a> and added <a href="#">Note 2</a>. Updated the <a href="#">Conformal Coating</a> section.</p> <p><b>Chapter 10:</b> Added an Important note about XQ devices with eutectic BGA balls on <a href="#">page 482</a>. Updated <a href="#">Table 10-1</a> with new data. Although the same information was already in <a href="#">Note 2</a> at the end of <a href="#">Table 10-1</a>, it is repeated in an additional Important note on <a href="#">page 481</a>. Added an Important note about XQ devices with eutectic BGA balls on <a href="#">page 482</a>. In <a href="#">Table 10-1</a>, revised <a href="#">FFVE900</a> values, added the XCVU27P (FIGD2104, FSGA2577), XCVU29P (FIGD2104, FSGA2577), XQKU5P (FFRB676, SFRB784), XQKU15P (FFRA1156, FFRE1517), XQVU3P (FFRC1517), XQVU7P (FLRA2104, FLRB2104), and XQVU11P (FLRC2104) device/package data. Also added data to the XCVU31P, XCVU33P, XCVU35P, and XCVU37P devices.</p> <p><b>Chapter 11:</b> Updated applied pressure range in Recommended note on <a href="#">page 493</a> to 20–50 psi.</p>

Date	Version	Revision
8/23/2018	1.11	<p><b>Chapter 1:</b> In <a href="#">Table 1-5</a>, updated the <a href="#">GC or HDGC</a> direction to Input/Output. In <a href="#">Table 1-9</a>, updated the XCVU160-FLGB2104 map to change the 233 quad location and added the 233 and 133 quads to XCVU160-FLGC2104 map.</p> <p><b>Chapter 2:</b> In <a href="#">Table 2-1</a>, updated the XCVU31P-FSVH1924, XCVU33P/XCVU35P-FSVH2104, XCVU13P-FSGA2577, and XCVU35P/XCVU37P-FSVH2892 to production and revised the links.</p> <p><b>Chapter 3:</b> In <a href="#">Table 3-4</a>, updated the XCVU31P-FSVH1924, XCVU33P/XCVU35P-FSVH2104, XCVU13P-FSGA2577, and XCVU35P/XCVU37P-FSVH2892 to production.</p> <p><b>Chapter 4:</b> In <a href="#">Table 4-1</a>, updated the mechanical drawing status for XCVU31P-FSVH1924, XCVU33P/XCVU35P-FSVH2104, XCVU13P-FSGA2577, and XCVU35P/XCVU37P-FSVH2892 to production.</p> <p><b>Chapter 10:</b> In <a href="#">Table 10-1</a>, added the XCVU31P-FSVH1924, XCVU33P/XCVU35P-FSVH2104, XCVU13P-FSGA2577, and XCVU35P/XCVU37P-FSVH2892 devices.</p>
4/09/2018	1.10	<p><b>Chapter 1:</b> Updated the <a href="#">Bank Locations of Dedicated and Multi-Function Pins</a> section. Added the XCVU13P-FSGA2577 device/package combination and the XCVU31P, XCVU33P, XCVU35P, and XCVU37P devices. This includes updates to <a href="#">Table 1-1</a>, <a href="#">Table 1-2</a>, <a href="#">Table 1-4</a>, <a href="#">Table 1-5</a>, <a href="#">Table 1-6</a>, <a href="#">Table 1-7</a>, and <a href="#">Table 1-9</a>. Added <a href="#">Figure 1-137</a>, <a href="#">Figure 1-138</a>, <a href="#">Figure 1-139</a>, <a href="#">Figure 1-140</a>, <a href="#">Figure 1-141</a>, <a href="#">Figure 1-142</a>, <a href="#">Figure 1-143</a>, <a href="#">Figure 1-144</a>, and <a href="#">Figure 1-145</a>.</p> <p><b>Chapter 2:</b> Added the XCVU13P-FSGA2577 device/package combination and the XCVU31P, XCVU33P, XCVU35P, and XCVU37P devices to <a href="#">Table 2-1</a>.</p> <p><b>Chapter 3:</b> Added the XCVU13P-FSGA2577 device/package combination and the XCVU31P, XCVU33P, XCVU35P, and XCVU37P devices to <a href="#">Table 3-4</a>.</p> <p><b>Chapter 4:</b> Added the XCVU13P-FSGA2577 device/package combination and the XCVU31P, XCVU33P, XCVU35P, and XCVU37P devices to <a href="#">Table 4-1</a>.</p> <p><b>Chapter 6:</b> Added the FSVH1924, FSVH2104, FSGA2577, and FSVH2892 packages to <a href="#">Table 6-1</a>.</p> <p><b>Chapter 7:</b> Added the FSVH1924, FSVH2104, FSGA2577, and FSVH2892 packages to <a href="#">Table 7-4</a>.</p> <p><b>Chapter 10:</b> Added the XCVU13P-FSGA2577 device/package combination and the XCVU31P, XCVU33P, XCVU35P, and XCVU37P devices to <a href="#">Table 10-1</a>.</p> <p><b>Chapter 13:</b> Added a link to <a href="#">Mechanical and Thermal Design Guidelines for Lidless Flip-Chip Packages Application Note (XAPP1301)</a>.</p>
12/15/2017	1.9	<p><b>Chapter 2, Package Files:</b> Updated links and package designations in <a href="#">Table 2-1</a>.</p> <p><b>Chapter 3, Device Diagrams:</b> Updated package designations in <a href="#">Table 3-3</a> and <a href="#">Table 3-4</a>. Added <a href="#">Figure 3-93</a>, <a href="#">Figure 3-94</a>, <a href="#">Figure 3-147</a>, and <a href="#">Figure 3-148</a>.</p> <p><b>Chapter 4, Mechanical Drawings:</b> Updated package designations in <a href="#">Table 4-1</a>. Added <a href="#">Figure 4-49</a>. Updated <a href="#">Figure 4-50</a> (the dimensions inside the Top View changed). Added <a href="#">Figure 4-51</a>.</p> <p><b>Chapter 10, Thermal Specifications:</b> Added <a href="#">Note 2</a> to <a href="#">Table 10-1</a>.</p> <p><b>Chapter 11, Thermal Management Strategy</b> updated the <a href="#">System Level Heat Sink Solutions</a> and <a href="#">Heat Sink Removal</a> sections. Added the <a href="#">Measurement Debug</a> section.</p> <p><b>Chapter 13, Mechanical and Thermal Design Guidelines for Lidless Flip-chip Packages</b> was added to user guide.</p>

Date	Version	Revision
8/25/2017	1.8	<p><b>Chapter 1, Packaging Overview:</b> In <a href="#">Table 1-4</a>, corrected (increased) the available HP I/O pin counts for the XCKU095-FFVB2104. In <a href="#">Table 1-5</a>, revised the <a href="#">VCCINT_IO</a> description. In <a href="#">Table 1-7</a>, updated the <a href="#">XCKU5P-FFVB676</a> mapping and added the <a href="#">XCKU095-FFVC1517</a>. Added at Tip on <a href="#">page 65</a>. Updated bank designations in <a href="#">Figure 1-8</a>, <a href="#">Figure 1-13</a>, <a href="#">Figure 1-15</a>, <a href="#">Figure 1-28</a>, <a href="#">Figure 1-32</a>, <a href="#">Figure 1-35</a>, all <a href="#">XCVU080 Bank Diagrams</a>, <a href="#">XCVU095 Bank Diagrams</a>, <a href="#">Figure 1-52</a>, <a href="#">XCKU9P Bank Diagrams</a>, <a href="#">Figure 1-85</a>, <a href="#">XCKU13P Bank Diagrams</a>, and <a href="#">XCKU15P and XQKU15P Bank Diagrams</a>.</p> <p><b>Chapter 2, Package Files:</b> Updated links and package designations in <a href="#">Table 2-1</a>.</p> <p><b>Chapter 3, Device Diagrams:</b> Updated package designations in <a href="#">Table 3-3</a> and <a href="#">Table 3-4</a>. Added <a href="#">Figure 3-99</a> and <a href="#">Figure 3-100</a>. Updated <a href="#">Figure 3-103</a> and <a href="#">Figure 3-104</a>. Added <a href="#">Figure 3-127</a>, <a href="#">Figure 3-128</a>, <a href="#">Figure 3-141</a>, <a href="#">Figure 3-142</a>, <a href="#">Figure 3-149</a>, and <a href="#">Figure 3-150</a>.</p> <p><b>Chapter 4, Mechanical Drawings:</b> Updated package designations in <a href="#">Table 4-1</a>.</p> <p><b>Chapter 5, Package Marking:</b> Updated the Top Marks for <a href="#">Figure 5-2</a> and <a href="#">Figure 5-3</a> to show the date code and lot number on the bar code version. Added package types to <a href="#">Table 5-1</a>.</p> <p><b>Chapter 6, Packing and Shipping:</b> Added package types to <a href="#">Table 6-1</a>.</p> <p><b>Chapter 7, Soldering Guidelines:</b> Added guidelines for lidless packages with stiffener ring and updated <a href="#">Table 7-1</a>. Revised the Mass Reflow from 250°C to 245°C on a number of package types in <a href="#">Table 7-4</a>. Revised <a href="#">Figure 7-2</a> with new guidelines.</p> <p><b>Chapter 10, Thermal Specifications:</b> Added package types to <a href="#">Table 10-1</a>.</p> <p>Added <a href="#">Documentation Navigator and Design Hubs in Appendix A</a>.</p>
4/27/2017	1.7.1	<p>Replaced the <a href="#">FFVE1760 (XCKU15P)</a> figures in <a href="#">Chapter 3, Device Diagrams</a>.</p>
4/26/2017	1.7	<p>Added the <a href="#">XQKU040</a>, <a href="#">XQKU060</a>, <a href="#">XQKU095</a>, and <a href="#">XQKU115</a> devices where applicable. Added the <a href="#">RBA676</a>, <a href="#">RFA1156</a>, <a href="#">RLD1517</a>, and <a href="#">RLF1924</a> packages where applicable.</p> <p><b>Chapter 1, Packaging Overview:</b> Updated <a href="#">Note 5</a> in <a href="#">Table 1-5</a>. Revised <a href="#">Table 1-6</a>, <a href="#">Table 1-7</a>, and <a href="#">Table 1-9</a>. Added notes and recommendations to the <a href="#">SYSMON, Configuration, PCIe, Interlaken, and 100GE Integrated Blocks</a> section. Revised many of the <a href="#">Device Diagrams</a>.</p> <p><b>Chapter 2, Package Files:</b> Updated the links. Added and updated package files for Virtex UltraScale+ and Kintex UltraScale+ FPGAs.</p> <p><b>Chapter 3, Device Diagrams:</b> Added and updated diagrams for Virtex UltraScale+ and Kintex UltraScale+ FPGAs.</p> <p><b>Chapter 4, Mechanical Drawings:</b> Added and replaced many of the mechanical drawings for the Virtex UltraScale+ and Kintex UltraScale+ devices.</p> <p><b>Chapter 5, Package Marking:</b> Updated the Virtex UltraScale and Kintex UltraScale device top-mark diagrams to include the bar code top-mark diagrams. Added the Virtex UltraScale+ and Kintex UltraScale+ device top-mark diagrams.</p> <p><b>Chapter 7, Soldering Guidelines:</b> Added the <a href="#">Sn/Pb Reflow Soldering</a> section. Updated the <a href="#">Conformal Coating</a> recommendation.</p>

Date	Version	Revision
4/25/2016	1.6	<p>Added Kintex UltraScale+ and Virtex UltraScale+ FPGAs.</p> <p><a href="#">Chapter 1, Packaging Overview</a>: Revised <a href="#">GC or HDGC</a> description and added <a href="#">RSVDGND</a> to <a href="#">Table 1-5</a>. Revised the <a href="#">Die Level Bank Numbering Overview</a> section including adding and replacing figures and removing tables.</p> <p><a href="#">Chapter 2, Package Files</a>: Updated the links.</p> <p><a href="#">Chapter 3, Device Diagrams</a>: Corrected <a href="#">Figure 3-7</a> and <a href="#">Figure 3-8</a>.</p> <p><a href="#">Chapter 4, Mechanical Drawings</a>: Updated top-lid flat-surface dimension from 31.05 sq. max. to 29.70sq. max. in <a href="#">Figure 4-12</a> (FFVA1156). Updated the top-lid flat-surface dimension from 29.10 max. to 29.70 sq. max. in <a href="#">Figure 4-13</a> (FFVA1156) and <a href="#">Figure 4-14</a> (FFVA1156). Added top-lid flat-surface dimension 33.10 in <a href="#">Figure 4-19</a> (FFVA1517). Update dimension A nominal from 3.61 to 3.51 in <a href="#">Figure 4-25</a> (FFVB1760). Updated <a href="#">Figure 4-42</a> (FLGB2104) to add a missing decimal point. Updated <a href="#">Figure 4-45</a> (FFVC2104) with the correct package dimensions.</p> <p><a href="#">Chapter 7, Soldering Guidelines</a>: Updated the device list in <a href="#">Table 7-4</a>.</p> <p><a href="#">Chapter 11, Thermal Management Strategy</a>: Added a new recommendation and <a href="#">Figure 11-3</a>.</p>
10/19/2015	1.5	<p>Added the XCKU025 and the XCKU095 in the FFVA1156 package.</p> <p>In <a href="#">Chapter 1, Packaging Overview</a>, updated SFVA784 package in <a href="#">Table 1-7</a>, <a href="#">Table 1-9</a> and <a href="#">Table 1-10</a>. Updated the FLVB1760 rows in <a href="#">Table 1-9</a>. Added an important note in <a href="#">Footprint Compatibility between Packages</a>. Replaced <a href="#">Figure 1-13</a>.</p> <p>In <a href="#">Chapter 3, Device Diagrams</a>, replaced the SFVA784 drawings in <a href="#">Figure 3-3</a> and <a href="#">Figure 3-4</a> with updated pinouts. Updated <a href="#">Figure 3-43</a> and <a href="#">Figure 3-44</a>.</p> <p>In <a href="#">Chapter 4, Mechanical Drawings</a>, updated <a href="#">Figure 4-6</a> (SFVA784) and <a href="#">Figure 4-13</a> (FFVA1156), and corrected the heading for <a href="#">Figure 4-42</a> to include FLGB2104 and FLGC2104. Replaced <a href="#">Figure 4-42</a>, <a href="#">Figure 4-54</a>, <a href="#">Figure 4-55</a>, and <a href="#">Figure 4-59</a>.</p> <p>In <a href="#">Chapter 8, Recommended PCB Design Rules for BGA Packages</a>, updated <a href="#">Table 8-1</a>.</p> <p>In <a href="#">Chapter 10, Thermal Specifications</a>, added thermal resistance data to <a href="#">Table 10-1</a>. Substantial edits to the <a href="#">Introduction</a>, <a href="#">Thermal Resistance Data</a>, and <a href="#">Support for Thermal Models</a> sections. Added a new recommendation on <a href="#">page 487</a>.</p> <p>In <a href="#">Chapter 11, Thermal Management Strategy</a>, removed <a href="#">Design and Silicon</a> section, updated the <a href="#">Flip-Chip Packages</a> and <a href="#">System Level Heat Sink Solutions</a> sections, removed the <a href="#">Thermal Management Options</a> section, added more information to <a href="#">Types of TIM</a>, removed the <a href="#">Comparing the Types of Interface Materials</a> section, added the <a href="#">Applied Pressure from Heat Sink to the Package via Thermal Interface Materials</a> section, and removed the <a href="#">Package Pressure Handling Capacity</a> section.</p> <p>In <a href="#">Chapter 12, Heat Sink Guidelines for Bare-die Flip-Chip Packages</a>, removed the <a href="#">Package Loading Specifications</a> section.</p>
5/13/2015	1.4	<p>Added the XCKU035 and XCKU040 devices in the SFVA784 package throughout this guide. Added XCKU085 and XCKU095 updates throughout including <a href="#">Table 1-7</a>, <a href="#">Table 1-9</a>, and <a href="#">Table 3-1</a>.</p> <p>In <a href="#">Chapter 1, Packaging Overview</a>, in <a href="#">Table 1-5</a> changed <a href="#">D01_DIN_0</a>, <a href="#">D02_0</a>, and <a href="#">D03_0</a> to bidirectional. Updated <a href="#">Figure 1-9</a> to <a href="#">Figure 1-14</a> with new GTH Quad placements.</p> <p>In <a href="#">Chapter 4, Mechanical Drawings</a>, updated <a href="#">Table 4-1</a> and the specific mechanical drawings of the SFVA784, FBVA900, FLVA1517, FLVD1517, FLVB1760, FLVA2104, FLVB2104, FLGB2104, FFVC2104, FLVC2104, and FLGC2104.</p>

Date	Version	Revision
3/23/2015	1.3	<p>Updated the <a href="#">Differences from Previous Generations</a> section. In <a href="#">Table 1-5</a>, updated VCCINT and VCCAUX descriptions and the <a href="#">Multi-gigabit Serial Transceiver Pins (GTHE3 and GTYE3)</a> section. Updated the <a href="#">Die Level Bank Numbering Overview</a> section including adding the <a href="#">SYSMON, Configuration, PCIe, Interlaken, and 100GE Integrated Blocks</a> section. Replaced <a href="#">Figure 1-4</a> through <a href="#">Figure 1-62</a> and updated information in <a href="#">Table 1-9</a> through <a href="#">Table 1-21</a>. Removed the XCKU075 and XCKU100 throughout. Added the XCKU085 and XCKU095 where data is available.</p> <p>In <a href="#">Chapter 2, Package Files</a>, updated the links to the ASCII files.</p> <p>In <a href="#">Chapter 3, Device Diagrams</a>, updated <a href="#">Figure 3-13</a>, <a href="#">Figure 3-14</a> and added numerous new figures.</p> <p>In <a href="#">Chapter 4, Mechanical Drawings</a>, removed the <a href="#">FBVA900</a> mechanical drawings and updated <a href="#">Figure 4-22</a>.</p> <p>In <a href="#">Chapter 5, Package Marking</a>, added to the 2nd line description in <a href="#">Table 5-1</a>.</p> <p>Revised <a href="#">Table 10-1</a>.</p>
1/12/2015	1.2	<p>Revised the device/package combinations per the update to the <i>UltraScale Architecture and Product Overview</i> (DS890) [Ref 1]. This revision was throughout the guide in every table with package listings, <a href="#">Package Files</a>, <a href="#">Device Diagrams</a>, and <a href="#">Mechanical Drawings</a>.</p> <p>Updated <a href="#">Table 1-16</a>, <a href="#">Table 1-17</a>, and replaced <a href="#">Table 1-18</a>, <a href="#">Table 1-19</a>, and <a href="#">Table 1-20</a>.</p> <p>Updated descriptions in <a href="#">Table 5-1</a>.</p> <p>Updated descriptions in <a href="#">Table 7-4</a>.</p> <p>Revised and added to <a href="#">Table 10-1</a>.</p> <p>Added references to <a href="#">Appendix A</a>.</p>



Date	Version	Revision
9/04/2014	1.1	<p>Added a discussion on ULA materials on <a href="#">page 18</a>. In <a href="#">Differences from Previous Generations</a>, updated the differential clock pin pairs and the VREF pin discussion. Added the Virtex UltraScale FPGA packages to <a href="#">Table 1-1</a>. Also added the Virtex UltraScale devices to <a href="#">Table 1-2</a>, <a href="#">Table 1-4</a>, and <a href="#">Table 1-6</a>. Updated <a href="#">PERSTN[0 to 1]</a>, <a href="#">DOUT_CSO_B</a>, <a href="#">FWE_FCS2_B</a>, <a href="#">RS[0 to 1]</a>, <a href="#">RDWR_FCS_B_0</a>, <a href="#">D00_MOSI_0</a>, <a href="#">D01_DIN_0</a>, and <a href="#">VREF_[bank number]</a> descriptions. Updated <a href="#">Multi-gigabit Serial Transceiver Pins (GTHE3 and GTYE3)</a> pin names. Added <a href="#">Table 1-7</a> and <a href="#">Table 1-9</a>. Revised the <a href="#">T[0 to 3][U or L]</a> and <a href="#">N[0 to 12]</a> descriptions in the <a href="#">User I/O Pins</a> section of <a href="#">Table 1-5: Pin Definitions</a>. Updated the figures and added tables to the <a href="#">Die Level Bank Numbering Overview</a> section.</p> <p>Changed the TXT and CSV files associated with <a href="#">Table 2-1</a>. Also updated <a href="#">Table 2-1</a> with additional device/packages and links.</p> <p>In <a href="#">Chapter 3, Device Diagrams</a>, replaced or added figures.</p> <p>Added <a href="#">Figure 4-1</a> through <a href="#">Figure 4-4</a>. Replaced <a href="#">Figure 4-12</a> and <a href="#">Figure 4-13</a>. Added <a href="#">Figure 4-19</a> through <a href="#">Figure 4-13</a>.</p> <p>Added the Virtex UltraScale device package marking template to <a href="#">Chapter 5</a>.</p> <p>Clarified the maximum reflow soldering guidelines on <a href="#">page 463</a> and updated <a href="#">Table 7-4: Peak Package Reflow Body Temperature(1)</a>. Replaced <a href="#">Figure 7-2</a>. Removed the <a href="#">Sn/Pb Reflow Soldering</a> section from <a href="#">Chapter 7, Soldering Guidelines</a>. Added <a href="#">Post Reflow/Cleaning/Washing</a> and <a href="#">Conformal Coating</a> sections.</p> <p>Updated <a href="#">Thermal Management Options</a> and <a href="#">Figure 10-2</a>. Added <a href="#">Heat Sink Removal</a> and <a href="#">Package Pressure Handling Capacity</a> to <a href="#">Chapter 11</a>.</p> <p>Updated the links to references <a href="#">[Ref 21]</a>, <a href="#">[Ref 22]</a>, and <a href="#">[Ref 23]</a> in <a href="#">Appendix A</a>. Added further references.</p>
12/10/2013	1.0	Initial Xilinx release.

# Table of Contents

Revision History . . . . .	2
<b>Chapter 1: Packaging Overview</b>	
Introduction to the UltraScale Architecture . . . . .	17
Introduction to UltraScale and UltraScale+ FPGAs Packaging and Pinouts . . . . .	18
Differences from Previous Generations . . . . .	19
Device/Package Combinations . . . . .	20
Gigabit Transceiver Channels by Device/Package . . . . .	22
User I/O Pins by Device/Package . . . . .	28
Pin Definitions . . . . .	33
Footprint Compatibility between Packages . . . . .	40
Die Level Bank Numbering Overview . . . . .	63
<b>Chapter 2: Package Files</b>	
About ASCII Package Files . . . . .	193
Package Specifications Designations . . . . .	194
ASCII Pinout Files . . . . .	195
<b>Chapter 3: Device Diagrams</b>	
Summary . . . . .	199
FBVA676 Package–XCKU035 and XCKU040 and RBA676 Package–XQKU040 . . . . .	205
SFVA784 (XCKU035 and XCKU040) . . . . .	207
FBVA900 (XCKU035 and XCKU040) . . . . .	209
FFVA1156 (XCKU025) . . . . .	211
FFVA1156 (XCKU035) . . . . .	213
FFVA1156 (XCKU040) and RFA1156 (XQKU040) . . . . .	215
FFVA1156 (XCKU060) and RFA1156 (XQKU060) . . . . .	217
FFVA1156 (XCKU095) and RFA1156 (XQKU095) . . . . .	219
FFVA1517 (XCKU060) . . . . .	221
FLVA1517 (XCKU085 and XCKU115) . . . . .	223
FFVC1517 (XCKU095) . . . . .	225
FLVD1517 (XCKU115) and RLD1517 (XQKU115) . . . . .	227
FFVB1760 (XCKU095) . . . . .	229

FLVB1760 (XCKU085) .....	231
FLVB1760 (XCKU115) .....	233
FLVD1924 (XCKU115) .....	235
FLVF1924 (XCKU085) .....	237
FLVF1924 (XCKU115) and RLF1924 (XQKU115) .....	239
FLVA2104 (XCKU115) .....	241
FFVB2104 (XCKU095) .....	243
FLVB2104 (XCKU115) .....	245
FFVC1517 (XCVU065) .....	247
FFVC1517 (XCVU080 and XCVU095) .....	249
FFVD1517 (XCVU080 and XCVU095) .....	251
FLVD1517 (XCVU125) .....	253
FFVB1760 (XCVU080 and XCVU095) .....	255
FLVB1760 (XCVU125) .....	257
FFVA2104 (XCVU080 and XCVU095) .....	259
FLVA2104 (XCVU125) .....	261
FFVB2104 (XCVU080 and XCVU095) .....	263
FLVB2104 (XCVU125) .....	265
FLGB2104 (XCVU160 and XCVU190) .....	267
FFVC2104 (XCVU095) .....	269
FLVC2104 (XCVU125) .....	271
FLGC2104 (XCVU160 and XCVU190) .....	273
FLGB2377 (XCVU440) .....	275
FLGA2577 (XCVU190) .....	277
FLGA2892 (XCVU440) .....	279
FFVB676 (XCAU20P) .....	281
FFVB676 (XCAU25P) .....	283
SFVB784 (XCAU20P) .....	285
SFVB784 (XCAU25P) .....	287
FFVA676 (XCKU3P and XCKU5P) .....	289
FFVB676 (XCKU3P and XCKU5P) and FFRB676 (XQKU5P) .....	291
SFVB784 (XCKU3P and XCKU5P) and SFRB784 (XQKU5P) .....	293
FFVD900 (XCKU3P and XCKU5P) .....	295
FFVD900 (XCKU11P) .....	297
FFVE900 (XCKU9P) .....	299
FFVE900 (XCKU13P) .....	301
FFVA1156 (XCKU11P) .....	303
FFVA1156 (XCKU15P) and FFRA1156 (XQKU15P) .....	305
FFVE1517 (XCKU11P) .....	307
FFVE1517 (XCKU15P) and FFRE1517 (XQKU15P) .....	309

FFVA1760 (XCKU15P) .....	311
FFVE1760 (XCKU15P) .....	313
FFVJ1760 (XCKU19P) .....	315
FFVB2104 (XCKU19P) .....	317
FFVC1517 (XCVU3P) and FFRC1517 (XQVU3P) .....	319
FFVC1517 (XCVU3P) and FFRC1517 (XQVU3P) .....	320
FSVJ1760 (XCVU23P) .....	322
FLGF1924 (XCVU11P) .....	324
FSVH1924 (XCVU31P) .....	326
FLVA2104 (XCVU5P and XCVU7P) and FLRA2104 (XQVU7P) .....	328
FLGA2104 (XCVU9P) .....	330
FHGA2104 (XCVU13P) .....	332
FLVB2104 (XCVU5P and XCVU7P) and FLRB2104 (XQVU7P) .....	334
FLGB2104 (XCVU9P) .....	336
FLGB2104 (XCVU11P) .....	338
FHGB2104 (XCVU13P) .....	340
FLVC2104 (XCVU5P and XCVU7P) .....	342
FLGC2104 (XCVU9P) .....	344
FLGC2104 (XCVU11P) and FLRC2104 (XQVU11P) .....	346
FHGC2104 (XCVU13P) .....	348
FSGD2104 (XCVU9P) .....	350
FSGD2104 (XCVU11P) .....	352
FIGD2104 (XCVU13P) .....	354
FIGD2104 (XCVU27P) .....	356
FIGD2104 (XCVU29P) .....	358
FSVH2104 (XCVU33P) .....	360
FSVH2104 (XCVU35P and XCVU45P) .....	362
FLGA2577 (XCVU9P) .....	364
FLGA2577 (XCVU11P) .....	366
FLGA2577 and FSGA2577 (XCVU13P) .....	368
FSGA2577 (XCVU27P) .....	370
FSGA2577 (XCVU29P) .....	372
FSVH2892 (XCVU35P and XCVU45P) .....	374
FSVH2892 (XCVU37P and XCVU47P) .....	376
FSVK2892 (XCVU57P) .....	378
FSVA3824 (XCVU19P) .....	380
FSVB3824 (XCVU19P) .....	382
VSVA1365 (XCVU23P) .....	384

## Chapter 4: Mechanical Drawings

Summary.....	386
FBVA676 Bare-die Flip-Chip, Fine-Pitch BGA (XCKU035 and XCKU040).....	391
FFVA676 and FFVB676 Flip-Chip, Fine-Pitch BGA (XCAU20P, XCAU25P, XCKU3P, and XCKU5P).....	393
FFRB676 Ruggedized Flip-Chip, Fine-Pitch BGA (XQKU5P).....	394
RBA676 Ruggedized Flip-Chip, Fine-Pitch BGA (XQKU040).....	395
SFVA784 Flip-Chip, Chip-Scale (0.8 mm) BGA (XCKU035 and XCKU040).....	396
SFVB784 Flip-Chip, Super-Fine Pitch (0.8 mm) BGA (XCAU20P, XCAU25P, XCKU3P, and XCKU5P).....	397
SFRB784 Ruggedized Flip-Chip, Super Fine-Pitch BGA (XQKU5P).....	398
FBVA900 Bare-die Flip-Chip, Fine-Pitch BGA (XCKU035 and XCKU040).....	399
FFVD900 (XCKU3P, XCKU5P, and XCKU11P) and FFVE900 (XCKU9P and XCKU13P).....	401
FFVA1156 Flip-Chip, Fine-Pitch BGA (XCKU025, XCKU035, and XCKU040).....	402
FFVA1156 Flip-Chip, Fine-Pitch BGA (XCKU060, XCKU095, and XCKU11P).....	403
FFVA1156 Flip-Chip, Fine-Pitch BGA (XCKU15P).....	404
FFRA1156 Ruggedized Flip-Chip, Fine-Pitch BGA (XQKU15P).....	405
RFA1156 Ruggedized Flip-Chip, Fine-Pitch BGA (XQKU040).....	406
RFA1156 Ruggedized Flip-Chip, Fine-Pitch BGA (XQKU060 and XQKU095).....	407
VSVA1365 Flip-Chip, Fine-Pitch BGA (XCVU23P).....	408
FFVA1517, FFVC1517, and FFVD1517 Flip-Chip, Fine-Pitch BGA (XCKU060, XCKU095, XCVU065, XCVU080, XCVU095).....	409
FFVC1517 (XCVU3P) and FFVE1517 (XCKU11P and XCKU15P) Flip-Chip, Fine-Pitch BGA.....	410
FFRC1517 (XQVU3P) and FFRE1517 (XQKU15P) Ruggedized Flip-Chip, Fine-Pitch BGA.....	411
FLVA1517 (XCKU085 and XCKU115) and FLVD1517 (XCKU115 and XCVU125) Flip-Chip, Fine-Pitch BGA.....	412
RLD1517 Ruggedized Flip-Chip, Fine-Pitch BGA (XQKU115).....	413
FFVA1760 Flip-Chip, Fine-Pitch BGA (XCKU15P).....	414
FFVB1760 Flip-Chip, Fine-Pitch BGA (XCKU095, XCVU080, and XCVU095).....	415
FLVB1760 Flip-Chip, Fine-Pitch BGA (XCKU085, XCKU115, and XCVU125).....	416
FFVE1760 Flip-Chip, Fine-Pitch BGA (XCKU15P).....	417
FFVJ1760 Flip-Chip, Fine-Pitch BGA (XCKU19P).....	418
FSVJ1760 Flip-Chip, Fine-Pitch BGA (XCVU23P).....	419
FLVD1924 (XCKU115) and FLVF1924 (XCKU085 and XCKU115) Flip-Chip, Fine-Pitch BGA.....	420

FLGF1924 (XCVU11P) Flip-Chip, Fine-Pitch BGA. . . . .	421
RLF1924 (XQKU115) Ruggedized Flip-Chip, Fine-Pitch BGA . . . . .	422
FSVH1924 (XCVU31P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA . . . . .	423
FFVA2104 (XCVU080 and XCVU095) and FFVB2104 (XCKU095, XCVU080, and XCVU095) Flip-Chip, Fine-Pitch BGA . . . . .	424
FFVB2104 (XCKU19P) Flip-Chip, Fine-Pitch BGA . . . . .	425
FHGA2104 (XCVU13P) Flip-Chip, Fine-Pitch BGA. . . . .	426
FHGB2104 (XCVU13P) and FHGC2104 (XCVU13P) Flip-Chip, Fine-Pitch BGA. . . . .	427
FLVA2104 (XCKU115 and XCVU125) and FLVB2104 (XCKU115 and XCVU125) Flip-Chip, Fine-Pitch BGA . . . . .	428
FLVA2104 (XCVU5P and XCVU7P) and FLVB2104 (XCVU5P and XCVU7P) Flip-Chip, Fine-Pitch BGA. . 429	
FLRA2104 (XQVU7P) and FLRB2104 (XQVU7P) Ruggedized Flip-Chip, Fine-Pitch BGA. . . . .	430
FLGA2104 (XCVU9P) Flip-Chip, Fine-Pitch BGA . . . . .	431
FLGB2104 (XCVU160 and XCVU190) and FLGC2104 (XCVU160 and XCVU190) Flip-Chip, Fine-Pitch BGA . . . . .	432
FLGB2104 (XCVU9P and XCVU11P) and FLGC2104 (XCVU11P) Flip-Chip, Fine-Pitch BGA . . . . .	433
FLRC2104 (XQVU11P) Ruggedized Flip-Chip, Fine-Pitch BGA . . . . .	434
FFVC2104 (XCVU095) Flip-Chip, Fine-Pitch BGA . . . . .	435
FLGC2104 (XCVU9P) Flip-Chip, Fine-Pitch BGA . . . . .	436
FLVC2104 (XCVU125) Flip-Chip, Fine-Pitch BGA. . . . .	437
FLVC2104 (XCVU5P and XCVU7P) Flip-Chip, Fine-Pitch BGA. . . . .	438
FIGD2104 (XCVU13P, XCVU27P, and XCVU29P) Flip-Chip, Fine-Pitch BGA . . . . .	439
FSGD2104 (XCVU9P) Flip-Chip, Fine-Pitch BGA . . . . .	440
FSGD2104 (XCVU11P) Flip-Chip, Fine-Pitch BGA . . . . .	441
FSVH2104 (XCVU33P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA . . . . .	442
FSVH2104 (XCVU35P and XCVU45P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA . . .	443
FLGB2377 Flip-Chip, Fine-Pitch BGA (XCVU440) . . . . .	444
FLGA2577 Flip-Chip, Fine-Pitch BGA (XCVU190) . . . . .	445
FLGA2577 Flip-Chip, Fine-Pitch BGA (XCVU9P and XCVU13P) . . . . .	446
FLGA2577 Flip-Chip, Fine-Pitch BGA (XCVU11P) . . . . .	447
FSGA2577 Flip-Chip, Fine-Pitch BGA (XCVU13P, XCVU27P, and XCVU29P) . . . . .	448
FLGA2892 Flip-Chip, Fine-Pitch BGA (XCVU440) . . . . .	449
FSVH2892 (XCVU35P and XCVU45P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA . . .	450
FSVH2892 (XCVU37P and XCVU47P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA . . .	451
FSVK2892 (XCVU57P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA . . . . .	452
FSVA3824 and FSVB3824 (XCVU19P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA. . .	453

<b>Chapter 5: Package Marking</b>	
Introduction .....	454
<b>Chapter 6: Packing and Shipping</b>	
Introduction .....	461
<b>Chapter 7: Soldering Guidelines</b>	
Soldering Guidelines .....	463
Conformal Coating .....	470
Strain Gauge Measurement .....	470
Solder Paste .....	471
Component Placement .....	471
<b>Chapter 8: Recommended PCB Design Rules for BGA Packages</b>	
BGA Packages .....	473
Stencil .....	475
<b>Chapter 9: Edge Bonding Guidelines</b>	
Summary .....	477
Edge Bonding Implementation .....	477
Edge Bond Removal .....	480
<b>Chapter 10: Thermal Specifications</b>	
Introduction .....	481
Thermal Resistance Data .....	481
Support for Thermal Models .....	487
<b>Chapter 11: Thermal Management Strategy</b>	
Introduction .....	488
Thermal Interface Material .....	489
Heat Sink Removal .....	493
Measurement Debug .....	495
<b>Chapter 12: Heat Sink Guidelines for Bare-die Flip-Chip Packages</b>	
Heat Sink Attachments for Bare-die FB Packages .....	496
Types of Heat Sink Attachments .....	497
<b>Chapter 13: Mechanical and Thermal Design Guidelines for Lidless Flip-chip Packages</b>	
Introduction .....	502

Lidless Flip-Chip Packages .....	502
----------------------------------	-----

## Appendix A: Additional Resources and Legal Notices

Xilinx Resources .....	504
Solution Centers .....	504
Documentation Navigator and Design Hubs .....	504
References .....	505
Please Read: Important Legal Notices .....	507



# Packaging Overview

---

## Introduction to the UltraScale Architecture

The Xilinx® UltraScale™ architecture is the first ASIC-class architecture to enable multi-hundred gigabit-per-second levels of system performance with smart processing, while efficiently routing and processing data on-chip. UltraScale architecture-based devices address a vast spectrum of high-bandwidth, high-utilization system requirements by using industry-leading technical innovations, including next-generation routing, ASIC-like clocking, 3D-on-3D ICs, multiprocessor SoC (MPSoC) technologies, and new power reduction features. The devices share many building blocks, providing scalability across process nodes and product families to leverage system-level investment across platforms.

Virtex® UltraScale+™ devices provide the highest performance and integration capabilities in a FinFET node, including both the highest serial I/O and signal processing bandwidth, as well as the highest on-chip memory density. As the industry's most capable FPGA family, the Virtex UltraScale+ devices are ideal for applications including 1+Tb/s networking and data center and fully integrated radar/early-warning systems.

Virtex UltraScale devices provide the greatest performance and integration at 20 nm, including serial I/O bandwidth and logic capacity. As the industry's only high-end FPGA at the 20 nm process node, this family is ideal for applications including 400G networking, large scale ASIC prototyping, and emulation.

Kintex® UltraScale+ devices provide the best price/performance/watt balance in a FinFET node, delivering the most cost-effective solution for high-end capabilities, including transceiver and memory interface line rates as well as 100G connectivity cores. Our newest mid-range family is ideal for both packet processing and DSP-intensive functions and is well suited for applications including wireless MIMO technology, Nx100G networking, and data center.

Artix® UltraScale+ devices provide high serial bandwidth and signal compute density in a cost-optimized device for critical networking applications, vision and video processing, and secured connectivity. Coupled with the innovative InFO packaging, which provides excellent thermal and power distribution, Artix UltraScale+ devices are perfectly suited to applications requiring high compute density in a small footprint.

Kintex UltraScale devices provide the best price/performance/watt at 20 nm and include the highest signal processing bandwidth in a mid-range device, next-generation transceivers, and low-cost packaging for an optimum blend of capability and cost-effectiveness. The family is ideal for packet processing in 100G networking and data centers applications as well as DSP-intensive processing needed in next-generation medical imaging, 8k4k video, and heterogeneous wireless infrastructure.

Zynq® UltraScale+ MPSoC devices provide 64-bit processor scalability while combining real-time control with soft and hard engines for graphics, video, waveform, and packet processing. Integrating an Arm®-based system for advanced analytics and on-chip programmable logic for task acceleration creates unlimited possibilities for applications including 5G Wireless, next generation ADAS, and Industrial Internet-of-Things.

This packaging and pinout specification user guide is part of the UltraScale Architecture documentation suite available at: [www.xilinx.com/ultrascale](http://www.xilinx.com/ultrascale).

---

## Introduction to UltraScale and UltraScale+ FPGAs Packaging and Pinouts

This section describes the packages and pinouts for the UltraScale architecture-based FPGAs in various organic flip-chip 0.8 mm and 1.0 mm pitch BGA packages.

- Kintex UltraScale, Kintex UltraScale+, and Artix UltraScale+ devices are offered in low-cost, space-saving flip-chip and bare-die flip-chip packages that are optimally designed for high performance-to-price ratio.
- Virtex UltraScale and Virtex UltraScale+ devices are offered exclusively in high performance flip-chip BGA packages that are optimally designed for highest system capacity, bandwidth and signal performance. Package inductance is minimized as a result of optimal placement and even distribution as well as an increased number of power and GND pins.
- Zynq UltraScale+ MPSoCs are further described in the *Zynq UltraScale+ MPSoC Packaging and Pinouts User Guide* (UG1075) [Ref 4].



**IMPORTANT:** *Many of the standard packages for commercial (XC) devices are lead-free (signified by an additional V in the package name). All of the UltraScale or UltraScale+ devices supported in a particular package are footprint compatible. Each device is split into I/O banks to allow for flexibility in the choice of I/O standards. See the UltraScale Architecture SelectIO Resources User Guide (UG571) [Ref 5].*

UltraScale and UltraScale+ device's flip-chip assembly materials are manufactured using ultra-low alpha (ULA) materials defined as <0.002 cph/cm<sup>2</sup> or materials that emit less than 0.002 alpha-particles per square centimeter per hour.

## Differences from Previous Generations

The packaging and pinout specifications for UltraScale architecture-based FPGAs differ from past generations, including the 7 series devices. These details are outlined in this section.

- All packages are constructed on organic laminate substrates.
- Many of the package and die components, including flip-chip solder bumps, are lead-free. The FLGx devices have lead in their bumps.
- Package names contain a single-character alphabetic designator followed by the exact number of pins found on the package.
- VCCAUX\_IO pins are not divided into bank groups. VCCAUX\_IO must be connected to VCCAUX at the board level.
- Internal logic is separated from I/O logic by the addition of the VCCINT\_IO power pins. VCCINT\_IO must be connected to VCCINT at the board level.
- Groups of gigabit serial transceiver (GT) power pins are separated by column for each column of GT Quads/Duals.
- Standard I/O banks each have a total of 52 SelectIO™ pins, optionally configurable as up to 24 differential pairs.
- Each bank has one dedicated VREF pin. These pins cannot be used as user I/Os.
- Four differential clock pin pairs per bank (two per 26-pin bank) consist of a single type of global clock (GC) input.
- Four memory byte groups per I/O bank (two per 26-pin bank) are each separated into an upper and a lower memory byte group.
- All configuration pins are located in bank 0 and bank 65.
- A POR\_OVERRIDE pin is used to override the default power-on-reset delay. See [Table 1-5](#).

## Device/Package Combinations

Table 1-1 shows the size and BGA pitch of the UltraScale and UltraScale+ device packages. The devices with stacked-silicon interconnect (SSI) technology are labeled.



**IMPORTANT:** All packages are available with eutectic BGA balls. To order these packages, the device type starts with an XQ vs. XC, and the third digit in the package name is Q (for example: FFQA1156).

Table 1-1: Package Specifications

Packages <sup>(1)</sup>	Description	Package Specifications		
		Package Type	Pitch (mm)	Size (mm)
FBVA676	Bare-die, flip-chip, fine-pitch	BGA	1.0	27 x 27
FFVA676	Flip-chip, fine-pitch			
FFVB676				
FFRB676	Ruggedized, flip-chip, fine-pitch			
RBA676				
SFVA784	Flip-chip, super-fine-pitch		0.8	23 x 23
SFVB784				
SFRB784	Ruggedized, flip-chip, super-fine pitch			
FBVA900	Bare-die, flip-chip, fine-pitch		1.0	31 x 31
FFVD900	Flip-chip, fine-pitch			
FFVE900				
FFVA1156	Flip-chip, fine-pitch		0.92	35 x 35
FFRA1156	Ruggedized, flip-chip, fine-pitch			
RFA1156				
VSVA1365	Flip-chip, fine-pitch lidless with stiffener ring			
FFVA1517	Flip-chip, fine-pitch	1.0	40 x 40	
FFVC1517				
FFVD1517				
FFVE1517				
FFRC1517	Ruggedized, flip-chip, fine-pitch			
FFRE1517				
RLD1517	Ruggedized, SSI, flip-chip, fine-pitch			
FLVA1517	SSI, flip-chip, fine-pitch			
FLVD1517				

Table 1-1: Package Specifications (Cont'd)

Packages <sup>(1)</sup>	Description	Package Specifications			
		Package Type	Pitch (mm)	Size (mm)	
FFVA1760	Flip-chip, fine-pitch	BGA	1.0	42.5 x 42.5	
FFVB1760					
FFVE1760					
FFVJ1760					
FLVB1760	SSI, flip-chip, fine-pitch				
FSVJ1760	SSI, flip-chip, fine-pitch, lidless with stiffener ring				
FLGF1924	SSI, flip-chip, fine-pitch			45 x 45	
FLVD1924					
FLVF1924					
FSVH1924	SSI, flip-chip, fine-pitch, lidless with stiffener ring				
RLF1924	Ruggedized, SSI, flip-chip, fine-pitch				
FFVA2104	Flip-chip, fine-pitch				47.5 x 47.5
FFVB2104					
FFVC2104					
FLVA2104	SSI, flip-chip, fine-pitch				
FLVB2104					
FLVC2104					
FLGA2104	SSI, flip-chip, fine-pitch, RoHS 6/6 with exemption 15			47.5 x 47.5	
FLGB2104					
FLGC2104					
FLRA2104	Ruggedized, SSI, flip-chip, fine-pitch	47.5 x 47.5			
FLRB2104					
FLRC2104					
FSGD2104	SSI, flip-chip, fine-pitch, lidless with stiffener ring, RoHS 6/6 with exemption 15	47.5 x 47.5			
FSVH2104	SSI, flip-chip, fine-pitch, lidless with stiffener ring	47.5 x 47.5			
FHGA2104 <sup>(2)</sup>	SSI, flip-chip, fine-pitch, overhang, RoHS 6/6 with exemption 15	52.5 x 52.5			
FHGB2104 <sup>(2)</sup>					
FHGC2104 <sup>(2)</sup>					
FIGD2104 <sup>(2)</sup>	SSI, flip-chip, fine-pitch, overhang, lidless with stiffener ring, RoHS 6/6 with exemption 15	52.5 x 52.5			
FLGB2377	SSI, flip-chip, fine-pitch, RoHS 6/6 with exemption 15	50 x 50			
FLGA2577	SSI, flip-chip, fine-pitch, RoHS 6/6 with exemption 15	52.5 x 52.5			
FSGA2577	SSI, flip-chip, fine-pitch, lidless with stiffener ring, RoHS 6/6 with exemption 15	52.5 x 52.5			

Table 1-1: Package Specifications (Cont'd)

Packages <sup>(1)</sup>	Description	Package Specifications		
		Package Type	Pitch (mm)	Size (mm)
FLGA2892	SSI, flip-chip, fine-pitch, RoHS 6/6 with exemption 15	BGA	1.0	55 x 55
FSVH2892	SSI, flip-chip, fine-pitch, lidless with stiffener ring			55 x 55
FSVK2892				55 x 55
FSVA3824	SSI, flip-chip, fine-pitch, lidless with stiffener ring			65 x 65
FSVB3824	SSI, flip-chip, fine-pitch, lidless with stiffener ring			65 x 65

**Notes:**

1. FFV, FLV, and FLG packages are footprint compatible when the package code letter designator and pin count are identical. See *UltraScale Architecture and Product Overview* (DS890) [Ref 1] for specific letter codes and ordering code information.
2. These 52.5 x 52.5 packages have the same PCB ball footprint as the 47.5 x 47.5 packages and are footprint compatible.

## Gigabit Transceiver Channels by Device/Package

Table 1-2 lists the quantity of gigabit transceiver channels for the UltraScale and UltraScale+ devices. In all devices, a gigabit transceiver channel is one set of MGTRXP, MGTRXN, MGTTXP, and MGTTXN pins. For transceiver data rate limitations on specific device/package combinations, see the specific *UltraScale and UltraScale+ device data sheets* [Ref 4].

Table 1-2: Serial Transceiver Channels (GTH/GTY) by Device/Package

Device	Package	GTH Channels	GTY Channels
<b>Kintex UltraScale Devices</b>			
XCKU035	FBVA676	16	0
XCKU040		16	0
XCKU035	SFVA784	8	0
XCKU040		8	0
XCKU035	FBVA900	16	0
XCKU040		16	0
XCKU025	FFVA1156	12	0
XCKU035		16	0
XCKU040		20	0
XCKU060		28	0
XCKU095	FFVA1517	20	8
XCKU060		32	0
XCKU085		48	0
XCKU115	FLVA1517	48	0

Table 1-2: Serial Transceiver Channels (GTH/GTY) by Device/Package (Cont'd)

Device	Package	GTH Channels	GTY Channels
XCKU095	FFVC1517	20	20
XCKU115	FLVD1517	64	0
XCKU095	FFVB1760	32	16
XCKU085	FLVB1760	44	0
XCKU115		52	0
XCKU115	FLVD1924	52	0
XCKU085	FLVF1924	56	0
XCKU115		64	0
XCKU115	FLVA2104	52	0
XCKU095	FFVB2104	32	32
XCKU115	FLVB2104	64	0
XQKU040	RBA676	16	0
XQKU040	RFA1156	20	0
XQKU060		28	0
XQKU095		20	0
XQKU115	RLD1517	64	0
XQKU115	RLF1924	64	0
<b>Virtex UltraScale Devices</b>			
XCVU065	FFVC1517	20	20
XCVU080		20	20
XCVU095		20	20
XCVU080	FFVD1517	32	32
XCVU095		32	32
XCVU125	FLVD1517	40	32
XCVU080	FFVB1760	32	16
XCVU095		32	16
XCVU125	FLVB1760	36	16
XCVU080	FFVA2104	28	24
XCVU095		28	24
XCVU125	FLVA2104	28	24
XCVU080	FFVB2104	32	32
XCVU095		32	32
XCVU125	FLVB2104	40	36
XCVU160	FLGB2104	40	36
XCVU190		40	36

Table 1-2: Serial Transceiver Channels (GTH/GTY) by Device/Package (Cont'd)

Device	Package	GTH Channels	GTY Channels
XCVU095	FFVC2104	32	32
XCVU125	FLVC2104	40	40
XCVU160	FLGC2104	52	52
XCVU190		52	52
XCVU440	FLGB2377	36	0
XCVU190	FLGA2577	60	60
XCVU440	FLGA2892	48	0
<b>Artix UltraScale+ Devices</b>			
XCAU20P	FFVB676	0	12
XCAU25P		0	12
XCAU20P	SFVB784	0	12
XCAU25P		0	12
<b>Kintex UltraScale+ Devices</b>			
XCKU3P	FFVA676	0	16
XCKU5P		0	16
XCKU3P	FFVB676	0	16
XCKU5P		0	16
XCKU3P	SFVB784	0	16
XCKU5P		0	16
XCKU3P	FFVD900	0	16
XCKU5P		0	16
XCKU11P		16	0
XCKU9P	FFVE900	28	0
XCKU13P		28	0
XCKU11P	FFVA1156	20	8
XCKU15P		20	8
XCKU11P	FFVE1517	32	20
XCKU15P		32	24
XCKU15P	FFVA1760	44	32
XCKU15P	FFVE1760	32	24
XCKU19P	FFVJ1760	0	32
XCKU19P	FFVB2104	0	32
XQKU5P	FFRB676	0	16
XQKU5P	SFRB784	0	16



Table 1-2: Serial Transceiver Channels (GTH/GTY) by Device/Package (Cont'd)

Device	Package	GTH Channels	GTY Channels
XQKU15P	FFRA1156	20	8
XQKU15P	FFRE1517	32	24

Table 1-2: Serial Transceiver Channels (GTH/GTY) by Device/Package (Cont'd)

Device	Package	GTH Channels	GTY Channels
<b>Virtex UltraScale+ Devices</b>			
XCVU3P	FFVC1517	0	40
XCVU11P	FLGF1924	0	64
XCVU31P	FSVH1924	0	32
XCVU5P	FLVA2104	0	52
XCVU7P		0	52
XCVU9P	FLGA2104	0	52
XCVU13P	FHGA2104	0	52
XCVU5P	FLVB2104	0	76
XCVU7P		0	76
XCVU9P	FLGB2104	0	76
XCVU11P		0	76
XCVU13P	FHGB2104	0	76
XCVU5P	FLVC2104	0	80
XCVU7P		0	80
XCVU9P	FLGC2104	0	104
XCVU11P		0	96
XCVU13P	FHGC2104	0	104
XCVU9P	FSGD2104	0	76
XCVU11P		0	76
XCVU13P	FIGD2104	0	76
XCVU33P	FSVH2104	0	32
XCVU35P		0	64
XCVU45P		0	64
XCVU9P	FLGA2577	0	120
XCVU11P		0	96
XCVU13P		0	128
XCVU13P	FSGA2577	0	128
XCVU35P	FSVH2892	0	64
XCVU37P		0	96
XCVU45P		0	64
XCVU47P		0	96
XCVU19P	FSVA3824	0	48
XCVU19P	FSVB3824	0	80

Table 1-2: Serial Transceiver Channels (GTH/GTY) by Device/Package (Cont'd)

Device	Package	GTH Channels	GTY Channels
XQVU3P	FFRC1517	0	40
XQVU7P	FLRA2104	0	52
XQVU7P	FLRB2104	0	76
XQVU11P	FLRC2104	0	96

Table 1-3: Serial Transceiver Channels (GTH/GTY/GTM) by Device/Package

Device	Package	GTH Channels	GTY Channels	GTM Channels
<b>Virtex UltraScale+ Devices</b>				
XCVU23P	VSVA1365	0	34	4
XCVU23P	FSVJ1760	0	34	4
XCVU27P	FIGD2104	0	16	30
XCVU29P		0	16	30
XCVU27P	FSGA2577	0	32	48
XCVU29P		0	32	48
XCVU57P	FSVK2892	0	32	32

## User I/O Pins by Device/Package

Table 1-4 lists the number of available 3.3V-capable high-range (HR), 3.3V-capable high-density (HD), and 1.8V-capable high-performance (HP) I/Os and the number of differential I/O pairs for each UltraScale and UltraScale+ device/package combination.



**IMPORTANT:** Because of package inductance, each device/package supports a limited number of simultaneous switching outputs. Limitations for specific applications can be determined using the Vivado Design Suite report\_ssn tool. See the Simultaneous Switching Outputs section of the UltraScale Architecture SelectIO Resources User Guide (UG571) [Ref 5] for more information.

Table 1-4: Available I/O Pins by Device/Package

Device	Package	Total User I/O			Differential I/O		
		HD(1)	HR(1)	HP(1)	HD	HR	HP
<b>Kintex UltraScale Devices</b>							
XCKU035	FBVA676	0	104	208	0	96	192
XCKU040		0	104	208	0	96	192
XCKU035	SFVA784	0	104	364	0	96	336
XCKU040		0	104	364	0	96	336
XCKU035	FBVA900	0	104	364	0	96	336
XCKU040		0	104	364	0	96	336
XCKU025	FFVA1156	0	104	208	0	96	192
XCKU035		0	104	416	0	96	384
XCKU040		0	104	416	0	96	384
XCKU060		0	104	416	0	96	384
XCKU095		0	52	468	0	48	432
XCKU060	FFVA1517	0	104	520	0	96	480
XCKU085	FLVA1517	0	104	520	0	96	480
XCKU115		0	104	520	0	96	480
XCKU095	FFVC1517	0	52	468	0	48	432
XCKU115	FLVD1517	0	104	234	0	96	216
XCKU095	FFVB1760	0	52	598	0	48	552
XCKU085	FLVB1760	0	104	572	0	96	528
XCKU115		0	104	598	0	96	552
XCKU115	FLVA2104	0	156	676	0	144	624
XCKU095	FFVB2104	0	52	650	0	48	600
XCKU115	FLVB2104	0	104	598	0	96	552
XCKU115	FLVD1924	0	156	676	0	144	624

Table 1-4: Available I/O Pins by Device/Package (Cont'd)

Device	Package	Total User I/O			Differential I/O		
		HD(1)	HR(1)	HP(1)	HD	HR	HP
XCKU085	FLVF1924	0	104	520	0	96	480
XCKU115		0	104	624	0	96	576
XQKU040	RBA676	0	104	208	0	96	192
XQKU040	RFA1156	0	104	416	0	96	384
XQKU060		0	104	416	0	96	384
XQKU095		0	52	468	0	48	432
XQKU115	RLD1517	0	104	234	0	96	216
XQKU115	RLF1924	0	104	624	0	96	576
<b>Virtex UltraScale Devices</b>							
XCVU065	FFVC1517	0	52	468	0	48	432
XCVU080		0	52	468	0	48	432
XCVU095		0	52	468	0	48	432
XCVU080	FFVD1517	0	52	286	0	48	264
XCVU095		0	52	286	0	48	264
XCVU125	FLVD1517	0	52	286	0	48	264
XCVU080	FFVB1760	0	52	650	0	48	600
XCVU095		0	52	650	0	48	600
XCVU125	FLVB1760	0	52	650	0	48	600
XCVU080	FFVA2104	0	52	780	0	48	720
XCVU095		0	52	780	0	48	720
XCVU125	FLVA2104	0	52	780	0	48	720
XCVU080	FFVB2104	0	52	650	0	48	600
XCVU095		0	52	650	0	48	600
XCVU125	FLVB2104	0	52	650	0	48	600
XCVU160	FLGB2104	0	52	650	0	48	600
XCVU190		0	52	650	0	48	600
XCVU095	FFVC2104	0	52	364	0	48	336
XCVU125	FLVC2104	0	52	364	0	48	336
XCVU160	FLGC2104	0	52	364	0	48	336
XCVU190		0	52	364	0	48	336
XCVU440	FLGB2377	0	52	1248	0	48	1152
XCVU190	FLGA2577	0	0	448	0	0	412
XCVU440	FLGA2892	0	52	1404	0	48	1296

Table 1-4: Available I/O Pins by Device/Package (Cont'd)

Device	Package	Total User I/O			Differential I/O		
		HD(1)	HR(1)	HP(1)	HD	HR	HP
<b>Artix UltraScale+ Devices</b>							
XCAU20P	FFVB676	72	0	156	72	0	144
XCAU25P		72	0	208	72	0	192
XCAU20P	SFVB784	72	0	156	72	0	144
XCAU25P		96	0	208	96	0	192
<b>Kintex UltraScale+ Devices</b>							
XCKU3P	FFVA676	48	0	208	48	0	192
XCKU5P		48	0	208	48	0	192
XCKU3P	FFVB676	72	0	208	72	0	192
XCKU5P		72	0	208	72	0	192
XCKU3P	SFVB784	96	0	208	96	0	192
XCKU5P		96	0	208	96	0	192
XCKU3P	FFVD900	96	0	208	96	0	192
XCKU5P		96	0	208	96	0	192
XCKU11P		96	0	312	96	0	288
XCKU9P	FFVE900	96	0	208	96	0	192
XCKU13P		96	0	208	96	0	192
XCKU11P	FFVA1156	48	0	416	48	0	384
XCKU15P		48	0	468	48	0	432
XCKU11P	FFVE1517	96	0	416	96	0	384
XCKU15P		96	0	416	96	0	384
XCKU15P	FFVA1760	96	0	416	96	0	384
XCKU15P	FFVE1760	96	0	572	96	0	528
XCKU19P	FFVJ1760	72	0	468	72	0	432
XCKU19P	FFVB2104	72	0	468	72	0	432
XQKU5P	FFRB676	72	0	208	72	0	192
XQKU5P	SFRB784	96	0	208	96	0	192
XQKU15P	FFRA1156	48	0	468	48	0	432
XQKU15P	FFRE1517	96	0	416	96	0	384

Table 1-4: Available I/O Pins by Device/Package (Cont'd)

Device	Package	Total User I/O			Differential I/O		
		HD(1)	HR(1)	HP(1)	HD	HR	HP
<b>Virtex UltraScale+ Devices</b>							
XCVU3P	FFVC1517	0	0	520	0	0	480
XCVU23P	VSVA1365	0	0	364	0	0	336
XCVU23P	FSVJ1760	72	0	572	72	0	528
XCVU11P	FLGF1924	0	0	624	0	0	576
XCVU31P	FSVH1924	0	0	208	0	0	192
XCVU5P	FLVA2104	0	0	832	0	0	768
XCVU7P		0	0	832	0	0	768
XCVU9P	FLGA2104	0	0	832	0	0	768
XCVU13P	FHGA2104	0	0	832	0	0	768
XCVU5P	FLVB2104	0	0	702	0	0	648
XCVU7P		0	0	702	0	0	648
XCVU9P	FLGB2104	0	0	702	0	0	648
XCVU11P		0	0	572	0	0	528
XCVU13P	FHGB2104	0	0	702	0	0	648
XCVU5P	FLVC2104	0	0	416	0	0	384
XCVU7P		0	0	416	0	0	384
XCVU9P	FLGC2104	0	0	416	0	0	384
XCVU11P		0	0	416	0	0	384
XCVU13P	FHGC2104	0	0	416	0	0	384
XCVU9P	FSGD2104	0	0	676	0	0	624
XCVU11P		0	0	572	0	0	528
XCVU13P	FIGD2104	0	0	676	0	0	624
XCVU27P	FIGD2104	0	0	520	0	0	240
XCVU29P		0	0	676	0	0	312
XCVU33P	FSVH2104	0	0	208	0	0	192
XCVU35P		0	0	416	0	0	384
XCVU45P		0	0	416	0	0	384
XCVU9P	FLGA2577	0	0	448	0	0	414
XCVU11P		0	0	448	0	0	414
XCVU13P		0	0	448	0	0	414
XCVU13P	FSGA2577	0	0	448	0	0	414

Table 1-4: Available I/O Pins by Device/Package (Cont'd)

Device	Package	Total User I/O			Differential I/O		
		HD <sup>(1)</sup>	HR <sup>(1)</sup>	HP <sup>(1)</sup>	HD	HR	HP
XCVU27P	FSGA2577	0	0	292	0	0	134
XCVU29P		0	0	448	0	0	206
XCVU35P	FSVH2892	0	0	416	0	0	384
XCVU37P		0	0	624	0	0	576
XCVU45P		0	0	416	0	0	384
XCVU47P		0	0	624	0	0	576
XCVU57P	FSVK2892	0	0	624	0	0	576
XCVU19P	FSVA3824	0	0	1976	0	0	1824
	FSVB3824	1	1	1664	0	0	1536
XQVU3P	FFRC1517	0	0	520	0	0	480
XQVU7P	FLRA2104	0	0	832	0	0	768
XQVU7P	FLRB2104	0	0	702	0	0	648
XQVU11P	FLRC2104	0	0	416	0	0	384

**Notes:**

1. The maximum user I/O numbers do not include pins in the configuration bank 0 or the GT serial transceivers.



## Pin Definitions

Table 1-5 lists the pin definitions used in UltraScale and UltraScale+ device packages.

Table 1-5: Pin Definitions

Pin Name	Type	Direction	Description
<b>User I/O Pins</b>			
IO_L[1 to 24][P or N]_T[0 to 3] [U or L]_N[0 to 12]_ [multi-function]_[bank number] or IO_T[0 to 3][U or L]_N[0 to 12]_[multi-function]_[bank number]			
	Dedicated	Input/Output	<p>Most user I/O pins are capable of differential signaling and can be implemented as pairs. Each user I/O pin name consists of several indicator labels, where:</p> <ul style="list-style-type: none"> <li>• IO indicates a user I/O pin.</li> <li>• L[1 to 24] indicates a unique differential pair with P (positive) and N (negative) sides. User I/O pins without the L indicator are single-ended.</li> <li>• T[0 to 3][U or L] indicates the assigned byte group and nibble location (upper or lower portion) within that group for the pin.</li> <li>• N[0 to 12] the number of the I/O within its byte group.</li> <li>• [multi-function] indicates any other functions that the pin can provide. If not used for this function, the pin can be a user I/O.</li> <li>• [bank number] indicates the assigned bank for the user I/O pin.</li> </ul>
<b>User I/O Multi-Function Pins</b>			
GC or HDGC	Multi-function	Input/Output	<p>Four global clock (GC) pin pairs are in each bank. HDGC pins have direct access to the global clock buffers. GC pins have direct access to the global clock buffers, MMCMs, and PLLs that are in the clock management tile (CMT) adjacent to the same I/O bank. GC and HDGC inputs provide dedicated, high-speed access to the internal global and regional clock resources. GC and HDGC inputs use dedicated routing and must be used for clock inputs where the timing of various clocking features is imperative. GC or HDGC pins can be treated as user I/O when not used as input clocks.</p> <p>Up-to-date information about designing with the GC (or HDGC) pin is available in the <i>UltraScale Architecture Clocking Resources User Guide</i> (UG572) [Ref 6].</p>
VRP <sup>(1)</sup>	Multi-function	N/A	<p>This pin is for the DCI voltage reference resistor of P transistor (per bank, to be pulled Low with a reference resistor).</p>

Table 1-5: Pin Definitions (Cont'd)

Pin Name	Type	Direction	Description
DBC QBC	Multi-function	Input	Byte lane clock (DBC and QBC) input pin pairs are clock inputs directly driving source synchronous clocks to the bit slices in the I/O banks. In memory applications, these are also known as DQS. For more information, consult the <i>UltraScale Architecture SelectIO Resources User Guide</i> (UG571) [Ref 5].
PERSTN[0 to 1]	Multi-function	Input	Default reset pin locations for the integrated block for PCI Express.
<b>User I/O Multi-Function Configuration Pins</b>			
For further descriptions, including configuration modes and recommended external pull-up/pull-down resistors, see the <i>UltraScale Architecture Configuration User Guide</i> (UG570) [Ref 7].			
EMCCLK	Multi-function	Input	External master configuration clock.
DOUT_CSO_B	Multi-function	Output	Data output for serial daisy-chaining or active-Low chip-select output for SelectMAP daisy-chaining.
D[04 to 31]	Multi-function	Bidirectional	Configuration data pins.
A[00 to 28]	Multi-function	Output	Address output.
CSI_ADV_B	Multi-function	Input or Output	Active-Low chip-select input or address valid output.
FOE_B	Multi-function	Output	Active-Low flash output enable.
FWE_FCS2_B	Multi-function	Output	Active-Low flash write-enable for BPI flash or flash chip-select for second SPI (x8) flash.
RS[0 to 1]	Multi-function	Output	Revision select outputs.
<b>Dedicated (Bank 0) Configuration Pins<sup>(2)</sup></b>			
For more information see the <i>UltraScale Architecture Configuration User Guide</i> (UG570) [Ref 7].			
M[0 to 2]_0	Dedicated	Input	Configuration mode selection.
INIT_B_0	Dedicated	Bidirectional (open-drain)	Active-Low initialization

Table 1-5: Pin Definitions (Cont'd)

Pin Name	Type	Direction	Description
CFGBVS_0	Dedicated	Input	Bank 0 and bank 65 voltage select. This pin determines the I/O voltage operating range and voltage tolerance for the dedicated configuration bank 0 and multi-function bank 65. Connect CFGBVS High or Low per the bank voltage requirements. <ul style="list-style-type: none"> <li>• <math>V_{CCO_0}</math> = 2.5V or 3.3V, tie CFGBVS High (connect to <math>V_{CCO_0}</math>).</li> <li>• <math>V_{CCO_0}</math> = 1.5V or 1.8V, tie CFGBVS Low (connect to GND)</li> </ul> <hr/> <b>CAUTION!</b> To avoid device damage, this pin must be connected correctly to either $V_{CCO_0}$ or GND.
PUDC_B_0	Dedicated	Input	Active-Low input enables internal pull-ups during configuration on all SelectIO pins: 0 = Weak preconfiguration I/O pull-up resistors enabled. 1 = Weak preconfiguration I/O pull-up resistors disabled.
POR_OVERRIDE	Dedicated	Input	All configuration modes Power-on reset delay override. <hr/> <b>CAUTION!</b> Do not allow this pin to float before and during configuration. This pin must be tied to $V_{CCINT}$ or GND. Do not connect to $V_{CCO_0}$ . <hr/> Information about designing with the POR_OVERRIDE pin is available in the <i>UltraScale Architecture Configuration User Guide</i> (UG570) [Ref 7].
DONE_0	Dedicated	Bidirectional	Active-High, DONE indicates successful completion of configuration.
PROGRAM_B_0	Dedicated	Input	Active Low, asynchronous reset to configuration logic.
TDO_0	Dedicated	Output	JTAG test data output.
TDI_0	Dedicated	Input	JTAG test data input.
RDWR_FCS_B_0	Dedicated	Input/Output	Input control signal for SelectMAP data bus direction: High for reading or Low for writing configuration data. Or, active-Low flash chip-select output.
TMS_0	Dedicated	Input	JTAG test mode data select.
TCK_0	Dedicated	Input	JTAG test clock
CCLK_0	Dedicated	Input/Output	Configuration clock. Output in Master mode or input in Slave mode.
D00_MOSI_0	Dedicated	Bidirectional	Data Bit 0 or SPI master-output
D01_DIN_0	Dedicated	Bidirectional	Data Bit 1 or serial mode data input
D02_0	Dedicated	Bidirectional	Data Bit 2
D03_0	Dedicated	Bidirectional	Data Bit 3

Table 1-5: Pin Definitions (Cont'd)



Pin Name	Type	Direction	Description
<b>Other Dedicated Pins</b>			
DXN	Dedicated	N/A	Temperature-sensing diode pins (Anode: DXP; Cathode: DXN). The thermal diode is accessed by using the DXP and DXN pins in bank 0. When not used, tie to GND. To use the thermal diode an appropriate external thermal monitoring IC must be added. Consult the external thermal monitoring IC data sheet for usage guidelines.
DXP			
<b>System Monitor Pins<sup>(3)</sup></b>			
AD[0 to 15][P or N]	Multi-function	Input	System Monitor differential auxiliary analog inputs 0–15.
VCCADC	Dedicated	N/A	System Monitor analog positive supply voltage.
GNDADC	Dedicated	N/A	System Monitor analog ground reference.
VREFP	Dedicated	N/A	Voltage reference input.
VREFN	Dedicated	N/A	Voltage reference GND.
VP	Dedicated	Input	System Monitor dedicated differential analog input (positive side).
VN	Dedicated	Input	System Monitor dedicated differential analog input (negative side).
I2C_SCLK	Multi-function	Bidirectional	I2C serial clock. Directly connected to the System Monitor DRP interface for I2C operation configuration.  <hr/> <b>IMPORTANT:</b> Because the SYSMON I2C interface is active after power-on, this pin should only be used for I2C access until after configuration.
I2C_SDA	Multi-function	Bidirectional	I2C serial data line. Directly connected to the System Monitor DRP interface for I2C operation configuration.  <hr/> <b>IMPORTANT:</b> Because the SYSMON I2C interface is active after power-on, this pin should only be used for I2C access until after configuration.

Table 1-5: Pin Definitions (Cont'd)


Pin Name	Type	Direction	Description
SMBALERT	Multi-function	Bidirectional	<p>Optional PMBus alert, interrupt signal. When Low, indicates a system fault that must be cleared using PMBus commands. Connect to SMBALERT_TS.</p> <p>For more information, see the <i>UltraScale Architecture System Monitor User Guide</i> (UG580) [Ref 10].</p> <p></p> <hr/> <p><b>IMPORTANT:</b> <i>By default, the PMBus is active prior to configuration. Only use as a multi-functional I/O pin in designs that can tolerate this pin being driven prior to configuration.</i></p> <hr/> <p>This pin is present on Artix UltraScale+, Kintex UltraScale+, and Virtex UltraScale+ devices.</p>
<b>Power/Ground Pins</b>			
For more information on voltage specifications see the <i>UltraScale and UltraScale+ device data sheets</i> [Ref 3].			
GND	Dedicated	N/A	Ground.
VCCINT	Dedicated	N/A	Power-supply pins for the internal logic.
VCCINT_IO	Dedicated	N/A	Power-supply pins for the I/O banks. For Kintex and Virtex UltraScale devices, connect VCCINT_IO to VCCINT. For Kintex and Virtex UltraScale+ devices, connect VCCINT_IO to VCCBRAM. Both migration and lower voltage differences (-1LI and -2LE at 0.72V) are discussed in the <i>UltraScale Architecture PCB and Pin Planning User Guide</i> (UG583). See the connection matrix in the <i>Power Supply Voltage Levels and VCCINT_IO Connection</i> section [Ref 11].
VCCINT_GT_[L or R]	Dedicated	N/A	GTM core power-supply pins.
VCCAUX	Dedicated	N/A	Power-supply pins for auxiliary circuits.
VCCAUX_IO	Dedicated	N/A	<p>Auxiliary power-supply pins for the I/O banks. VCCAUX_IO must be connected to VCCAUX on the board.</p> <p><b>Note:</b> Package files for XQ ruggedized Kintex and Virtex UltraScale+ devices (for example: FFRB676) have unique pin names for VCCAUX_HPIO and VCCAUX_HDIO. These pins can be connected to a common VCCAUX_IO supply.</p>
VCCIO_HBM_[HBM bank number]	Dedicated	N/A	HBM component I/O power supply (VDDQ)
VCC_HBM_[HBM bank number]	Dedicated	N/A	HBM component core power supply (VDDC)
VCCAUX_HBM_[HBM bank number]	Dedicated	N/A	HBM component word line voltage pump (VPP)
VCCBRAM	Dedicated	N/A	Block RAM power supply pins.
VBATT	Dedicated	N/A	Decryptor key memory backup supply; this pin should be tied to the appropriate V <sub>CC</sub> or GND when not used.

Table 1-5: Pin Definitions (Cont'd)



Pin Name	Type	Direction	Description
VCCO_[bank number] <sup>(4)</sup>	Dedicated	N/A	Power-supply pins for the output drivers (per bank).
VREF_[bank number]	Dedicated	N/A	These are input threshold voltage pins.
RSVDGND	Dedicated	N/A	Reserved pins—must be tied to GND. These pins are present on Artix UltraScale+, Kintex UltraScale+, and Virtex UltraScale+ devices.  <hr/> <b>TIP:</b> In footprint compatible devices, this pin can be labeled differently and serve different purposes. When planning migration between devices, include the functionality between all footprint compatible devices.
RSVD	Dedicated	N/A	Reserved pins—leave floating.  <hr/> <b>TIP:</b> In footprint compatible devices, this pin can be labeled differently and serve different purposes. When planning migration between devices, include the functionality between all footprint compatible devices.
<b>Multi-gigabit Serial Transceiver Pins (GTHE3 and GTYE3)</b>			
For more information on the GTH and GTY transceivers see the <i>UltraScale Architecture GTH Transceivers User Guide</i> (UG576) [Ref 8] or <i>UltraScale Architecture GTY Transceivers User Guide</i> (UG578) [Ref 9].			
MGTHRXP or N][0 to 3]_[GT quad number]	Dedicated	Input	Differential receive port GTH Quad.
MGTHTXP or N][0 to 3]_[GT quad number]	Dedicated	Output	Differential transmit port GTH Quad.
MGTYRXP or N][0 to 3]_[GT quad number]	Dedicated	Input	Differential receive port GTY Quad.
MGTYTXP or N][0 to 3]_[GT quad number]	Dedicated	Output	Differential transmit port GTY Quad.
MGTYRXP or N][0 to 3]_[GT dual number]	Dedicated	Input	Differential receive port GTM Dual.
MGTYTXP or N][0 to 3]_[GT dual number]	Dedicated	Output	Differential transmit port GTM Dual.
MGTAVCC_[L or R][N, UC, C, LC, or S] <sup>(5)</sup>	Dedicated	Input	Analog power-supply pin for the receiver and transmitter internal circuits.
MGTAVTT_[L or R][N, UC, C, LC, or S] <sup>(5)</sup>	Dedicated	Input	Analog power-supply pin for the transmit driver.

Table 1-5: Pin Definitions (Cont'd)

Pin Name	Type	Direction	Description
MGTVCCAUX_[L or R] [N, UC, C, LC, or S] <sup>(5)</sup>	Dedicated	Input	Auxiliary analog Quad PLL (QPLL) voltage supply for the transceivers.
MGTREFCLK[0 or 1] [P or N]	Dedicated	Input	Differential reference clock for the transceivers.
MGTAVTTRCAL_[L or R] [N, UC, C, LC, or S] <sup>(5)</sup>	Dedicated	N/A	Precision reference resistor pin for internal calibration termination.
MGTRREF_[L or R] [N, UC, C, LC, or S] <sup>(5)</sup>	Dedicated	Input	Precision reference resistor pin for internal calibration termination.

**Notes:**

1. See the DCI sections in *UltraScale Architecture SelectIO Resources User Guide* (UG571) [Ref 5] for more information on the VRP pins.
2. All dedicated configuration pins are powered by  $V_{CC0_0}$ .
3. See the *UltraScale Architecture System Monitor User Guide* (UG580) [Ref 10] for the default connections required to support on-chip monitoring.
4.  $V_{CC0}$  pins in unbonded banks must be connected to the  $V_{CC0}$  for that bank (for package migration). Do NOT connect unbonded  $V_{CC0}$  pins to different supplies. Without a package migration requirement,  $V_{CC0}$  pins in unbonded banks can be tied to a common supply ( $V_{CC0}$  or GND).
5. L (left) or R (right) plus N (north), UC (upper center), C (center), LC (lower center), and S (south) signify the GT transceiver quad power supply groups. For example, RUC signifies the right-upper-center power supply group and LLC signifies the left-lower-center power supply group in the FLGA2577 package.

## Footprint Compatibility between Packages

UltraScale and UltraScale+ devices are footprint compatible only with other UltraScale and UltraScale+ devices with the same number of package pins and the same preceding alphabetic designator. For example, XCKU060-FFVA1517 is compatible with XCKU085-FLVA1517 and XCKU115-FLVA1517, but not with XCKU115-FLVD1517. Pins that are available in one device but are not available in another device with a compatible package include the other device's name in the *No Connect* column of the package file. These pins are labeled as *No Connects* in the other device's package file.


 **IMPORTANT:** Footprint compatibility does not necessarily imply that all pins will function in the same manner for different devices in a package. For limitations and guidelines on designing for footprint compatible packages, refer to the *Migration Between UltraScale Devices and Packages* section of *UltraScale Architecture PCB and Pin Planning User Guide (UG583)* [Ref 11].

Table 1-6 shows the footprint compatible devices available for each UltraScale and UltraScale+ device package. See *UltraScale Architecture and Product Overview (DS890)* [Ref 1] for specific package letter code options.


 **IMPORTANT:** The height dimensions of footprint compatible packages can vary since some devices contain SSI technology.

Table 1-6: Footprint Compatibility

Packages	Footprint Compatible Devices											
A676	XCKU035	XCKU040	XQKU040	XCKU3P	XCKU5P							
B676	XCAU20P	XCAU25P	XCKU3P	XCKU5P	XQKU5P							
A784	XCKU035	XCKU040										
B784	XCAU20P	XCAU25P	XCKU3P	XCKU5P	XQKU5P							
A900	XCKU035	XCKU040										
D900	XCKU3P	XCKU5P	XCKU11P									
E900	XCKU9P	XCKU13P										
A1156	XCKU025	XCKU035	XCKU040	XQKU040	XCKU060	XQKU060	XCKU095	XQKU095	XCKU11P	XCKU15P	XQKU15P	
A1365	XCVU23P											



Table 1-6: Footprint Compatibility (Cont'd)

Packages	Footprint Compatible Devices													
A1517	XCKU060	XCKU085	XCKU115											
C1517	XCKU095	XCVU065	XCVU080	XCVU095	XCVU3P	XQVU3P								
D1517	XCKU115	XQKU115	XCVU080	XCVU095	XCVU125									
E1517	XCKU11P	XCKU15P	XQKU15P											
A1760	XCKU15P													
B1760	XCKU085	XCKU095	XCKU115	XCVU080	XCVU095	XCVU125								
E1760	XCKU15P													
J1760	XCKU19P	XCVU23P												
D1924	XCKU115													
F1924	XCKU085	XCKU115	XQKU115	XCVU11P										
H1924	XCVU31P													
A2104	XCKU115	XCVU080	XCVU095	XCVU125	XCVU5P	XCVU7P	XCVU9P	XCVU13P <sup>(1)</sup>	XQVU7P					
B2104	XCKU095	XCKU115	XCKU19P	XCVU080	XCVU095	XCVU125	XCVU160	XCVU190	XCVU5P	XCVU7P	XCVU9P	XCVU11P	XCVU13P <sup>(1)</sup>	XQVU7P
C2104	XCVU095	XCVU125	XCVU160	XCVU190	XCVU5P	XCVU7P	XCVU9P	XCVU11P	XCVU13P <sup>(1)</sup>	XQVU11P				
D2104	XCVU9P	XCVU11P	XCVU13P	XCVU27P <sup>(1)</sup>	XCVU29P <sup>(1)</sup>									
H2104	XCVU33P	XCVU35P	XCVU45P											
B2377	XCVU440													
A2577	XCVU190	XCVU9P	XCVU11P	XCVU13P	XCVU27P	XCVU29P								
A2892	XCVU440													
H2892	XCVU35P	XCVU37P	XCVU45P	XCVU47P										
K2892	XCVU57P													
A3824	XCVU19P													
B3824	XCVU19P													

**Notes:**

1. While footprint compatible, the body size for the VU13P, VU27P, and VU39P is 52.5 mm, which is larger than the 47.5 mm for a 2104 ball package.







Table 1-7: I/O Bank Migration: HP I/O Banks are Unshaded, HR I/O Banks are in Gray, and HD I/O Banks are in Dark Gray<sup>(1)</sup> (Cont'd)

Package	Device	Package to Device I/O Mapping																				Unbonded I/O Banks											
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T		U	V	W	X	Y	Z	AA	AB	AC		
FFVA1517	XCKU060			65	44	45	24	25	66	67	68	46	47	48						64													
FLVA1517	XCKU085			65	44	45	24	25	66	67	68	46	47	48						64													29, 30, 49, 50, 51, 52, 69, 70, 71, 72
	XCKU115			65	44	45	24	25	66	67	68	46	47	48						64													29, 30, 49, 50, 51, 52, 69, 70, 71, 72
FFVC1517	XCKU095	84/94	65	66	67	68	44	45	46	47	48																						51, 50, 49, 71, 70, 69
	XCVU080	84/94	65	66	67	68	44	45	46	47	48																						51, 50, 49, 71, 70, 69
	XCVU065	84/94	65	66	67	68	44	45	46	47	48																						
	XCVU095	84/94	65	66	67	68	44	45	46	47	48																						51, 50, 49, 71, 70, 69
	XCVU3P	64	65	66	67	68	44	45	46	47	48																						
FFRC1517	XQVU3P	64	65	66	67	68	44	45	46	47	48																						
FFVD1517	XCVU080	84/94	65	66	67 <sup>(2)</sup>	69	70	71																								44, 45, 46, 47, 48, 49, 50, 51, 68	
	XCVU095	84/94	65	66	67 <sup>(2)</sup>	69	70	71																								44, 45, 46, 47, 48, 49, 50, 51, 68	
FLVD1517	XCKU115	84/94	65	66	67 <sup>(2)</sup>	71	72	73																								24, 25, 29, 30, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 68, 69, 70	
	XCVU125	84/94	65	66	67 <sup>(2)</sup>	71	72	73																								44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 68, 69, 70	
RLD1517	XQKU115	84/94	65	66	67 <sup>(2)</sup>	71	72	73																								24, 25, 29, 30, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 68, 69, 70	
FFVE1517	XCKU11P		65	64	66	67	68								91	90	89	88	71	70	69												
	XCKU15P		65	64	66	67	68								94	93	91	90	71	70	69											74, 73, 72	
FFRE1517	XQKU15P		65	64	66	67	68								94	93	91	90	71	70	69											74, 73, 72	



Table 1-7: I/O Bank Migration: HP I/O Banks are Unshaded, HR I/O Banks are in Gray, and HD I/O Banks are in Dark Gray<sup>(1)</sup> (Cont'd)

Package	Device	Package to Device I/O Mapping																								Unbonded I/O Banks		
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X		Y	Z
FFVA2104	XCVU080	84/94	65	66	67	44	45	46	47	48	49	50	51	68	69	70	71											
	XCVU095	84/94	65	66	67	44	45	46	47	48	49	50	51	68	69	70	71											
FLVA2104	XCKU115	84/94	65	66	67	44	45	46	47	50	51	52	53	70	71	72	73											30, 29, 25, 24, 49, 48, 69, 68
	XCVU125	84/94	65	66	67	44	45	46	47	50	51	52	53	70	71	72	73											49, 48, 69, 68
	XCVU5P	64	65	66	67	44	45	46	47	50	51	52	53	70	71	72	73											49, 48, 69, 68
	XCVU7P	64	65	66	67	44	45	46	47	50	51	52	53	70	71	72	73											49, 48, 69, 68
FLRA2104	XQVU7P	64	65	66	67	44	45	46	47	50	51	52	53	70	71	72	73											49, 48, 69, 68
FLGA2104	XCVU9P	64	65	66	67	40	41	42	43	45	46	47	48	70	71	72	73											53, 52, 51, 50, 49, 44, 39, 69, 68, 63, 62, 61, 60, 59
FHGA2104	XCVU13P	64	65	66	67	60	61	62	63	68	69	70	71	72	73	74	75											

Table 1-7: I/O Bank Migration: HP I/O Banks are Unshaded, HR I/O Banks are in Gray, and HD I/O Banks are in Dark Gray<sup>(1)</sup> (Cont'd)

Package	Device	Package to Device I/O Mapping																								Unbonded I/O Banks		
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X		Y	Z
FFVB2104	XCKU095		84/94	65	66	67	68 <sup>(2)</sup>	44	45	46	49	50	51	69	70	71												48, 47
	XCVU080		84/94	65	66	67	68 <sup>(2)</sup>	44	45	46	49	50	51	69	70	71												48, 47
	XCVU095		84/94	65	66	67	68 <sup>(2)</sup>	44	45	46	49	50	51	69	70	71												48, 47
	XCKU19P	90	92	65	66	67	88					73	72	71	68	69	70											
FLVB2104	XCKU115		84/94	65	66	67	68 <sup>(2)</sup>	44	45	46	51	52	53	71	72	73												30, 29, 25, 24, 50, 49, 48, 47, 70, 69
	XCVU125		84/94	65	66	67	68 <sup>(2)</sup>	44	45	46	50	51	52	70	71	72												53, 49, 48, 47, 73, 69
	XCVU5P		64	65	66	67	68 <sup>(2)</sup>	44	45	46	50	51	52	70	71	72												53, 49, 48, 47, 73, 69
	XCVU7P		64	65	66	67	68 <sup>(2)</sup>	44	45	46	50	51	52	70	71	72												53, 49, 48, 47, 73, 69
FLRB2104	XQVU7P		64	65	66	67	68 <sup>(2)</sup>	44	45	46	50	51	52	70	71	72												53, 49, 48, 47, 73, 69
FLGB2104	XCVU160		84/94	65	66	67	68 <sup>(2)</sup>	44	45	46	50	51	52	70	71	72												53, 49, 48, 47, 43, 42, 41, 40, 73, 69, 63, 62, 61, 60
	XCVU190		84/94	65	66	67	68 <sup>(2)</sup>	44	45	46	50	51	52	70	71	72												53, 49, 48, 47, 43, 42, 41, 40, 39, 73, 69, 63, 62, 61, 60, 59
	XCVU9P		64	65	66	67	68 <sup>(2)</sup>	40	41	42	46	47	48	70	71	72												53, 52, 51, 50, 49, 45, 44, 43, 39, 73, 69, 63, 62, 61, 60, 59
	XCVU11P		64	65	66	67		68				69	70	71	72	73	74											
FHGB2104	XCVU13P		64	65	66	67	68 <sup>(2)</sup>	61	62	63	69	70	71	72	73	74												75, 60



Table 1-7: I/O Bank Migration: HP I/O Banks are Unshaded, HR I/O Banks are in Gray, and HD I/O Banks are in Dark Gray<sup>(1)</sup> (Cont'd)

Package	Device	Package to Device I/O Mapping																								Unbonded I/O Banks		
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X		Y	Z
FFVC2104	XCVU095		84/94	65	66	67	68	69	70	71															51, 50, 49, 48, 47, 46, 45, 44			
FLVC2104	XCVU125		84/94	65	66	67	68	70	71	72															53, 52, 51, 50, 49, 48, 47, 46, 45, 44, 73, 69			
	XCVU5P		64	65	66	67	68	70	71	72															53, 52, 51, 50, 49, 48, 47, 46, 45, 44, 73, 69			
	XCVU7P		64	65	66	67	68	70	71	72															53, 52, 51, 50, 49, 48, 47, 46, 45, 44, 73, 69			
	XCVU160		84/94	65	66	67	68	70	71	72															52, 51, 50, 49, 48, 47, 46, 45, 44, 43, 42, 41, 40, 69, 63, 62, 61, 60			
FLGC2104	XCVU190		84/94	65	66	67	68	70	71	72															53, 52, 51, 50, 49, 48, 47, 46, 45, 44, 43, 42, 41, 40, 39, 73, 69, 63, 62, 61, 60, 59			
	XCVU9P		64	65	66	67	68	70	71	72															53, 52, 51, 50, 49, 48, 47, 46, 45, 44, 43, 42, 41, 40, 39, 73, 69, 63, 62, 61, 60, 59			
	XCVU11P		64	65	66	67	68	69	70	71															75, 74, 73, 72			
	XQVU11P		64	65	66	67	68	69	70	71															75, 74, 73, 72			
FHGC2104	XCVU13P		64	65	66	67	68	69	70	71															75, 74, 73, 72, 63, 62, 61, 60			
FSGD2104	XCVU9P		64	65	66	67	40	41	42	46	47	48	70	71	72											53, 52, 51, 50, 49, 45, 44, 43, 39, 73, 69, 68, 63, 62, 61, 60, 59		
	XCVU11P		64	65	66	67	68	69	70	71	72	73	74											75				
FIGD2104	XCVU13P		64	65	66	67	61	62	63	69	70	71	72	73	74											75, 68, 60		
	XCVU27P		64	65	66	67	61	62	63	69	70	71	72	73	74											75, 68, 60		
	XCVU29P		64	65	66	67	61	62	63	69	70	71	72	73	74											75, 68, 60		
	XCVU33P		64	65	66	67																						
FSVH2104	XCVU35P		64	65	66	67	68	69	70	71																		
	XCVU45P		64	65	66	67	68	69	70	71																		

Table 1-7: I/O Bank Migration: HP I/O Banks are Unshaded, HR I/O Banks are in Gray, and HD I/O Banks are in Dark Gray<sup>(1)</sup> (Cont'd)

Package	Device	Package to Device I/O Mapping																										Unbonded I/O Banks			
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z		AA	AB	AC
FLGB2377	XCVU440	84/94	65	66	67	68	60	61	62	63	40	41	42	43	45	46	47	48	50	51	52	53	70	71	72	73					39, 44, 49, 59, 69
FLGA2577	XCVU190	66 <sup>(2)</sup>	65	61	62	63	67	68 <sup>(2)</sup>	70	71	72																53, 52, 51, 50, 49, 48, 47, 46, 45, 44, 43, 42, 41, 40, 39, 73, 69, 64, 60, 59				
	XCVU9P	66 <sup>(2)</sup>	65	61	62	63	67	68 <sup>(2)</sup>	70	71	72																53, 52, 51, 50, 49, 48, 47, 46, 45, 44, 43, 42, 41, 40, 39, 73, 69, 64, 60, 59				
	XCVU11P	66 <sup>(2)</sup>	65	68	69	70	71	72 <sup>(2)</sup>	73	74	75																67, 64				
	XCVU13P	66 <sup>(2)</sup>	65	61	62	63	70	71 <sup>(2)</sup>	73	74	75																72, 69, 68, 67, 64, 60				
FSGA2577	XCVU13P	66 <sup>(2)</sup>	65	61	62	63	70	71 <sup>(2)</sup>	73	74	75																72, 69, 68, 67, 64, 60				
	XCVU27P	66 <sup>(2)</sup>	65	61	62	63	70	71 <sup>(2)</sup>	73	74	75																72, 69, 68, 67, 64, 60				
	XCVU29P	66 <sup>(2)</sup>	65	61	62	63	70	71 <sup>(2)</sup>	73	74	75																72, 69, 68, 67, 64, 60				
FLGA2892	XCVU440	84/94	65	66	67	68	60	61	62	63	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	70	71	72	73	59, 69	
FSVH2892	XCVU35P	64	65	66	67	68	69		70	71																					
	XCVU37P	64	65	66	67	68	69		70	71	72	73	74	75																	
	XCVU45P	64	65	66	67	68	69		70	71																					
	XCVU47P	64	65	66	67	68	69		70	71	72	73	74	75																	
FSVK2892	XCVU57P	64	65	66	67	68	69		75	74	73	70	71	72																	

**Notes:**

1. See the [Die Level Bank Numbering Overview](#) for specific changes in column numbering.
2. A limited number of banks have fewer than 52 SelectIO pins. These banks are labeled as partial.

Table 1-8: I/O Bank Migration for VU19P devices: HP I/O Banks are Unshaded and HD I/O Banks are in Dark Gray

Package	Device	Package to Device I/O Mapping																												Unbonded I/O Banks														
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	AA	AB		AC	AD	AE	AF	AG	AH	AI	AJ	AK	AL	AM	AN	AO	AP
FSVA3824	XCVU19P	59	60	65	61	62	63	64	66	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	69	70	71	72	73	74	75	76	77	78	98	93	88	83	68, 67
FSVB3824	XCVU19P	60	61	65	62	66	67	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	70	71	72	75	76	77	98	93	88	83	78, 74, 73, 69, 68, 64, 63, 59						

For each grouped set of footprint compatible packages listed in [Table 1-9](#), there is a row detailing the power supply group for each quad. These groups are labeled according to the regions for the transceiver power supply pins, as listed in the [ASCII Pinout Files](#) linked from [Chapter 2, Package Files](#). For a visual representation of all of this information, see the [Die Level Bank Numbering Overview](#) section.

**Table 1-9: Transceiver Quad Migration (GTH Quads are White, GTY Quads are Gray, GTM Duals are Dark Gray)**

Package	Device	Package to Device Transceiver Mapping																								Unbonded GT Quads					
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X		Y	Z	AA	AB	AC
Power Supply Group		—																													
FBVA676	XCKU035	224	225	226	227																									228	
	XCKU040	224	225	226	227																									228	
RBA676	XQKU040	224	225	226	227																									228	
Power Supply Group		R																													
FFVA676	XCKU3P	224	225	226	227																										
	XCKU5P	224	225	226	227																										
Power Supply Group		R																													
FFVB676	XCAU20P	224	225	226																									227		
	XCAU25P	224	225	226																									227		
	XCKU3P	224	225	226	227																										
	XCKU5P	224	225	226	227																										
FFRA676	XQKU5P	224	225	226	227																										

Table 1-9: Transceiver Quad Migration (GTH Quads are White, GTY Quads are Gray, GTM Duals are Dark Gray) (Cont'd)

Package	Device	Package to Device Transceiver Mapping																								Unbonded GT Quads								
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X		Y	Z	AA	AB	AC	AD	AE	AF
Power Supply Group		—																																
SFVA784	XCKU035	224	225																											228,227,226				
	XCKU040	224	225																											228,227,226				
Power Supply Group		R																																
SFVB784	XCAU20P	224	225	226																														
	XCAU25P	224	225	226																														
	XCKU3P	224	225	226	227																													
	XCKU5P	224	225	226	227																													
SFRB784	XQKU5P	224	225	226	227																													
Power Supply Group		—																																
FBVA900	XCKU035	224	225	226	227																									228				
	XCKU040	224	225	226	227																									228				
Power Supply Group		R																																
FFVD900	XCKU3P	224	225	226	227																													
	XCKU5P	224	225	226	227																													
	XCKU11P	224	225	226	227																									131, 130, 129, 128, 127, 231, 230, 229, 228				
Power Supply Group		R				L																												
FFVE900	XCKU9P	228	229	230	127	128	129	130																										
	XCKU13P	228	229	230	127	128	129	130																										

Table 1-9: Transceiver Quad Migration (GTH Quads are White, GTY Quads are Gray, GTM Duals are Dark Gray) (Cont'd)

Package	Device	Package to Device Transceiver Mapping																								Unbonded GT Quads					
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X		Y	Z	AA	AB	AC
Power Supply Group		R																													
FFVA1156	XCKU025	224	225	226																											
	XCKU035	224	225	226	227																			228							
	XCKU040	224	225	226	227	228																									
	XCKU060	224	225	226	227	228	127	128																			126				
	XCKU095	224	225	226	227	228	129	130																			131, 128, 127, 126, 125, 124, 231, 230, 229				
	XCKU11P	224	225	226	227	228	129	130																			131, 128, 127, 231, 230				
	XCKU15P	224	225	226	227	228	129	130																			134, 133, 132, 131, 128, 127, 234, 233, 232, 231, 230, 229				
FFRA1156	XQKU15P	224	225	226	227	228	129	130																			134, 133, 132, 131, 128, 127, 234, 233, 232, 231, 230, 229				
RFA1156	XQKU040	224	225	226	227	228																									
	XQKU060	224	225	226	227	228	127	128																			126				
	XQKU095	224	225	226	227	228	129	130																			131, 128, 127, 126, 125, 124, 231, 230, 229				
Power Supply Group		RS				RC				RN																					
VSPA1365	XCVU23P	224	225	226	227	228	229	230	231	232	233	234																			

Table 1-9: Transceiver Quad Migration (GTH Quads are White, GTY Quads are Gray, GTM Duals are Dark Gray) (Cont'd)

Package	Device	Package to Device Transceiver Mapping																										Unbonded GT Quads								
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z		AA	AB	AC	AD	AE	AF		
Power Supply Group		RS					RN					L																								
FFVA1517	XCKU060	224	225	226	227	228						126	127	128																						
FLVA1517	XCKU085	224	225	226	227	228	229	230	231	232	126	127	128															132,131								
	XCKU115	224	225	226	227	228	229	230	231	232	126	127	128															132,131								
Power Supply Group		R					L																													
FFVC1517	XCKU095	224	225	226	227	228	125	126	127	128	129															131, 130, 124, 231, 230, 229										
	XCVU080	224	225	226	227	228	125	126	127	128	129															131, 130, 124, 231, 230, 229										
	XCVU065	224	225	226	227	228	124	125	126	127	128																									
	XCVU095	224	225	226	227	228	125	126	127	128	129															131, 130, 124, 231, 230, 229										
	XCVU3P	224	225	226	227	228	124	125	126	127	128																									
FFRC1517	XQVU3P	224	225	226	227	228	124	125	126	127	128																									
Power Supply Group		RS					RN					LS				LN																				
FFVD1517	XCVU080	224	225	226	227	228	229	230	231			124	125	126	127	128	129	130	131																	
	XCVU095	224	225	226	227	228	229	230	231			124	125	126	127	128	129	130	131																	
FLVD1517	XCVU125	224	225	226	227	228	229	230	231	232	233	124	125	126	127	129	130	131	132															133,128		
	XCKU115	224	225	226	227	228	229	230	231	232	233			126	127	128			131	132	133															
RLD1517	XQKU115	224	225	226	227	228	229	230	231	232	233			126	127	128			131	132	133															
Power Supply Group		RS					RN					L																								
FFVE1517	XCKU11P	224	225	226	227	228	229	230	231	127	128	129	130	131																						
	XCKU15P	224	225	226	227	228	229	230	231	127	128	129	130	131	132															134, 133, 234, 233, 232						
FFRE1517	XQKU15P	224	225	226	227	228	229	230	231	127	128	129	130	131	132															134, 133, 234, 233, 232						

Table 1-9: Transceiver Quad Migration (GTH Quads are White, GTY Quads are Gray, GTM Duals are Dark Gray) (Cont'd)

Package	Device	Package to Device Transceiver Mapping																										Unbonded GT Quads			
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z		AA	AB	AC
Power Supply Group		RS						RN						LS				LN													
FFVA1760	XCKU15P	224	225	226	227	228	229	230	231	232	233	234	127	128	129	130	131	132	133	134											
Power Supply Group		RS						RN						L																	
FLVB1760	XCKU085	224	225	226	227	228	230	231	232			128	131	132								127,126,229									
	XCKU115	224	225	226	227	228	230	231	232	233		128	131	132	133							127,126,229									
FFVB1760	XCKU095	224	225	226	227	228	229	230	231			128	129	130	131							127,126,125,124									
	XCVU080	224	225	226	227	228	229	230	231			128	129	130	131							127,126,125,124									
	XCVU095	224	225	226	227	228	229	230	231			128	129	130	131							127,126,125,124									
FLVB1760	XCVU125	224	225	226	227	228	230	231	232	233	129	130	131	132							133, 128, 127, 126, 125, 229										
Power Supply Group		RS						RN						L																	
FFVE1760	XCKU15P	224	225	226	227	228	229	230	231	127	128	129	130	131	132							134, 133, 234, 233, 232									
Power Supply Group		RS						RC						RN																	
FFVJ1760	XCKU19P		225	226	227	228	229	230	231	232																					
FSVJ1760	XCVU23P	224	225	226	227	228	229	230	231	232	233	234																			



Table 1-9: Transceiver Quad Migration (GTH Quads are White, GTY Quads are Gray, GTM Duals are Dark Gray) (Cont'd)

Package	Device	Package to Device Transceiver Mapping																										Unbonded GT Quads					
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z		AA	AB	AC	AD	AE
Power Supply Group		RS				RN				LS				LN																			
FLVD1924	XCKU115	224	225	226	227	231	232	233	126	127	128	131	132	133															230,229,228				
Power Supply Group		RS				RN				LS				LN																			
FLVF1924	XCKU085	224	225	226	227	228	229	230	231	232		126	127	128	131			132															
	XCKU115	224	225	226	227	228	229	230	231	232	233	126	127	128	131		133	132															
RLF1924	XQKU115	224	225	226	227	228	229	230	231	232	233	126	127	128	131																		
FLGF1924	XCVU11P	224	225	226	227	228	229	230	231	232	233	125	126	127	129		131	130															135, 134, 133, 132, 128, 124, 235, 234
Power Supply Group		R				L																											
FSVH1924	XCVU31P	224	225	226	227	124	125	126	127																								

Table 1-9: Transceiver Quad Migration (GTH Quads are White, GTY Quads are Gray, GTM Duals are Dark Gray) (Cont'd)

Package	Device	Package to Device Transceiver Mapping																										Unbonded GT Quads																
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z		AA	AB	AC	AD	AE	AF										
Power Supply Group		RS				RN				LS				LN																														
FFVA2104	XCVU080	224	225	226	227	228	229	230	125	126	127	128	129	130																											131, 124, 231			
	XCVU095	224	225	226	227	228	229	230	125	126	127	128	129	130																											131, 124, 231			
FLVA2104	XCKU115	224	225	226	227	231	232	233	126	127	128	131	132	133																											230, 229, 228			
	XCVU125	224	225	226	227	231	232	233	125	126	127	130	131	132																											133, 129, 128, 124, 230, 229, 228			
	XCVU5P	224	225	226	227	231	232	233	125	126	127	130	131	132																											133, 129, 128, 124, 230, 229, 228			
	XCVU7P	224	225	226	227	231	232	233	125	126	127	130	131	132																											133, 129, 128, 124, 230, 229, 228			
FLRA2104	XQVU7P	224	225	226	227	231	232	233	125	126	127	130	131	132																											133, 129, 128, 124, 230, 229, 228			
FLGA2104	XCVU9P	224	225	226	227	231	232	233	120	121	122	125	126	127																											133, 132, 131, 130, 129, 128, 124, 123, 119, 230, 229, 228, 223, 222, 221, 220, 219			
FHGA2104	XCVU13P	224	225	226	227	229	230	231	125	126	127	129	130	131																											135, 134, 133, 132, 128, 124, 123, 122, 121, 120, 235, 234, 233, 232, 228, 223, 222, 221, 220			

Table 1-9: Transceiver Quad Migration (GTH Quads are White, GTY Quads are Gray, GTM Duals are Dark Gray) (Cont'd)

Package	Device	Package to Device Transceiver Mapping																										Unbonded GT Quads									
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z		AA	AB	AC	AD	AE	AF			
Power Supply Group		RS					RN					LS					LN																				
FFVB2104	XCKU095	224	225	226	227	228	229	230	231				124	125	126	127	128	129	130	131																	
	XCVU080	224	225	226	227	228	229	230	231				124	125	126	127	128	129	130	131																	
	XCVU095	224	225	226	227	228	229	230	231				124	125	126	127	128	129	130	131																	
	XCKU19P	225	226	227	228		229	230	231	232																											
FLVB2104	XCKU115	224	225	226	227	228	229	230	231	232	233	126	127	128					131	132	133																
	XCVU125	224	225	226	227	228	229	230	231	232	233	125	126	127	128	129	130	131	132	133																	
	XCVU5P	224	225	226	227	228	229	230	231	232	233	125	126	127	128	129	130	131	132	133																	
	XCVU7P	224	225	226	227	228	229	230	231	232	233	125	126	127	128	129	130	131	132	133																	
FLRB2104	XQVU7P	224	225	226	227	228	229	230	231	232	233	125	126	127	128	129	130	131	132	133																	
FLGB2104	XCVU160	224	225	226	227	228	229	230	231	232	233	125	126	127	128	129	130	131	132	133																	
	XCVU190	224	225	226	227	228	229	230	231	232	233	125	126	127	128	129	130	131	132	133																	
	XCVU9P	224	225	226	227	228	229	230	231	232	233	120	121	122	123	124	125	126	127	128																	
	XCVU11P	224	225	226	227	228	229	230	231	232	233	124	125	126	127	128	129	130	131	133																	
FHGB2104	XCVU13P	224	225	226	227	228	229	230	231	232	233	124	125	126	127	128	129	130	131	133																	

Table 1-9: Transceiver Quad Migration (GTH Quads are White, GTY Quads are Gray, GTM Duals are Dark Gray) (Cont'd)

Package	Device	Package to Device Transceiver Mapping																										Unbonded GT Quads			
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z		AA	AB	AC
Power Supply Group		RC				RN				RS			LC				LN				LS										
FFVC2104	XCVU095	224	225	226	227	228	229	230	231				124	125	126	127	128	129	130	131											
FLVC2104	XCVU125	224	225	226	227	228	229	230	231	232	233				124	125	126	127	128	129	130	131	132	133							
	XCVU5P	224	225	226	227	228	229	230	231	232	233				124	125	126	127	128	129	130	131	132	133							
	XCVU7P	224	225	226	227	228	229	230	231	232	233				124	125	126	127	128	129	130	131	132	133							
FLGC2104	XCVU160	224	225	226	227	228	229	230	231	232	233	220	221	222	124	125	126	127	128	129	130	131	132	133	120	121	122	123, 223			
	XCVU190	224	225	226	227	228	229	230	231	232	233	220	221	222	124	125	126	127	128	129	130	131	132	133	120	121	122	123, 119, 223, 219			
	XCVU9P	224	225	226	227	228	229	230	231	232	233	220	221	222	124	125	126	127	128	129	130	131	132	133	120	121	122	123, 119, 223, 219			
	XCVU11P	226	227	228	229	230	231	232	233	234	235	224	225	226	227	228	229	230	231	232	233	234	235	124	125						
FLRC2104	XQVU11P	226	227	228	229	230	231	232	233	234	235	224	225	226	227	228	229	230	231	232	233	234	235	124	125						
FHGC2104	XCVU13P	224	225	226	227	228	229	230	231	232	233	221	222	223	124	125	126	127	128	129	130	131	132	133	121	122	123	135, 134, 120, 235, 234, 220			

Table 1-9: Transceiver Quad Migration (GTH Quads are White, GTY Quads are Gray, GTM Duals are Dark Gray) (Cont'd)

Package	Device	Package to Device Transceiver Mapping																								Unbonded GT Quads							
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X		Y	Z	AA	AB	AC	AD	AE
Power Supply Group		RS				RN				LS				LN																			
FSGD2104	XCVU9P	224	225	226	227	228	229	230	231	232	233	120	121	122	123	124	125	126	127	131													133, 132, 130, 129, 128, 119, 223, 222, 221, 220, 219
	XCVU11P	224	225	226	227	228	229	230	231	232	233	124	125	126	127	128	129	130	131	133													135, 134, 132, 235, 234
FIGD2104	XCVU13P	224	225	226	227	228	229	230	231	232	233	120	121	122	123	128	129	130	131	133													135, 134, 132, 127, 126, 125, 124, 235, 234, 223, 222, 221, 220
	XCVU27P	224	225	226	227	228	229	230	231	232	233	120	121	122	123	128	129	130	131	133													135, 134, 132, 127, 126, 125, 124, 235, 234, 223, 222, 221, 220
	XCVU29P	224	225	226	227	228	229	230	231	232	233	120	121	122	123	128	129	130	131	133													135, 134, 132, 127, 126, 125, 124, 235, 234, 223, 222, 221, 220
Power Supply Group		RS				RN				LS				LN																			
FSVH2104	XCVU33P	224	225	226	227					124	125	126	127																				
	XCVU35P	224	225	226	227	228	229	230	231	124	125	126	127	128	129	130	131																
	XCVU45P	224	225	226	227	228	229	230	231	124	125	126	127	128	129	130	131																
Power Supply Group		RC			RN			RS																									
FLGB2377	XCVU440	224	225	226	231	232	233	221	222	223													233, 232, 231, 226, 225, 224, 223, 222, 221										

Table 1-9: Transceiver Quad Migration (GTH Quads are White, GTY Quads are Gray, GTM Duals are Dark Gray) (Cont'd)

Package	Device	Package to Device Transceiver Mapping																										Unbonded GT Quads										
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z		AA	AB	AC	AD	AE	AF				
Power Supply Group		RLC			RUC				RN				RS				RLC	LLC			LUC				LN			LS			LLC							
FLGA2577	XCVU190	224	225	226	227	228	229	230	231	232	233		219	220	221	222	223	124	125	126	127	128	129	130	131	132	133		119	120	121	122	123					
	XCVU9P	224	225	226	227	228	229	230	231	232	233		219	220	221	222	223	124	125	126	127	128	129	130	131	132	133		119	120	121	122	123					
	XCVU11P	225	226	227	228	229	230	231	232	233	234	235					224	125	126	127	128	129	130	131	132	133	134	135					124					
	XCVU13P	225	226	227	228	229	230	231	232	233	234	235	220	221	222	223	224	125	126	127	128	129	130	131	132	133	134	135	120	121	122	123	124					
FSGA2577	XCVU13P	225	226	227	228	229	230	231	232	233	234	235	220	221	222	223	224	125	126	127	128	129	130	131	132	133	134	135	120	121	122	123	124					
	XCVU27P	225	226	227	228	229	230	231	232	233	234	235	220	221	222	223	224	125	126	127	128	129	130	131	132	133	134	135	120	121	122	123	124					
	XCVU29P	225	226	227	228	229	230	231	232	233	234	235	220	221	222	223	224	125	126	127	128	129	130	131	132	133	134	135	120	121	122	123	124					
Power Supply Group		RC			RN				RS																													
FLGA2892	XCVU440	224	225	226	227	229	230	231	232	219	220	221	222																	233, 228, 223								
Power Supply Group		RS			RC				RN				LS				LC			LN																		
FSVH2892	XCVU35P	224	225	226	227	228	229	230	231					124	125	126	127	128	129	130	131																	
	XCVU37P	224	225	226	227	228	229	230	231	232	233	234	235	124	125	126	127	128	129	130	131	132	133	134	135													
	XCVU45P	224	225	226	227	228	229	230	231					124	125	126	127	128	129	130	131																	
	XCVU47P	224	225	226	227	228	229	230	231	232	233	234	235	124	125	126	127	128	129	130	131	132	133	134	135													
Power Supply Group		RS			RC				RN				LS				LC			LN																		
FSVK2892	XCVU57P	224	225	226	227	228	229	230	231	232	233	234	235	124	125	126	127	128	129	130	131	132	133	134	135													
Power Supply Group		RLC			RUC				RN				RS																									
FSVA3824	XCVU19P	225	226	227	230	231	232	235	236	237	220	221	222																	238, 234, 233, 229, 228, 224, 223, 219								
Power Supply Group		RLC			RUC				RN				RS																									
FSVB3824	XCVU19P	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	219	220	221	222	223																	

## Die Level Bank Numbering Overview

### *Banking and Clocking Summary*

- For each device, not all banks are bonded out in every package.

### *GTH/GTY/GTM Columns*

- One GTH/GTY Quad = Four transceivers = Four GTHE3 or GTYE3 primitives.
- One GTM Dual = Two transceivers = Two GTME3 primitives
- Not all GT Quads/Duals are bonded out in every package.
- Also shown are quads/duals labeled with RCAL. This specifies the location of the RCAL masters for each device. With respect to the package, the RCAL masters are located on the same package pin for each package, regardless of the device.
- The XY coordinates shown in each quad/dual correspond to the transceiver channel number found in the pin names for that quad/dual, as shown in [Figure 1-1](#).
- An alphabetic designator is shown in each quad/dual. Each letter corresponds to the columns in [Table 1-7](#) and [Table 1-9](#).
- The power supply group is shown in brackets [ ] for each quad/dual.

### *I/O Banks*

- Each user I/O bank has a total of 52 I/Os where 48 can be used as differential (24 differential pairs) or single-ended I/Os. The remaining four function only as single-ended I/Os. All 52 pads of a bank are not always bonded out to pins.
- A limited number of banks have fewer than 52 SelectIO pins. These banks are labeled as partial.
- Adjacent to each bank is a physical layer (PHY) containing a CMT and other clock resources.
- Adjacent to each bank and PHY is a tile of logic resources that makes up a clock region.
- Banks are arranged in columns and separated into rows which are pitch-matched with adjacent PHY, clock regions, and GT blocks.
- An alphabetic designator is shown in each bank. Each letter corresponds to the columns in [Table 1-7](#) and [Table 1-9](#).

## Clocking

- Each bank has four pairs of global clock (GC) inputs for four differential or four single-ended clock inputs. Single-ended clock inputs should be connected to the P side of the differential pair.
- Clock signals are distributed through global buffers driving routing and distribution networks to reach any clock region, I/O, or GT.
- Global clock inputs can connect to an MMCM and two PLLs within the horizontally adjacent CMT.

## Bank Locations of Dedicated and Multi-Function Pins

- In all UltraScale and UltraScale+ devices, bank 65 contains the multi-function configuration pins. Bank 0 contains the dedicated configuration pins.
- In [Figure 1-2](#) through [Figure 1-124](#), the multi-function configuration bank 65 is shown adjacent to the SYSMON/CFG blocks. For devices with multiple super logic regions (SLRs), banks 60 and 70 are also shown adjacent to the SYSMON/CFG blocks. Due to the architectural differences between these and other banks, special consideration must be taken when using them under certain conditions. See the [State of I/Os During and After Configuration](#) and the [Special DCI Requirements in Some Banks](#) sections of *UltraScale Architecture SelectIO Resources User Guide* (UG571) [[Ref 5](#)] for details.
- For UltraScale devices, all dedicated configuration I/Os (bank 0) and HR I/Os are 1.5V to 3.3V capable.
- For UltraScale+ devices, all dedicated configuration I/Os (bank 0) and HR I/Os are 1.5V to 1.8V capable.

## SYSMON, Configuration, PCIe, Interlaken, and 100GE Integrated Blocks

- CFG: Configuration block
- SYSMON/CFG: Block shared between SYSMON and configuration
- PCIe: Integrated block for PCIe

**Note:** Do not connect the integrated block for PCIe to transceiver channels through an SLR crossing. For further details, refer to the *Placement Rules* section of the *UltraScale Devices Gen3 Integrated Block for PCI Express Product Guide* (PG156) [[Ref 14](#)] and *UltraScale+ Devices Integrated Block for PCI Express Product Guide* (PG213) [[Ref 15](#)]. Blocks with an additional (Tandem) label support Tandem configuration.

- ILKN: Interlaken block

**Note:** Do not connect the Interlaken block to transceiver channels through an SLR crossing. For further details, refer to the *Transceiver Interface* section of the *Integrated Interlaken 150G Product Guide* (PG169) [[Ref 16](#)].




- CMAC: 100G Ethernet block

**Note:** Do not connect the 100G Ethernet block to transceiver channels through an SLR crossing. For further details, refer to the *Transceiver Selection Rules* section of the *UltraScale Devices Integrated Block for 100G Ethernet Product Guide* (PG165) [Ref 17] or *UltraScale+ Devices Integrated 100G Ethernet Subsystem Product Guide* (PG203) [Ref 18].

## Device Diagrams

Figure 1-1 shows an example diagram with a brief explanation for each component.

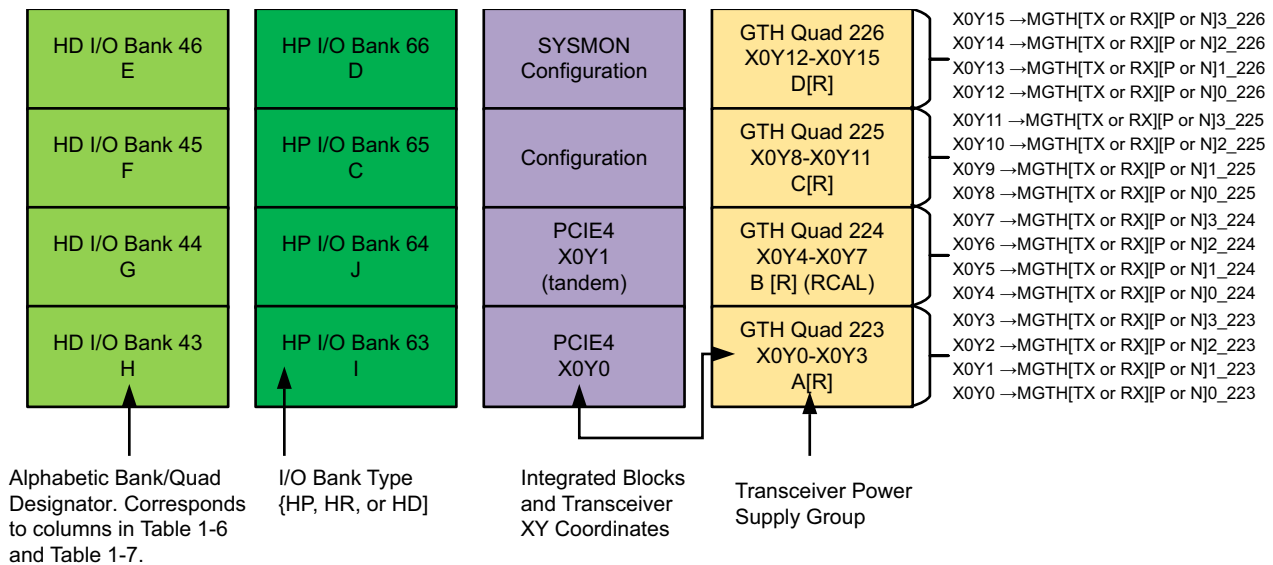

X16518-083020

Figure 1-1: Example Device Diagram



**TIP:** Due to design limitations, the device resources might be less than what is shown in the device diagrams. The actual available resources by device and package are listed in the *UltraScale Architecture and Product Overview (DS890)* [Ref 1].

The following figures show a die view of each device followed by a view with respect to each available package.

## XCKU025 Bank Diagrams

HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11
HP I/O Bank 45	HR I/O Bank 65	Configuration	GTH Quad 225 X0Y4-X0Y7 (RCAL)
HP I/O Bank 44	HR I/O Bank 64	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3

X16426-012917

Figure 1-2: XCKU025 Banks

HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 45 H	HR I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 44 G	HR I/O Bank 64 R	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X16427-012917

Figure 1-3: XCKU025 Banks in FFVA1156 Package

## XCKU035 Bank Diagrams

HP I/O Bank 48	HP I/O Bank 68	PCIe X0Y2	GTH Quad 228 X0Y16-X0Y19
HP I/O Bank 47	HP I/O Bank 67	PCIe X0Y1	GTH Quad 227 X0Y12-X0Y15
HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11
HP I/O Bank 45	HR I/O Bank 65	Configuration	GTH Quad 225 X0Y4-X0Y7 (RCAL)
HP I/O Bank 44	HR I/O Bank 64	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3

X16429-012917

Figure 1-4: XCKU035 Banks

HP I/O Bank 48	HP I/O Bank 68	PCIe X0Y2	GTH Quad 228 X0Y16-X0Y19
HP I/O Bank 47	HP I/O Bank 67	PCIe X0Y1	GTH Quad 227 X0Y12-X0Y15 D [R]
HP I/O Bank 46 G	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 45 F	HR I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 44 E	HR I/O Bank 64 R	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X16430-012917

Figure 1-5: XCKU035 Banks in FBVA676 Package

HP I/O Bank 48	HP I/O Bank 68 I	PCIe X0Y2	GTH Quad 228 X0Y16-X0Y19
HP I/O Bank 47 G	HP I/O Bank 67 J	PCIe X0Y1	GTH Quad 227 X0Y12-X0Y15
HP I/O Bank 46 F	HP I/O Bank 66 H	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11
HP I/O Bank 45 E	HR I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 44 D	HR I/O Bank 64 R	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X16432-012917

Figure 1-6: XCKU035 Banks in SFVA784 Package

HP I/O Bank 48 J	HP I/O Bank 68	PCIe X0Y2	GTH Quad 228 X0Y16-X0Y19
HP I/O Bank 47 I	HP I/O Bank 67 E	PCIe X0Y1	GTH Quad 227 X0Y12-X0Y15 D [R]
HP I/O Bank 46 H	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 45 G	HR I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 44 F	HR I/O Bank 64 R	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X16433-012917

Figure 1-7: XCKU035 Banks in FBVA900 Package

HP I/O Bank 48 K	HP I/O Bank 68 F	PCIe X0Y2	GTH Quad 228 X0Y16-X0Y19
HP I/O Bank 47 J	HP I/O Bank 67 E	PCIe X0Y1	GTH Quad 227 X0Y12-X0Y15 D [R]
HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 45 H	HR I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 44 G	HR I/O Bank 64 R	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X16434-062117

Figure 1-8: XCKU035 Banks in FFVA1156 Package

## XCKU040 and XQKU040 Bank Diagrams

HP I/O Bank 48	HP I/O Bank 68	PCle X0Y2	GTH Quad 228 X0Y16-X0Y19
HP I/O Bank 47	HP I/O Bank 67	PCle X0Y1	GTH Quad 227 X0Y12-X0Y15
HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11
HP I/O Bank 45	HR I/O Bank 65	Configuration	GTH Quad 225 X0Y4-X0Y7 (RCAL)
HP I/O Bank 44	HR I/O Bank 64	PCle X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3

X16435-012917

Figure 1-9: XCKU040 and XQKU040 Banks

HP I/O Bank 48	HP I/O Bank 68	PCle X0Y2	GTH Quad 228 X0Y16-X0Y19
HP I/O Bank 47	HP I/O Bank 67	PCle X0Y1	GTH Quad 227 X0Y12-X0Y15 D [R]
HP I/O Bank 46 G	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 45 F	HR I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 44 E	HR I/O Bank 64 R	PCle X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X16436-012917

Figure 1-10: XCKU040 Banks in FBVA676 Package and XQKU040 Banks in RBA676 Package

HP I/O Bank 48	HP I/O Bank 68 I	PCIe X0Y2	GTH Quad 228 X0Y16-X0Y19
HP I/O Bank 47 G	HP I/O Bank 67 J	PCIe X0Y1	GTH Quad 227 X0Y12-X0Y15
HP I/O Bank 46 F	HP I/O Bank 66 H	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11
HP I/O Bank 45 E	HR I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 44 D	HR I/O Bank 64 R	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X16437-012917

Figure 1-11: XCKU040 Banks in SFVA784 Package

HP I/O Bank 48 J	HP I/O Bank 68	PCIe X0Y2	GTH Quad 228 X0Y16-X0Y19
HP I/O Bank 47 I	HP I/O Bank 67 E	PCIe X0Y1	GTH Quad 227 X0Y12-X0Y15 D [R]
HP I/O Bank 46 H	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 45 G	HR I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 44 F	HR I/O Bank 64 R	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X16438-012917

Figure 1-12: XCKU040 Banks in FBVA900 Package

HP I/O Bank 48 K	HP I/O Bank 68 F	PCIe X0Y2	GTH Quad 228 X0Y16-X0Y19 E [R]
HP I/O Bank 47 J	HP I/O Bank 67 E	PCIe X0Y1	GTH Quad 227 X0Y12-X0Y15 D [R]
HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 45 H	HR I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 44 G	HR I/O Bank 64 R	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X16439-062117

Figure 1-13: XCKU040 Banks in FFVA1156 Package and XQKU040 in RFA1156 Package



## XCKU060 and XQKU060 Bank Diagrams

GTH Quad 128 X0Y16-X0Y19 (RCAL)	HP I/O Bank 48	HP I/O Bank 68	PCIe X0Y2	GTH Quad 228 X1Y16-X1Y19
GTH Quad 127 X0Y12-X0Y15	HP I/O Bank 47	HP I/O Bank 67	PCIe X0Y1	GTH Quad 227 X1Y12-X1Y15
GTH Quad 126 X0Y8-X0Y11	HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X1Y8-X1Y11 (RCAL)
HP I/O Bank 25	HP I/O Bank 45	HR I/O Bank 65	Configuration	GTH Quad 225 X1Y4-X1Y7
HP I/O Bank 24	HP I/O Bank 44	HR I/O Bank 64	PCIe X0Y0 (tandem)	GTH Quad 224 X1Y0-X1Y3

X16440-012917

Figure 1-14: XCKU060 and XQKU060 Banks

GTH Quad 128 X0Y16-X0Y19 G [L] (RCAL)	HP I/O Bank 48 K	HP I/O Bank 68 F	PCIe X0Y2	GTH Quad 228 X1Y16-X1Y19 E [R]
GTH Quad 127 X0Y12-X0Y15 F [L]	HP I/O Bank 47 J	HP I/O Bank 67 E	PCIe X0Y1	GTH Quad 227 X1Y12-X1Y15 D [R]
GTH Quad 126 X0Y8-X0Y11	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X1Y8-X1Y11 C [R] (RCAL)
HP I/O Bank 25	HP I/O Bank 45 H	HR I/O Bank 65 C	Configuration	GTH Quad 225 X1Y4-X1Y7 B [R]
HP I/O Bank 24	HP I/O Bank 44 G	HR I/O Bank 64 R	PCIe X0Y0 (tandem)	GTH Quad 224 X1Y0-X1Y3 A [R]

X16441-062117

Figure 1-15: XCKU060 Banks in FFVA1156 Package and XQKU060 Banks in RFA1156 Package

GTH Quad 128 X0Y16-X0Y19 L [L] (RCAL)	HP I/O Bank 48 M	HP I/O Bank 68 J	PCIe X0Y2	GTH Quad 228 X1Y16-X1Y19 E [RS]
GTH Quad 127 X0Y12-X0Y15 K [L]	HP I/O Bank 47 L	HP I/O Bank 67 I	PCIe X0Y1	GTH Quad 227 X1Y12-X1Y15 D [RS]
GTH Quad 126 X0Y8-X0Y11 J [L]	HP I/O Bank 46 K	HP I/O Bank 66 H	SYSMON Configuration	GTH Quad 226 X1Y8-X1Y11 C [RS] (RCAL)
HP I/O Bank 25 G	HP I/O Bank 45 E	HR I/O Bank 65 C	Configuration	GTH Quad 225 X1Y4-X1Y7 B [RS]
HP I/O Bank 24 F	HP I/O Bank 44 D	HR I/O Bank 64 R	PCIe X0Y0 (tandem)	GTH Quad 224 X1Y0-X1Y3 A [RS]

X16442-012917

Figure 1-16: XCKU060 Banks in FFVA1517 Package

## XCKU085 Bank Diagrams

GTH Quad 132 X0Y32-X0Y35	HP I/O Bank 52	HP I/O Bank 72	PCIe X0Y4	GTH Quad 232 X1Y32-X1Y35
GTH Quad 131 X0Y28-X0Y31	HP I/O Bank 51	HP I/O Bank 71	SYSMON Configuration	GTH Quad 231 X1Y28-X1Y31 (RCAL)
HP I/O Bank 30	HP I/O Bank 50	HR I/O Bank 70	Configuration	GTH Quad 230 X1Y24-X1Y27
HP I/O Bank 29	HP I/O Bank 49	HR I/O Bank 69	PCIe X0Y3	GTH Quad 229 X1Y20-X1Y23
SLR Crossing				
GTH Quad 128 X0Y16-X0Y19 (RCAL)	HP I/O Bank 48	HP I/O Bank 68	PCIe X0Y2	GTH Quad 228 X1Y16-X1Y19
GTH Quad 127 X0Y12-X0Y15	HP I/O Bank 47	HP I/O Bank 67	PCIe X0Y1	GTH Quad 227 X1Y12-X1Y15
GTH Quad 126 X0Y8-X0Y11	HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X1Y8-X1Y11 (RCAL)
HP I/O Bank 25	HP I/O Bank 45	HR I/O Bank 65	Configuration	GTH Quad 225 X1Y4-X1Y7
HP I/O Bank 24	HP I/O Bank 44	HR I/O Bank 64	PCIe X0Y0 (tandem)	GTH Quad 224 X1Y0-X1Y3

X16443-012917

Figure 1-17: XCKU085 Banks

GTH Quad 132 X0Y32-X0Y35	HP I/O Bank 52	HP I/O Bank 72	PCle X0Y4	GTH Quad 232 X1Y32-X1Y35 I [RN]
GTH Quad 131 X0Y28-X0Y31	HP I/O Bank 51	HP I/O Bank 71	SYSMON Configuration	GTH Quad 231 X1Y28-X1Y31 H [RN] (RCAL)
HP I/O Bank 30	HP I/O Bank 50	HR I/O Bank 70	Configuration	GTH Quad 230 X1Y24-X1Y27 G [RN]
HP I/O Bank 29	HP I/O Bank 49	HR I/O Bank 69	PCle X0Y3	GTH Quad 229 X1Y20-X1Y23 F [RN]
SLR Crossing				
GTH Quad 128 X0Y16-X0Y19 L [L] (RCAL)	HP I/O Bank 48 M	HP I/O Bank 68 J	PCle X0Y2	GTH Quad 228 X1Y16-X1Y19 E [RS]
GTH Quad 127 X0Y12-X0Y15 K [L]	HP I/O Bank 47 L	HP I/O Bank 67 I	PCle X0Y1	GTH Quad 227 X1Y12-X1Y15 D [RS]
GTH Quad 126 X0Y8-X0Y11 J [L]	HP I/O Bank 46 K	HP I/O Bank 66 H	SYSMON Configuration	GTH Quad 226 X1Y8-X1Y11 C [RS] (RCAL)
HP I/O Bank 25 G	HP I/O Bank 45 E	HR I/O Bank 65 C	Configuration	GTH Quad 225 X1Y4-X1Y7 B [RS]
HP I/O Bank 24 F	HP I/O Bank 44 D	HR I/O Bank 64 R	PCle X0Y0 (tandem)	GTH Quad 224 X1Y0-X1Y3 A [RS]

X16444-012917

Figure 1-18: XCKU085 Banks in FLVA1517 Package

GTH Quad 132 X0Y32-X0Y35 L [L]	HP I/O Bank 52 N	HP I/O Bank 72	PCIe X0Y4	GTH Quad 232 X1Y32-X1Y35 H [RN]
GTH Quad 131 X0Y28-X0Y31 K [L]	HP I/O Bank 51 M	HP I/O Bank 71	SYSMON Configuration	GTH Quad 231 X1Y28-X1Y31 G [RN] (RCAL)
HP I/O Bank 30	HP I/O Bank 50 L	HR I/O Bank 70	Configuration	GTH Quad 230 X1Y24-X1Y27 F [RN]
HP I/O Bank 29	HP I/O Bank 49 K	HR I/O Bank 69	PCIe X0Y3	GTH Quad 229 X1Y20-X1Y23
SLR Crossing				
GTH Quad 128 X0Y16-X0Y19 J [L] (RCAL)	HP I/O Bank 48 J	HP I/O Bank 68	PCIe X0Y2	GTH Quad 228 X1Y16-X1Y19 E [RS]
GTH Quad 127 X0Y12-X0Y15	HP I/O Bank 47 I	HP I/O Bank 67 E	PCIe X0Y1	GTH Quad 227 X1Y12-X1Y15 D [RS]
GTH Quad 126 X0Y8-X0Y11	HP I/O Bank 46 H	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X1Y8-X1Y11 C [RS] (RCAL)
HP I/O Bank 25	HP I/O Bank 45 G	HR I/O Bank 65 C	Configuration	GTH Quad 225 X1Y4-X1Y7 B [RS]
HP I/O Bank 24	HP I/O Bank 44 F	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X1Y0-X1Y3 A [RS]

X16445-031820

Figure 1-19: XCKU085 Banks in FLVB1760 Package

GTH Quad 132 X0Y32-X0Y35 O [LN]	HP I/O Bank 52 K	HP I/O Bank 72 O	PCle X0Y4	GTH Quad 232 X1Y32-X1Y35 I [RN]
GTH Quad 131 X0Y28-X0Y31 N [LN]	HP I/O Bank 51 J	HP I/O Bank 71 N	SYSMON Configuration	GTH Quad 231 X1Y28-X1Y31 H [RN] (RCAL)
HP I/O Bank 30	HP I/O Bank 50	HR I/O Bank 70 M	Configuration	GTH Quad 230 X1Y24-X1Y27 G [RN]
HP I/O Bank 29	HP I/O Bank 49	HR I/O Bank 69	PCle X0Y3	GTH Quad 229 X1Y20-X1Y23 F [RN]
SLR Crossing				
GTH Quad 128 X0Y16-X0Y19 M [LS] (RCAL)	HP I/O Bank 48	HP I/O Bank 68 F	PCle X0Y2	GTH Quad 228 X1Y16-X1Y19 E [RS]
GTH Quad 127 X0Y12-X0Y15 L [LS]	HP I/O Bank 47	HP I/O Bank 67 E	PCle X0Y1	GTH Quad 227 X1Y12-X1Y15 D [RS]
GTH Quad 126 X0Y8-X0Y11 K [LS]	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X1Y8-X1Y11 C [RS] (RCAL)
HP I/O Bank 25	HP I/O Bank 45 H	HR I/O Bank 65 C	Configuration	GTH Quad 225 X1Y4-X1Y7 B [RS]
HP I/O Bank 24	HP I/O Bank 44 G	HR I/O Bank 84/94	PCle X0Y0 (tandem)	GTH Quad 224 X1Y0-X1Y3 A [RS]

X16446-012917

Figure 1-20: XCKU085 Banks in FLVF1924 Package

## XCKU095 and XQKU095 Bank Diagrams

GTU Quad 131 X0Y28-X0Y31		HP I/O Bank 51	HP I/O Bank 71	PCIe X0Y3	GTH Quad 231 X0Y28-X0Y31
GTU Quad 130 X0Y24-X0Y27		HP I/O Bank 50	HP I/O Bank 70	ILKN X0Y2	GTH Quad 230 X0Y24-X0Y27
GTU Quad 129 X0Y20-X0Y23 (RCAL)	CMAC X0Y1	HP I/O Bank 49	HP I/O Bank 69	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23
GTU Quad 128 X0Y16-X0Y19		HP I/O Bank 48	HP I/O Bank 68	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19
GTU Quad 127 X0Y12-X0Y15	CMAC X0Y0	HP I/O Bank 47	HP I/O Bank 67	ILKN X0Y0	GTH Quad 227 X0Y12-X0Y15
GTU Quad 126 X0Y8-X0Y11		HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11
GTU Quad 125 X0Y4-X0Y7		HP I/O Bank 45	HP I/O Bank 65	Configuration	GTH Quad 225 X0Y4-X0Y7 (RCAL)
GTU Quad 124 X0Y0-X0Y3		HP I/O Bank 44	HR I/O Bank 84/94	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3

X16448-012917

Figure 1-21: XCKU095 and XQKU095 Banks

GTU Quad 131 X0Y28-X0Y31		HP I/O Bank 51	HP I/O Bank 71	PCIe X0Y3	GTH Quad 231 X0Y28-X0Y31
GTU Quad 130 X0Y24-X0Y27 G [L]		HP I/O Bank 50	HP I/O Bank 70	ILKN X0Y2	GTH Quad 230 X0Y24-X0Y27
GTU Quad 129 X0Y20-X0Y23 F [L] (RCAL)	CMAC X0Y1	HP I/O Bank 49	HP I/O Bank 69	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23
GTU Quad 128 X0Y16-X0Y19		HP I/O Bank 48 K	HP I/O Bank 68 D	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [R]
GTU Quad 127 X0Y12-X0Y15	CMAC X0Y0	HP I/O Bank 47 J	HP I/O Bank 67 F	ILKN X0Y0	GTH Quad 227 X0Y12-X0Y15 D [R]
GTU Quad 126 X0Y8-X0Y11		HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [R]
GTU Quad 125 X0Y4-X0Y7		HP I/O Bank 45 G	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R] (RCAL)
GTU Quad 124 X0Y0-X0Y3		HP I/O Bank 44 H	HR I/O Bank 64 R	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X16449-012917

Figure 1-22: XCKU095 Banks in FFVA1156 Package and XQKU095 in RFA1156 Package



GTU Quad 131 X0Y28-X0Y31		HP I/O Bank 51	HP I/O Bank 71	PCIe X0Y3	GTH Quad 231 X0Y28-X0Y31
GTU Quad 130 X0Y24-X0Y27		HP I/O Bank 50	HP I/O Bank 70	ILKN X0Y2	GTH Quad 230 X0Y24-X0Y27
GTU Quad 129 X0Y20-X0Y23 J [L] (RCAL)	CMAC X0Y1	HP I/O Bank 49	HP I/O Bank 69	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23
GTU Quad 128 X0Y16-X0Y19 I [L]		HP I/O Bank 48 K	HP I/O Bank 68 F	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [R]
GTU Quad 127 X0Y12-X0Y15 H [L]	CMAC X0Y0	HP I/O Bank 47 J	HP I/O Bank 67 E	ILKN X0Y0	GTH Quad 227 X0Y12-X0Y15 D [R]
GTU Quad 126 X0Y8-X0Y11 G [L]		HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [R]
GTU Quad 125 X0Y4-X0Y7 F [L]		HP I/O Bank 45 H	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R] (RCAL)
GTU Quad 124 X0Y0-X0Y3		HP I/O Bank 44 G	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X16450-012917

Figure 1-23: XCKU095 Banks in FFVC1517 Package

GTU Quad 131 X0Y28-X0Y31 M [L]		HP I/O Bank 51 O (Partial)	HP I/O Bank 71 L	PCIe X0Y3	GTH Quad 231 X0Y28-X0Y31 H [RN]
GTU Quad 130 X0Y24-X0Y27 L [L]		HP I/O Bank 50 N	HP I/O Bank 70 K	ILKN X0Y2	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTU Quad 129 X0Y20-X0Y23 K [L] (RCAL)	CMAC X0Y1	HP I/O Bank 49 M	HP I/O Bank 69	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23 F [RN]
GTU Quad 128 X0Y16-X0Y19 J [L]		HP I/O Bank 48 J	HP I/O Bank 68	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [RS]
GTU Quad 127 X0Y12-X0Y15	CMAC X0Y0	HP I/O Bank 47 I	HP I/O Bank 67 E	ILKN X0Y0	GTH Quad 227 X0Y12-X0Y15 D [RS]
GTU Quad 126 X0Y8-X0Y11		HP I/O Bank 46 H	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS]
GTU Quad 125 X0Y4-X0Y7		HP I/O Bank 45 G	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS] (RCAL)
GTU Quad 124 X0Y0-X0Y3		HP I/O Bank 44 F	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X16451-012917

Figure 1-24: XCKU095 Banks in FFVB1760 Package

GTY Quad 131 X0Y28-X0Y31 R [LN]		HP I/O Bank 51 L	HP I/O Bank 71 O	PCIe X0Y3	GTH Quad 231 X0Y28-X0Y31 H [RN]
GTY Quad 130 X0Y24-X0Y27 Q [LN]		HP I/O Bank 50 K	HP I/O Bank 70 N	ILKN X0Y2	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTY Quad 129 X0Y20-X0Y23 P [LN] (RCAL)	CMAC X0Y1	HP I/O Bank 49 J	HP I/O Bank 69 M	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23 F [RN]
GTY Quad 128 X0Y16-X0Y19 O [LN]		HP I/O Bank 48	HP I/O Bank 68 F (Partial)	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [RS]
GTY Quad 127 X0Y12-X0Y15 N [LS]	CMAC X0Y0	HP I/O Bank 47	HP I/O Bank 67 E	ILKN X0Y0	GTH Quad 227 X0Y12-X0Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11 M [LS]		HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS]
GTY Quad 125 X0Y4-X0Y7 L [LS]		HP I/O Bank 45 H	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS] (RCAL)
GTY Quad 124 X0Y0-X0Y3 K [LS]		HP I/O Bank 44 G	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X16452-012917

Figure 1-25: XCKU095 Banks in FFVB2104 Package

## XCKU115 and XQKU115 Bank Diagrams

GTH Quad 133 X0Y36-X0Y39 (RCAL)	HP I/O Bank 53	HP I/O Bank 73	PCle X0Y5	GTH Quad 233 X1Y36-X1Y39
GTH Quad 132 X0Y32-X0Y35	HP I/O Bank 52	HP I/O Bank 72	PCle X0Y4	GTH Quad 232 X1Y32-X1Y35
GTH Quad 131 X0Y28-X0Y31	HP I/O Bank 51	HP I/O Bank 71	SYSMON Configuration	GTH Quad 231 X1Y28-X1Y31 (RCAL)
HP I/O Bank 30	HP I/O Bank 50	HR I/O Bank 70	Configuration	GTH Quad 230 X1Y24-X1Y27
HP I/O Bank 29	HP I/O Bank 49	HR I/O Bank 69	PCle X0Y3	GTH Quad 229 X1Y20-X1Y23
SLR Crossing				
GTH Quad 128 X0Y16-X0Y19 (RCAL)	HP I/O Bank 48	HP I/O Bank 68	PCle X0Y2	GTH Quad 228 X1Y16-X1Y19
GTH Quad 127 X0Y12-X0Y15	HP I/O Bank 47	HP I/O Bank 67	PCle X0Y1	GTH Quad 227 X1Y12-X1Y15
GTH Quad 126 X0Y8-X0Y11	HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X1Y8-X1Y11 (RCAL)
HP I/O Bank 25	HP I/O Bank 45	HR I/O Bank 65	Configuration	GTH Quad 225 X1Y4-X1Y7
HP I/O Bank 24	HP I/O Bank 44	HR I/O Bank 64	PCle X0Y0 (tandem)	GTH Quad 224 X1Y0-X1Y3

X16453-012917

Figure 1-26: XCKU115 and XQKU115 Banks



**TIP:** Bank 64 is labeled as 84/94 in some packages.

GTH Quad 133 X0Y36-X0Y39 (RCAL)	HP I/O Bank 53	HP I/O Bank 73	PCle X0Y5	GTH Quad 233 X1Y36-X1Y39
GTH Quad 132 X0Y32-X0Y35	HP I/O Bank 52	HP I/O Bank 72	PCle X0Y4	GTH Quad 232 X1Y32-X1Y35 I [RN]
GTH Quad 131 X0Y28-X0Y31	HP I/O Bank 51	HP I/O Bank 71	SYSMON Configuration	GTH Quad 231 X1Y28-X1Y31 H [RN] (RCAL)
HP I/O Bank 30	HP I/O Bank 50	HR I/O Bank 70	Configuration	GTH Quad 230 X1Y24-X1Y27 G [RN]
HP I/O Bank 29	HP I/O Bank 49	HR I/O Bank 69	PCle X0Y3	GTH Quad 229 X1Y20-X1Y23 F [RN]
SLR Crossing				
GTH Quad 128 X0Y16-X0Y19 L [L] (RCAL)	HP I/O Bank 48 M	HP I/O Bank 68 J	PCle X0Y2	GTH Quad 228 X1Y16-X1Y19 E [RS]
GTH Quad 127 X0Y12-X0Y15 K [L]	HP I/O Bank 47 L	HP I/O Bank 67 I	PCle X0Y1	GTH Quad 227 X1Y12-X1Y15 D [RS]
GTH Quad 126 X0Y8-X0Y11 J [L]	HP I/O Bank 46 K	HP I/O Bank 66 H	SYSMON Configuration	GTH Quad 226 X1Y8-X1Y11 C [RS] (RCAL)
HP I/O Bank 25 G	HP I/O Bank 45 E	HR I/O Bank 65 C	Configuration	GTH Quad 225 X1Y4-X1Y7 B [RS]
HP I/O Bank 24 F	HP I/O Bank 44 D	HR I/O Bank 64 R	PCle X0Y0 (tandem)	GTH Quad 224 X1Y0-X1Y3 A [RS]

X16454-012917

Figure 1-27: XCKU115 Banks in FLVA1517 Package

GTH Quad 133 X0Y36-X0Y39 R [LN] (RCAL)	HP I/O Bank 53	HP I/O Bank 73 H	PCle X0Y5	GTH Quad 233 X1Y36-X1Y39 J [RN]
GTH Quad 132 X0Y32-X0Y35 Q [LN]	HP I/O Bank 52	HP I/O Bank 72 G	PCle X0Y4	GTH Quad 232 X1Y32-X1Y35 I [RN]
GTH Quad 131 X0Y28-X0Y31 P [LN]	HP I/O Bank 51	HP I/O Bank 71 F	SYSMON Configuration	GTH Quad 231 X1Y28-X1Y31 H [RN] (RCAL)
HP I/O Bank 30	HP I/O Bank 50	HR I/O Bank 70	Configuration	GTH Quad 230 X1Y24-X1Y27 G [RN]
HP I/O Bank 29	HP I/O Bank 49	HR I/O Bank 69	PCle X0Y3	GTH Quad 229 X1Y20-X1Y23 F [RN]
SLR Crossing				
GTH Quad 128 X0Y16-X0Y19 N [LS] (RCAL)	HP I/O Bank 48	HP I/O Bank 68	PCle X0Y2	GTH Quad 228 X1Y16-X1Y19 E [RS]
GTH Quad 127 X0Y12-X0Y15 M [LS]	HP I/O Bank 47	HP I/O Bank 67 E (Partial)	PCle X0Y1	GTH Quad 227 X1Y12-X1Y15 D [RS]
GTH Quad 126 X0Y8-X0Y11 L [LS]	HP I/O Bank 46	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X1Y8-X1Y11 C [RS] (RCAL)
HP I/O Bank 25	HP I/O Bank 45	HR I/O Bank 65 C	Configuration	GTH Quad 225 X1Y4-X1Y7 B [RS]
HP I/O Bank 24	HP I/O Bank 44	HR I/O Bank 84/94 B	PCle X0Y0 (tandem)	GTH Quad 224 X1Y0-X1Y3 A [RS]

X16455-062117

Figure 1-28: XCKU115 Banks in FLVD1517 Package and XQKU115 in the RLD1517 Package


**TIP:** Bank 64 is labeled as 84/94 in some packages.

GTH Quad 133 X0Y36-X0Y39 M [L] (RCAL)	HP I/O Bank 53 O (Partial)	HP I/O Bank 73	PCle X0Y5	GTH Quad 233 X1Y36-X1Y39 I [RN]
GTH Quad 132 X0Y32-X0Y35 L [L]	HP I/O Bank 52 N	HP I/O Bank 72	PCle X0Y4	GTH Quad 232 X1Y32-X1Y35 H [RN]
GTH Quad 131 X0Y28-X0Y31 K [L]	HP I/O Bank 51 M	HP I/O Bank 71	SYSMON Configuration	GTH Quad 231 X1Y28-X1Y31 G [RN] (RCAL)
HP I/O Bank 30	HP I/O Bank 50 L	HR I/O Bank 70	Configuration	GTH Quad 230 X1Y24-X1Y27 F [RN]
HP I/O Bank 29	HP I/O Bank 49 K	HR I/O Bank 69	PCle X0Y3	GTH Quad 229 X1Y20-X1Y23
SLR Crossing				
GTH Quad 128 X0Y16-X0Y19 J [L] (RCAL)	HP I/O Bank 48 J	HP I/O Bank 68	PCle X0Y2	GTH Quad 228 X1Y16-X1Y19 E [RS]
GTH Quad 127 X0Y12-X0Y15	HP I/O Bank 47 I	HP I/O Bank 67 E	PCle X0Y1	GTH Quad 227 X1Y12-X1Y15 D [RS]
GTH Quad 126 X0Y8-X0Y11	HP I/O Bank 46 H	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X1Y8-X1Y11 C [RS] (RCAL)
HP I/O Bank 25	HP I/O Bank 45 G	HR I/O Bank 65 C	Configuration	GTH Quad 225 X1Y4-X1Y7 B [RS]
HP I/O Bank 24	HP I/O Bank 44 F	HR I/O Bank 84/94 B	PCle X0Y0 (tandem)	GTH Quad 224 X1Y0-X1Y3 A [RS]

X16456-012917

Figure 1-29: XCKU115 Banks in FLVB1760 Package



**TIP:** Bank 64 is labeled as 84/94 in some packages.

GTH Quad 133 X0Y36-X0Y39 M [LN] (RCAL)	HP I/O Bank 53 M	HP I/O Bank 73 Q	PCle X0Y5	GTH Quad 233 X1Y36-X1Y39 G [RN]
GTH Quad 132 X0Y32-X0Y35 L [LN]	HP I/O Bank 52 L	HP I/O Bank 72 P	PCle X0Y4	GTH Quad 232 X1Y32-X1Y35 F [RN]
GTH Quad 131 X0Y28-X0Y31 K [LN]	HP I/O Bank 51 K	HP I/O Bank 71 O	SYSMON Configuration	GTH Quad 231 X1Y28-X1Y31 E [RN] (RCAL)
HP I/O Bank 30	HP I/O Bank 50 J	HR I/O Bank 70 N	Configuration	GTH Quad 230 X1Y24-X1Y27
HP I/O Bank 29	HP I/O Bank 49	HR I/O Bank 69	PCle X0Y3	GTH Quad 229 X1Y20-X1Y23
SLR Crossing				
GTH Quad 128 X0Y16-X0Y19 J [LS] (RCAL)	HP I/O Bank 48	HP I/O Bank 68	PCle X0Y2	GTH Quad 228 X1Y16-X1Y19
GTH Quad 127 X0Y12-X0Y15 I [LS]	HP I/O Bank 47 I	HP I/O Bank 67 E	PCle X0Y1	GTH Quad 227 X1Y12-X1Y15 D [RS]
GTH Quad 126 X0Y8-X0Y11 H [LS]	HP I/O Bank 46 H	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X1Y8-X1Y11 C [RS] (RCAL)
HP I/O Bank 25	HP I/O Bank 45 G	HR I/O Bank 65 C	Configuration	GTH Quad 225 X1Y4-X1Y7 B [RS]
HP I/O Bank 24	HP I/O Bank 44 F	HR I/O Bank 84/94 B	PCle X0Y0 (tandem)	GTH Quad 224 X1Y0-X1Y3 A [RS]

X16457-012917

Figure 1-30: XCKU115 Banks in FLVD1924 Package


**TIP:** Bank 64 is labeled as 84/94 in some packages.



GTH Quad 133 X0Y36-X0Y39 P [LN] (RCAL)	HP I/O Bank 53 L	HP I/O Bank 73 P	PCIe X0Y5	GTH Quad 233 X1Y36-X1Y39 J [RN]
GTH Quad 132 X0Y32-X0Y35 O [LN]	HP I/O Bank 52 K	HP I/O Bank 72 O	PCIe X0Y4	GTH Quad 232 X1Y32-X1Y35 I [RN]
GTH Quad 131 X0Y28-X0Y31 N [LN]	HP I/O Bank 51 J	HP I/O Bank 71 N	SYSMON Configuration	GTH Quad 231 X1Y28-X1Y31 H [RN] (RCAL)
HP I/O Bank 30	HP I/O Bank 50	HR I/O Bank 70 M	Configuration	GTH Quad 230 X1Y24-X1Y27 G [RN]
HP I/O Bank 29	HP I/O Bank 49	HR I/O Bank 69	PCIe X0Y3	GTH Quad 229 X1Y20-X1Y23 F [RN]
SLR Crossing				
GTH Quad 128 X0Y16-X0Y19 M [LS] (RCAL)	HP I/O Bank 48	HP I/O Bank 68 F	PCIe X0Y2	GTH Quad 228 X1Y16-X1Y19 E [RS]
GTH Quad 127 X0Y12-X0Y15 L [LS]	HP I/O Bank 47	HP I/O Bank 67 E	PCIe X0Y1	GTH Quad 227 X1Y12-X1Y15 D [RS]
GTH Quad 126 X0Y8-X0Y11 K [LS]	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X1Y8-X1Y11 C [RS] (RCAL)
HP I/O Bank 25	HP I/O Bank 45 H	HR I/O Bank 65 C	Configuration	GTH Quad 225 X1Y4-X1Y7 B [RS]
HP I/O Bank 24	HP I/O Bank 44 G	HR I/O Bank 84/94	PCIe X0Y0 (tandem)	GTH Quad 224 X1Y0-X1Y3 A [RS]

X16458-012917

Figure 1-31: XCKU115 Banks in FLVF1924 Package and XQKU115 Banks in RLF1924 Package

GTH Quad 133 X0Y36-X0Y39 M [LN] (RCAL)	HP I/O Bank 53 M	HP I/O Bank 73 Q	PCle X0Y5	GTH Quad 233 X1Y36-X1Y39 G [RN]
GTH Quad 132 X0Y32-X0Y35 L [LN]	HP I/O Bank 52 L	HP I/O Bank 72 P	PCle X0Y4	GTH Quad 232 X1Y32-X1Y35 F [RN]
GTH Quad 131 X0Y28-X0Y31 K [LN]	HP I/O Bank 51 K	HP I/O Bank 71 O	SYSMON Configuration	GTH Quad 231 X1Y28-X1Y31 E [RN] (RCAL)
HP I/O Bank 30	HP I/O Bank 50 J	HR I/O Bank 70 N	Configuration	GTH Quad 230 X1Y24-X1Y27
HP I/O Bank 29	HP I/O Bank 49	HR I/O Bank 69	PCle X0Y3	GTH Quad 229 X1Y20-X1Y23
SLR Crossing				
GTH Quad 128 X0Y16-X0Y19 J [LS] (RCAL)	HP I/O Bank 48	HP I/O Bank 68	PCle X0Y2	GTH Quad 228 X1Y16-X1Y19
GTH Quad 127 X0Y12-X0Y15 I [LS]	HP I/O Bank 47 I	HP I/O Bank 67 E	PCle X0Y1	GTH Quad 227 X1Y12-X1Y15 D [RS]
GTH Quad 126 X0Y8-X0Y11 H [LS]	HP I/O Bank 46 H	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X1Y8-X1Y11 C [RS] (RCAL)
HP I/O Bank 25	HP I/O Bank 45 G	HR I/O Bank 65 C	Configuration	GTH Quad 225 X1Y4-X1Y7 B [RS]
HP I/O Bank 24	HP I/O Bank 44 F	HR I/O Bank 84/94 B	PCle X0Y0 (tandem)	GTH Quad 224 X1Y0-X1Y3 A [RS]

X16459-062117

Figure 1-32: XCKU115 Banks in FLVA2104 Package



**TIP:** Bank 64 is labeled as 84/94 in some packages.

GTH Quad 133 X0Y36-X0Y39 R [LN] (RCAL)	HP I/O Bank 53 L	HP I/O Bank 73 O	PCIe X0Y5	GTH Quad 233 X1Y36-X1Y39 J [RN]
GTH Quad 132 X0Y32-X0Y35 Q [LN]	HP I/O Bank 52 K	HP I/O Bank 72 N	PCIe X0Y4	GTH Quad 232 X1Y32-X1Y35 I [RN]
GTH Quad 131 X0Y28-X0Y31 P [LN]	HP I/O Bank 51 J	HP I/O Bank 71 M	SYSMON Configuration	GTH Quad 231 X1Y28-X1Y31 H [RN] (RCAL)
HP I/O Bank 30	HP I/O Bank 50	HR I/O Bank 70	Configuration	GTH Quad 230 X1Y24-X1Y27 G [RN]
HP I/O Bank 29	HP I/O Bank 49	HR I/O Bank 69	PCIe X0Y3	GTH Quad 229 X1Y20-X1Y23 F [RN]
SLR Crossing				
GTH Quad 128 X0Y16-X0Y19 M [LS] (RCAL)	HP I/O Bank 48	HP I/O Bank 68 F (Partial)	PCIe X0Y2	GTH Quad 228 X1Y16-X1Y19 E [RS]
GTH Quad 127 X0Y12-X0Y15 L [LS]	HP I/O Bank 47	HP I/O Bank 67 E	PCIe X0Y1	GTH Quad 227 X1Y12-X1Y15 D [RS]
GTH Quad 126 X0Y8-X0Y11 K [LS]	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X1Y8-X1Y11 C [RS] (RCAL)
HP I/O Bank 25	HP I/O Bank 45 H	HR I/O Bank 65 C	Configuration	GTH Quad 225 X1Y4-X1Y7 B [RS]
HP I/O Bank 24	HP I/O Bank 44 G	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X1Y0-X1Y3 A [RS]

X16460-012917

Figure 1-33: XCKU115 Banks in FLVB2104 Package



**TIP:** Bank 64 is labeled as 84/94 in some packages.

## XCVU065 Bank Diagrams

GTY Quad 128 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 48	HP I/O Bank 68	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19
GTY Quad 127 X0Y12-X0Y15	CMAC X0Y1	HP I/O Bank 47	HP I/O Bank 67	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15
GTY Quad 126 X0Y8-X0Y11	ILKN X0Y1	HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 (RCAL)
GTY Quad 125 X0Y4-X0Y7 (RCAL)	CMAC X0Y0	HP I/O Bank 45	HP I/O Bank 65	Configuration	GTH Quad 225 X0Y4-X0Y7
GTY Quad 124 X0Y0-X0Y3	ILKN X0Y0	HP I/O Bank 44	HR I/O Bank 84/94	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3

X16466-012917

Figure 1-34: XCVU065 Banks

GTY Quad 128 X0Y16-X0Y19 J [L]	CMAC X0Y2	HP I/O Bank 48 K	HP I/O Bank 68 F	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [R]
GTY Quad 127 X0Y12-X0Y15 I [L]	CMAC X0Y1	HP I/O Bank 47 J	HP I/O Bank 67 E	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [R]
GTY Quad 126 X0Y8-X0Y11 H [L]	ILKN X0Y1	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [R] (RCAL)
GTY Quad 125 X0Y4-X0Y7 G [L] (RCAL)	CMAC X0Y0	HP I/O Bank 45 H	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R]
GTY Quad 124 X0Y0-X0Y3 F [L]	ILKN X0Y0	HP I/O Bank 44 G	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X16467-062117

Figure 1-35: XCVU065 Banks in FFVC1517 Package

## XCVU080 Bank Diagrams

GTU Quad 131 X0Y28-X0Y31	CMAC X0Y3	HP I/O Bank 51	HP I/O Bank 71	PCIe X0Y3	GTH Quad 231 X0Y28-X0Y31
GTU Quad 130 X0Y24-X0Y27	ILKN X0Y4	HP I/O Bank 50	HP I/O Bank 70	ILKN X1Y4	GTH Quad 230 X0Y24-X0Y27
GTU Quad 129 X0Y20-X0Y23 (RCAL)	CMAC X0Y2	HP I/O Bank 49	HP I/O Bank 69	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23
GTU Quad 128 X0Y16-X0Y19	ILKN X0Y3	HP I/O Bank 48	HP I/O Bank 68	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19
GTU Quad 127 X0Y12-X0Y15	CMAC X0Y1	HP I/O Bank 47	HP I/O Bank 67	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15
GTU Quad 126 X0Y8-X0Y11	ILKN X0Y1	HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11
GTU Quad 125 X0Y4-X0Y7	CMAC X0Y0	HP I/O Bank 45	HP I/O Bank 65	Configuration	GTH Quad 225 X0Y4-X0Y7 (RCAL)
GTU Quad 124 X0Y0-X0Y3	ILKN X0Y0	HP I/O Bank 44	HR I/O Bank 84/94	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3

X16468-062117

Figure 1-36: XCVU080 Banks

GTU Quad 131 X0Y28-X0Y31	CMAC X0Y3	HP I/O Bank 51	HP I/O Bank 71	PCle X0Y3	GTH Quad 231 X0Y28-X0Y31
GTU Quad 130 X0Y24-X0Y27	ILKN X0Y4	HP I/O Bank 50	HP I/O Bank 70	ILKN X1Y4	GTH Quad 230 X0Y24-X0Y27
GTU Quad 129 X0Y20-X0Y23 J [L] (RCAL)	CMAC X0Y2	HP I/O Bank 49	HP I/O Bank 69	PCle X0Y2	GTH Quad 229 X0Y20-X0Y23
GTU Quad 128 X0Y16-X0Y19 I [L]	ILKN X0Y3	HP I/O Bank 48 K	HP I/O Bank 68 F	PCle X0Y1	GTH Quad 228 X0Y16-X0Y19 E [R]
GTU Quad 127 X0Y12-X0Y15 H [L]	CMAC X0Y1	HP I/O Bank 47 J	HP I/O Bank 67 E	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [R]
GTU Quad 126 X0Y8-X0Y11 G [L]	ILKN X0Y1	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [R]
GTU Quad 125 X0Y4-X0Y7 F [L]	CMAC X0Y0	HP I/O Bank 45 H	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R] (RCAL)
GTU Quad 124 X0Y0-X0Y3	ILKN X0Y0	HP I/O Bank 44 G	HR I/O Bank 84/94 B	PCle X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X16469-062117

Figure 1-37: XCVU080 Banks in FFVC1517 Package

GTU Quad 131 X0Y28-X0Y31 R [LN]	CMAC X0Y3	HP I/O Bank 51	HP I/O Bank 71 H	PCIe X0Y3	GTH Quad 231 X0Y28-X0Y31 H [RN]
GTU Quad 130 X0Y24-X0Y27 Q [LN]	ILKN X0Y4	HP I/O Bank 50	HP I/O Bank 70 G	ILKN X1Y4	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTU Quad 129 X0Y20-X0Y23 P [LN] (RCAL)	CMAC X0Y2	HP I/O Bank 49	HP I/O Bank 69 F	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23 F [RN]
GTU Quad 128 X0Y16-X0Y19 O [LN]	ILKN X0Y3	HP I/O Bank 48	HP I/O Bank 68	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [RS]
GTU Quad 127 X0Y12-X0Y15 N [LS]	CMAC X0Y1	HP I/O Bank 47	HP I/O Bank 67 E (Partial)	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [RS]
GTU Quad 126 X0Y8-X0Y11 M [LS]	ILKN X0Y1	HP I/O Bank 46	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS]
GTU Quad 125 X0Y4-X0Y7 L [LS]	CMAC X0Y0	HP I/O Bank 45	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS] (RCAL)
GTU Quad 124 X0Y0-X0Y3 K [LS]	ILKN X0Y0	HP I/O Bank 44	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X16470-062117

Figure 1-38: XCVU080 Banks in FFVD1517 Package

GTU Quad 131 X0Y28-X0Y31 M [L]	CMAC X0Y3	HP I/O Bank 51 O (Partial)	HP I/O Bank 71 L	PCIe X0Y3	GTH Quad 231 X0Y28-X0Y31 H [RN]
GTU Quad 130 X0Y24-X0Y27 L [L]	ILKN X0Y4	HP I/O Bank 50 N	HP I/O Bank 70 K	ILKN X1Y4	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTU Quad 129 X0Y20-X0Y23 K [L] (RCAL)	CMAC X0Y2	HP I/O Bank 49 M	HP I/O Bank 69	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23 F [RN]
GTU Quad 128 X0Y16-X0Y19 J [L]	ILKN X0Y3	HP I/O Bank 48 J	HP I/O Bank 68	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [RS]
GTU Quad 127 X0Y12-X0Y15	CMAC X0Y1	HP I/O Bank 47 I	HP I/O Bank 67 E	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [RS]
GTU Quad 126 X0Y8-X0Y11	ILKN X0Y1	HP I/O Bank 46 H	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS]
GTU Quad 125 X0Y4-X0Y7	CMAC X0Y0	HP I/O Bank 45 G	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS] (RCAL)
GTU Quad 124 X0Y0-X0Y3	ILKN X0Y0	HP I/O Bank 44 F	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X16471-062117

Figure 1-39: XCVU080 Banks in FFVB1760 Package



GTU Quad 131 X0Y28-X0Y31	CMAC X0Y3	HP I/O Bank 51 M	HP I/O Bank 71 Q	PCIe X0Y3	GTH Quad 231 X0Y28-X0Y31
GTU Quad 130 X0Y24-X0Y27 M [LN]	ILKN X0Y4	HP I/O Bank 50 L	HP I/O Bank 70 P	ILKN X1Y4	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTU Quad 129 X0Y20-X0Y23 L [LN] (RCAL)	CMAC X0Y2	HP I/O Bank 49 K	HP I/O Bank 69 O	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23 F [RN]
GTU Quad 128 X0Y16-X0Y19 K [LN]	ILKN X0Y3	HP I/O Bank 48 J	HP I/O Bank 68 N	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [RN]
GTU Quad 127 X0Y12-X0Y15 J [LS]	CMAC X0Y1	HP I/O Bank 47 I	HP I/O Bank 67 E	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [RS]
GTU Quad 126 X0Y8-X0Y11 I [LS]	ILKN X0Y1	HP I/O Bank 46 H	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS]
GTU Quad 125 X0Y4-X0Y7 H [LS]	CMAC X0Y0	HP I/O Bank 45 G	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS] (RCAL)
GTU Quad 124 X0Y0-X0Y3	ILKN X0Y0	HP I/O Bank 44 F	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X16472-062117

Figure 1-40: XCVU080 Banks in FFVA2104 Package

GTU Quad 131 X0Y28-X0Y31 R [LN]	CMAC X0Y3	HP I/O Bank 51 L	HP I/O Bank 71 O	PCIe X0Y3	GTH Quad 231 X0Y28-X0Y31 H [RN]
GTU Quad 130 X0Y24-X0Y27 Q [LN]	ILKN X0Y4	HP I/O Bank 50 K	HP I/O Bank 70 N	ILKN X1Y4	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTU Quad 129 X0Y20-X0Y23 P [LN] (RCAL)	CMAC X0Y2	HP I/O Bank 49 J	HP I/O Bank 69 M	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23 F [RN]
GTU Quad 128 X0Y16-X0Y19 O [LN]	ILKN X0Y3	HP I/O Bank 48	HP I/O Bank 68 F (Partial)	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [RS]
GTU Quad 127 X0Y12-X0Y15 N [LS]	CMAC X0Y1	HP I/O Bank 47	HP I/O Bank 67 E	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [RS]
GTU Quad 126 X0Y8-X0Y11 M [LS]	ILKN X0Y1	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS]
GTU Quad 125 X0Y4-X0Y7 L [LS]	CMAC X0Y0	HP I/O Bank 45 H	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS] (RCAL)
GTU Quad 124 X0Y0-X0Y3 K [LS]	ILKN X0Y0	HP I/O Bank 44 G	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X16473-062117

Figure 1-41: XCVU080 Banks in FFVB2104 Package

## XCVU095 Bank Diagrams

GTY Quad 131 X0Y28-X0Y31	CMAC X0Y3	HP I/O Bank 51	HP I/O Bank 71	PCIe X0Y3	GTH Quad 231 X0Y28-X0Y31
GTY Quad 130 X0Y24-X0Y27	ILKN X0Y4	HP I/O Bank 50	HP I/O Bank 70	ILKN X1Y4	GTH Quad 230 X0Y24-X0Y27
GTY Quad 129 X0Y20-X0Y23 (RCAL)	CMAC X0Y2	HP I/O Bank 49	HP I/O Bank 69	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23
GTY Quad 128 X0Y16-X0Y19	ILKN X0Y3	HP I/O Bank 48	HP I/O Bank 68	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19
GTY Quad 127 X0Y12-X0Y15	CMAC X0Y1	HP I/O Bank 47	HP I/O Bank 67	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15
GTY Quad 126 X0Y8-X0Y11	ILKN X0Y1	HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11
GTY Quad 125 X0Y4-X0Y7	CMAC X0Y0	HP I/O Bank 45	HP I/O Bank 65	Configuration	GTH Quad 225 X0Y4-X0Y7 (RCAL)
GTY Quad 124 X0Y0-X0Y3	ILKN X0Y0	HP I/O Bank 44	HR I/O Bank 84/94	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3

X16474-062117

Figure 1-42: XCVU095 Banks

GTU Quad 131 X0Y28-X0Y31	CMAC X0Y3	HP I/O Bank 51	HP I/O Bank 71	PCIe X0Y3	GTH Quad 231 X0Y28-X0Y31
GTU Quad 130 X0Y24-X0Y27	ILKN X0Y4	HP I/O Bank 50	HP I/O Bank 70	ILKN X1Y4	GTH Quad 230 X0Y24-X0Y27
GTU Quad 129 X0Y20-X0Y23 J [L] (RCAL)	CMAC X0Y2	HP I/O Bank 49	HP I/O Bank 69	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23
GTU Quad 128 X0Y16-X0Y19 I [L]	ILKN X0Y3	HP I/O Bank 48 K	HP I/O Bank 68 F	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [R]
GTU Quad 127 X0Y12-X0Y15 H [L]	CMAC X0Y1	HP I/O Bank 47 J	HP I/O Bank 67 E	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [R]
GTU Quad 126 X0Y8-X0Y11 G [L]	ILKN X0Y1	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [R]
GTU Quad 125 X0Y4-X0Y7 F [L]	CMAC X0Y0	HP I/O Bank 45 H	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R] (RCAL)
GTU Quad 124 X0Y0-X0Y3	ILKN X0Y0	HP I/O Bank 44 G	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X16475-062117

Figure 1-43: XCVU095 Banks in FFVC1517 Package

GTY Quad 131 X0Y28-X0Y31 R [LN]	CMAC X0Y3	HP I/O Bank 51	HP I/O Bank 71 H	PCle X0Y3	GTH Quad 231 X0Y28-X0Y31 H [RN]
GTY Quad 130 X0Y24-X0Y27 Q [LN]	ILKN X0Y4	HP I/O Bank 50	HP I/O Bank 70 G	ILKN X1Y4	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTY Quad 129 X0Y20-X0Y23 P [LN] (RCAL)	CMAC X0Y2	HP I/O Bank 49	HP I/O Bank 69 F	PCle X0Y2	GTH Quad 229 X0Y20-X0Y23 F [RN]
GTY Quad 128 X0Y16-X0Y19 O [LN]	ILKN X0Y3	HP I/O Bank 48	HP I/O Bank 68	PCle X0Y1	GTH Quad 228 X0Y16-X0Y19 E [RS]
GTY Quad 127 X0Y12-X0Y15 N [LS]	CMAC X0Y1	HP I/O Bank 47	HP I/O Bank 67 E (Partial)	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11 M [LS]	ILKN X0Y1	HP I/O Bank 46	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS]
GTY Quad 125 X0Y4-X0Y7 L [LS]	CMAC X0Y0	HP I/O Bank 45	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS] (RCAL)
GTY Quad 124 X0Y0-X0Y3 K [LS]	ILKN X0Y0	HP I/O Bank 44	HR I/O Bank 84/94 B	PCle X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X16476-062117

Figure 1-44: XCVU095 Banks in FFVD1517 Package

GTY Quad 131 X0Y28-X0Y31 M [L]	CMAC X0Y3	HP I/O Bank 51 O (Partial)	HP I/O Bank 71 L	PCIe X0Y3	GTH Quad 231 X0Y28-X0Y31 H [RN]
GTY Quad 130 X0Y24-X0Y27 L [L]	ILKN X0Y4	HP I/O Bank 50 N	HP I/O Bank 70 K	ILKN X1Y4	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTY Quad 129 X0Y20-X0Y23 K [L] (RCAL)	CMAC X0Y2	HP I/O Bank 49 M	HP I/O Bank 69	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23 F [RN]
GTY Quad 128 X0Y16-X0Y19 J [L]	ILKN X0Y3	HP I/O Bank 48 J	HP I/O Bank 68	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [RS]
GTY Quad 127 X0Y12-X0Y15	CMAC X0Y1	HP I/O Bank 47 I	HP I/O Bank 67 E	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11	ILKN X0Y1	HP I/O Bank 46 H	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS]
GTY Quad 125 X0Y4-X0Y7	CMAC X0Y0	HP I/O Bank 45 G	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS] (RCAL)
GTY Quad 124 X0Y0-X0Y3	ILKN X0Y0	HP I/O Bank 44 F	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X16477-062117

Figure 1-45: XCVU095 Banks in FFVB1760 Package

GTY Quad 131 X0Y28-X0Y31	CMAC X0Y3	HP I/O Bank 51 M	HP I/O Bank 71 Q	PCle X0Y3	GTH Quad 231 X0Y28-X0Y31
GTY Quad 130 X0Y24-X0Y27 M [LN]	ILKN X0Y4	HP I/O Bank 50 L	HP I/O Bank 70 P	ILKN X1Y4	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTY Quad 129 X0Y20-X0Y23 L [LN] (RCAL)	CMAC X0Y2	HP I/O Bank 49 K	HP I/O Bank 69 O	PCle X0Y2	GTH Quad 229 X0Y20-X0Y23 F [RN]
GTY Quad 128 X0Y16-X0Y19 K [LN]	ILKN X0Y3	HP I/O Bank 48 J	HP I/O Bank 68 N	PCle X0Y1	GTH Quad 228 X0Y16-X0Y19 E [RN]
GTY Quad 127 X0Y12-X0Y15 J [LS]	CMAC X0Y1	HP I/O Bank 47 I	HP I/O Bank 67 E	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11 I [LS]	ILKN X0Y1	HP I/O Bank 46 H	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS]
GTY Quad 125 X0Y4-X0Y7 H [LS]	CMAC X0Y0	HP I/O Bank 45 G	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS] (RCAL)
GTY Quad 124 X0Y0-X0Y3	ILKN X0Y0	HP I/O Bank 44 F	HR I/O Bank 84/94 B	PCle X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X16478-062117

Figure 1-46: XCVU095 Banks in FFVA2104 Package

GTY Quad 131 X0Y28-X0Y31 R [LN]	CMAC X0Y3	HP I/O Bank 51 L	HP I/O Bank 71 O	PCle X0Y3	GTH Quad 231 X0Y28-X0Y31 H [RN]
GTY Quad 130 X0Y24-X0Y27 Q [LN]	ILKN X0Y4	HP I/O Bank 50 K	HP I/O Bank 70 N	ILKN X1Y4	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTY Quad 129 X0Y20-X0Y23 P [LN] (RCAL)	CMAC X0Y2	HP I/O Bank 49 J	HP I/O Bank 69 M	PCle X0Y2	GTH Quad 229 X0Y20-X0Y23 F [RN]
GTY Quad 128 X0Y16-X0Y19 O [LN]	ILKN X0Y3	HP I/O Bank 48	HP I/O Bank 68 F (Partial)	PCle X0Y1	GTH Quad 228 X0Y16-X0Y19 E [RS]
GTY Quad 127 X0Y12-X0Y15 N [LS]	CMAC X0Y1	HP I/O Bank 47	HP I/O Bank 67 E	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11 M [LS]	ILKN X0Y1	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS]
GTY Quad 125 X0Y4-X0Y7 L [LS]	CMAC X0Y0	HP I/O Bank 45 H	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS] (RCAL)
GTY Quad 124 X0Y0-X0Y3 K [LS]	ILKN X0Y0	HP I/O Bank 44 G	HR I/O Bank 84/94 B	PCle X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X16479-062117

Figure 1-47: XCVU095 Banks in FFVB2104 Package



GTU Quad 131 X0Y28-X0Y31 U [LN]	CMAC X0Y3	HP I/O Bank 51	HP I/O Bank 71 I	PCIe X0Y3	GTH Quad 231 X0Y28-X0Y31 H [RN]
GTU Quad 130 X0Y24-X0Y27 T [LN]	ILKN X0Y4	HP I/O Bank 50	HP I/O Bank 70 H	ILKN X1Y4	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTU Quad 129 X0Y20-X0Y23 S [LN] (RCAL)	CMAC X0Y2	HP I/O Bank 49	HP I/O Bank 69 G	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23 F [RN]
GTU Quad 128 X0Y16-X0Y19 R [LC]	ILKN X0Y3	HP I/O Bank 48	HP I/O Bank 68 F	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [RC]
GTU Quad 127 X0Y12-X0Y15 Q [LC]	CMAC X0Y1	HP I/O Bank 47	HP I/O Bank 67 E	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [RC]
GTU Quad 126 X0Y8-X0Y11 P [LC]	ILKN X0Y1	HP I/O Bank 46	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RC]
GTU Quad 125 X0Y4-X0Y7 O [LC]	CMAC X0Y0	HP I/O Bank 45	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RC] (RCAL)
GTU Quad 124 X0Y0-X0Y3 N [LC]	ILKN X0Y0	HP I/O Bank 44	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RC]

X16480-062117

Figure 1-48: XCVU095 Banks in FFVC2104 Package

## XCVU125 Bank Diagrams

GTU Quad 133 X0Y36-X0Y39	CMAC X0Y5	HP I/O Bank 53	HP I/O Bank 73	PCIe X0Y3	GTH Quad 233 X0Y36-X0Y39
GTU Quad 132 X0Y32-X0Y35	CMAC X0Y4	HP I/O Bank 52	HP I/O Bank 72	ILKN X1Y5	GTH Quad 232 X0Y32-X0Y35
GTU Quad 131 X0Y28-X0Y31	ILKN X0Y4	HP I/O Bank 51	HP I/O Bank 71	SYSMON Configuration	GTH Quad 231 X0Y28-X0Y31 (RCAL)
GTU Quad 130 X0Y24-X0Y27 (RCAL)	CMAC X0Y3	HP I/O Bank 50	HP I/O Bank 70	Configuration	GTH Quad 230 X0Y24-X0Y27
GTU Quad 129 X0Y20-X0Y23	ILKN X0Y3	HP I/O Bank 49	HR I/O Bank 69	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23
SLR Crossing					
GTU Quad 128 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 48	HP I/O Bank 68	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19
GTU Quad 127 X0Y12-X0Y15	CMAC X0Y1	HP I/O Bank 47	HP I/O Bank 67	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15
GTU Quad 126 X0Y8-X0Y11	ILKN X0Y1	HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 (RCAL)
GTU Quad 125 X0Y4-X0Y7 (RCAL)	CMAC X0Y0	HP I/O Bank 45	HP I/O Bank 65	Configuration	GTH Quad 225 X0Y4-X0Y7
GTU Quad 124 X0Y0-X0Y3	ILKN X0Y0	HP I/O Bank 44	HR I/O Bank 84/94	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3

X16481-012917

Figure 1-49: XCVU125 Banks

GTU Quad 133 X0Y36-X0Y39	CMAC X0Y5	HP I/O Bank 53	HP I/O Bank 73 H	PCIe X0Y3	GTH Quad 233 X0Y36-X0Y39 J [RN]
GTU Quad 132 X0Y32-X0Y35 R [LN]	CMAC X0Y4	HP I/O Bank 52	HP I/O Bank 72 G	ILKN X1Y5	GTH Quad 232 X0Y32-X0Y35 I [RN]
GTU Quad 131 X0Y28-X0Y31 Q [LN]	ILKN X0Y4	HP I/O Bank 51	HP I/O Bank 71 F	SYSMON Configuration	GTH Quad 231 X0Y28-X0Y31 H [RN] (RCAL)
GTU Quad 130 X0Y24-X0Y27 P [LN] (RCAL)	CMAC X0Y3	HP I/O Bank 50	HP I/O Bank 70	Configuration	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTU Quad 129 X0Y20-X0Y23 O [LN]	ILKN X0Y3	HP I/O Bank 49	HR I/O Bank 69	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23 F [RN]
SLR Crossing					
GTU Quad 128 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 48	HP I/O Bank 68	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [RS]
GTU Quad 127 X0Y12-X0Y15 N [LS]	CMAC X0Y1	HP I/O Bank 47	HP I/O Bank 67 E (Partial)	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [RS]
GTU Quad 126 X0Y8-X0Y11 M [LS]	ILKN X0Y1	HP I/O Bank 46	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS] (RCAL)
GTU Quad 125 X0Y4-X0Y7 L [LS] (RCAL)	CMAC X0Y0	HP I/O Bank 45	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS]
GTU Quad 124 X0Y0-X0Y3 K [LS]	ILKN X0Y0	HP I/O Bank 44	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X16482-031820

Figure 1-50: XCVU125 Banks in FLVD1517 Package

GTY Quad 133 X0Y36-X0Y39	CMAC X0Y5	HP I/O Bank 53 O (Partial)	HP I/O Bank 73	PCIe X0Y3	GTH Quad 233 X0Y36-X0Y39 I [RN]
GTY Quad 132 X0Y32-X0Y35 M [L]	CMAC X0Y4	HP I/O Bank 52 N	HP I/O Bank 72	ILKN X1Y5	GTH Quad 232 X0Y32-X0Y35 H [RN]
GTY Quad 131 X0Y28-X0Y31 L [L]	ILKN X0Y4	HP I/O Bank 51 M	HP I/O Bank 71	SYSMON Configuration	GTH Quad 231 X0Y28-X0Y31 G [RN] (RCAL)
GTY Quad 130 X0Y24-X0Y27 K [L] (RCAL)	CMAC X0Y3	HP I/O Bank 50 L	HP I/O Bank 70	Configuration	GTH Quad 230 X0Y24-X0Y27 F [RN]
GTY Quad 129 X0Y20-X0Y23 J [L]	ILKN X0Y3	HP I/O Bank 49 K	HR I/O Bank 69	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23
SLR Crossing					
GTY Quad 128 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 48 J	HP I/O Bank 68	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [RS]
GTY Quad 127 X0Y12-X0Y15	CMAC X0Y1	HP I/O Bank 47 I	HP I/O Bank 67 E	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11	ILKN X0Y1	HP I/O Bank 46 H	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS] (RCAL)
GTY Quad 125 X0Y4-X0Y7 (RCAL)	CMAC X0Y0	HP I/O Bank 45 G	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS]
GTY Quad 124 X0Y0-X0Y3	ILKN X0Y0	HP I/O Bank 44 F	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X16483-031820

Figure 1-51: XCVU125 Banks in FLVB1760 Package

GTU Quad 133 X0Y36-X0Y39	CMAC X0Y5	HP I/O Bank 53 M	HP I/O Bank 73 Q	PCIe X0Y3	GTH Quad 233 X0Y36-X0Y39 G [RN]
GTU Quad 132 X0Y32-X0Y35 M [LN]	CMAC X0Y4	HP I/O Bank 52 L	HP I/O Bank 72 P	ILKN X1Y5	GTH Quad 232 X0Y32-X0Y35 F [RN]
GTU Quad 131 X0Y28-X0Y31 L [LN]	ILKN X0Y4	HP I/O Bank 51 K	HP I/O Bank 71 O	SYSMON Configuration	GTH Quad 231 X0Y28-X0Y31 E [RN] (RCAL)
GTU Quad 130 X0Y24-X0Y27 K [LN] (RCAL)	CMAC X0Y3	HP I/O Bank 50 J	HP I/O Bank 70 N	Configuration	GTH Quad 230 X0Y24-X0Y27
GTU Quad 129 X0Y20-X0Y23	ILKN X0Y3	HP I/O Bank 49	HR I/O Bank 69	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23
SLR Crossing					
GTU Quad 128 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 48	HP I/O Bank 68	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19
GTU Quad 127 X0Y12-X0Y15 J [LS]	CMAC X0Y1	HP I/O Bank 47 I	HP I/O Bank 67 E	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [RS]
GTU Quad 126 X0Y8-X0Y11 I [LS]	ILKN X0Y1	HP I/O Bank 46 H	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS] (RCAL)
GTU Quad 125 X0Y4-X0Y7 H [LS] (RCAL)	CMAC X0Y0	HP I/O Bank 45 G	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS]
GTU Quad 124 X0Y0-X0Y3	ILKN X0Y0	HP I/O Bank 44 F	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X16484-031820

Figure 1-52: XCVU125 Banks in FLVA2104 Package

GTU Quad 133 X0Y36-X0Y39 S [LN]	CMAC X0Y5	HP I/O Bank 53	HP I/O Bank 73	PCIe X0Y3	GTH Quad 233 X0Y36-X0Y39 J [RN]
GTU Quad 132 X0Y32-X0Y35 R [LN]	CMAC X0Y4	HP I/O Bank 52 L	HP I/O Bank 72 O	ILKN X1Y5	GTH Quad 232 X0Y32-X0Y35 I [RN]
GTU Quad 131 X0Y28-X0Y31 Q [LN]	ILKN X0Y4	HP I/O Bank 51 K	HP I/O Bank 71 N	SYSMON Configuration	GTH Quad 231 X0Y28-X0Y31 H [RN] (RCAL)
GTU Quad 130 X0Y24-X0Y27 P [LN] (RCAL)	CMAC X0Y3	HP I/O Bank 50 J	HP I/O Bank 70 M	Configuration	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTU Quad 129 X0Y20-X0Y23 O [LN]	ILKN X0Y3	HP I/O Bank 49	HR I/O Bank 69	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23 F [RN]
SLR Crossing					
GTU Quad 128 X0Y16-X0Y19 N [LS]	CMAC X0Y2	HP I/O Bank 48	HP I/O Bank 68 F (Partial)	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [RS]
GTU Quad 127 X0Y12-X0Y15 M [LS]	CMAC X0Y1	HP I/O Bank 47	HP I/O Bank 67 E	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [RS]
GTU Quad 126 X0Y8-X0Y11 L [LS]	ILKN X0Y1	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS] (RCAL)
GTU Quad 125 X0Y4-X0Y7 K [LS] (RCAL)	CMAC X0Y0	HP I/O Bank 45 H	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS]
GTU Quad 124 X0Y0-X0Y3 N [LC]	ILKN X0Y0	HP I/O Bank 44 G	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X16485-031820

Figure 1-53: XCVU125 Banks in FLVB2104 Package

GTU Quad 133 X0Y36-X0Y39 W [LN]	CMAC X0Y5	HP I/O Bank 53	HP I/O Bank 73	PCIe X0Y3	GTH Quad 233 X0Y36-X0Y39 J [RN]
GTU Quad 132 X0Y32-X0Y35 V [LN]	CMAC X0Y4	HP I/O Bank 52	HP I/O Bank 72 I	ILKN X1Y5	GTH Quad 232 X0Y32-X0Y35 I [RN]
GTU Quad 131 X0Y28-X0Y31 U [LN]	ILKN X0Y4	HP I/O Bank 51	HP I/O Bank 71 H	SYSMON Configuration	GTH Quad 231 X0Y28-X0Y31 H [RN] (RCAL)
GTU Quad 130 X0Y24-X0Y27 T [LN] (RCAL)	CMAC X0Y3	HP I/O Bank 50	HP I/O Bank 70 G	Configuration	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTU Quad 129 X0Y20-X0Y23 S [LN]	ILKN X0Y3	HP I/O Bank 49	HR I/O Bank 69	PCIe X0Y2	GTH Quad 229 X0Y20-X0Y23 F [RN]
SLR Crossing					
GTU Quad 128 X0Y16-X0Y19 R [LC]	CMAC X0Y2	HP I/O Bank 48	HP I/O Bank 68 F	PCIe X0Y1	GTH Quad 228 X0Y16-X0Y19 E [RC]
GTU Quad 127 X0Y12-X0Y15 Q [LC]	CMAC X0Y1	HP I/O Bank 47	HP I/O Bank 67 E	ILKN X1Y2	GTH Quad 227 X0Y12-X0Y15 D [RC]
GTU Quad 126 X0Y8-X0Y11 P [LC]	ILKN X0Y1	HP I/O Bank 46	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RC] (RCAL)
GTU Quad 125 X0Y4-X0Y7 O [LC] (RCAL)	CMAC X0Y0	HP I/O Bank 45	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RC]
GTU Quad 124 X0Y0-X0Y3 N [LC]	ILKN X0Y0	HP I/O Bank 44	HR I/O Bank 84/94 B	PCIe X0Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RC]

X16486-031720

Figure 1-54: XCVU125 Banks in FLVC2104 Package

## XCVU160 Bank Diagrams

GTU Quad 133 X0Y52-X0Y55	CMAC X0Y8	HP I/O Bank 53	HP I/O Bank 73	PCIe X0Y4	GTH Quad 233 X0Y52-X0Y55
GTU Quad 132 X0Y45-X0Y51	CMAC X0Y7	HP I/O Bank 52	HP I/O Bank 72	ILKN X1Y7	GTH Quad 232 X0Y45-X0Y51
GTU Quad 131 X0Y44-X0Y47	ILKN X0Y6	HP I/O Bank 51	HP I/O Bank 71	SYSMON Configuration	GTH Quad 231 X0Y44-X0Y47 (RCAL)
GTU Quad 130 X0Y40-X0Y43 (RCAL)	CMAC X0Y6	HP I/O Bank 50	HP I/O Bank 70	Configuration	GTH Quad 230 X0Y40-X0Y43
GTU Quad 129 X0Y36-X0Y39	ILKN X0Y5	HP I/O Bank 49	HR I/O Bank 69	PCIe X0Y3	GTH Quad 229 X0Y36-X0Y39
SLR Crossing					
GTU Quad 128 X0Y32-X0Y35	CMAC X0Y5	HP I/O Bank 48	HP I/O Bank 68	PCIe X0Y2	GTH Quad 228 X0Y32-X0Y35
GTU Quad 127 X0Y28-X0Y31	CMAC X0Y4	HP I/O Bank 47	HP I/O Bank 67	ILKN X1Y4	GTH Quad 227 X0Y28-X0Y31
GTU Quad 126 X0Y24-X0Y27	ILKN X0Y2	HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X0Y24-X0Y27 (RCAL)
GTU Quad 125 X0Y20-X0Y23 (RCAL)	CMAC X0Y3	HP I/O Bank 45	HP I/O Bank 65	Configuration	GTH Quad 225 X0Y20-X0Y23
GTU Quad 124 X0Y16-X0Y19	ILKN X0Y2	HP I/O Bank 44	HR I/O Bank 84/94	PCIe X0Y1 (tandem)	GTH Quad 224 X0Y16-X0Y19
SLR Crossing					
GTU Quad 123 X0Y12-X0Y15	CMAC X0Y2	HP I/O Bank 43	HP I/O Bank 63	PCIe X0Y0	GTH Quad 223 X0Y12-X0Y15
GTU Quad 122 X0Y8-X0Y11	CMAC X0Y1	HP I/O Bank 42	HP I/O Bank 62	ILKN X1Y1	GTH Quad 222 X0Y8-X0Y11
GTU Quad 121 X0Y4-X0Y7	ILKN X0Y0	HP I/O Bank 41	HP I/O Bank 61	SYSMON Configuration	GTH Quad 221 X0Y4-X0Y7 (RCAL)
GTU Quad 120 X0Y0-X0Y3 (RCAL)	CMAC X0Y0	HP I/O Bank 40	HP I/O Bank 60	Configuration	GTH Quad 220 X0Y0-X0Y3

X16488-012917

Figure 1-55: XCVU160 Banks



GTY Quad 133 X0Y52-X0Y55 S [LN]	CMAC X0Y8	HP I/O Bank 53	HP I/O Bank 73	PCle X0Y4	GTH Quad 233 X0Y52-X0Y55 J [RN]
GTY Quad 132 X0Y45-X0Y51 R [LN]	CMAC X0Y7	HP I/O Bank 52 L	HP I/O Bank 72 O	ILKN X1Y7	GTH Quad 232 X0Y45-X0Y51 I [RN]
GTY Quad 131 X0Y44-X0Y47 Q [LN]	ILKN X0Y6	HP I/O Bank 51 K	HP I/O Bank 71 N	SYSMON Configuration	GTH Quad 231 X0Y44-X0Y47 H [RN] (RCAL)
GTY Quad 130 X0Y40-X0Y43 P [LN] (RCAL)	CMAC X0Y6	HP I/O Bank 50 J	HP I/O Bank 70 M	Configuration	GTH Quad 230 X0Y40-X0Y43 G [RN]
GTY Quad 129 X0Y36-X0Y39 O [LN]	ILKN X0Y5	HP I/O Bank 49	HR I/O Bank 69	PCle X0Y3	GTH Quad 229 X0Y36-X0Y39 F [RN]
SLR Crossing					
GTY Quad 128 X0Y32-X0Y35 N [LS]	CMAC X0Y5	HP I/O Bank 48	HP I/O Bank 68 F (Partial)	PCle X0Y2	GTH Quad 228 X0Y32-X0Y35 E [RS]
GTY Quad 127 X0Y28-X0Y31 M [LS]	CMAC X0Y4	HP I/O Bank 47	HP I/O Bank 67 E	ILKN X1Y4	GTH Quad 227 X0Y28-X0Y31 D [RS]
GTY Quad 126 X0Y24-X0Y27 L [LS]	ILKN X0Y2	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y24-X0Y27 C [RS] (RCAL)
GTY Quad 125 X0Y20-X0Y23 K [LS] (RCAL)	CMAC X0Y3	HP I/O Bank 45 H	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y20-X0Y23 B [RS]
GTY Quad 124 X0Y16-X0Y19	ILKN X0Y2	HP I/O Bank 44 G	HR I/O Bank 84/94 B	PCle X0Y1 (tandem)	GTH Quad 224 X0Y16-X0Y19 A [RS]
SLR Crossing					
GTY Quad 123 X0Y12-X0Y15	CMAC X0Y2	HP I/O Bank 43	HP I/O Bank 63	PCle X0Y0	GTH Quad 223 X0Y12-X0Y15
GTY Quad 122 X0Y8-X0Y11	CMAC X0Y1	HP I/O Bank 42	HP I/O Bank 62	ILKN X1Y1	GTH Quad 222 X0Y8-X0Y11
GTY Quad 121 X0Y4-X0Y7	ILKN X0Y0	HP I/O Bank 41	HP I/O Bank 61	SYSMON Configuration	GTH Quad 221 X0Y4-X0Y7 (RCAL)
GTY Quad 120 X0Y0-X0Y3 (RCAL)	CMAC X0Y0	HP I/O Bank 40	HP I/O Bank 60	Configuration	GTH Quad 220 X0Y0-X0Y3

X16489-012917

Figure 1-56: XCVU160 Banks in FLGB2104 Package

GTU Quad 133 X0Y52-X0Y55 W [LN]	CMAC X0Y8	HP I/O Bank 53	HP I/O Bank 73	PCle X0Y4	GTH Quad 233 X0Y52-X0Y55 J [RN]
GTU Quad 132 X0Y45-X0Y51 V [LN]	CMAC X0Y7	HP I/O Bank 52 L	HP I/O Bank 72 I	ILKN X1Y7	GTH Quad 232 X0Y45-X0Y51 I [RN]
GTU Quad 131 X0Y44-X0Y47 U [LN]	ILKN X0Y6	HP I/O Bank 51 K	HP I/O Bank 71 H	SYSMON Configuration	GTH Quad 231 X0Y44-X0Y47 H [RN] (RCAL)
GTU Quad 130 X0Y40-X0Y43 T [LN] (RCAL)	CMAC X0Y6	HP I/O Bank 50 J	HP I/O Bank 70 G	Configuration	GTH Quad 230 X0Y40-X0Y43 G [RN]
GTU Quad 129 X0Y36-X0Y39 S [LN]	ILKN X0Y5	HP I/O Bank 49	HR I/O Bank 69	PCle X0Y3	GTH Quad 229 X0Y36-X0Y39 F [RN]
SLR Crossing					
GTU Quad 128 X0Y32-X0Y35 R [LC]	CMAC X0Y5	HP I/O Bank 48	HP I/O Bank 68 F	PCle X0Y2	GTH Quad 228 X0Y32-X0Y35 E [RC]
GTU Quad 127 X0Y28-X0Y31 Q [LC]	CMAC X0Y4	HP I/O Bank 47	HP I/O Bank 67 E	ILKN X1Y4	GTH Quad 227 X0Y28-X0Y31 D [RC]
GTU Quad 126 X0Y24-X0Y27 P [LC]	ILKN X0Y2	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y24-X0Y27 C [RC] (RCAL)
GTU Quad 125 X0Y20-X0Y23 O [LC] (RCAL)	CMAC X0Y3	HP I/O Bank 45 H	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y20-X0Y23 B [RC]
GTU Quad 124 X0Y16-X0Y19 N [LC]	ILKN X0Y2	HP I/O Bank 44 G	HR I/O Bank 84/94 B	PCle X0Y1 (tandem)	GTH Quad 224 X0Y16-X0Y19 A [RC]
SLR Crossing					
GTU Quad 123 X0Y12-X0Y15	CMAC X0Y2	HP I/O Bank 43	HP I/O Bank 63	PCle X0Y0	GTH Quad 223 X0Y12-X0Y15
GTU Quad 122 X0Y8-X0Y11 Z [LS]	CMAC X0Y1	HP I/O Bank 42	HP I/O Bank 62	ILKN X1Y1	GTH Quad 222 X0Y8-X0Y11 M [RS]
GTU Quad 121 X0Y4-X0Y7 Y [LS]	ILKN X0Y0	HP I/O Bank 41	HP I/O Bank 61	SYSMON Configuration	GTH Quad 221 X0Y4-X0Y7 L [RS] (RCAL)
GTU Quad 120 X0Y0-X0Y3 X [LS] (RCAL)	CMAC X0Y0	HP I/O Bank 40	HP I/O Bank 60	Configuration	GTH Quad 220 X0Y0-X0Y3 K [RS]

X16490-012917

Figure 1-57: XCVU160 Banks in FLGC2104 Package

## XCVU190 Bank Diagrams

GTY Quad 133 X0Y56-X0Y59	CMAC X0Y8	HP I/O Bank 53	HP I/O Bank 73	PCIe X0Y5	GTH Quad 233 X0Y56-X0Y59
GTY Quad 132 X0Y52-X0Y55	CMAC X0Y7	HP I/O Bank 52	HP I/O Bank 72	ILKN X1Y8	GTH Quad 232 X0Y52-X0Y55
GTY Quad 131 X0Y48-X0Y51	ILKN X0Y7	HP I/O Bank 51	HP I/O Bank 71	SYSMON Configuration	GTH Quad 231 X0Y48-X0Y51 (RCAL)
GTY Quad 130 X0Y44-X0Y47 (RCAL)	CMAC X0Y6	HP I/O Bank 50	HP I/O Bank 70	Configuration	GTH Quad 230 X0Y44-X0Y47
GTY Quad 129 X0Y40-X0Y43	ILKN X0Y6	HP I/O Bank 49	HR I/O Bank 69	PCIe X0Y4	GTH Quad 229 X0Y40-X0Y43
SLR Crossing					
GTY Quad 128 X0Y36-X0Y39	CMAC X0Y5	HP I/O Bank 48	HP I/O Bank 68	PCIe X0Y3	GTH Quad 228 X0Y36-X0Y39
GTY Quad 127 X0Y32-X0Y35	CMAC X0Y4	HP I/O Bank 47	HP I/O Bank 67	ILKN X1Y5	GTH Quad 227 X0Y32-X0Y35
GTY Quad 126 X0Y28-X0Y31	ILKN X0Y4	HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X0Y28-X0Y31 (RCAL)
GTY Quad 125 X0Y24-X0Y27 (RCAL)	CMAC X0Y3	HP I/O Bank 45	HP I/O Bank 65	Configuration	GTH Quad 225 X0Y24-X0Y27
GTY Quad 124 X0Y20-X0Y23	ILKN X0Y3	HP I/O Bank 44	HR I/O Bank 84/94	PCIe X0Y2 (tandem)	GTH Quad 224 X0Y20-X0Y23
SLR Crossing					
GTY Quad 123 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 43	HP I/O Bank 63	PCIe X0Y1	GTH Quad 223 X0Y16-X0Y19
GTY Quad 122 X0Y12-X0Y15	CMAC X0Y1	HP I/O Bank 42	HP I/O Bank 62	ILKN X1Y2	GTH Quad 222 X0Y12-X0Y15
GTY Quad 121 X0Y8-X0Y11	ILKN X0Y1	HP I/O Bank 41	HP I/O Bank 61	SYSMON Configuration	GTH Quad 221 X0Y8-X0Y11 (RCAL)
GTY Quad 120 X0Y4-X0Y7 (RCAL)	CMAC X0Y0	HP I/O Bank 40	HP I/O Bank 60	Configuration	GTH Quad 220 X0Y4-X0Y7
GTY Quad 119 X0Y0-X0Y3	ILKN X0Y0	HP I/O Bank 39	HR I/O Bank 59	PCIe X0Y0	GTH Quad 219 X0Y0-X0Y3

X16491-012917

Figure 1-58: XCVU190 Banks

GTU Quad 133 X0Y56-X0Y59 S [LN]	CMAC X0Y8	HP I/O Bank 53	HP I/O Bank 73	PCIe X0Y5	GTH Quad 233 X0Y56-X0Y59 J [RN]
GTU Quad 132 X0Y52-X0Y55 R [LN]	CMAC X0Y7	HP I/O Bank 52 L	HP I/O Bank 72 O	ILKN X1Y8	GTH Quad 232 X0Y52-X0Y55 I [RN]
GTU Quad 131 X0Y48-X0Y51 Q [LN]	ILKN X0Y7	HP I/O Bank 51 K	HP I/O Bank 71 N	SYSMON Configuration	GTH Quad 231 X0Y48-X0Y51 H [RN] (RCAL)
GTU Quad 130 X0Y44-X0Y47 P [LN] (RCAL)	CMAC X0Y6	HP I/O Bank 50 J	HP I/O Bank 70 M	Configuration	GTH Quad 230 X0Y44-X0Y47 G [RN]
GTU Quad 129 X0Y40-X0Y43 O [LN]	ILKN X0Y6	HP I/O Bank 49	HR I/O Bank 69	PCIe X0Y4	GTH Quad 229 X0Y40-X0Y43 F [RN]
SLR Crossing					
GTU Quad 128 X0Y36-X0Y39 N [LS]	CMAC X0Y5	HP I/O Bank 48	HP I/O Bank 68 F (Partial)	PCIe X0Y3	GTH Quad 228 X0Y36-X0Y39 E [RS]
GTU Quad 127 X0Y32-X0Y35 M [LS]	CMAC X0Y4	HP I/O Bank 47	HP I/O Bank 67 E	ILKN X1Y5	GTH Quad 227 X0Y32-X0Y35 D [RS]
GTU Quad 126 X0Y28-X0Y31 L [LS]	ILKN X0Y4	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y28-X0Y31 C [RS] (RCAL)
GTU Quad 125 X0Y24-X0Y27 K [LS] (RCAL)	CMAC X0Y3	HP I/O Bank 45 H	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y24-X0Y27 B [RS]
GTU Quad 124 X0Y20-X0Y23	ILKN X0Y3	HP I/O Bank 44 G	HR I/O Bank 84/94 B	PCIe X0Y2 (tandem)	GTH Quad 224 X0Y20-X0Y23 A [RS]
SLR Crossing					
GTU Quad 123 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 43	HP I/O Bank 63	PCIe X0Y1	GTH Quad 223 X0Y16-X0Y19
GTU Quad 122 X0Y12-X0Y15	CMAC X0Y1	HP I/O Bank 42	HP I/O Bank 62	ILKN X1Y2	GTH Quad 222 X0Y12-X0Y15
GTU Quad 121 X0Y8-X0Y11	ILKN X0Y1	HP I/O Bank 41	HP I/O Bank 61	SYSMON Configuration	GTH Quad 221 X0Y8-X0Y11 (RCAL)
GTU Quad 120 X0Y4-X0Y7 (RCAL)	CMAC X0Y0	HP I/O Bank 40	HP I/O Bank 60	Configuration	GTH Quad 220 X0Y4-X0Y7
GTU Quad 119 X0Y0-X0Y3	ILKN X0Y0	HP I/O Bank 39	HR I/O Bank 59	PCIe X0Y0	GTH Quad 219 X0Y0-X0Y3

X16492-012917

Figure 1-59: XCVU190 Banks in FLGB2104 Package

GTY Quad 133 X0Y56-X0Y59 W [LN]	CMAC X0Y8	HP I/O Bank 53	HP I/O Bank 73	PCIe X0Y5	GTH Quad 233 X0Y56-X0Y59 J [RN]
GTY Quad 132 X0Y52-X0Y55 V [LN]	CMAC X0Y7	HP I/O Bank 52 L	HP I/O Bank 72 I	ILKN X1Y8	GTH Quad 232 X0Y52-X0Y55 I [RN]
GTY Quad 131 X0Y48-X0Y51 U [LN]	ILKN X0Y7	HP I/O Bank 51 K	HP I/O Bank 71 H	SYSMON Configuration	GTH Quad 231 X0Y48-X0Y51 H [RN] (RCAL)
GTY Quad 130 X0Y44-X0Y47 T [LN] (RCAL)	CMAC X0Y6	HP I/O Bank 50 J	HP I/O Bank 70 G	Configuration	GTH Quad 230 X0Y44-X0Y47 G [RN]
GTY Quad 129 X0Y40-X0Y43 S [LN]	ILKN X0Y6	HP I/O Bank 49	HR I/O Bank 69	PCIe X0Y4	GTH Quad 229 X0Y40-X0Y43 F [RN]
SLR Crossing					
GTY Quad 128 X0Y36-X0Y39 R [LC]	CMAC X0Y5	HP I/O Bank 48	HP I/O Bank 68 F	PCIe X0Y3	GTH Quad 228 X0Y36-X0Y39 E [RC]
GTY Quad 127 X0Y32-X0Y35 Q [LC]	CMAC X0Y4	HP I/O Bank 47	HP I/O Bank 67 E	ILKN X1Y5	GTH Quad 227 X0Y32-X0Y35 D [RC]
GTY Quad 126 X0Y28-X0Y31 P [LC]	ILKN X0Y4	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y28-X0Y31 C [RC] (RCAL)
GTY Quad 125 X0Y24-X0Y27 O [LC] (RCAL)	CMAC X0Y3	HP I/O Bank 45 H	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y24-X0Y27 B [RC]
GTY Quad 124 X0Y20-X0Y23 N [LC]	ILKN X0Y3	HP I/O Bank 44 G	HR I/O Bank 84/94 B	PCIe X0Y2 (tandem)	GTH Quad 224 X0Y20-X0Y23 A [RC]
SLR Crossing					
GTY Quad 123 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 43	HP I/O Bank 63	PCIe X0Y1	GTH Quad 223 X0Y16-X0Y19
GTY Quad 122 X0Y12-X0Y15 Z [LS]	CMAC X0Y1	HP I/O Bank 42	HP I/O Bank 62	ILKN X1Y2	GTH Quad 222 X0Y12-X0Y15 M [RS]
GTY Quad 121 X0Y8-X0Y11 Y [LS]	ILKN X0Y1	HP I/O Bank 41	HP I/O Bank 61	SYSMON Configuration	GTH Quad 221 X0Y8-X0Y11 L [RS] (RCAL)
GTY Quad 120 X0Y4-X0Y7 X [LS] (RCAL)	CMAC X0Y0	HP I/O Bank 40	HP I/O Bank 60	Configuration	GTH Quad 220 X0Y4-X0Y7 K [RS]
GTY Quad 119 X0Y0-X0Y3	ILKN X0Y0	HP I/O Bank 39	HR I/O Bank 59	PCIe X0Y0	GTH Quad 219 X0Y0-X0Y3

X16493-012917

Figure 1-60: XCVU190 Banks in FLGC2104 Package

GTY Quad 133 X0Y56-X0Y59 Z [LN]	CMAC X0Y8	HP I/O Bank 53	HP I/O Bank 73	PCIe X0Y5	GTH Quad 233 X0Y56-X0Y59 J [RN]
GTY Quad 132 X0Y52-X0Y55 Y [LN]	CMAC X0Y7	HP I/O Bank 52	HP I/O Bank 72 K	ILKN X1Y8	GTH Quad 232 X0Y52-X0Y55 I [RN]
GTY Quad 131 X0Y48-X0Y51 X [LN]	ILKN X0Y7	HP I/O Bank 51	HP I/O Bank 71 J	SYSMON Configuration	GTH Quad 231 X0Y48-X0Y51 H [RN] (RCAL)
GTY Quad 130 X0Y44-X0Y47 W [LUC] (RCAL)	CMAC X0Y6	HP I/O Bank 50	HP I/O Bank 70 I	Configuration	GTH Quad 230 X0Y44-X0Y47 G [RUC]
GTY Quad 129 X0Y40-X0Y43 V [LUC]	ILKN X0Y6	HP I/O Bank 49	HR I/O Bank 69	PCIe X0Y4	GTH Quad 229 X0Y40-X0Y43 F [RUC]
SLR Crossing					
GTY Quad 128 X0Y36-X0Y39 U [LUC]	CMAC X0Y5	HP I/O Bank 48	HP I/O Bank 68 H (Partial)	PCIe X0Y3	GTH Quad 228 X0Y36-X0Y39 E [RUC]
GTY Quad 127 X0Y32-X0Y35 T [LUC]	CMAC X0Y4	HP I/O Bank 47	HP I/O Bank 67 G	ILKN X1Y5	GTH Quad 227 X0Y32-X0Y35 D [RUC]
GTY Quad 126 X0Y28-X0Y31 S [LLC]	ILKN X0Y4	HP I/O Bank 46	HP I/O Bank 66 B (Partial)	SYSMON Configuration	GTH Quad 226 X0Y28-X0Y31 C [RLC] (RCAL)
GTY Quad 125 X0Y24-X0Y27 R [LLC] (RCAL)	CMAC X0Y3	HP I/O Bank 45	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y24-X0Y27 B [RLC]
GTY Quad 124 X0Y20-X0Y23 Q [LLC]	ILKN X0Y3	HP I/O Bank 44	HR I/O Bank 84/94	PCIe X0Y2 (tandem)	GTH Quad 224 X0Y20-X0Y23 A [RLC]
SLR Crossing					
GTY Quad 123 X0Y16-X0Y19 AF [LLC]	CMAC X0Y2	HP I/O Bank 43	HP I/O Bank 63 F	PCIe X0Y1	GTH Quad 223 X0Y16-X0Y19 P [RLC]
GTY Quad 122 X0Y12-X0Y15 AE [LS]	CMAC X0Y1	HP I/O Bank 42	HP I/O Bank 62 E	ILKN X1Y2	GTH Quad 222 X0Y12-X0Y15 O [RS]
GTY Quad 121 X0Y8-X0Y11 AD [LS]	ILKN X0Y1	HP I/O Bank 41	HP I/O Bank 61 D	SYSMON Configuration	GTH Quad 221 X0Y8-X0Y11 N [RS] (RCAL)
GTY Quad 120 X0Y4-X0Y7 AC [LS] (RCAL)	CMAC X0Y0	HP I/O Bank 40	HP I/O Bank 60	Configuration	GTH Quad 220 X0Y4-X0Y7 M [RS]
GTY Quad 119 X0Y0-X0Y3 AB [LS]	ILKN X0Y0	HP I/O Bank 39	HR I/O Bank 59	PCIe X0Y0	GTH Quad 219 X0Y0-X0Y3 L [RS]

X16494-012917

Figure 1-61: XCVU190 Banks in FLGA2577 Package

## XCVU440 Bank Diagrams

HP I/O Bank 53	HP I/O Bank 73	PCIe X0Y5	GTH Quad 233 X0Y56-X0Y59
HP I/O Bank 52	HP I/O Bank 72	CMAC X0Y2	GTH Quad 232 X0Y52-X0Y55
HP I/O Bank 51	HP I/O Bank 71	SYSMON Configuration	GTH Quad 231 X0Y48-X0Y51 (RCAL)
HP I/O Bank 50	HP I/O Bank 70	Configuration	GTH Quad 230 X0Y44-X0Y47
HP I/O Bank 49	HR I/O Bank 69	PCIe X0Y4	GTH Quad 229 X0Y40-X0Y43
SLR Crossing			
HP I/O Bank 48	HP I/O Bank 68	PCIe X0Y3	GTH Quad 228 X0Y36-X0Y39
HP I/O Bank 47	HP I/O Bank 67	CMAC X0Y1	GTH Quad 227 X0Y32-X0Y35
HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X0Y28-X0Y31 (RCAL)
HP I/O Bank 45	HP I/O Bank 65	Configuration	GTH Quad 225 X0Y24-X0Y27
HP I/O Bank 44	HR I/O Bank 84/94	PCIe X0Y2 (tandem)	GTH Quad 224 X0Y20-X0Y23
SLR Crossing			
HP I/O Bank 43	HP I/O Bank 63	PCIe X0Y1	GTH Quad 223 X0Y16-X0Y19
HP I/O Bank 42	HP I/O Bank 62	CMAC X0Y0	GTH Quad 222 X0Y12-X0Y15
HP I/O Bank 41	HP I/O Bank 61	SYSMON Configuration	GTH Quad 221 X0Y8-X0Y11 (RCAL)
HP I/O Bank 40	HP I/O Bank 60	Configuration	GTH Quad 220 X0Y4-X0Y7
HP I/O Bank 39	HR I/O Bank 59	PCIe X0Y0	GTH Quad 219 X0Y0-X0Y3

X16497-012917

Figure 1-62: XCVU440 Banks

HP I/O Bank 53 V	HP I/O Bank 73 Z	PCIe X0Y5	GTH Quad 233 X0Y56-X0Y59 F [RN]
HP I/O Bank 52 U	HP I/O Bank 72 Y	CMAC X0Y2	GTH Quad 232 X0Y52-X0Y55 E [RN]
HP I/O Bank 51 T	HP I/O Bank 71 X	SYSMON Configuration	GTH Quad 231 X0Y48-X0Y51 D [RN] (RCAL)
HP I/O Bank 50 S	HP I/O Bank 70 W	Configuration	GTH Quad 230 X0Y44-X0Y47
HP I/O Bank 49	HR I/O Bank 69	PCIe X0Y4	GTH Quad 229 X0Y40-X0Y43
SLR Crossing			
HP I/O Bank 48 R	HP I/O Bank 68 F	PCIe X0Y3	GTH Quad 228 X0Y36-X0Y39
HP I/O Bank 47 Q	HP I/O Bank 67 E	CMAC X0Y1	GTH Quad 227 X0Y32-X0Y35
HP I/O Bank 46 P	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y28-X0Y31 C [RC] (RCAL)
HP I/O Bank 45 O	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y24-X0Y27 B [RC]
HP I/O Bank 44	HR I/O Bank 84/94 B	PCIe X0Y2 (tandem)	GTH Quad 224 X0Y20-X0Y23 A [RC]
SLR Crossing			
HP I/O Bank 43 N	HP I/O Bank 63 J	PCIe X0Y1	GTH Quad 223 X0Y16-X0Y19 I [RS]
HP I/O Bank 42 M	HP I/O Bank 62 I	CMAC X0Y0	GTH Quad 222 X0Y12-X0Y15 H [RS]
HP I/O Bank 41 L	HP I/O Bank 61 H	SYSMON Configuration	GTH Quad 221 X0Y8-X0Y11 G [RS] (RCAL)
HP I/O Bank 40 K	HP I/O Bank 60 G	Configuration	GTH Quad 220 X0Y4-X0Y7
HP I/O Bank 39	HR I/O Bank 59	PCIe X0Y0	GTH Quad 219 X0Y0-X0Y3

X16498-012917

Figure 1-63: XCVU440 Banks in FLGB2377 Package



HP I/O Bank 53 Y	HP I/O Bank 73 AC	PCIe X0Y5	GTH Quad 233 X0Y56-X0Y59
HP I/O Bank 52 X	HP I/O Bank 72 AB	CMAC X0Y2	GTH Quad 232 X0Y52-X0Y55 H [RN]
HP I/O Bank 51 W	HP I/O Bank 71 AA	SYSMON Configuration	GTH Quad 231 X0Y48-X0Y51 G [RN] (RCAL)
HP I/O Bank 50 V	HP I/O Bank 70 Z	Configuration	GTH Quad 230 X0Y44-X0Y47 F [RN]
HP I/O Bank 49 U	HR I/O Bank 69	PCIe X0Y4	GTH Quad 229 X0Y40-X0Y43 E [RN]
SLR Crossing			
HP I/O Bank 48 T	HP I/O Bank 68 F	PCIe X0Y3	GTH Quad 228 X0Y36-X0Y39
HP I/O Bank 47 S	HP I/O Bank 67 E	CMAC X0Y1	GTH Quad 227 X0Y32-X0Y35 D [RC]
HP I/O Bank 46 R	HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y28-X0Y31 C [RC] (RCAL)
HP I/O Bank 45 Q	HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y24-X0Y27 B [RC]
HP I/O Bank 44 P	HR I/O Bank 84/94 B	PCIe X0Y2 (tandem)	GTH Quad 224 X0Y20-X0Y23 A [RC]
SLR Crossing			
HP I/O Bank 43 O	HP I/O Bank 63 J	PCIe X0Y1	GTH Quad 223 X0Y16-X0Y19
HP I/O Bank 42 N	HP I/O Bank 62 I	CMAC X0Y0	GTH Quad 222 X0Y12-X0Y15 L [RS]
HP I/O Bank 41 M	HP I/O Bank 61 H	SYSMON Configuration	GTH Quad 221 X0Y8-X0Y11 K [RS] (RCAL)
HP I/O Bank 40 L	HP I/O Bank 60 G	Configuration	GTH Quad 220 X0Y4-X0Y7 J [RS]
HP I/O Bank 39 K	HR I/O Bank 59	PCIe X0Y0	GTH Quad 219 X0Y0-X0Y3 I [RS]

X16496-012917

Figure 1-64: XCVU440 Banks in FLGA2892 Package

## XCAU20P Bank Diagrams

HP I/O Bank 67	HD I/O Bank 87		
HP I/O Bank 66	HD I/O Bank 86	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11
HP I/O Bank 65	HD I/O Bank 85	Configuration	GTY Quad 225 X0Y4-X0Y7 (RCAL)
HP I/O Bank 64	HD I/O Bank 84	PCIE4 X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3

X25582-081921

Figure 1-65: XCAU20P Banks

HP I/O Bank 67	HD I/O Bank 86 G		
HP I/O Bank 66 D	HD I/O Bank 86 F	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 65 C	HD I/O Bank 85	Configuration	GTY Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 64 B	HD I/O Bank 84 A	PCIE4 X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3 A [R]

X25584-081921

Figure 1-66: XCAU20P Banks in FFVB676 Package

HP I/O Bank 67	HD I/O Bank 87		
HP I/O Bank 66 D	HD I/O Bank 86 G	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 65 C	HD I/O Bank 85 I	Configuration	GTY Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 64 B	HD I/O Bank 84 H	PCIE4 X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3 A [R]

X25583-081921

Figure 1-67: XCAU20P Banks in SFVB784 Package

### XCAU25P Bank Diagrams

HP I/O Bank 67	HD I/O Bank 87		
HP I/O Bank 66	HD I/O Bank 86	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11
HP I/O Bank 65	HD I/O Bank 85	Configuration	GTY Quad 225 X0Y4-X0Y7 (RCAL)
HP I/O Bank 64	HD I/O Bank 84	PCIE4 X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3

X25579-072021

Figure 1-68: XCAU25P Banks

HP I/O Bank 67 E	HD I/O Bank 87 G		
HP I/O Bank 66 D	HD I/O Bank 86 F	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 65 C	HD I/O Bank 85	Configuration	GTY Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 64 B	HD I/O Bank 84 A	PCIE4 X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3 A [R]

X25580-072021

Figure 1-69: XCAU25P Banks in FFVB676 Package

HP I/O Bank 67 E	HD I/O Bank 87 F		
HP I/O Bank 66 D	HD I/O Bank 86 G	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 65 C	HD I/O Bank 85 I	Configuration PCIE4	GTY Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 64 B	HD I/O Bank 84 H	X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3 A [R]

X25581-072021

Figure 1-70: XCAU25P Banks in SFVB784 Package

## XCKU3P Bank Diagrams

HP I/O Bank 67	HD I/O Bank 87	CMAC X0Y0	GTY Quad 227 X0Y12-X0Y15
HP I/O Bank 66	HD I/O Bank 86	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11
HP I/O Bank 65	HD I/O Bank 85	Configuration	GTY Quad 225 X0Y4-X0Y7 (RCAL)
HP I/O Bank 64	HD I/O Bank 84	PCIE4 X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3

X15536-020817

Figure 1-71: XCKU3P Banks

HP I/O Bank 67 G	HD I/O Bank 87	CMAC X0Y0	GTY Quad 227 X0Y12-X0Y15 D [R]
HP I/O Bank 66 D	HD I/O Bank 86	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 65 C	HD I/O Bank 85 R	Configuration	GTY Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 64 E	HD I/O Bank 84 R	PCIE4 X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3 A [R]

X15538-020817

Figure 1-72: XCKU3P Banks in FFVA676 Package

HP I/O Bank 67 E	HD I/O Bank 87 G	CMAC X0Y0	GTY Quad 227 X0Y12-X0Y15 D [R]
HP I/O Bank 66 D	HD I/O Bank 86 F	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 65 C	HD I/O Bank 85	Configuration	GTY Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 64 B	HD I/O Bank 84 A	PCIE4 X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3 A [R]

X16502-020817

Figure 1-73: XCKU3P Banks in FFVB676 Package

HP I/O Bank 67 E	HD I/O Bank 87 F	CMAC X0Y0	GTY Quad 227 X0Y12-X0Y15 D [R]
HP I/O Bank 66 D	HD I/O Bank 86 G	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 65 C	HD I/O Bank 85 I	Configuration	GTY Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 64 B	HD I/O Bank 84 H	PCIE4 X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3 A [R]

X15537-020817

Figure 1-74: XCKU3P Banks in SFVB784 Package

HP I/O Bank 67 F	HD I/O Bank 87 K	CMAC X0Y0	GTY Quad 227 X0Y12-X0Y15 D [R]
HP I/O Bank 66 D	HD I/O Bank 86 L	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 65 C	HD I/O Bank 85 J	Configuration	GTY Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 64 E	HD I/O Bank 84 I	PCIE4 X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3 A [R]

X16503-020817

Figure 1-75: XCKU3P Banks in FFVD900 Package

## XCKU5P and XQKU5P Bank Diagrams

HP I/O Bank 67	HD I/O Bank 87	CMAC X0Y0	GTY Quad 227 X0Y12-X0Y15
HP I/O Bank 66	HD I/O Bank 86	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11
HP I/O Bank 65	HD I/O Bank 85	Configuration	GTY Quad 225 X0Y4-X0Y7 (RCAL)
HP I/O Bank 64	HD I/O Bank 84	PCIE4 X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3

X15539-020817

Figure 1-76: XCKU5P and XQKU5P Banks

HP I/O Bank 67 G	HD I/O Bank 87	CMAC X0Y0	GTY Quad 227 X0Y12-X0Y15 D [R]
HP I/O Bank 66 D	HD I/O Bank 86	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 65 C	HD I/O Bank 85 R	Configuration	GTY Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 64 E	HD I/O Bank 84 R	PCIE4 X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3 A [R]

X15588-020817

Figure 1-77: XCKU5P Banks in FFVA676 Package

HP I/O Bank 67 E	HD I/O Bank 87 G	CMAC X0Y0	GTY Quad 227 X0Y12-X0Y15 D [R]
HP I/O Bank 66 D	HD I/O Bank 86 F	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 65 C	HD I/O Bank 85	Configuration	GTY Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 64 B	HD I/O Bank 84 A	PCIE4 X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3 A [R]

X15586-020817

Figure 1-78: XCKU5P Banks in FFVB676 Package and XQKU5P Banks in FFRB676 Package

HP I/O Bank 67 E	HD I/O Bank 87 F	CMAC X0Y0	GTY Quad 227 X0Y12-X0Y15 D [R]
HP I/O Bank 66 D	HD I/O Bank 86 G	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 65 C	HD I/O Bank 85 I	Configuration	GTY Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 64 B	HD I/O Bank 84 H	PCIE4 X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3 A [R]

X15587-020817

Figure 1-79: XCKU5P Banks in SFVB784 Package and XQKU5P Banks in SFRB784 Package

HP I/O Bank 67 F	HD I/O Bank 87 K	CMAC X0Y0	GTY Quad 227 X0Y12-X0Y15 D [R]
HP I/O Bank 66 D	HD I/O Bank 86 L	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11 C [R]
HP I/O Bank 65 C	HD I/O Bank 85 J	Configuration	GTY Quad 225 X0Y4-X0Y7 B [R] (RCAL)
HP I/O Bank 64 E	HD I/O Bank 84 I	PCIE4 X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3 A [R]

X15589-020817

Figure 1-80: XCKU5P Banks in FFVD900 Package



## XCKU9P Bank Diagrams

GTH Quad 130 X0Y12-X0Y15	HD I/O Bank 50	GTH Quad 230 X1Y12-X1Y15
GTH Quad 129 X0Y8-X0Y11	HD I/O Bank 49	GTH Quad 229 X1Y8-X1Y11
GTH Quad 128 X0Y4-X0Y7 (RCAL)	HD I/O Bank 48	GTH Quad 228 X1Y4-X1Y7 (RCAL)
GTH Quad 127 X0Y0-X0Y3	HD I/O Bank 47	HP I/O Bank 67
	SYSMON Configuration	HP I/O Bank 66
	Configuration	HP I/O Bank 65
	HD I/O Bank 44	HP I/O Bank 64

X15591-062217

Figure 1-81: XCKU9P Banks

GTH Quad 130 X0Y12-X0Y15 G [L]	HD I/O Bank 50	GTH Quad 230 X1Y12-X1Y15 C [R]
GTH Quad 129 X0Y8-X0Y11 F [L]	HD I/O Bank 49 O	GTH Quad 229 X1Y8-X1Y11 B [R]
GTH Quad 128 X0Y4-X0Y7 E [L] (RCAL)	HD I/O Bank 48 N	GTH Quad 228 X1Y4-X1Y7 A [R] (RCAL)
GTH Quad 127 X0Y0-X0Y3 D [L]	HD I/O Bank 47 G	HP I/O Bank 67 E
	SYSMON Configuration	HP I/O Bank 66 D
	Configuration	HP I/O Bank 65 C
	HD I/O Bank 44 F	HP I/O Bank 64 B

X15592-062217

Figure 1-82: XCKU9P Banks in FFVE900 Package

## XCKU11P Bank Diagrams

GTY Quad 131 X0Y16-X0Y19	PCIE4 X0Y3	HP I/O Bank 71	HD I/O Bank 91	GTH Quad 231 X0Y28-X0Y31
GTY Quad 130 X0Y12-X0Y15	CMAC X0Y1	HP I/O Bank 70	HD I/O Bank 90	GTH Quad 230 X0Y24-X0Y27
GTY Quad 129 X0Y8-X0Y11 (RCAL)	ILKN X0Y0	HP I/O Bank 69	HD I/O Bank 89	GTH Quad 229 X0Y20-X0Y23
GTY Quad 128 X0Y4-X0Y7	PCIE4 X0Y2	HP I/O Bank 68	HD I/O Bank 88	GTH Quad 228 X0Y16-X0Y19
GTY Quad 127 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 67	PCIE4 X1Y1	GTH Quad 227 X0Y12-X0Y15
		HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 (RCAL)
		HP I/O Bank 65	Configuration	GTH Quad 225 X0Y4-X0Y7
		HP I/O Bank 64	PCIE4 X1Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3

X15593-020817

Figure 1-83: XCKU11P Banks

GTY Quad 131 X0Y16-X0Y19	PCIE4 X0Y3	HP I/O Bank 71	HD I/O Bank 91 K	GTH Quad 231 X0Y28-X0Y31
GTY Quad 130 X0Y12-X0Y15	CMAC X0Y1	HP I/O Bank 70 H	HD I/O Bank 90 L	GTH Quad 230 X0Y24-X0Y27
GTY Quad 129 X0Y8-X0Y11 (RCAL)	ILKN X0Y0	HP I/O Bank 69 G	HD I/O Bank 89 J	GTH Quad 229 X0Y20-X0Y23
GTY Quad 128 X0Y4-X0Y7	PCIE4 X0Y2	HP I/O Bank 68 F	HD I/O Bank 88 I	GTH Quad 228 X0Y16-X0Y19
GTY Quad 127 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 67 E	PCIE4 X1Y1	GTH Quad 227 X0Y12-X0Y15 D [R]
		HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [R] (RCAL)
		HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R]
		HP I/O Bank 64	PCIE4 X1Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X15594-020817

Figure 1-84: XCKU11P Banks in FFVD900 Package

GTU Quad 131 X0Y16-X0Y19	PCIE4 X0Y3	HP I/O Bank 71 F	HD I/O Bank 91	GTH Quad 231 X0Y28-X0Y31
GTU Quad 130 X0Y12-X0Y15 G[L]	CMAC X0Y1	HP I/O Bank 70 E	HD I/O Bank 90	GTH Quad 230 X0Y24-X0Y27
GTU Quad 129 X0Y8-X0Y11 F [L] (RCAL)	ILKN X0Y0	HP I/O Bank 69 K	HD I/O Bank 89 R	GTH Quad 229 X0Y20-X0Y23
GTU Quad 128 X0Y4-X0Y7	PCIE4 X0Y2	HP I/O Bank 68 J	HD I/O Bank 88 R	GTH Quad 228 X0Y16-X0Y19 E [R]
GTU Quad 127 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 67 G	PCIE4 X1Y1	GTH Quad 227 X0Y12-X0Y15 D [R]
		HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [R] (RCAL)
		HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R]
		HP I/O Bank 64 H	PCIE4 X1Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X15595-062217

Figure 1-85: XCKU11P Banks in FFVA1156 Package

GTY Quad 131 X0Y16-X0Y19 M [L]	PCIE4 X0Y3	HP I/O Bank 71 R	HD I/O Bank 91 N	GTH Quad 231 X0Y28-X0Y31 H [RN]
GTY Quad 130 X0Y12-X0Y15 L [L]	CMAC X0Y1	HP I/O Bank 70 S	HD I/O Bank 90 O	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTY Quad 129 X0Y8-X0Y11 K [L] (RCAL)	ILKN X0Y0	HP I/O Bank 69 T	HD I/O Bank 89 P	GTH Quad 229 X0Y20-X0Y23 F [RN]
GTY Quad 128 X0Y4-X0Y7 J [L]	PCIE4 X0Y2	HP I/O Bank 68 G	HD I/O Bank 88 Q	GTH Quad 228 X0Y16-X0Y19 E [RN]
GTY Quad 127 X0Y0-X0Y3 I [L]	CMAC X0Y0	HP I/O Bank 67 F	PCIE4 X1Y1	GTH Quad 227 X0Y12-X0Y15 D [RS]
		HP I/O Bank 66 E	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS] (RCAL)
		HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS]
		HP I/O Bank 64 D	PCIE4 X1Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X15597-020817

Figure 1-86: XCKU11P Banks in FFVE1517 Package

## XCKU13P Bank Diagrams

GTH Quad 130 X0Y12-X0Y15	HD I/O Bank 50	GTH Quad 230 X1Y12-X1Y15
GTH Quad 129 X0Y8-X0Y11	HD I/O Bank 49	GTH Quad 229 X1Y8-X1Y11
GTH Quad 128 X0Y4-X0Y7 (RCAL)	HD I/O Bank 48	GTH Quad 228 X1Y4-X1Y7 (RCAL)
GTH Quad 127 X0Y0-X0Y3	HD I/O Bank 47	HP I/O Bank 67
	SYSMON Configuration	HP I/O Bank 66
	Configuration	HP I/O Bank 65
	HD I/O Bank 44	HP I/O Bank 64

X15598-062217

Figure 1-87: XCKU13P Banks

GTH Quad 130 X0Y12-X0Y15 G [L]	HD I/O Bank 50	GTH Quad 230 X1Y12-X1Y15 C [R]
GTH Quad 129 X0Y8-X0Y11 F [L]	HD I/O Bank 49 O	GTH Quad 229 X1Y8-X1Y11 B [R]
GTH Quad 128 X0Y4-X0Y7 E [L] (RCAL)	HD I/O Bank 48 N	GTH Quad 228 X1Y4-X1Y7 A [R] (RCAL)
GTH Quad 127 X0Y0-X0Y3 D [L]	HD I/O Bank 47 G	HP I/O Bank 67 E
	SYSMON Configuration	HP I/O Bank 66 D
	Configuration	HP I/O Bank 65 C
	HD I/O Bank 44 F	HP I/O Bank 64 B

X15599-062217

Figure 1-88: XCKU13P Banks in FFVE900 Package



## XCKU15P and XQKU15P Bank Diagrams

GTY Quad 134 X0Y28-X0Y31	CMAC X0Y3	HP I/O Bank 74	HD I/O Bank 94	GTH Quad 234 X0Y40-X0Y43
GTY Quad 133 X0Y24-X0Y27	ILKN X0Y2	HP I/O Bank 73	HD I/O Bank 93	GTH Quad 233 X0Y36-X0Y39
GTY Quad 132 X0Y20-X0Y23	CMAC X0Y2	HP I/O Bank 72	ILKN X1Y1	GTH Quad 232 X0Y32-X0Y35
GTY Quad 131 X0Y16-X0Y19	PCIE4 X0Y3	HP I/O Bank 71	HD I/O Bank 91	GTH Quad 231 X0Y28-X0Y31
GTY Quad 130 X0Y12-X0Y15	CMAC X0Y1	HP I/O Bank 70	HD I/O Bank 90	GTH Quad 230 X0Y24-X0Y27
GTY Quad 129 X0Y8-X0Y11 (RCAL)	ILKN X0Y0	HP I/O Bank 69	ILKN X1Y0	GTH Quad 229 X0Y20-X0Y23
GTY Quad 128 X0Y4-X0Y7	PCIE4 X0Y2	HP I/O Bank 68	PCIE4 X1Y2	GTH Quad 228 X0Y16-X0Y19
GTY Quad 127 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 67	PCIE4 X1Y1	GTH Quad 227 X0Y12-X0Y15
		HP I/O Bank 66	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 (RCAL)
		HP I/O Bank 65	Configuration	GTH Quad 225 X0Y4-X0Y7
		HP I/O Bank 64	PCIE4 X1Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3

X15600-062217

Figure 1-89: XCKU15P and XQKU15P Banks

GTU Quad 134 X0Y28-X0Y31	CMAC X0Y3	HP I/O Bank 74	HD I/O Bank 94	GTH Quad 234 X0Y40-X0Y43
GTU Quad 133 X0Y24-X0Y27	ILKN X0Y2	HP I/O Bank 73	HD I/O Bank 93	GTH Quad 233 X0Y36-X0Y39
GTU Quad 132 X0Y20-X0Y23	CMAC X0Y2	HP I/O Bank 72 F	ILKN X1Y1	GTH Quad 232 X0Y32-X0Y35
GTU Quad 131 X0Y16-X0Y19	PCIE4 X0Y3	HP I/O Bank 71 E	HD I/O Bank 91 R	GTH Quad 231 X0Y28-X0Y31
GTU Quad 130 X0Y12-X0Y15 G[L]	CMAC X0Y1	HP I/O Bank 70 K	HD I/O Bank 90 R	GTH Quad 230 X0Y24-X0Y27
GTU Quad 129 X0Y8-X0Y11 F[L] (RCAL)	ILKN X0Y0	HP I/O Bank 69 J	ILKN X1Y0	GTH Quad 229 X0Y20-X0Y23
GTU Quad 128 X0Y4-X0Y7	PCIE4 X0Y2	HP I/O Bank 68 I	PCIE4 X1Y2	GTH Quad 228 X0Y16-X0Y19 E [R]
GTU Quad 127 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 67 G	PCIE4 X1Y1	GTH Quad 227 X0Y12-X0Y15 D [R]
		HP I/O Bank 66 D	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [R] (RCAL)
		HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [R]
		HP I/O Bank 64 H	PCIE4 X1Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [R]

X15601-062217

Figure 1-90: XCKU15P Banks in FFVA1156 Package and XQKU15P in FFRA1156 Package

GTY Quad 134 X0Y28-X0Y31	CMAC X0Y3	HP I/O Bank 74	HD I/O Bank 94 N	GTH Quad 234 X0Y40-X0Y43
GTY Quad 133 X0Y24-X0Y27	ILKN X0Y2	HP I/O Bank 73	HD I/O Bank 93 O	GTH Quad 233 X0Y36-X0Y39
GTY Quad 132 X0Y20-X0Y23 N [L]	CMAC X0Y2	HP I/O Bank 72	ILKN X1Y1	GTH Quad 232 X0Y32-X0Y35
GTY Quad 131 X0Y16-X0Y19 M [L]	PCIE4 X0Y3	HP I/O Bank 71 R	HD I/O Bank 91 P	GTH Quad 231 X0Y28-X0Y31 H [RN]
GTY Quad 130 X0Y12-X0Y15 L [L]	CMAC X0Y1	HP I/O Bank 70 S	HD I/O Bank 90 Q	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTY Quad 129 X0Y8-X0Y11 K [L] (RCAL)	ILKN X0Y0	HP I/O Bank 69 T	ILKN X1Y0	GTH Quad 229 X0Y20-X0Y23 F [RN]
GTY Quad 128 X0Y4-X0Y7 J [L]	PCIE4 X0Y2	HP I/O Bank 68 G	PCIE4 X1Y2	GTH Quad 228 X0Y16-X0Y19 E [RN]
GTY Quad 127 X0Y0-X0Y3 I [L]	CMAC X0Y0	HP I/O Bank 67 F	PCIE4 X1Y1	GTH Quad 227 X0Y12-X0Y15 D [RS]
		HP I/O Bank 66 E	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS] (RCAL)
		HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS]
		HP I/O Bank 64 D	PCIE4 X1Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X15602-062217

Figure 1-91: XCKU15P Banks in FFVE1517 Package and XQKU15P Banks in FFRE1517 Package

GTU Quad 134 X0Y28-X0Y31 S [LN]	CMAC X0Y3	HP I/O Bank 74	HD I/O Bank 94 N	GTH Quad 234 X0Y40-X0Y43 K [RN]
GTU Quad 133 X0Y24-X0Y27 R [LN]	ILKN X0Y2	HP I/O Bank 73	HD I/O Bank 93 O	GTH Quad 233 X0Y36-X0Y39 J [RN]
GTU Quad 132 X0Y20-X0Y23 Q [LN]	CMAC X0Y2	HP I/O Bank 72 R	ILKN X1Y1	GTH Quad 232 X0Y32-X0Y35 I [RN]
GTU Quad 131 X0Y16-X0Y19 P [LN]	PCIE4 X0Y3	HP I/O Bank 71 S	HD I/O Bank 91 P	GTH Quad 231 X0Y28-X0Y31 H [RN]
GTU Quad 130 X0Y12-X0Y15 O [LS]	CMAC X0Y1	HP I/O Bank 70 T	HD I/O Bank 90 Q	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTU Quad 129 X0Y8-X0Y11 N [LS] (RCAL)	ILKN X0Y0	HP I/O Bank 69	ILKN X1Y0	GTH Quad 229 X0Y20-X0Y23 F [RS]
GTU Quad 128 X0Y4-X0Y7 M [LS]	PCIE4 X0Y2	HP I/O Bank 68 G	PCIE4 X1Y2	GTH Quad 228 X0Y16-X0Y19 E [RS]
GTU Quad 127 X0Y0-X0Y3 L [LS]	CMAC X0Y0	HP I/O Bank 67 F	PCIE4 X1Y1	GTH Quad 227 X0Y12-X0Y15 D [RS]
		HP I/O Bank 66 E	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS] (RCAL)
		HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS]
		HP I/O Bank 64 D	PCIE4 X1Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X15604-062217

Figure 1-92: XCKU15P Banks in FFVA1760 Package

GTY Quad 134 X0Y28-X0Y31	CMAC X0Y3	HP I/O Bank 74 R	HD I/O Bank 94 N	GTH Quad 234 X0Y40-X0Y43
GTY Quad 133 X0Y24-X0Y27	ILKN X0Y2	HP I/O Bank 73 S	HD I/O Bank 93 O	GTH Quad 233 X0Y36-X0Y39
GTY Quad 132 X0Y20-X0Y23 N [L]	CMAC X0Y2	HP I/O Bank 72 T	ILKN X1Y1	GTH Quad 232 X0Y32-X0Y35
GTY Quad 131 X0Y16-X0Y19 M [L]	PCIE4 X0Y3	HP I/O Bank 71 U	HD I/O Bank 91 P	GTH Quad 231 X0Y28-X0Y31 H [RN]
GTY Quad 130 X0Y12-X0Y15 L [L]	CMAC X0Y1	HP I/O Bank 70 V	HD I/O Bank 90 Q	GTH Quad 230 X0Y24-X0Y27 G [RN]
GTY Quad 129 X0Y8-X0Y11 K [L] (RCAL)	ILKN X0Y0	HP I/O Bank 69 H	ILKN X1Y0	GTH Quad 229 X0Y20-X0Y23 F [RN]
GTY Quad 128 X0Y4-X0Y7 J [L]	PCIE4 X0Y2	HP I/O Bank 68 G	PCIE4 X1Y2	GTH Quad 228 X0Y16-X0Y19 E [RN]
GTY Quad 127 X0Y0-X0Y3 I [L]	CMAC X0Y0	HP I/O Bank 67 F	PCIE4 X1Y1	GTH Quad 227 X0Y12-X0Y15 D [RS]
		HP I/O Bank 66 E	SYSMON Configuration	GTH Quad 226 X0Y8-X0Y11 C [RS] (RCAL)
		HP I/O Bank 65 C	Configuration	GTH Quad 225 X0Y4-X0Y7 B [RS]
		HP I/O Bank 64 D	PCIE4 X1Y0 (tandem)	GTH Quad 224 X0Y0-X0Y3 A [RS]

X15603-062217

Figure 1-93: XCKU15P Banks in FFVE1760 Package

## XCKU19P Bank Diagrams

HP I/O Bank 73	CMAC X0Y0	
HP I/O Bank 72	HD I/O Bank 92	GTY Quad 232 X0Y28-X0Y31
HP I/O Bank 71	PCIE4C X0Y2	GTY Quad 231 X0Y24-X0Y27
HP I/O Bank 70	HD I/O Bank 90	GTY Quad 230 X0Y20-X0Y23
HP I/O Bank 69	PCIE4C X0Y1	GTY Quad 229 X0Y16-X0Y19
HP I/O Bank 68	HD I/O Bank 88	GTY Quad 228 X0Y12-X0Y15
HP I/O Bank 67	PCIE4C X0Y0	GTY Quad 227 X0Y8-X0Y11
HP I/O Bank 66	SYSMON Configuration	GTY Quad 226 X0Y4-X0Y7
HP I/O Bank 65	Configuration	GTY Quad 225 X0Y0-X0Y3 (RCAL)

X24987-010821

Figure 1-94: XCKU19P Banks



**IMPORTANT:** Tandem configuration is not supported for any PCIE4C instance in XCKU19P banks.

HP I/O Bank 73 U	CMAC X0Y0	
HP I/O Bank 72 T	HD I/O Bank 92 P	GTY Quad 232 X0Y28-X0Y31 I [RC]
HP I/O Bank 71 S	PCIE4C X0Y2	GTY Quad 231 X0Y24-X0Y27 H [RC]
HP I/O Bank 70 R	HD I/O Bank 90 O	GTY Quad 230 X0Y20-X0Y23 G [RC]
HP I/O Bank 69 G	PCIE4C X0Y1	GTY Quad 229 X0Y16-X0Y19 F [RC]
HP I/O Bank 68 F	HD I/O Bank 88 N	GTY Quad 228 X0Y12-X0Y15 E [RC]
HP I/O Bank 67 E	PCIE4C X0Y0	GTY Quad 227 X0Y8-X0Y11 D [RS]
HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X0Y4-X0Y7 C [RS]
HP I/O Bank 65 C	Configuration	GTY Quad 225 X0Y0-X0Y3 B [RS] (RCAL)

X24989-010821

Figure 1-95: XCKU19P Banks in FFVJ1760 Package



**IMPORTANT:** Tandem configuration is not supported for any PCIE4C instance in XCKU19P banks.

HP I/O Bank 73 J	CMAC X0Y0	
HP I/O Bank 72 K	HD I/O Bank 92 B	GTY Quad 232 X0Y28-X0Y31 I [RN]
HP I/O Bank 71 L	PCIE4C X0Y2	GTY Quad 231 X0Y24-X0Y27 H [RN]
HP I/O Bank 70 O	HD I/O Bank 90 A	GTY Quad 230 X0Y20-X0Y23 G [RN]
HP I/O Bank 69 N	PCIE4C X0Y1	GTY Quad 229 X0Y16-X0Y19 F [RN]
HP I/O Bank 68 M	HD I/O Bank 88 F	GTY Quad 228 X0Y12-X0Y15 D [RS]
HP I/O Bank 67 E	PCIE4C X0Y0	GTY Quad 227 X0Y8-X0Y11 C [RS]
HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X0Y4-X0Y7 B [RS]
HP I/O Bank 65 C	Configuration	GTY Quad 225 X0Y0-X0Y3 A [RS] (RCAL)

X24988-010821

Figure 1-96: XCKU19P Banks in FFVB2104 Package



**IMPORTANT:** Tandem configuration is not supported for any PCIE4C instance in XCKU19P banks.



## XCVU3P and XQVU3P Bank Diagrams

GTY Quad 128 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 48	HP I/O Bank 68	ILKN X1Y2	GTY Quad 228 X1Y16-X1Y19
GTY Quad 127 X0Y12-X0Y15	PCIE4 X0Y1	HP I/O Bank 47	HP I/O Bank 67	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15
GTY Quad 126 X0Y8-X0Y11 (RCAL)	CMAC X0Y1	HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 (RCAL)
GTY Quad 125 X0Y4-X0Y7	ILKN X0Y0	HP I/O Bank 45	HP I/O Bank 65	Configuration	GTY Quad 225 X1Y4-X1Y7
GTY Quad 124 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 44	HP I/O Bank 64	PCIE4 X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3

X15605-020817

Figure 1-97: XCVU3P and XQVU3P Banks

GTY Quad 128 X0Y16-X0Y19 J [L]	CMAC X0Y2	HP I/O Bank 48 K	HP I/O Bank 68 F	ILKN X1Y2	GTY Quad 228 X1Y16-X1Y19 E [R]
GTY Quad 127 X0Y12-X0Y15 I [L]	PCIE4 X0Y1	HP I/O Bank 47 J	HP I/O Bank 67 E	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15 D [R]
GTY Quad 126 X0Y8-X0Y11 H [L] (RCAL)	CMAC X0Y1	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 C [R] (RCAL)
GTY Quad 125 X0Y4-X0Y7 G [L]	ILKN X0Y0	HP I/O Bank 45 H	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 B [R]
GTY Quad 124 X0Y0-X0Y3 F [L]	CMAC X0Y0	HP I/O Bank 44 G	HP I/O Bank 64 B	PCIE4 X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 A [R]

X15606-020817

Figure 1-98: XCVU3P Banks in FFVC1517 Package and XQVU3P Banks in FFRC1517 Package

## XCVU5P Bank Diagrams

GTY Quad 133 X0Y36-X0Y39	CMAC X0Y5	HP I/O Bank 53	HP I/O Bank 73	ILKN X1Y5	GTY Quad 233 X1Y36-X1Y39
GTY Quad 132 X0Y32-X0Y35	PCIE4 X0Y3	HP I/O Bank 52	HP I/O Bank 72	ILKN X1Y4	GTY Quad 232 X1Y32-X1Y35
GTY Quad 131 X0Y28-X0Y31 (RCAL)	CMAC X0Y4	HP I/O Bank 51	HP I/O Bank 71	SYSMON Configuration	GTY Quad 231 X1Y28-X1Y31 (RCAL)
GTY Quad 130 X0Y24-X0Y27	ILKN X0Y3	HP I/O Bank 50	HP I/O Bank 70	Configuration	GTY Quad 230 X1Y24-X1Y27
GTY Quad 129 X0Y20-X0Y23	CMAC X0Y3	HP I/O Bank 49	HP I/O Bank 69	PCIE4 X1Y2	GTY Quad 229 X1Y20-X1Y23
SLR Crossing					
GTY Quad 128 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 48	HP I/O Bank 68	ILKN X1Y2	GTY Quad 228 X1Y16-X1Y19
GTY Quad 127 X0Y12-X0Y15	PCIE4 X0Y1	HP I/O Bank 47	HP I/O Bank 67	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15
GTY Quad 126 X0Y8-X0Y11 (RCAL)	CMAC X0Y1	HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 (RCAL)
GTY Quad 125 X0Y4-X0Y7	ILKN X0Y0	HP I/O Bank 45	HP I/O Bank 65	Configuration	GTY Quad 225 X1Y4-X1Y7
GTY Quad 124 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 44	HP I/O Bank 64	PCIE4 X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3

X18708-020817

Figure 1-99: XCVU5P Banks

GTY Quad 133 X0Y36-X0Y39	CMAC X0Y5	HP I/O Bank 53 M	HP I/O Bank 73 Q	ILKN X1Y5	GTY Quad 233 X1Y36-X1Y39 G [RN]
GTY Quad 132 X0Y32-X0Y35 M [LN]	PCIE4 X0Y3	HP I/O Bank 52 L	HP I/O Bank 72 P	ILKN X1Y4	GTY Quad 232 X1Y32-X1Y35 F [RN]
GTY Quad 131 X0Y28-X0Y31 L [LN] (RCAL)	CMAC X0Y4	HP I/O Bank 51 K	HP I/O Bank 71 O	SYSMON Configuration	GTY Quad 231 X1Y28-X1Y31 E [RN] (RCAL)
GTY Quad 130 X0Y24-X0Y27 K [LN]	ILKN X0Y3	HP I/O Bank 50 J	HP I/O Bank 70 N	Configuration	GTY Quad 230 X1Y24-X1Y27
GTY Quad 129 X0Y20-X0Y23	CMAC X0Y3	HP I/O Bank 49	HP I/O Bank 69	PCIE4 X1Y2	GTY Quad 229 X1Y20-X1Y23
SLR Crossing					
GTY Quad 128 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 48	HP I/O Bank 68	ILKN X1Y2	GTY Quad 228 X1Y16-X1Y19
GTY Quad 127 X0Y12-X0Y15 J [LS]	PCIE4 X0Y1	HP I/O Bank 47 I	HP I/O Bank 67 E	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11 I [LS] (RCAL)	CMAC X0Y1	HP I/O Bank 46 H	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 C [RS] (RCAL)
GTY Quad 125 X0Y4-X0Y7 H [LS]	ILKN X0Y0	HP I/O Bank 45 G	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 B [RS]
GTY Quad 124 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 44 F	HP I/O Bank 64 B	PCIE4 X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 A [RS]

X18709-020817

Figure 1-100: XCVU5P Banks in FLVA2104 Package

GTY Quad 133 X0Y36-X0Y39 S [LN]	CMAC X0Y5	HP I/O Bank 53	HP I/O Bank 73	ILKN X1Y5	GTY Quad 233 X1Y36-X1Y39 J [RN]
GTY Quad 132 X0Y32-X0Y35 R [LN]	PCIE4 X0Y3	HP I/O Bank 52 L	HP I/O Bank 72 O	ILKN X1Y4	GTY Quad 232 X1Y32-X1Y35 I [RN]
GTY Quad 131 X0Y28-X0Y31 Q [LN] (RCAL)	CMAC X0Y4	HP I/O Bank 51 K	HP I/O Bank 71 N	SYSMON Configuration	GTY Quad 231 X1Y28-X1Y31 H [RN] (RCAL)
GTY Quad 130 X0Y24-X0Y27 P [LN]	ILKN X0Y3	HP I/O Bank 50 J	HP I/O Bank 70 M	Configuration	GTY Quad 230 X1Y24-X1Y27 G [RN]
GTY Quad 129 X0Y20-X0Y23 O [LN]	CMAC X0Y3	HP I/O Bank 49	HP I/O Bank 69	PCIE4 X1Y2	GTY Quad 229 X1Y20-X1Y23 F [RN]
SLR Crossing					
GTY Quad 128 X0Y16-X0Y19 N [LS]	CMAC X0Y2	HP I/O Bank 48	HP I/O Bank 68 F (Partial)	ILKN X1Y2	GTY Quad 228 X1Y16-X1Y19 E [RS]
GTY Quad 127 X0Y12-X0Y15 M [LS]	PCIE4 X0Y1	HP I/O Bank 47	HP I/O Bank 67 E	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11 L [LS] (RCAL)	CMAC X0Y1	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 C [RS] (RCAL)
GTY Quad 125 X0Y4-X0Y7 K [LS]	ILKN X0Y0	HP I/O Bank 45 H	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 B [RS]
GTY Quad 124 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 44 G	HP I/O Bank 64 B	PCIE4 X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 A [RS]

X16504-020817

Figure 1-101: XCVU5P Banks in FLVB2104 Package

GTY Quad 133 X0Y36-X0Y39 W [LN]	CMAC X0Y5	HP I/O Bank 53	HP I/O Bank 73	ILKN X1Y5	GTY Quad 233 X1Y36-X1Y39 J [RN]
GTY Quad 132 X0Y32-X0Y35 V [LN]	PCIE4 X0Y3	HP I/O Bank 52	HP I/O Bank 72 I	ILKN X1Y4	GTY Quad 232 X1Y32-X1Y35 I [RN]
GTY Quad 131 X0Y28-X0Y31 U [LN] (RCAL)	CMAC X0Y4	HP I/O Bank 51	HP I/O Bank 71 H	SYSMON Configuration	GTY Quad 231 X1Y28-X1Y31 H [RN] (RCAL)
GTY Quad 130 X0Y24-X0Y27 T [LN]	ILKN X0Y3	HP I/O Bank 50	HP I/O Bank 70 G	Configuration	GTY Quad 230 X1Y24-X1Y27 G [RN]
GTY Quad 129 X0Y20-X0Y23 S [LN]	CMAC X0Y3	HP I/O Bank 49	HP I/O Bank 69	PCIE4 X1Y2	GTY Quad 229 X1Y20-X1Y23 F [RN]
SLR Crossing					
GTY Quad 128 X0Y16-X0Y19 R [LC]	CMAC X0Y2	HP I/O Bank 48	HP I/O Bank 68 F	ILKN X1Y2	GTY Quad 228 X1Y16-X1Y19 E [RC]
GTY Quad 127 X0Y12-X0Y15 Q [LC]	PCIE4 X0Y1	HP I/O Bank 47	HP I/O Bank 67 E	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15 D [RC]
GTY Quad 126 X0Y8-X0Y11 P [LC] (RCAL)	CMAC X0Y1	HP I/O Bank 46	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 C [RC] (RCAL)
GTY Quad 125 X0Y4-X0Y7 O [LC]	ILKN X0Y0	HP I/O Bank 45	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 B [RC]
GTY Quad 124 X0Y0-X0Y3 N [LC]	CMAC X0Y0	HP I/O Bank 44	HP I/O Bank 64 B	PCIE4 X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 A [RC]

X16505-020817

Figure 1-102: XCVU5P Banks in FLVC2104 Package

## XCVU7P and XQVU7P Bank Diagrams

GTY Quad 133 X0Y36-X0Y39	CMAC X0Y5	HP I/O Bank 53	HP I/O Bank 73	ILKN X1Y5	GTY Quad 233 X1Y36-X1Y39
GTY Quad 132 X0Y32-X0Y35	PCIE4 X0Y3	HP I/O Bank 52	HP I/O Bank 72	ILKN X1Y4	GTY Quad 232 X1Y32-X1Y35
GTY Quad 131 X0Y28-X0Y31 (RCAL)	CMAC X0Y4	HP I/O Bank 51	HP I/O Bank 71	SYSMON Configuration	GTY Quad 231 X1Y28-X1Y31 (RCAL)
GTY Quad 130 X0Y24-X0Y27	ILKN X0Y3	HP I/O Bank 50	HP I/O Bank 70	Configuration	GTY Quad 230 X1Y24-X1Y27
GTY Quad 129 X0Y20-X0Y23	CMAC X0Y3	HP I/O Bank 49	HP I/O Bank 69	PCIE4 X1Y2	GTY Quad 229 X1Y20-X1Y23
SLR Crossing					
GTY Quad 128 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 48	HP I/O Bank 68	ILKN X1Y2	GTY Quad 228 X1Y16-X1Y19
GTY Quad 127 X0Y12-X0Y15	PCIE4 X0Y1	HP I/O Bank 47	HP I/O Bank 67	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15
GTY Quad 126 X0Y8-X0Y11 (RCAL)	CMAC X0Y1	HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 (RCAL)
GTY Quad 125 X0Y4-X0Y7	ILKN X0Y0	HP I/O Bank 45	HP I/O Bank 65	Configuration	GTY Quad 225 X1Y4-X1Y7
GTY Quad 124 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 44	HP I/O Bank 64	PCIE4 X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3

X15607-020817

Figure 1-103: XCVU7P and XQVU7P Banks

GTY Quad 133 X0Y36-X0Y39	CMAC X0Y5	HP I/O Bank 53 M	HP I/O Bank 73 Q	ILKN X1Y5	GTY Quad 233 X1Y36-X1Y39 G [RN]
GTY Quad 132 X0Y32-X0Y35 M [LN]	PCIE4 X0Y3	HP I/O Bank 52 L	HP I/O Bank 72 P	ILKN X1Y4	GTY Quad 232 X1Y32-X1Y35 F [RN]
GTY Quad 131 X0Y28-X0Y31 L [LN] (RCAL)	CMAC X0Y4	HP I/O Bank 51 K	HP I/O Bank 71 O	SYSMON Configuration	GTY Quad 231 X1Y28-X1Y31 E [RN] (RCAL)
GTY Quad 130 X0Y24-X0Y27 K [LN]	ILKN X0Y3	HP I/O Bank 50 J	HP I/O Bank 70 N	Configuration	GTY Quad 230 X1Y24-X1Y27
GTY Quad 129 X0Y20-X0Y23	CMAC X0Y3	HP I/O Bank 49	HP I/O Bank 69	PCIE4 X1Y2	GTY Quad 229 X1Y20-X1Y23
SLR Crossing					
GTY Quad 128 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 48	HP I/O Bank 68	ILKN X1Y2	GTY Quad 228 X1Y16-X1Y19
GTY Quad 127 X0Y12-X0Y15 J [LS]	PCIE4 X0Y1	HP I/O Bank 47 I	HP I/O Bank 67 E	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11 I [LS] (RCAL)	CMAC X0Y1	HP I/O Bank 46 H	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 C [RS] (RCAL)
GTY Quad 125 X0Y4-X0Y7 H [LS]	ILKN X0Y0	HP I/O Bank 45 G	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 B [RS]
GTY Quad 124 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 44 F	HP I/O Bank 64 B	PCIE4 X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 A [RS]

X15608-020817

Figure 1-104: XCVU7P Banks in FLVA2104 Package and XQVU7P in FLRA2104 Package

GTY Quad 133 X0Y36-X0Y39 S [LN]	CMAC X0Y5	HP I/O Bank 53	HP I/O Bank 73	ILKN X1Y5	GTY Quad 233 X1Y36-X1Y39 J [RN]
GTY Quad 132 X0Y32-X0Y35 R [LN]	PCIE4 X0Y3	HP I/O Bank 52 L	HP I/O Bank 72 O	ILKN X1Y4	GTY Quad 232 X1Y32-X1Y35 I [RN]
GTY Quad 131 X0Y28-X0Y31 Q [LN] (RCAL)	CMAC X0Y4	HP I/O Bank 51 K	HP I/O Bank 71 N	SYSMON Configuration	GTY Quad 231 X1Y28-X1Y31 H [RN] (RCAL)
GTY Quad 130 X0Y24-X0Y27 P [LN]	ILKN X0Y3	HP I/O Bank 50 J	HP I/O Bank 70 M	Configuration	GTY Quad 230 X1Y24-X1Y27 G [RN]
GTY Quad 129 X0Y20-X0Y23 O [LN]	CMAC X0Y3	HP I/O Bank 49	HP I/O Bank 69	PCIE4 X1Y2	GTY Quad 229 X1Y20-X1Y23 F [RN]
SLR Crossing					
GTY Quad 128 X0Y16-X0Y19 N [LS]	CMAC X0Y2	HP I/O Bank 48	HP I/O Bank 68 F (Partial)	ILKN X1Y2	GTY Quad 228 X1Y16-X1Y19 E [RS]
GTY Quad 127 X0Y12-X0Y15 M [LS]	PCIE4 X0Y1	HP I/O Bank 47	HP I/O Bank 67 E	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15 D [RS]
GTY Quad 126 X0Y08-X0Y11 L [LS] (RCAL)	CMAC X0Y1	HP I/O Bank 46 I	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 C [RS] (RCAL)
GTY Quad 125 X0Y4-X0Y7 K [LS]	ILKN X0Y0	HP I/O Bank 45 H	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 B [RS]
GTY Quad 124 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 44 G	HP I/O Bank 64 B	PCIE4 X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 A [RS]

X15609-020817

Figure 1-105: XCVU7P Banks in FLVB2104 Package and XQVU7P in FLRB2104 Package



GTY Quad 133 X0Y36-X0Y39 W [LN]	CMAC X0Y5	HP I/O Bank 53	HP I/O Bank 73	ILKN X1Y5	GTY Quad 233 X1Y36-X1Y39 J [RN]
GTY Quad 132 X0Y32-X0Y35 V [LN]	PCIE4 X0Y3	HP I/O Bank 52	HP I/O Bank 72 I	ILKN X1Y4	GTY Quad 232 X1Y32-X1Y35 I [RN]
GTY Quad 131 X0Y28-X0Y31 U [LN] (RCAL)	CMAC X0Y4	HP I/O Bank 51	HP I/O Bank 71 H	SYSMON Configuration	GTY Quad 231 X1Y28-X1Y31 H [RN] (RCAL)
GTY Quad 130 X0Y24-X0Y27 T [LN]	ILKN X0Y3	HP I/O Bank 50	HP I/O Bank 70 G	Configuration	GTY Quad 230 X1Y24-X1Y27 G [RN]
GTY Quad 129 X0Y20-X0Y23 S [LN]	CMAC X0Y3	HP I/O Bank 49	HP I/O Bank 69	PCIE4 X1Y2	GTY Quad 229 X1Y20-X1Y23 F [RN]
SLR Crossing					
GTY Quad 128 X0Y16-X0Y19 R [LC]	CMAC X0Y2	HP I/O Bank 48	HP I/O Bank 68 F	ILKN X1Y2	GTY Quad 228 X1Y16-X1Y19 E [RC]
GTY Quad 127 X0Y12-X0Y15 Q [LC]	PCIE4 X0Y1	HP I/O Bank 47	HP I/O Bank 67 E	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15 D [RC]
GTY Quad 126 X0Y8-X0Y11 P [LC] (RCAL)	CMAC X0Y1	HP I/O Bank 46	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 C [RC] (RCAL)
GTY Quad 125 X0Y4-X0Y7 O [LC]	ILKN X0Y0	HP I/O Bank 45	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 B [RC]
GTY Quad 124 X0Y0-X0Y3 N [LC]	CMAC X0Y0	HP I/O Bank 44	HP I/O Bank 64 B	PCIE4 X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 A [RC]

X15610-020817

Figure 1-106: XCVU7P Banks in FLVC2104 Package

## XCVU9P Bank Diagrams

GTU Quad 133 X0Y56-X0Y59	CMAC X0Y8	HP I/O Bank 53	HP I/O Bank 73	ILKN X1Y8	GTU Quad 233 X1Y56-X1Y59
GTU Quad 132 X0Y52-X0Y55	PCIE4 X0Y5	HP I/O Bank 52	HP I/O Bank 72	ILKN X1Y7	GTU Quad 232 X1Y52-X1Y55
GTU Quad 131 X0Y48-X0Y51 (RCAL)	CMAC X0Y7	HP I/O Bank 51	HP I/O Bank 71	SYSMON Configuration	GTU Quad 231 X1Y48-X1Y51 (RCAL)
GTU Quad 130 X0Y44-X0Y47	ILKN X0Y6	HP I/O Bank 50	HP I/O Bank 70	Configuration	GTU Quad 230 X1Y44-X1Y47
GTU Quad 129 X0Y40-X0Y43	CMAC X0Y6	HP I/O Bank 49	HP I/O Bank 69	PCIE4 X1Y4	GTU Quad 229 X1Y40-X1Y43
SLR Crossing					
GTU Quad 128 X0Y36-X0Y39	CMAC X0Y5	HP I/O Bank 48	HP I/O Bank 68	ILKN X1Y5	GTU Quad 228 X1Y36-X1Y39
GTU Quad 127 X0Y32-X0Y35	PCIE4 X0Y3	HP I/O Bank 47	HP I/O Bank 67	ILKN X1Y4	GTU Quad 227 X1Y32-X1Y35
GTU Quad 126 X0Y28-X0Y31 (RCAL)	CMAC X0Y4	HP I/O Bank 46	HP I/O Bank 66	SYSMON Configuration	GTU Quad 226 X1Y28-X1Y31 (RCAL)
GTU Quad 125 X0Y24-X0Y27	ILKN X0Y3	HP I/O Bank 45	HP I/O Bank 65	Configuration	GTU Quad 225 X1Y24-X1Y27
GTU Quad 124 X0Y20-X0Y23	CMAC X0Y3	HP I/O Bank 44	HP I/O Bank 64	PCIE4 X1Y2 (tandem)	GTU Quad 224 X1Y20-X1Y23
SLR Crossing					
GTU Quad 123 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 43	HP I/O Bank 63	ILKN X1Y2	GTU Quad 223 X1Y16-X1Y19
GTU Quad 122 X0Y12-X0Y15	PCIE4 X0Y1	HP I/O Bank 42	HP I/O Bank 62	ILKN X1Y1	GTU Quad 222 X1Y12-X1Y15
GTU Quad 121 X0Y8-X0Y11 (RCAL)	CMAC X0Y1	HP I/O Bank 41	HP I/O Bank 61	SYSMON Configuration	GTU Quad 221 X1Y8-X1Y11 (RCAL)
GTU Quad 120 X0Y4-X0Y7	ILKN X0Y0	HP I/O Bank 40	HP I/O Bank 60	Configuration	GTU Quad 220 X1Y4-X1Y7
GTU Quad 119 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 39	HP I/O Bank 59	PCIE4 X1Y0	GTU Quad 219 X1Y0-X1Y3

X15611-020817

Figure 1-107: XCVU9P Banks

GTY Quad 133 X0Y56-X0Y59	CMAC X0Y8	HP I/O Bank 53	HP I/O Bank 73 Q	ILKN X1Y8	GTY Quad 233 X1Y56-X1Y59 G [RN]
GTY Quad 132 X0Y52-X0Y55	PCIE4 X0Y5	HP I/O Bank 52	HP I/O Bank 72 P	ILKN X1Y7	GTY Quad 232 X1Y52-X1Y55 F [RN]
GTY Quad 131 X0Y48-X0Y51 (RCAL)	CMAC X0Y7	HP I/O Bank 51	HP I/O Bank 71 O	SYSMON Configuration	GTY Quad 231 X1Y48-X1Y51 E [RN] (RCAL)
GTY Quad 130 X0Y44-X0Y47	ILKN X0Y6	HP I/O Bank 50	HP I/O Bank 70 N	Configuration	GTY Quad 230 X1Y44-X1Y47
GTY Quad 129 X0Y40-X0Y43	CMAC X0Y6	HP I/O Bank 49	HP I/O Bank 69	PCIE4 X1Y4	GTY Quad 229 X1Y40-X1Y43
SLR Crossing					
GTY Quad 128 X0Y36-X0Y39	CMAC X0Y5	HP I/O Bank 48 M	HP I/O Bank 68	ILKN X1Y5	GTY Quad 228 X1Y36-X1Y39
GTY Quad 127 X0Y32-X0Y35 M [LN]	PCIE4 X0Y3	HP I/O Bank 47 L	HP I/O Bank 67 E	ILKN X1Y4	GTY Quad 227 X1Y32-X1Y35 D [RS]
GTY Quad 126 X0Y28-X0Y31 L [LN] (RCAL)	CMAC X0Y4	HP I/O Bank 46 K	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y28-X1Y31 C [RS] (RCAL)
GTY Quad 125 X0Y24-X0Y27 K [LN]	ILKN X0Y3	HP I/O Bank 45 J	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y24-X1Y27 B [RS]
GTY Quad 124 X0Y20-X0Y23	CMAC X0Y3	HP I/O Bank 44	HP I/O Bank 64 B	PCIE4 X1Y2 (tandem)	GTY Quad 224 X1Y20-X1Y23 A [RS]
SLR Crossing					
GTY Quad 123 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 43 I	HP I/O Bank 63	ILKN X1Y2	GTY Quad 223 X1Y16-X1Y19
GTY Quad 122 X0Y12-X0Y15 J [LS]	PCIE4 X0Y1	HP I/O Bank 42 H	HP I/O Bank 62	ILKN X1Y1	GTY Quad 222 X1Y12-X1Y15
GTY Quad 121 X0Y8-X0Y11 I [LS] (RCAL)	CMAC X0Y1	HP I/O Bank 41 G	HP I/O Bank 61	SYSMON Configuration	GTY Quad 221 X1Y8-X1Y11 (RCAL)
GTY Quad 120 X0Y4-X0Y7 H [LS]	ILKN X0Y0	HP I/O Bank 40 F	HP I/O Bank 60	Configuration	GTY Quad 220 X1Y4-X1Y7
GTY Quad 119 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 39	HP I/O Bank 59	PCIE4 X1Y0	GTY Quad 219 X1Y0-X1Y3

X15612-020817

Figure 1-108: XCVU9P Banks in FLGA2104 Package

GTY Quad 133 X0Y56-X0Y59	CMAC X0Y8	HP I/O Bank 53	HP I/O Bank 73	ILKN X1Y8	GTY Quad 233 X1Y56-X1Y59 J [RN]
GTY Quad 132 X0Y52-X0Y55	PCIE4 X0Y5	HP I/O Bank 52	HP I/O Bank 72 O	ILKN X1Y7	GTY Quad 232 X1Y52-X1Y55 I [RN]
GTY Quad 131 X0Y48-X0Y51 (RCAL)	CMAC X0Y7	HP I/O Bank 51	HP I/O Bank 71 N	SYSMON Configuration	GTY Quad 231 X1Y48-X1Y51 H [RN] (RCAL)
GTY Quad 130 X0Y44-X0Y47	ILKN X0Y6	HP I/O Bank 50	HP I/O Bank 70 M	Configuration	GTY Quad 230 X1Y44-X1Y47 G [RN]
GTY Quad 129 X0Y40-X0Y43	CMAC X0Y6	HP I/O Bank 49	HP I/O Bank 69	PCIE4 X1Y4	GTY Quad 229 X1Y40-X1Y43 F [RN]
SLR Crossing					
GTY Quad 128 X0Y36-X0Y39 S [LN]	CMAC X0Y5	HP I/O Bank 48 L	HP I/O Bank 68 F (Partial)	ILKN X1Y5	GTY Quad 228 X1Y36-X1Y39 E [RS]
GTY Quad 127 X0Y32-X0Y35 R [LN]	PCIE4 X0Y3	HP I/O Bank 47 K	HP I/O Bank 67 E	ILKN X1Y4	GTY Quad 227 X1Y32-X1Y35 D [RS]
GTY Quad 126 X0Y28-X0Y31 Q [LN] (RCAL)	CMAC X0Y4	HP I/O Bank 46 J	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y28-X1Y31 C [RS] (RCAL)
GTY Quad 125 X0Y24-X0Y27 P [LN]	ILKN X0Y3	HP I/O Bank 45	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y24-X1Y27 B [RS]
GTY Quad 124 X0Y20-X0Y23 O [LN]	CMAC X0Y3	HP I/O Bank 44	HP I/O Bank 64 B	PCIE4 X1Y2 (tandem)	GTY Quad 224 X1Y20-X1Y23 A [RS]
SLR Crossing					
GTY Quad 123 X0Y16-X0Y19 N [LS]	CMAC X0Y2	HP I/O Bank 43	HP I/O Bank 63	ILKN X1Y2	GTY Quad 223 X1Y16-X1Y19
GTY Quad 122 X0Y12-X0Y15 M [LS]	PCIE4 X0Y1	HP I/O Bank 42 I	HP I/O Bank 62	ILKN X1Y1	GTY Quad 222 X1Y12-X1Y15
GTY Quad 121 X0Y8-X0Y11 L [LS] (RCAL)	CMAC X0Y1	HP I/O Bank 41 H	HP I/O Bank 61	SYSMON Configuration	GTY Quad 221 X1Y8-X1Y11 (RCAL)
GTY Quad 120 X0Y4-X0Y7 K [LS]	ILKN X0Y0	HP I/O Bank 40 G	HP I/O Bank 60	Configuration	GTY Quad 220 X1Y4-X1Y7
GTY Quad 119 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 39	HP I/O Bank 59	PCIE4 X1Y0	GTY Quad 219 X1Y0-X1Y3

X15613-020817

Figure 1-109: XCVU9P Banks in FLGB2104 Package

GTY Quad 133 X0Y56-X0Y59 W [LN]	CMAC X0Y8	HP I/O Bank 53	HP I/O Bank 73	ILKN X1Y8	GTY Quad 233 X1Y56-X1Y59 J [RN]
GTY Quad 132 X0Y52-X0Y55 V [LN]	PCIE4 X0Y5	HP I/O Bank 52	HP I/O Bank 72 I	ILKN X1Y7	GTY Quad 232 X1Y52-X1Y55 I [RN]
GTY Quad 131 X0Y48-X0Y51 U [LN] (RCAL)	CMAC X0Y7	HP I/O Bank 51	HP I/O Bank 71 H	SYSMON Configuration	GTY Quad 231 X1Y48-X1Y51 H [RN] (RCAL)
GTY Quad 130 X0Y44-X0Y47 T [LN]	ILKN X0Y6	HP I/O Bank 50	HP I/O Bank 70 G	Configuration	GTY Quad 230 X1Y44-X1Y47 G [RN]
GTY Quad 129 X0Y40-X0Y43 S [LN]	CMAC X0Y6	HP I/O Bank 49	HP I/O Bank 69	PCIE4 X1Y4	GTY Quad 229 X1Y40-X1Y43 F [RN]
SLR Crossing					
GTY Quad 128 X0Y36-X0Y39 R [LC]	CMAC X0Y5	HP I/O Bank 48	HP I/O Bank 68 F	ILKN X1Y5	GTY Quad 228 X1Y36-X1Y39 E [RC]
GTY Quad 127 X0Y32-X0Y35 Q [LC]	PCIE4 X0Y3	HP I/O Bank 47	HP I/O Bank 67 E	ILKN X1Y4	GTY Quad 227 X1Y32-X1Y35 D [RC]
GTY Quad 126 X0Y28-X0Y31 P [LC] (RCAL)	CMAC X0Y4	HP I/O Bank 46	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y28-X1Y31 C [RC] (RCAL)
GTY Quad 125 X0Y24-X0Y27 O [LC]	ILKN X0Y3	HP I/O Bank 45	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y24-X1Y27 B [RC]
GTY Quad 124 X0Y20-X0Y23 N [LC]	CMAC X0Y3	HP I/O Bank 44	HP I/O Bank 64 B	PCIE4 X1Y2 (tandem)	GTY Quad 224 X1Y20-X1Y23 A [RC]
SLR Crossing					
GTY Quad 123 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 43	HP I/O Bank 63	ILKN X1Y2	GTY Quad 223 X1Y16-X1Y19
GTY Quad 122 X0Y12-X0Y15 Z [LS]	PCIE4 X0Y1	HP I/O Bank 42	HP I/O Bank 62	ILKN X1Y1	GTY Quad 222 X1Y12-X1Y15 M [RS]
GTY Quad 121 X0Y8-X0Y11 Y [LS] (RCAL)	CMAC X0Y1	HP I/O Bank 41	HP I/O Bank 61	SYSMON Configuration	GTY Quad 221 X1Y8-X1Y11 L [RS] (RCAL)
GTY Quad 120 X0Y4-X0Y7 X [LS]	ILKN X0Y0	HP I/O Bank 40	HP I/O Bank 60	Configuration	GTY Quad 220 X1Y4-X1Y7 K [RS]
GTY Quad 119 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 39	HP I/O Bank 59	PCIE4 X1Y0	GTY Quad 219 X1Y0-X1Y3

X15614-020817

Figure 1-110: XCVU9P Banks in FLGC2104 Package

GTY Quad 133 X0Y56-X0Y59	CMAC X0Y8	HP I/O Bank 53	HP I/O Bank 73	ILKN X1Y8	GTY Quad 233 X1Y56-X1Y59 J [RN]
GTY Quad 132 X0Y52-X0Y55	PCIE4 X0Y5	HP I/O Bank 52	HP I/O Bank 72 O	ILKN X1Y7	GTY Quad 232 X1Y52-X1Y55 I [RN]
GTY Quad 131 X0Y48-X0Y51 S [LN] (RCAL)	CMAC X0Y7	HP I/O Bank 51	HP I/O Bank 71 N	SYSMON Configuration	GTY Quad 231 X1Y48-X1Y51 H [RN] (RCAL)
GTY Quad 130 X0Y44-X0Y47	ILKN X0Y6	HP I/O Bank 50	HP I/O Bank 70 M	Configuration	GTY Quad 230 X1Y44-X1Y47 G [RN]
GTY Quad 129 X0Y40-X0Y43	CMAC X0Y6	HP I/O Bank 49	HP I/O Bank 69	PCIE4 X1Y4	GTY Quad 229 X1Y40-X1Y43 F [RN]
SLR Crossing					
GTY Quad 128 X0Y36-X0Y39	CMAC X0Y5	HP I/O Bank 48 L	HP I/O Bank 68	ILKN X1Y5	GTY Quad 228 X1Y36-X1Y39 E [RS]
GTY Quad 127 X0Y32-X0Y35 R [LN]	PCIE4 X0Y3	HP I/O Bank 47 K	HP I/O Bank 67 E	ILKN X1Y4	GTY Quad 227 X1Y32-X1Y35 D [RS]
GTY Quad 126 X0Y28-X0Y31 Q [LN] (RCAL)	CMAC X0Y4	HP I/O Bank 46 J	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y28-X1Y31 C [RS] (RCAL)
GTY Quad 125 X0Y24-X0Y27 P [LN]	ILKN X0Y3	HP I/O Bank 45	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y24-X1Y27 B [RS]
GTY Quad 124 X0Y20-X0Y23 O [LN]	CMAC X0Y3	HP I/O Bank 44	HP I/O Bank 64 B	PCIE4 X1Y2 (tandem)	GTY Quad 224 X1Y20-X1Y23 A [RS]
SLR Crossing					
GTY Quad 123 X0Y16-X0Y19 N [LS]	CMAC X0Y2	HP I/O Bank 43	HP I/O Bank 63	ILKN X1Y2	GTY Quad 223 X1Y16-X1Y19
GTY Quad 122 X0Y12-X0Y15 M [LS]	PCIE4 X0Y1	HP I/O Bank 42 H	HP I/O Bank 62	ILKN X1Y1	GTY Quad 222 X1Y12-X1Y15
GTY Quad 121 X0Y8-X0Y11 L [LS](RCAL)	CMAC X0Y1	HP I/O Bank 41 G	HP I/O Bank 61	SYSMON Configuration	GTY Quad 221 X1Y8-X1Y11
GTY Quad 120 X0Y4-X0Y7 K [LS]	ILKN X0Y0	HP I/O Bank 40 F	HP I/O Bank 60	Configuration	GTY Quad 220 X1Y4-X1Y7
GTY Quad 119 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 39	HP I/O Bank 59	PCIE4 X1Y0	GTY Quad 219 X1Y0-X1Y3

X18713-020817

Figure 1-111: XCVU9P Banks in FSGD2104 Package

GTU Quad 133 X0Y56-X0Y59 Z [LN]	CMAC X0Y8	HP I/O Bank 53	HP I/O Bank 73	ILKN X1Y8	GTU Quad 233 X1Y56-X1Y59 J [RN]
GTU Quad 132 X0Y52-X0Y55 Y [LN]	PCIE4 X0Y5	HP I/O Bank 52	HP I/O Bank 72 K	ILKN X1Y7	GTU Quad 232 X1Y52-X1Y55 I [RN]
GTU Quad 131 X0Y48-X0Y51 X [LN] (RCAL)	CMAC X0Y7	HP I/O Bank 51	HP I/O Bank 71 J	SYSMON Configuration	GTU Quad 231 X1Y48-X1Y51 H [RN] (RCAL)
GTU Quad 130 X0Y44-X0Y47 W [LUC]	ILKN X0Y6	HP I/O Bank 50	HP I/O Bank 70 I	Configuration	GTU Quad 230 X1Y44-X1Y47 G [RUC]
GTU Quad 129 X0Y40-X0Y43 V [LUC]	CMAC X0Y6	HP I/O Bank 49	HP I/O Bank 69	PCIE4 X1Y4	GTU Quad 229 X1Y40-X1Y43 F [RUC]
SLR Crossing					
GTU Quad 128 X0Y36-X0Y39 U [LUC]	CMAC X0Y5	HP I/O Bank 48	HP I/O Bank 68 H (Partial)	ILKN X1Y5	GTU Quad 228 X1Y36-X1Y39 E [RUC]
GTU Quad 127 X0Y32-X0Y35 T [LUC]	PCIE4 X0Y3	HP I/O Bank 47	HP I/O Bank 67 G	ILKN X1Y4	GTU Quad 227 X1Y32-X1Y35 D [RUC]
GTU Quad 126 X0Y28-X0Y31 S [LLC] (RCAL)	CMAC X0Y4	HP I/O Bank 46	HP I/O Bank 66 B (Partial)	SYSMON Configuration	GTU Quad 226 X1Y28-X1Y31 C [RLC] (RCAL)
GTU Quad 125 X0Y24-X0Y27 R [LLC]	ILKN X0Y3	HP I/O Bank 45	HP I/O Bank 65 C	Configuration	GTU Quad 225 X1Y24-X1Y27 B [RLC]
GTU Quad 124 X0Y20-X0Y23 Q [LLC]	CMAC X0Y3	HP I/O Bank 44	HP I/O Bank 64	PCIE4 X1Y2 (tandem)	GTU Quad 224 X1Y20-X1Y23 A [RLC]
SLR Crossing					
GTU Quad 123 X0Y16-X0Y19 AF [LLC]	CMAC X0Y2	HP I/O Bank 43	HP I/O Bank 63 F	ILKN X1Y2	GTU Quad 223 X1Y16-X1Y19 P [RLC]
GTU Quad 122 X0Y12-X0Y15 AE [LS]	PCIE4 X0Y1	HP I/O Bank 42	HP I/O Bank 62 E	ILKN X1Y1	GTU Quad 222 X1Y12-X1Y15 O [RS]
GTU Quad 121 X0Y8-X0Y11 AD [LS] (RCAL)	CMAC X0Y1	HP I/O Bank 41	HP I/O Bank 61 D	SYSMON Configuration	GTU Quad 221 X1Y8-X1Y11 N [RS] (RCAL)
GTU Quad 120 X0Y4-X0Y7 AC [LS]	ILKN X0Y0	HP I/O Bank 40	HP I/O Bank 60	Configuration	GTU Quad 220 X1Y4-X1Y7 M [RS]
GTU Quad 119 X0Y0-X0Y3 AB [LS]	CMAC X0Y0	HP I/O Bank 39	HP I/O Bank 59	PCIE4 X1Y0	GTU Quad 219 X1Y0-X1Y3 L [RS]

X15615-020817

Figure 1-112: XCVU9P Banks in FLGA2577 Package

## XCVU11P and XQVU11P Bank Diagrams

GTY Quad 135 X0Y44-X0Y47	CMAC X0Y8	HP I/O Bank 75	ILKN X1Y5	GTY Quad 235 X1Y44-X1Y47
GTY Quad 134 X0Y40-X0Y43	CMAC X0Y7	HP I/O Bank 74	SYSMON Configuration	GTY Quad 234 X1Y40-X1Y43
GTY Quad 133 X0Y36-X0Y39 (RCAL)	ILKN X0Y4	HP I/O Bank 73	Configuration	GTY Quad 233 X1Y36-X1Y39 (RCAL)
GTY Quad 132 X0Y32-X0Y35	CMAC X0Y6	HP I/O Bank 72	PCIE4 X0Y2	GTY Quad 232 X1Y32-X1Y35
SLR Crossing				
GTY Quad 131 X0Y28-X0Y31	CMAC X0Y5	HP I/O Bank 71	ILKN X1Y3	GTY Quad 231 X1Y28-X1Y31
GTY Quad 130 X0Y24-X0Y27	CMAC X0Y4	HP I/O Bank 70	SYSMON Configuration	GTY Quad 230 X1Y24-X1Y27
GTY Quad 129 X0Y20-X0Y23 (RCAL)	ILKN X0Y2	HP I/O Bank 69	Configuration	GTY Quad 229 X1Y20-X1Y23 (RCAL)
GTY Quad 128 X0Y16-X0Y19	CMAC X0Y3	HP I/O Bank 68	PCIE4 X0Y1	GTY Quad 228 X1Y16-X1Y19
SLR Crossing				
GTY Quad 127 X0Y12-X0Y15	CMAC X0Y2	HP I/O Bank 67	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15
GTY Quad 126 X0Y8-X0Y11	CMAC X0Y1	HP I/O Bank 66	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11
GTY Quad 125 X0Y4-X0Y7 (RCAL)	ILKN X0Y0	HP I/O Bank 65	Configuration	GTY Quad 225 X1Y4-X1Y7 (RCAL)
GTY Quad 124 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 64	PCIE4 X0Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3

X15616-020817

Figure 1-113: XCVU11P and XQVU11P Banks



GTY Quad 135 X0Y44-X0Y47	CMAC X0Y8	HP I/O Bank 75 P	ILKN X1Y5	GTY Quad 235 X1Y44-X1Y47
GTY Quad 134 X0Y40-X0Y43	CMAC X0Y7	HP I/O Bank 74 O	SYSMON Configuration	GTY Quad 234 X1Y40-X1Y43
GTY Quad 133 X0Y36-X0Y39 (RCAL)	ILKN X0Y4	HP I/O Bank 73 N	Configuration	GTY Quad 233 X1Y36-X1Y39 J [RN] (RCAL)
GTY Quad 132 X0Y32-X0Y35	CMAC X0Y6	HP I/O Bank 72 M	PCIE4 X0Y2	GTY Quad 232 X1Y32-X1Y35 I [RN]
SLR Crossing				
GTY Quad 131 X0Y28-X0Y31 P [LN]	CMAC X0Y5	HP I/O Bank 71 L	ILKN X1Y3	GTY Quad 231 X1Y28-X1Y31 H [RN]
GTY Quad 130 X0Y24-X0Y27 Q [LN]	CMAC X0Y4	HP I/O Bank 70 K	SYSMON Configuration	GTY Quad 230 X1Y24-X1Y27 G [RN]
GTY Quad 129 X0Y20-X0Y23 N [LN] (RCAL)	ILKN X0Y2	HP I/O Bank 69 J	Configuration	GTY Quad 229 X1Y20-X1Y23 F [RN] (RCAL)
GTY Quad 128 X0Y16-X0Y19	CMAC X0Y3	HP I/O Bank 68 F	PCIE4 X0Y1	GTY Quad 228 X1Y16-X1Y19 E [RS]
SLR Crossing				
GTY Quad 127 X0Y12-X0Y15 M [LS]	CMAC X0Y2	HP I/O Bank 67 E	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11 L [LS]	CMAC X0Y1	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 C [RS]
GTY Quad 125 X0Y4-X0Y7 K [LS] (RCAL)	ILKN X0Y0	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 B [RS] (RCAL)
GTY Quad 124 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 64 G	PCIE4 X0Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 A [RS]

X15620-020817

Figure 1-114: XCVU11P Banks in FLGF1924 Package

GTY Quad 135 X0Y44-X0Y47	CMAC X0Y8	HP I/O Bank 75	ILKN X1Y5	GTY Quad 235 X1Y44-X1Y47
GTY Quad 134 X0Y40-X0Y43	CMAC X0Y7	HP I/O Bank 74 O	SYSMON Configuration	GTY Quad 234 X1Y40-X1Y43
GTY Quad 133 X0Y36-X0Y39 S [LN] (RCAL)	ILKN X0Y4	HP I/O Bank 73 N	Configuration	GTY Quad 233 X1Y36-X1Y39 J [RN] (RCAL)
GTY Quad 132 X0Y32-X0Y35	CMAC X0Y6	HP I/O Bank 72 M	PCIE4 X0Y2	GTY Quad 232 X1Y32-X1Y35 I [RN]
SLR Crossing				
GTY Quad 131 X0Y28-X0Y31 R [LN]	CMAC X0Y5	HP I/O Bank 71 L	ILKN X1Y3	GTY Quad 231 X1Y28-X1Y31 H [RN]
GTY Quad 130 X0Y24-X0Y27 Q [LN]	CMAC X0Y4	HP I/O Bank 70 K	SYSMON Configuration	GTY Quad 230 X1Y24-X1Y27 G [RN]
GTY Quad 129 X0Y20-X0Y23 P [LN] (RCAL)	ILKN X0Y2	HP I/O Bank 69 J	Configuration	GTY Quad 229 X1Y20-X1Y23 F [RN] (RCAL)
GTY Quad 128 X0Y16-X0Y19 O [LN]	CMAC X0Y3	HP I/O Bank 68 G	PCIE4 X0Y1	GTY Quad 228 X1Y16-X1Y19 E [RS]
SLR Crossing				
GTY Quad 127 X0Y12-X0Y15 N [LS]	CMAC X0Y2	HP I/O Bank 67 E	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11 M [LS]	CMAC X0Y1	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 C [RS]
GTY Quad 125 X0Y4-X0Y7 L [LS] (RCAL)	ILKN X0Y0	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 B [RS] (RCAL)
GTY Quad 124 X0Y0-X0Y3 K [LS]	CMAC X0Y0	HP I/O Bank 64 B	PCIE4 X0Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 A [RS]

X15617-020817

Figure 1-115: XCVU11P Banks in FLGB2104 Package

GTY Quad 135 X0Y44-X0Y47 W [LN]	CMAC X0Y8	HP I/O Bank 75	ILKN X1Y5	GTY Quad 235 X1Y44-X1Y47 J [RN]
GTY Quad 134 X0Y40-X0Y43 V [LN]	CMAC X0Y7	HP I/O Bank 74	SYSMON Configuration	GTY Quad 234 X1Y40-X1Y43 I [RN]
GTY Quad 133 X0Y36-X0Y39 U [LN] (RCAL)	ILKN X0Y4	HP I/O Bank 73	Configuration	GTY Quad 233 X1Y36-X1Y39 H [RN] (RCAL)
GTY Quad 132 X0Y32-X0Y35 T [LN]	CMAC X0Y6	HP I/O Bank 72	PCIE4 X0Y2	GTY Quad 232 X1Y32-X1Y35 G [RN]
SLR Crossing				
GTY Quad 131 X0Y28-X0Y31 S [LN]	CMAC X0Y5	HP I/O Bank 71 I	ILKN X1Y3	GTY Quad 231 X1Y28-X1Y31 F [RN]
GTY Quad 130 X0Y24-X0Y27 R [LC]	CMAC X0Y4	HP I/O Bank 70 H	SYSMON Configuration	GTY Quad 230 X1Y24-X1Y27 E [RC]
GTY Quad 129 X0Y20-X0Y23 Q [LC] (RCAL)	ILKN X0Y2	HP I/O Bank 69 G	Configuration	GTY Quad 229 X1Y20-X1Y23 D [RC] (RCAL)
GTY Quad 128 X0Y16-X0Y19 P [LC]	CMAC X0Y3	HP I/O Bank 68 F	PCIE4 X0Y1	GTY Quad 228 X1Y16-X1Y19 C [RC]
SLR Crossing				
GTY Quad 127 X0Y12-X0Y15 O [LC]	CMAC X0Y2	HP I/O Bank 67 E	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15 B [RC]
GTY Quad 126 X0Y8-X0Y11 N [LC]	CMAC X0Y1	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 A [RC]
GTY Quad 125 X0Y4-X0Y7 Z [LS] (RCAL)	ILKN X0Y0	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 M [RS] (RCAL)
GTY Quad 124 X0Y0-X0Y3 Y [LS]	CMAC X0Y0	HP I/O Bank 64 B	PCIE4 X0Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 L [RS]

X15618-020817

Figure 1-116: XCVU11P Banks in FLGC2104 Package and XQVU11P Banks in FLRC2104 Package

GTY Quad 135 X0Y44-X0Y47	CMAC X0Y8	HP I/O Bank 75	ILKN X1Y5	GTY Quad 235 X1Y44-X1Y47
GTY Quad 134 X0Y40-X0Y43	CMAC X0Y7	HP I/O Bank 74 O	SYSMON Configuration	GTY Quad 234 X1Y40-X1Y43
GTY Quad 133 X0Y36-X0Y39 S [LN] (RCAL)	ILKN X0Y4	HP I/O Bank 73 N	Configuration	GTY Quad 233 X1Y36-X1Y39 J [RN] (RCAL)
GTY Quad 132 X0Y32-X0Y35	CMAC X0Y6	HP I/O Bank 72 M	PCIE4 X0Y2	GTY Quad 232 X1Y32-X1Y35 I [RN]
SLR Crossing				
GTY Quad 131 X0Y28-X0Y31 R [LN]	CMAC X0Y5	HP I/O Bank 71 L	ILKN X1Y3	GTY Quad 231 X1Y28-X1Y31 H [RN]
GTY Quad 130 X0Y24-X0Y27 Q [LN]	CMAC X0Y4	HP I/O Bank 70 K	SYSMON Configuration	GTY Quad 230 X1Y24-X1Y27 G [RN]
GTY Quad 129 X0Y20-X0Y23 P [LN] (RCAL)	ILKN X0Y2	HP I/O Bank 69 J	Configuration	GTY Quad 229 X1Y20-X1Y23 F [RN] (RCAL)
GTY Quad 128 X0Y16-X0Y19 O [LN]	CMAC X0Y3	HP I/O Bank 68 F	PCIE4 X0Y1	GTY Quad 228 X1Y16-X1Y19 E [RS]
SLR Crossing				
GTY Quad 127 X0Y12-X0Y15 N [LS]	CMAC X0Y2	HP I/O Bank 67 E	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11 M [LS]	CMAC X0Y1	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 C [RS]
GTY Quad 125 X0Y4-X0Y7 L [LS] (RCAL)	ILKN X0Y0	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 B [RS] (RCAL)
GTY Quad 124 X0Y0-X0Y3 K [LS]	CMAC X0Y0	HP I/O Bank 64 B	PCIE4 X0Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 A [RS]

X18714-020817

Figure 1-117: XCVU11P Banks in FSGD2104 Package

GTY Quad 135 X0Y44-X0Y47 AA [LN]	CMAC X0Y8	HP I/O Bank 75 K	ILKN X1Y5	GTY Quad 235 X1Y44-X1Y47 K [RN]
GTY Quad 134 X0Y40-X0Y43 Z [LN]	CMAC X0Y7	HP I/O Bank 74 J	SYSMON Configuration	GTY Quad 234 X1Y40-X1Y43 J [RN]
GTY Quad 133 X0Y36-X0Y39 Y [LN] (RCAL)	ILKN X0Y4	HP I/O Bank 73 I	Configuration	GTY Quad 233 X1Y36-X1Y39 I [RN] (RCAL)
GTY Quad 132 X0Y32-X0Y35 X [LN]	CMAC X0Y6	HP I/O Bank 72 H (Partial)	PCIE4 X0Y2	GTY Quad 232 X1Y32-X1Y35 H [RN]
SLR Crossing				
GTY Quad 131 X0Y28-X0Y31 W [LUC]	CMAC X0Y5	HP I/O Bank 71 G	ILKN X1Y3	GTY Quad 231 X1Y28-X1Y31 G [RUC]
GTY Quad 130 X0Y24-X0Y27 V [LUC]	CMAC X0Y4	HP I/O Bank 70 F	SYSMON Configuration	GTY Quad 230 X1Y24-X1Y27 F [RUC]
GTY Quad 129 X0Y20-X0Y23 U [LUC] (RCAL)	ILKN X0Y2	HP I/O Bank 69 E	Configuration	GTY Quad 229 X1Y20-X1Y23 E [RUC] (RCAL)
GTY Quad 128 X0Y16-X0Y19 T [LUC]	CMAC X0Y3	HP I/O Bank 68 D	PCIE4 X0Y1	GTY Quad 228 X1Y16-X1Y19 D [RUC]
SLR Crossing				
GTY Quad 127 X0Y12-X0Y15 S [LLC]	CMAC X0Y2	HP I/O Bank 67 A	ILKN X1Y1	GTY Quad 227 X1Y12-X1Y15 C [RLC]
GTY Quad 126 X0Y8-X0Y11 R [LLC]	CMAC X0Y1	HP I/O Bank 66 B (Partial)	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 B [RLC]
GTY Quad 125 X0Y4-X0Y7 Q [LLC] (RCAL)	ILKN X0Y0	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 A [RLC] (RCAL)
GTY Quad 124 X0Y0-X0Y3 AF [LLC]	CMAC X0Y0	HP I/O Bank 64 P	PCIE4 X0Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 P [RLC]

X15619-020817

Figure 1-118: XCVU11P Banks in FLGA2577 Package

## XCVU13P Bank Diagrams

GTY Quad 135 X0Y60-X0Y63	CMAC X0Y11	HP I/O Bank 75	ILKN X1Y7	GTY Quad 235 X1Y60-X1Y63
GTY Quad 134 X0Y56-X0Y59	CMAC X0Y10	HP I/O Bank 74	SYSMON Configuration	GTY Quad 234 X1Y56-X1Y59
GTY Quad 133 X0Y52-X0Y55 (RCAL)	ILKN X0Y6	HP I/O Bank 73	Configuration	GTY Quad 233 X1Y52-X1Y55 (RCAL)
GTY Quad 132 X0Y48-X0Y51	CMAC X0Y9	HP I/O Bank 72	PCIE4 X0Y3	GTY Quad 232 X1Y48-X1Y51
SLR Crossing				
GTY Quad 131 X0Y44-X0Y47	CMAC X0Y8	HP I/O Bank 71	ILKN X1Y5	GTY Quad 231 X1Y44-X1Y47
GTY Quad 130 X0Y40-X0Y43	CMAC X0Y7	HP I/O Bank 70	SYSMON Configuration	GTY Quad 230 X1Y40-X1Y43
GTY Quad 129 X0Y36-X0Y39 (RCAL)	ILKN X0Y4	HP I/O Bank 69	Configuration	GTY Quad 229 X1Y36-X1Y39 (RCAL)
GTY Quad 128 X0Y32-X0Y35	CMAC X0Y6	HP I/O Bank 68	PCIE4 X0Y2	GTY Quad 228 X1Y32-X1Y35
SLR Crossing				
GTY Quad 127 X0Y28-X0Y31	CMAC X0Y5	HP I/O Bank 67	ILKN X1Y3	GTY Quad 227 X1Y28-X1Y31
GTY Quad 126 X0Y24-X0Y27	CMAC X0Y4	HP I/O Bank 66	SYSMON Configuration	GTY Quad 226 X1Y24-X1Y27
GTY Quad 125 X0Y20-X0Y23 (RCAL)	ILKN X0Y2	HP I/O Bank 65	Configuration	GTY Quad 225 X1Y20-X1Y23 (RCAL)
GTY Quad 124 X0Y16-X0Y19	CMAC X0Y3	HP I/O Bank 64	PCIE4 X0Y1 (tandem)	GTY Quad 224 X1Y16-X1Y19
SLR Crossing				
GTY Quad 123 X0Y12-X0Y15	CMAC X0Y2	HP I/O Bank 63	ILKN X1Y1	GTY Quad 223 X1Y12-X1Y15
GTY Quad 122 X0Y8-X0Y11	CMAC X0Y1	HP I/O Bank 62	SYSMON Configuration	GTY Quad 222 X1Y8-X1Y11
GTY Quad 121 X0Y4-X0Y7 (RCAL)	ILKN X0Y0	HP I/O Bank 61	Configuration	GTY Quad 221 X1Y4-X1Y7 (RCAL)
GTY Quad 120 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 60	PCIE4 X0Y0	GTY Quad 220 X1Y0-X1Y3

X15621-020817

Figure 1-119: XCVU13P Banks

GTY Quad 135 X0Y60-X0Y63	CMAC X0Y11	HP I/O Bank 75 Q	ILKN X1Y7	GTY Quad 235 X1Y60-X1Y63
GTY Quad 134 X0Y56-X0Y59	CMAC X0Y10	HP I/O Bank 74 P	SYSMON Configuration	GTY Quad 234 X1Y56-X1Y59
GTY Quad 133 X0Y52-X0Y55 (RCAL)	ILKN X0Y6	HP I/O Bank 73 O	Configuration	GTY Quad 233 X1Y52-X1Y55 (RCAL)
GTY Quad 132 X0Y48-X0Y51	CMAC X0Y9	HP I/O Bank 72 N	PCIE4 X0Y3	GTY Quad 232 X1Y48-X1Y51
SLR Crossing				
GTY Quad 131 X0Y44-X0Y47 M [LN]	CMAC X0Y8	HP I/O Bank 71 M	ILKN X1Y5	GTY Quad 231 X1Y44-X1Y47 G [RN]
GTY Quad 130 X0Y40-X0Y43 L [LN]	CMAC X0Y7	HP I/O Bank 70 L	SYSMON Configuration	GTY Quad 230 X1Y40-X1Y43 F [RN]
GTY Quad 129 X0Y36-X0Y39 K [LN] (RCAL)	ILKN X0Y4	HP I/O Bank 69 K	Configuration	GTY Quad 229 X1Y36-X1Y39 E [RN] (RCAL)
GTY Quad 128 X0Y32-X0Y35	CMAC X0Y6	HP I/O Bank 68 J	PCIE4 X0Y2	GTY Quad 228 X1Y32-X1Y35
SLR Crossing				
GTY Quad 127 X0Y28-X0Y31 J [LS]	CMAC X0Y5	HP I/O Bank 67 E	ILKN X1Y3	GTY Quad 227 X1Y28-X1Y31 D [RS]
GTY Quad 126 X0Y24-X0Y27 I [LS]	CMAC X0Y4	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y24-X1Y27 C [RS]
GTY Quad 125 X0Y20-X0Y23 H [LS] (RCAL)	ILKN X0Y2	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y20-X1Y23 B [RS] (RCAL)
GTY Quad 124 X0Y16-X0Y19	CMAC X0Y3	HP I/O Bank 64 B	PCIE4 X0Y1 (tandem)	GTY Quad 224 X1Y16-X1Y19 A [RS]
SLR Crossing				
GTY Quad 123 X0Y12-X0Y15	CMAC X0Y2	HP I/O Bank 63 I	ILKN X1Y1	GTY Quad 223 X1Y12-X1Y15
GTY Quad 122 X0Y8-X0Y11	CMAC X0Y1	HP I/O Bank 62 H	SYSMON Configuration	GTY Quad 222 X1Y8-X1Y11
GTY Quad 121 X0Y4-X0Y7 (RCAL)	ILKN X0Y0	HP I/O Bank 61 G	Configuration	GTY Quad 221 X1Y4-X1Y7 (RCAL)
GTY Quad 120 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 60 F	PCIE4 X0Y0	GTY Quad 220 X1Y0-X1Y3

X15622-020817

Figure 1-120: XCVU13P Banks in FHGA2104 Package

GTY Quad 135 X0Y60-X0Y63	CMAC X0Y11	HP I/O Bank 75	ILKN X1Y7	GTY Quad 235 X1Y60-X1Y63
GTY Quad 134 X0Y56-X0Y59	CMAC X0Y10	HP I/O Bank 74 O	SYSMON Configuration	GTY Quad 234 X1Y56-X1Y59
GTY Quad 133 X0Y52-X0Y55 S [LN] (RCAL)	ILKN X0Y6	HP I/O Bank 73 N	Configuration	GTY Quad 233 X1Y52-X1Y55 J [RN] (RCAL)
GTY Quad 132 X0Y48-X0Y51	CMAC X0Y9	HP I/O Bank 72 M	PCIE4 X0Y3	GTY Quad 232 X1Y48-X1Y51 I [RN]
SLR Crossing				
GTY Quad 131 X0Y44-X0Y47 R [LN]	CMAC X0Y8	HP I/O Bank 71 L	ILKN X1Y5	GTY Quad 231 X1Y44-X1Y47 H [RN]
GTY Quad 130 X0Y40-X0Y43 Q [LN]	CMAC X0Y7	HP I/O Bank 70 K	SYSMON Configuration	GTY Quad 230 X1Y40-X1Y43 G [RN]
GTY Quad 129 X0Y36-X0Y39 P [LN] (RCAL)	ILKN X0Y4	HP I/O Bank 69 J	Configuration	GTY Quad 229 X1Y36-X1Y39 F [RN] (RCAL)
GTY Quad 128 X0Y32-X0Y35 O [LN]	CMAC X0Y6	HP I/O Bank 68 F (Partial)	PCIE4 X0Y2	GTY Quad 228 X1Y32-X1Y35 E [RS]
SLR Crossing				
GTY Quad 127 X0Y28-X0Y31 N [LS]	CMAC X0Y5	HP I/O Bank 67 E	ILKN X1Y3	GTY Quad 227 X1Y28-X1Y31 D [RS]
GTY Quad 126 X0Y24-X0Y27 M [LS]	CMAC X0Y4	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y24-X1Y27 C [RS]
GTY Quad 125 X0Y20-X0Y23 L [LS] (RCAL)	ILKN X0Y2	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y20-X1Y23 B [RS] (RCAL)
GTY Quad 124 X0Y16-X0Y19 K [LS]	CMAC X0Y3	HP I/O Bank 64 B	PCIE4 X0Y1 (tandem)	GTY Quad 224 X1Y16-X1Y19 A [RS]
SLR Crossing				
GTY Quad 123 X0Y12-X0Y15	CMAC X0Y2	HP I/O Bank 63 I	ILKN X1Y1	GTY Quad 223 X1Y12-X1Y15
GTY Quad 122 X0Y8-X0Y11	CMAC X0Y1	HP I/O Bank 62 H	SYSMON Configuration	GTY Quad 222 X1Y8-X1Y11
GTY Quad 121 X0Y4-X0Y7 (RCAL)	ILKN X0Y0	HP I/O Bank 61 G	Configuration	GTY Quad 221 X1Y4-X1Y7 (RCAL)
GTY Quad 120 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 60 F	PCIE4 X0Y0	GTY Quad 220 X1Y0-X1Y3

X15623-020817

Figure 1-121: XCVU13P Banks in FHGB2104 Package



GTY Quad 135 X0Y60-X0Y63	CMAC X0Y11	HP I/O Bank 75	ILKN X1Y7	GTY Quad 235 X1Y60-X1Y63
GTY Quad 134 X0Y56-X0Y59	CMAC X0Y10	HP I/O Bank 74	SYSMON Configuration	GTY Quad 234 X1Y56-X1Y59
GTY Quad 133 X0Y52-X0Y55 W [LN] (RCAL)	ILKN X0Y6	HP I/O Bank 73	Configuration	GTY Quad 233 X1Y52-X1Y55 J [RN] (RCAL)
GTY Quad 132 X0Y48-X0Y51 V [LN]	CMAC X0Y9	HP I/O Bank 72	PCIE4 X0Y3	GTY Quad 232 X1Y48-X1Y51 I [RN]
SLR Crossing				
GTY Quad 131 X0Y44-X0Y47 U [LN]	CMAC X0Y8	HP I/O Bank 71 I	ILKN X1Y5	GTY Quad 231 X1Y44-X1Y47 H [RN]
GTY Quad 130 X0Y40-X0Y43 T [LN]	CMAC X0Y7	HP I/O Bank 70 H	SYSMON Configuration	GTY Quad 230 X1Y40-X1Y43 G [RN]
GTY Quad 129 X0Y36-X0Y39 S [LN] (RCAL)	ILKN X0Y4	HP I/O Bank 69 G	Configuration	GTY Quad 229 X1Y36-X1Y39 F [RN] (RCAL)
GTY Quad 128 X0Y32-X0Y35 R [LC]	CMAC X0Y6	HP I/O Bank 68 F	PCIE4 X0Y2	GTY Quad 228 X1Y32-X1Y35 E [RC]
SLR Crossing				
GTY Quad 127 X0Y28-X0Y31 Q [LC]	CMAC X0Y5	HP I/O Bank 67 E	ILKN X1Y3	GTY Quad 227 X1Y28-X1Y31 D [RC]
GTY Quad 126 X0Y24-X0Y27 P [LC]	CMAC X0Y4	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y24-X1Y27 C [RC]
GTY Quad 125 X0Y20-X0Y23 O [LC] (RCAL)	ILKN X0Y2	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y20-X1Y23 B [RC] (RCAL)
GTY Quad 124 X0Y16-X0Y19 N [LC]	CMAC X0Y3	HP I/O Bank 64 B	PCIE4 X0Y1 (tandem)	GTY Quad 224 X1Y16-X1Y19 A [RC]
SLR Crossing				
GTY Quad 123 X0Y12-X0Y15 Z [LS]	CMAC X0Y2	HP I/O Bank 63	ILKN X1Y1	GTY Quad 223 X1Y12-X1Y15 M [RS]
GTY Quad 122 X0Y8-X0Y11 Y [LS]	CMAC X0Y1	HP I/O Bank 62	SYSMON Configuration	GTY Quad 222 X1Y8-X1Y11 L [RS]
GTY Quad 121 X0Y4-X0Y7 X [LS] (RCAL)	ILKN X0Y0	HP I/O Bank 61	Configuration	GTY Quad 221 X1Y4-X1Y7 K [RS] (RCAL)
GTY Quad 120 X0Y0-X0Y3	CMAC X0Y0	HP I/O Bank 60	PCIE4 X0Y0	GTY Quad 220 X1Y0-X1Y3

X15624-020817

Figure 1-122: XCVU13P Banks in FHGC2104 Package

GTY Quad 135 X0Y60-X0Y63	CMAC X0Y11	HP I/O Bank 75	ILKN X1Y7	GTY Quad 235 X1Y60-X1Y63
GTY Quad 134 X0Y56-X0Y59	CMAC X0Y10	HP I/O Bank 74 O	SYSMON Configuration	GTY Quad 234 X1Y56-X1Y59
GTY Quad 133 X0Y52-X0Y55 S [LN] (RCAL)	ILKN X0Y6	HP I/O Bank 73 N	Configuration	GTY Quad 233 X1Y52-X1Y55 J [RN] (RCAL)
GTY Quad 132 X0Y48-X0Y51	CMAC X0Y9	HP I/O Bank 72 M	PCIE4 X0Y3	GTY Quad 232 X1Y48-X1Y51 I [RN]
SLR Crossing				
GTY Quad 131 X0Y44-X0Y47 R [LN]	CMAC X0Y8	HP I/O Bank 71 L	ILKN X1Y5	GTY Quad 231 X1Y44-X1Y47 H [RN]
GTY Quad 130 X0Y40-X0Y43 Q [LN]	CMAC X0Y7	HP I/O Bank 70 K	SYSMON Configuration	GTY Quad 230 X1Y40-X1Y43 G [RN]
GTY Quad 129 X0Y36-X0Y39 P [LN] (RCAL)	ILKN X0Y4	HP I/O Bank 69 J	Configuration	GTY Quad 229 X1Y36-X1Y39 F [RN] (RCAL)
GTY Quad 128 X0Y32-X0Y35 O [LC]	CMAC X0Y6	HP I/O Bank 68	PCIE4 X0Y2	GTY Quad 228 X1Y32-X1Y35 E [RS]
SLR Crossing				
GTY Quad 127 X0Y28-X0Y31	CMAC X0Y5	HP I/O Bank 67 E	ILKN X1Y3	GTY Quad 227 X1Y28-X1Y31 D [RS]
GTY Quad 126 X0Y24-X0Y27	CMAC X0Y4	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y24-X1Y27 C [RS]
GTY Quad 125 X0Y20-X0Y23 (RCAL)	ILKN X0Y2	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y20-X1Y23 B [RS] (RCAL)
GTY Quad 124 X0Y16-X0Y19	CMAC X0Y3	HP I/O Bank 64 B	PCIE4 X0Y1 (tandem)	GTY Quad 224 X1Y16-X1Y19 A [RS]
SLR Crossing				
GTY Quad 123 X0Y12-X0Y15 N [LS]	CMAC X0Y2	HP I/O Bank 63 H	ILKN X1Y1	GTY Quad 223 X1Y12-X1Y15
GTY Quad 122 X0Y8-X0Y11 M [LS]	CMAC X0Y1	HP I/O Bank 62 G	SYSMON Configuration	GTY Quad 222 X1Y8-X1Y11
GTY Quad 121 X0Y4-X0Y7 L [LS] (RCAL)	ILKN X0Y0	HP I/O Bank 61 F	Configuration	GTY Quad 221 X1Y4-X1Y7 (RCAL)
GTY Quad 120 X0Y0-X0Y3 K [LS]	CMAC X0Y0	HP I/O Bank 60	PCIE4 X0Y0	GTY Quad 220 X1Y0-X1Y3

X18715-071119

Figure 1-123: XCVU13P Banks in FIGD2104 Package

GTY Quad 135 X0Y60-X0Y63 AA [LN]	CMAC X0Y11	HP I/O Bank 75 K	ILKN X1Y7	GTY Quad 235 X1Y60-X1Y63 K [RN]
GTY Quad 134 X0Y56-X0Y59 Z [LN]	CMAC X0Y10	HP I/O Bank 74 J	SYSMON Configuration	GTY Quad 234 X1Y56-X1Y59 J [RN]
GTY Quad 133 X0Y52-X0Y55 Y [LN] (RCAL)	ILKN X0Y6	HP I/O Bank 73 I	Configuration	GTY Quad 233 X1Y52-X1Y55 I [RN] (RCAL)
GTY Quad 132 X0Y48-X0Y51 X [LN]	CMAC X0Y9	HP I/O Bank 72	PCIE4 X0Y3	GTY Quad 232 X1Y48-X1Y51 H [RN]
SLR Crossing				
GTY Quad 131 X0Y44-X0Y47 W [LUC]	CMAC X0Y8	HP I/O Bank 71 H (Partial)	ILKN X1Y5	GTY Quad 231 X1Y44-X1Y47 G [RUC]
GTY Quad 130 X0Y40-X0Y43 V [LUC]	CMAC X0Y7	HP I/O Bank 70 G	SYSMON Configuration	GTY Quad 230 X1Y40-X1Y43 F [RUC]
GTY Quad 129 X0Y36-X0Y39 U [LUC] (RCAL)	ILKN X0Y4	HP I/O Bank 69	Configuration	GTY Quad 229 X1Y36-X1Y39 E [RUC] (RCAL)
GTY Quad 128 X0Y32-X0Y35 T [LUC]	CMAC X0Y6	HP I/O Bank 68	PCIE4 X0Y2	GTY Quad 228 X1Y32-X1Y35 D [RUC]
SLR Crossing				
GTY Quad 127 X0Y28-X0Y31 S [LLC]	CMAC X0Y5	HP I/O Bank 67	ILKN X1Y3	GTY Quad 227 X1Y28-X1Y31 C [RLC]
GTY Quad 126 X0Y24-X0Y27 R [LLC]	CMAC X0Y4	HP I/O Bank 66 B (Partial)	SYSMON Configuration	GTY Quad 226 X1Y24-X1Y27 B [RLC]
GTY Quad 125 X0Y20-X0Y23 Q [LLC] (RCAL)	ILKN X0Y2	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y20-X1Y23 A [RLC] (RCAL)
GTY Quad 124 X0Y16-X0Y19 AF [LLC]	CMAC X0Y3	HP I/O Bank 64	PCIE4 X0Y1 (tandem)	GTY Quad 224 X1Y16-X1Y19 P [RLC]
SLR Crossing				
GTY Quad 123 X0Y12-X0Y15 AE [LS]	CMAC X0Y2	HP I/O Bank 63 F	ILKN X1Y1	GTY Quad 223 X1Y12-X1Y15 O [RS]
GTY Quad 122 X0Y8-X0Y11 AD [LS]	CMAC X0Y1	HP I/O Bank 62 E	SYSMON Configuration	GTY Quad 222 X1Y8-X1Y11 N [RS]
GTY Quad 121 X0Y4-X0Y7 AC [LS] (RCAL)	ILKN X0Y0	HP I/O Bank 61 D	Configuration	GTY Quad 221 X1Y4-X1Y7 M [RS] (RCAL)
GTY Quad 120 X0Y0-X0Y3 AB [LS]	CMAC X0Y0	HP I/O Bank 60	PCIE4 X0Y0	GTY Quad 220 X1Y0-X1Y3 L [RS]

X15625-020817

Figure 1-124: XCVU13P Banks in FLGA2577 and FSGA2577 Packages

## XCVU19P Bank Diagrams

HP I/O Bank 38	HP I/O Bank 78	HD I/O Bank 98	GTU Quad 238 X0Y76-X0Y79
HP I/O Bank 37	HP I/O Bank 77	PCIE4C X0Y7	GTU Quad 237 X0Y72-X0Y75
HP I/O Bank 36	HP I/O Bank 76	SYSMON Configuration	GTU Quad 236 X0Y68-X0Y71
HP I/O Bank 35	HP I/O Bank 75	Configuration	GTU Quad 235 X0Y64-X0Y67 (RCAL)
HP I/O Bank 34	HP I/O Bank 74	PCIE4C X0Y6	GTU Quad 234 X0Y60-X0Y63
SLR Crossing			
HP I/O Bank 33	HP I/O Bank 73	HD I/O Bank 93	GTU Quad 233 X0Y56-X0Y59
HP I/O Bank 32	HP I/O Bank 72	PCIE4C X0Y5	GTU Quad 232 X0Y52-X0Y55
HP I/O Bank 31	HP I/O Bank 71	SYSMON Configuration	GTU Quad 231 X0Y48-X0Y51
HP I/O Bank 30	HP I/O Bank 70	Configuration	GTU Quad 230 X0Y44-X0Y47 (RCAL)
HP I/O Bank 29	HP I/O Bank 69	PCIE4C X0Y4	GTU Quad 229 X0Y40-X0Y43
SLR Crossing			
HP I/O Bank 28	HP I/O Bank 68	HD I/O Bank 88	GTU Quad 228 X0Y36-X0Y39
HP I/O Bank 27	HP I/O Bank 67	PCIE4C X0Y3	GTU Quad 227 X0Y32-X0Y35
HP I/O Bank 26	HP I/O Bank 66	SYSMON Configuration	GTU Quad 226 X0Y28-X0Y31
HP I/O Bank 25	HP I/O Bank 65	Configuration	GTU Quad 225 X0Y24-X0Y27 (RCAL)
HP I/O Bank 24	HP I/O Bank 64	PCIE4C X0Y2 (tandem)	GTU Quad 224 X0Y20-X0Y23
SLR Crossing			
HP I/O Bank 23	HP I/O Bank 63	HD I/O Bank 83	GTU Quad 223 X0Y16-X0Y19
HP I/O Bank 22	HP I/O Bank 62	PCIE4C X0Y1	GTU Quad 222 X0Y12-X0Y15
HP I/O Bank 21	HP I/O Bank 61	SYSMON Configuration	GTU Quad 221 X0Y8-X0Y11
HP I/O Bank 20	HP I/O Bank 60	Configuration	GTU Quad 220 X0Y4-X0Y7 (RCAL)
HP I/O Bank 19	HP I/O Bank 59	PCIE4C X0Y0	GTU Quad 219 X0Y0-X0Y3

X23017-071119

Figure 1-125: XCVU19P Banks

HP I/O Bank 38 AB	HP I/O Bank 78 AL	HD I/O Bank 98 AM	GTY Quad 238 X0Y76-X0Y79
HP I/O Bank 37 AA	HP I/O Bank 77 AK	PCIE4C X0Y7	GTY Quad 237 X0Y72-X0Y75 I [RN]
HP I/O Bank 36 Z	HP I/O Bank 76 AJ	SYSMON Configuration	GTY Quad 236 X0Y68-X0Y71 H [RN]
HP I/O Bank 35 Y	HP I/O Bank 75 AI	Configuration	GTY Quad 235 X0Y64-X0Y67 G [RN] (RCAL)
HP I/O Bank 34 X	HP I/O Bank 74 AH	PCIE4C X0Y6	GTY Quad 234 X0Y60-X0Y63
SLR Crossing			
HP I/O Bank 33 W	HP I/O Bank 73 AG	HD I/O Bank 93 AN	GTY Quad 233 X0Y56-X0Y59
HP I/O Bank 32 V	HP I/O Bank 72 AF	PCIE4C X0Y5	GTY Quad 232 X0Y52-X0Y55 F [RUC]
HP I/O Bank 31 U	HP I/O Bank 71 AE	SYSMON Configuration	GTY Quad 231 X0Y48-X0Y51 E [RUC]
HP I/O Bank 30 T	HP I/O Bank 70 AD	Configuration	GTY Quad 230 X0Y44-X0Y47 D [RUC] (RCAL)
HP I/O Bank 29 S	HP I/O Bank 69 AC	PCIE4C X0Y4	GTY Quad 229 X0Y40-X0Y43
SLR Crossing			
HP I/O Bank 28 R	HP I/O Bank 68	HD I/O Bank 88 AO	GTY Quad 228 X0Y36-X0Y39
HP I/O Bank 27 Q	HP I/O Bank 67	PCIE4C X0Y3	GTY Quad 227 X0Y32-X0Y35 C [RUC]
HP I/O Bank 26 P	HP I/O Bank 66 H	SYSMON Configuration	GTY Quad 226 X0Y28-X0Y31 B [RLC]
HP I/O Bank 25 O	HP I/O Bank 65 C	Configuration	GTY Quad 225 X0Y24-X0Y27 A [RLC] (RCAL)
HP I/O Bank 24 N	HP I/O Bank 64 G	PCIE4C X0Y2 (tandem)	GTY Quad 224 X0Y20-X0Y23
SLR Crossing			
HP I/O Bank 23 M	HP I/O Bank 63 F	HD I/O Bank 83 AP	GTY Quad 223 X0Y16-X0Y19
HP I/O Bank 22 L	HP I/O Bank 62 E	PCIE4C X0Y1	GTY Quad 222 X0Y12-X0Y15 L [RS]
HP I/O Bank 21 K	HP I/O Bank 61 D	SYSMON Configuration	GTY Quad 221 X0Y8-X0Y11 K [RS]
HP I/O Bank 20 J	HP I/O Bank 60 B	Configuration	GTY Quad 220 X0Y4-X0Y7 J [RS] (RCAL)
HP I/O Bank 19 I	HP I/O Bank 59 A	PCIE4C X0Y0	GTY Quad 219 X0Y0-X0Y3

X23024-071119

Figure 1-126: XCVU19P Banks in FSVA3824 Package

HP I/O Bank 38 Z	HP I/O Bank 78	HD I/O Bank 98 AG	GTY Quad 238 X0Y76-X0Y79 O [RN]
HP I/O Bank 37 Y	HP I/O Bank 77 AF	PCIE4C X0Y7	GTY Quad 237 X0Y72-X0Y75 N [RN]
HP I/O Bank 36 X	HP I/O Bank 76 AE	SYSMON Configuration	GTY Quad 236 X0Y68-X0Y71 M [RN]
HP I/O Bank 35 W	HP I/O Bank 75 AD	Configuration	GTY Quad 235 X0Y64-X0Y67 L [RN] (RCAL)
HP I/O Bank 34 V	HP I/O Bank 74	PCIE4C X0Y6	GTY Quad 234 X0Y60-X0Y63 K [RN]
SLR Crossing			
HP I/O Bank 33 U	HP I/O Bank 73	HD I/O Bank 93 AH	GTY Quad 233 X0Y56-X0Y59 J [RUC]
HP I/O Bank 32 T	HP I/O Bank 72 AC	PCIE4C X0Y5	GTY Quad 232 X0Y52-X0Y55 I [RUC]
HP I/O Bank 31 S	HP I/O Bank 71 AB	SYSMON Configuration	GTY Quad 231 X0Y48-X0Y51 H [RUC]
HP I/O Bank 30 R	HP I/O Bank 70 AA	Configuration	GTY Quad 230 X0Y44-X0Y47 G [RUC] (RCAL)
HP I/O Bank 29 Q	HP I/O Bank 69	PCIE4C X0Y4	GTY Quad 229 X0Y40-X0Y43 F [RUC]
SLR Crossing			
HP I/O Bank 28 P	HP I/O Bank 68	HD I/O Bank 88 AO	GTY Quad 228 X0Y36-X0Y39 E [RLC]
HP I/O Bank 27 O	HP I/O Bank 67 F	PCIE4C X0Y3	GTY Quad 227 X0Y32-X0Y35 D [RLC]
HP I/O Bank 26 N	HP I/O Bank 66 E	SYSMON Configuration	GTY Quad 226 X0Y28-X0Y31 C [RLC]
HP I/O Bank 25 M	HP I/O Bank 65 C	Configuration	GTY Quad 225 X0Y24-X0Y27 B [RLC] (RCAL)
HP I/O Bank 24 L	HP I/O Bank 64	PCIE4C X0Y2 (tandem)	GTY Quad 224 X0Y20-X0Y23 A [RLC]
SLR Crossing			
HP I/O Bank 23 K	HP I/O Bank 63	HD I/O Bank 83 AJ	GTY Quad 223 X0Y16-X0Y19 T [RS]
HP I/O Bank 22 J	HP I/O Bank 62 D	PCIE4C X0Y1	GTY Quad 222 X0Y12-X0Y15 S [RS]
HP I/O Bank 21 I	HP I/O Bank 61 B	SYSMON Configuration	GTY Quad 221 X0Y8-X0Y11 R [RS]
HP I/O Bank 20 H	HP I/O Bank 60 A	Configuration	GTY Quad 220 X0Y4-X0Y7 Q [RS] (RCAL)
HP I/O Bank 19 G	HP I/O Bank 59	PCIE4C X0Y0	GTY Quad 219 X0Y0-X0Y3 P [RS]

X23025-071119

Figure 1-127: XCVU19P Banks in FSVB3824 Package

## XCVU23P Bank Diagrams

HP I/O Bank 74	CMAC X0Y1	GTM Dual 234 X0Y1
HP I/O Bank 73	CMAC X0Y0	GTM Dual 233 X0Y0 (RCAL)
HP I/O Bank 72	HD I/O Bank 92	GTY Quad 232 X0Y32-X0Y35
HP I/O Bank 71	PCIE4C X0Y3	GTY Quad 231 X0Y28-X0Y31
HP I/O Bank 70	HD I/O Bank 90	GTY Quad 230 X0Y24-X0Y27
HP I/O Bank 69	PCIE4C X0Y2	GTY Quad 229 X0Y20-X0Y23
HP I/O Bank 68	HD I/O Bank 88	GTY Quad 228 X0Y16-X0Y19
HP I/O Bank 67	PCIE4C X0Y1	GTY Quad 227 X0Y12-X0Y15
HP I/O Bank 66	SYSMON Configuration	GTY Quad 226 X0Y8-X0Y11
HP I/O Bank 65	Configuration	GTY Quad 225 X0Y4-X0Y7 (RCAL)
HP I/O Bank 64	PCIE4C X0Y0 (tandem)	GTY Quad 224 X0Y0-X0Y3

X24990-122120

Figure 1-128: XCVU23P Banks

HP I/O Bank 74 L [VCCO_N]	CMAC X0Y1	GTM Dual 234 X0Y1 K [RN]
HP I/O Bank 73 K [VCCO_N]	CMAC X0Y0	GTM Dual 233 X0Y0 J [RN] (RCAL)
HP I/O Bank 72 J [VCCO_N]	HD I/O Bank 92	GTU Quad 232 X0Y32-X0Y33 I [RC]
HP I/O Bank 71	PCIE4C X0Y3	GTU Quad 231 X0Y28-X0Y31 H [RC]
HP I/O Bank 70	HD I/O Bank 90	GTU Quad 230 X0Y24-X0Y27 G [RC]
HP I/O Bank 69	PCIE4C X0Y2	GTU Quad 229 X0Y20-X0Y23 F [RC]
HP I/O Bank 68 F [VCCO_S]	HD I/O Bank 88	GTU Quad 228 X0Y16-X0Y19 E [RC]
HP I/O Bank 67 E [VCCO_S]	PCIE4C X0Y1	GTU Quad 227 X0Y12-X0Y15 D [RS]
HP I/O Bank 66 D [VCCO_S]	SYSMON Configuration	GTU Quad 226 X0Y8-X0Y11 C [RS]
HP I/O Bank 65 C	Configuration	GTU Quad 225 X0Y4-X0Y7 B [RS] (RCAL)
HP I/O Bank 64	PCIE4C X0Y0 (tandem)	GTU Quad 224 X0Y0-X0Y3 A [RS]

X24992-122120

Figure 1-129: XCVU23P Banks in VSVA1365 Package

**Note:** Banks with a common  $V_{CCO}$  (such as VCCO\_S or VCCO\_N) should be tied to a common on-board power supply voltage.



HP I/O Bank 74 V	CMAC X0Y1	GTM Dual 234 X0Y1 K [RN]
HP I/O Bank 73 U	CMAC X0Y0	GTM Dual 233 X0Y0 J [RN] (RCAL)
HP I/O Bank 72 T	HD I/O Bank 92 P	GTU Quad 232 X0Y32-X0Y33 I [RC]
HP I/O Bank 71 S	PCIE4C X0Y3	GTU Quad 231 X0Y28-X0Y31 H [RC]
HP I/O Bank 70 R	HD I/O Bank 90 O	GTU Quad 230 X0Y24-X0Y27 G [RC]
HP I/O Bank 69 G	PCIE4C X0Y2	GTU Quad 229 X0Y20-X0Y23 F [RC]
HP I/O Bank 68 F	HD I/O Bank 88 N	GTU Quad 228 X0Y16-X0Y19 E [RC]
HP I/O Bank 67 E	PCIE4C X0Y1	GTU Quad 227 X0Y12-X0Y15 D [RS]
HP I/O Bank 66 D	SYSMON Configuration	GTU Quad 226 X0Y8-X0Y11 C [RS]
HP I/O Bank 65 C	Configuration	GTU Quad 225 X0Y4-X0Y7 B [RS] (RCAL)
HP I/O Bank 64 B	PCIE4C X0Y0 (tandem)	GTU Quad 224 X0Y0-X0Y3 A [RS]

X24991-122120

Figure 1-130: XCVU23P Banks in FSVJ1760 Package

## XCVU27P Bank Diagrams

GTM Dual 135 X0Y11	CMAC X0Y11	HP I/O Bank 75	ILKN X1Y7	GTM Dual 235 X1Y11
GTM Dual 134 X0Y10	CMAC X0Y10	HP I/O Bank 74	SYSMON Configuration	GTM Dual 234 X1Y10
GTM Dual 133 X0Y9 (RCAL)	ILKN X0Y6	HP I/O Bank 73	Configuration	GTM Dual 233 X1Y9 (RCAL)
GTM Dual 132 X0Y8	CMAC X0Y9	HP I/O Bank 72	CMAC X1Y9	GTM Dual 232 X1Y8
SLR Crossing				
GTM Dual 131 X0Y7	CMAC X0Y8	HP I/O Bank 71	ILKN X1Y5	GTM Dual 231 X1Y7
GTM Dual 130 X0Y6	CMAC X0Y7	HP I/O Bank 70	SYSMON Configuration	GTM Dual 230 X1Y6
GTM Dual 129 X0Y5 (RCAL)	ILKN X0Y4	HP I/O Bank 69	Configuration	GTM Dual 229 X1Y5 (RCAL)
GTM Dual 128 X0Y4	CMAC X0Y6	HP I/O Bank 68	CMAC X1Y6	GTM Dual 228 X1Y4
SLR Crossing				
GTU Quad 127 X0Y12-X0Y15	CMAC X0Y5	HP I/O Bank 67	ILKN X1Y3	GTU Quad 227 X1Y12-X1Y15
GTU Quad 126 X0Y8-X0Y11	CMAC X0Y4	HP I/O Bank 66	SYSMON Configuration	GTU Quad 226 X1Y8-X1Y11
GTU Quad 125 X0Y4-X0Y7 (RCAL)	ILKN X0Y2	HP I/O Bank 65	Configuration	GTU Quad 225 X1Y4-X1Y7 (RCAL)
GTU Quad 124 X0Y0-X0Y3	CMAC X0Y3	HP I/O Bank 64	PCIE4 X0Y0 (tandem)	GTU Quad 224 X1Y0-X1Y3
SLR Crossing				
GTM Dual 123 X0Y3	CMAC X0Y2	HP I/O Bank 63	ILKN X1Y1	GTM Dual 223 X1Y3
GTM Dual 122 X0Y2	CMAC X0Y1	HP I/O Bank 62	SYSMON Configuration	GTM Dual 222 X1Y2
GTM Dual 121 X0Y1 (RCAL)	ILKN X0Y0	HP I/O Bank 61	Configuration	GTM Dual 221 X1Y1 (RCAL)
GTM Dual 120 X0Y0	CMAC X0Y0	HP I/O Bank 60	CMAC X1Y0	GTM Dual 220 X1Y0

X20507-072619

Figure 1-131: XCVU27P Banks

GTM Dual 135 X0Y11	CMAC X0Y11	HP I/O Bank 75	ILKN X1Y7	GTM Dual 235 X1Y11
GTM Dual 134 X0Y10	CMAC X0Y10	HP I/O Bank 74 O	SYSMON Configuration	GTM Dual 234 X1Y10
GTM Dual 133 X0Y9 S [LN] (RCAL)	ILKN X0Y6	HP I/O Bank 73 N	Configuration	GTM Dual 233 X1Y9 J [RN] (RCAL)
GTM Dual 132 X0Y8	CMAC X0Y9	HP I/O Bank 72 M	CMAC X1Y9	GTM Dual 232 X1Y8 I [RN]
SLR Crossing				
GTM Dual 131 X0Y7 R [LN]	CMAC X0Y8	HP I/O Bank 71 L	ILKN X1Y5	GTM Dual 231 X1Y7 H [RN]
GTM Dual 130 X0Y6 Q [LN]	CMAC X0Y7	HP I/O Bank 70 K	SYSMON Configuration	GTM Dual 230 X1Y6 G [RN]
GTM Dual 129 X0Y5 P [LN] (RCAL)	ILKN X0Y4	HP I/O Bank 69 J	Configuration	GTM Dual 229 X1Y5 F [RN] (RCAL)
GTM Dual 128 X0Y4 O [LC]	CMAC X0Y6	HP I/O Bank 68	CMAC X1Y6	GTM Dual 228 X1Y4 E [RS]
SLR Crossing				
GTU Quad 127 X0Y12-X0Y15	CMAC X0Y5	HP I/O Bank 67 E	ILKN X1Y3	GTU Quad 227 X1Y12-X1Y15 D [RS]
GTU Quad 126 X0Y8-X0Y11	CMAC X0Y4	HP I/O Bank 66 D	SYSMON Configuration	GTU Quad 226 X1Y8-X1Y11 C [RS]
GTU Quad 125 X0Y4-X0Y7 (RCAL)	ILKN X0Y2	HP I/O Bank 65 C	Configuration	GTU Quad 225 X1Y4-X1Y7 B [RS] (RCAL)
GTU Quad 124 X0Y0-X0Y3	CMAC X0Y3	HP I/O Bank 64 B	PCIE4 X0Y0 (tandem)	GTU Quad 224 X1Y0-X1Y3 A [RS]
SLR Crossing				
GTM Dual 123 X0Y3 N [LS]	CMAC X0Y2	HP I/O Bank 63 H	ILKN X1Y1	GTM Dual 223 X1Y3
GTM Dual 122 X0Y2 M [LS]	CMAC X0Y1	HP I/O Bank 62 G	SYSMON Configuration	GTM Dual 222 X1Y2
GTM Dual 121 X0Y1 L [LS] (RCAL)	ILKN X0Y0	HP I/O Bank 61 F	Configuration	GTM Dual 221 X1Y1 (RCAL)
GTM Dual 120 X0Y0 K [LS]	CMAC X0Y0	HP I/O Bank 60	CMAC X1Y0	GTM Dual 220 X1Y0

X20508-072615

Figure 1-132: XCVU27P Banks in FIGD2104 Package

GTM Dual 135 X0Y11 AA [LN]	CMAC X0Y11	HP I/O Bank 75 K	ILKN X1Y7	GTM Dual 235 X1Y11 K [RN]
GTM Dual 134 X0Y10 Z [LN]	CMAC X0Y10	HP I/O Bank 74 J	SYSMON Configuration	GTM Dual 234 X1Y10 J [RN]
GTM Dual 133 X0Y9 Y [LN] (RCAL)	ILKN X0Y6	HP I/O Bank 73 I	Configuration	GTM Dual 233 X1Y9 I [RN] (RCAL)
GTM Dual 132 X0Y8 X [LN]	CMAC X0Y9	HP I/O Bank 72	CMAC X1Y9	GTM Dual 232 X1Y8 H [RN]
SLR Crossing				
GTM Dual 131 X0Y7 W [LUC]	CMAC X0Y8	HP I/O Bank 71 H (Partial)	ILKN X1Y5	GTM Dual 231 X1Y7 G [RUC]
GTM Dual 130 X0Y6 V [LUC]	CMAC X0Y7	HP I/O Bank 70 G	SYSMON Configuration	GTM Dual 230 X1Y6 F [RUC]
GTM Dual 129 X0Y5 U [LUC] (RCAL)	ILKN X0Y4	HP I/O Bank 69	Configuration	GTM Dual 229 X1Y5 E [RUC] (RCAL)
GTM Dual 128 X0Y4 T [LUC]	CMAC X0Y6	HP I/O Bank 68	CMAC X1Y6	GTM Dual 228 X1Y4 D [RUC]
SLR Crossing				
GTU Quad 127 X0Y12-X0Y15 S [LLC]	CMAC X0Y5	HP I/O Bank 67	ILKN X1Y3	GTU Quad 227 X1Y12-X1Y15 C [RLC]
GTU Quad 126 X0Y8-X0Y11 R [LLC]	CMAC X0Y4	HP I/O Bank 66 B (Partial)	SYSMON Configuration	GTU Quad 226 X1Y8-X1Y11 B [RLC]
GTU Quad 125 X0Y4-X0Y7 Q [LLC] (RCAL)	ILKN X0Y2	HP I/O Bank 65 C	Configuration	GTU Quad 225 X1Y4-X1Y7 A [RLC] (RCAL)
GTU Quad 124 X0Y0-X0Y3 AF [LLC]	CMAC X0Y3	HP I/O Bank 64	PCIE4 X0Y0 (tandem)	GTU Quad 224 X1Y0-X1Y3 P [RLC]
SLR Crossing				
GTM Dual 123 X0Y3 AE [LS]	CMAC X0Y2	HP I/O Bank 63 F	ILKN X1Y1	GTM Dual 223 X1Y3 O [RS]
GTM Dual 122 X0Y2 AD [LS]	CMAC X0Y1	HP I/O Bank 62 E	SYSMON Configuration	GTM Dual 222 X1Y2 N [RS]
GTM Dual 121 X0Y1 AC [LS] (RCAL)	ILKN X0Y0	HP I/O Bank 61 D	Configuration	GTM Dual 221 X1Y1 M [RS] (RCAL)
GTM Dual 120 X0Y0 AB [LS]	CMAC X0Y0	HP I/O Bank 60	CMAC X1Y0	GTM Dual 220 X1Y0 L [RS]

X20509-072619

Figure 1-133: XCVU27P Banks in FSGA2577 Package

## XCVU29P Bank Diagrams

GTM Dual 135 X0Y11	CMAC X0Y11	HP I/O Bank 75	ILKN X1Y7	GTM Dual 235 X1Y11
GTM Dual 134 X0Y10	CMAC X0Y10	HP I/O Bank 74	SYSMON Configuration	GTM Dual 234 X1Y10
GTM Dual 133 X0Y9 (RCAL)	ILKN X0Y6	HP I/O Bank 73	Configuration	GTM Dual 233 X1Y9 (RCAL)
GTM Dual 132 X0Y8	CMAC X0Y9	HP I/O Bank 72	CMAC X1Y9	GTM Dual 232 X1Y8
SLR Crossing				
GTM Dual 131 X0Y7	CMAC X0Y8	HP I/O Bank 71	ILKN X1Y5	GTM Dual 231 X1Y7
GTM Dual 130 X0Y6	CMAC X0Y7	HP I/O Bank 70	SYSMON Configuration	GTM Dual 230 X1Y6
GTM Dual 129 X0Y5 (RCAL)	ILKN X0Y4	HP I/O Bank 69	Configuration	GTM Dual 229 X1Y5 (RCAL)
GTM Dual 128 X0Y4	CMAC X0Y6	HP I/O Bank 68	CMAC X1Y6	GTM Dual 228 X1Y4
SLR Crossing				
GTU Quad 127 X0Y12-X0Y15	CMAC X0Y5	HP I/O Bank 67	ILKN X1Y3	GTU Quad 227 X1Y12-X1Y15
GTU Quad 126 X0Y8-X0Y11	CMAC X0Y4	HP I/O Bank 66	SYSMON Configuration	GTU Quad 226 X1Y8-X1Y11
GTU Quad 125 X0Y4-X0Y7 (RCAL)	ILKN X0Y2	HP I/O Bank 65	Configuration	GTU Quad 225 X1Y4-X1Y7 (RCAL)
GTU Quad 124 X0Y0-X0Y3	CMAC X0Y3	HP I/O Bank 64	PCIE4 X0Y0 (tandem)	GTU Quad 224 X1Y0-X1Y3
SLR Crossing				
GTM Dual 123 X0Y3	CMAC X0Y2	HP I/O Bank 63	ILKN X1Y1	GTM Dual 223 X1Y3
GTM Dual 122 X0Y2	CMAC X0Y1	HP I/O Bank 62	SYSMON Configuration	GTM Dual 222 X1Y2
GTM Dual 121 X0Y1 (RCAL)	ILKN X0Y0	HP I/O Bank 61	Configuration	GTM Dual 221 X1Y1 (RCAL)
GTM Dual 120 X0Y0	CMAC X0Y0	HP I/O Bank 60	CMAC X1Y0	GTM Dual 220 X1Y0

X20507-072619

Figure 1-134: XCVU29P Banks

GTM Dual 135 X0Y11	CMAC X0Y11	HP I/O Bank 75	ILKN X1Y7	GTM Dual 235 X1Y11
GTM Dual 134 X0Y10	CMAC X0Y10	HP I/O Bank 74 O	SYSMON Configuration	GTM Dual 234 X1Y10
GTM Dual 133 X0Y9 S [LN] (RCAL)	ILKN X0Y6	HP I/O Bank 73 N	Configuration	GTM Dual 233 X1Y9 J [RN] (RCAL)
GTM Dual 132 X0Y8	CMAC X0Y9	HP I/O Bank 72 M	CMAC X1Y9	GTM Dual 232 X1Y8 I [RN]
SLR Crossing				
GTM Dual 131 X0Y7 R [LN]	CMAC X0Y8	HP I/O Bank 71 L	ILKN X1Y5	GTM Dual 231 X1Y7 H [RN]
GTM Dual 130 X0Y6 Q [LN]	CMAC X0Y7	HP I/O Bank 70 K	SYSMON Configuration	GTM Dual 230 X1Y6 G [RN]
GTM Dual 129 X0Y5 P [LN] (RCAL)	ILKN X0Y4	HP I/O Bank 69 J	Configuration	GTM Dual 229 X1Y5 F [RN] (RCAL)
GTM Dual 128 X0Y4 O [LC]	CMAC X0Y6	HP I/O Bank 68	CMAC X1Y6	GTM Dual 228 X1Y4 E [RS]
SLR Crossing				
GTU Quad 127 X0Y12-X0Y15	CMAC X0Y5	HP I/O Bank 67 E	ILKN X1Y3	GTU Quad 227 X1Y12-X1Y15 D [RS]
GTU Quad 126 X0Y8-X0Y11	CMAC X0Y4	HP I/O Bank 66 D	SYSMON Configuration	GTU Quad 226 X1Y8-X1Y11 C [RS]
GTU Quad 125 X0Y4-X0Y7 (RCAL)	ILKN X0Y2	HP I/O Bank 65 C	Configuration	GTU Quad 225 X1Y4-X1Y7 B [RS] (RCAL)
GTU Quad 124 X0Y0-X0Y3	CMAC X0Y3	HP I/O Bank 64 B	PCIE4 X0Y0 (tandem)	GTU Quad 224 X1Y0-X1Y3 A [RS]
SLR Crossing				
GTM Dual 123 X0Y3 N [LS]	CMAC X0Y2	HP I/O Bank 63 H	ILKN X1Y1	GTM Dual 223 X1Y3
GTM Dual 122 X0Y2 M [LS]	CMAC X0Y1	HP I/O Bank 62 G	SYSMON Configuration	GTM Dual 222 X1Y2
GTM Dual 121 X0Y1 L [LS] (RCAL)	ILKN X0Y0	HP I/O Bank 61 F	Configuration	GTM Dual 221 X1Y1 (RCAL)
GTM Dual 120 X0Y0 K [LS]	CMAC X0Y0	HP I/O Bank 60	CMAC X1Y0	GTM Dual 220 X1Y0

X20508-072615

Figure 1-135: XCVU29P Banks in FIGD2104 Package

GTM Dual 135 X0Y11 AA [LN]	CMAC X0Y11	HP I/O Bank 75 K	ILKN X1Y7	GTM Dual 235 X1Y11 K [RN]
GTM Dual 134 X0Y10 Z [LN]	CMAC X0Y10	HP I/O Bank 74 J	SYSMON Configuration	GTM Dual 234 X1Y10 J [RN]
GTM Dual 133 X0Y9 Y [LN] (RCAL)	ILKN X0Y6	HP I/O Bank 73 I	Configuration	GTM Dual 233 X1Y9 I [RN] (RCAL)
GTM Dual 132 X0Y8 X [LN]	CMAC X0Y9	HP I/O Bank 72	CMAC X1Y9	GTM Dual 232 X1Y8 H [RN]
SLR Crossing				
GTM Dual 131 X0Y7 W [LUC]	CMAC X0Y8	HP I/O Bank 71 H (Partial)	ILKN X1Y5	GTM Dual 231 X1Y7 G [RUC]
GTM Dual 130 X0Y6 V [LUC]	CMAC X0Y7	HP I/O Bank 70 G	SYSMON Configuration	GTM Dual 230 X1Y6 F [RUC]
GTM Dual 129 X0Y5 U [LUC] (RCAL)	ILKN X0Y4	HP I/O Bank 69	Configuration	GTM Dual 229 X1Y5 E [RUC] (RCAL)
GTM Dual 128 X0Y4 T [LUC]	CMAC X0Y6	HP I/O Bank 68	CMAC X1Y6	GTM Dual 228 X1Y4 D [RUC]
SLR Crossing				
GTU Quad 127 X0Y12-X0Y15 S [LLC]	CMAC X0Y5	HP I/O Bank 67	ILKN X1Y3	GTU Quad 227 X1Y12-X1Y15 C [RLC]
GTU Quad 126 X0Y8-X0Y11 R [LLC]	CMAC X0Y4	HP I/O Bank 66 B (Partial)	SYSMON Configuration	GTU Quad 226 X1Y8-X1Y11 B [RLC]
GTU Quad 125 X0Y4-X0Y7 Q [LLC] (RCAL)	ILKN X0Y2	HP I/O Bank 65 C	Configuration	GTU Quad 225 X1Y4-X1Y7 A [RLC] (RCAL)
GTU Quad 124 X0Y0-X0Y3 AF [LLC]	CMAC X0Y3	HP I/O Bank 64	PCIE4 X0Y0 (tandem)	GTU Quad 224 X1Y0-X1Y3 P [RLC]
SLR Crossing				
GTM Dual 123 X0Y3 AE [LS]	CMAC X0Y2	HP I/O Bank 63 F	ILKN X1Y1	GTM Dual 223 X1Y3 O [RS]
GTM Dual 122 X0Y2 AD [LS]	CMAC X0Y1	HP I/O Bank 62 E	SYSMON Configuration	GTM Dual 222 X1Y2 N [RS]
GTM Dual 121 X0Y1 AC [LS] (RCAL)	ILKN X0Y0	HP I/O Bank 61 D	Configuration	GTM Dual 221 X1Y1 M [RS] (RCAL)
GTM Dual 120 X0Y0 AB [LS]	CMAC X0Y0	HP I/O Bank 60	CMAC X1Y0	GTM Dual 220 X1Y0 L [RS]

X20509-072619

Figure 1-136: XCVU29P Banks in FSGA2577 Package

### XCVU31P Bank Diagrams

GTY Quad 127 X0Y12-X0Y15	PCIE4C X0Y1	HP I/O Bank 67	PCIE4C X1Y1	GTY Quad 227 X1Y12-X1Y15
GTY Quad 126 X0Y8-X0Y11	CMAC X0Y1	HP I/O Bank 66	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11
GTY Quad 125 X0Y4-X0Y7 (RCAL)	CMAC X0Y0	HP I/O Bank 65	Configuration	GTY Quad 225 X1Y4-X1Y7 (RCAL)
GTY Quad 124 X0Y0-X0Y3	PCIE4C X0Y0	HP I/O Bank 64	PCIE4C X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3
			HBM Bank 83	

X19796-072619

Figure 1-137: XCVU31P Banks

GTY Quad 127 X0Y12-X0Y15 H [L]	PCIE4C X0Y1	HP I/O Bank 67 E	PCIE4C X1Y1	GTY Quad 227 X1Y12-X1Y15 D [R]
GTY Quad 126 X0Y8-X0Y11 G [L]	CMAC X0Y1	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 C [R]
GTY Quad 125 X0Y4-X0Y7 F [L] (RCAL)	CMAC X0Y0	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 B [R] (RCAL)
GTY Quad 124 X0Y0-X0Y3 E [L]	PCIE4C X0Y0	HP I/O Bank 64 B	PCIE4C X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 A [R]
			HBM Bank 83	

X19797-072619

Figure 1-138: XCVU31P Banks in FSVH1924 Package



### XCVU33P Bank Diagrams

GTY Quad 127 X0Y12-X0Y15	PCIE4C X0Y1	HP I/O Bank 67	PCIE4C X1Y1	GTY Quad 227 X1Y12-X1Y15
GTY Quad 126 X0Y8-X0Y11	CMAC X0Y1	HP I/O Bank 66	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11
GTY Quad 125 X0Y4-X0Y7 (RCAL)	CMAC X0Y0	HP I/O Bank 65	Configuration	GTY Quad 225 X1Y4-X1Y7 (RCAL)
GTY Quad 124 X0Y0-X0Y3	PCIE4C X0Y0	HP I/O Bank 64	PCIE4C X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3
	HBM Bank 43		HBM Bank 83	

X19798-072619

Figure 1-139: XCVU33P Banks

GTY Quad 127 X0Y12-X0Y15 L [LS]	PCIE4C X0Y1	HP I/O Bank 67 G	PCIE4C X1Y1	GTY Quad 227 X1Y12-X1Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11 K [LS]	CMAC X0Y1	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 C [RS]
GTY Quad 125 X0Y4-X0Y7 J [LS] (RCAL)	CMAC X0Y0	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 B [RS] (RCAL)
GTY Quad 124 X0Y0-X0Y3 I [LS]	PCIE4C X0Y0	HP I/O Bank 64 B	PCIE4C X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 A [RS]
	HBM Bank 43		HBM Bank 83	

X19799-072619

Figure 1-140: XCVU33P Banks in FSVH2104 Package

### XCVU35P and XCVU45P Bank Diagrams

GTU Quad 131 X0Y28-X0Y31	CMAC X0Y4	HP I/O Bank 71	ILKN X1Y1	GTU Quad 231 X1Y28-X1Y31
GTU Quad 130 X0Y24-X0Y27	CMAC X0Y3	HP I/O Bank 70	SYSMON Configuration	GTU Quad 230 X1Y24-X1Y27
GTU Quad 129 X0Y20-X0Y23 (RCAL)	ILKN X0Y0	HP I/O Bank 69	Configuration	GTU Quad 229 X1Y20-X1Y23 (RCAL)
GTU Quad 128 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 68	PCIE4 X0Y0	GTU Quad 228 X1Y16-X1Y19
SLR Crossing				
GTU Quad 127 X0Y12-X0Y15	PCIE4C X0Y1	HP I/O Bank 67	PCIE4C X1Y1	GTU Quad 227 X1Y12-X1Y15
GTU Quad 126 X0Y8-X0Y11	CMAC X0Y1	HP I/O Bank 66	SYSMON Configuration	GTU Quad 226 X1Y8-X1Y11
GTU Quad 125 X0Y4-X0Y7 (RCAL)	CMAC X0Y0	HP I/O Bank 65	Configuration	GTU Quad 225 X1Y4-X1Y7 (RCAL)
GTU Quad 124 X0Y0-X0Y3	PCIE4C X0Y0	HP I/O Bank 64	PCIE4C X1Y0 (tandem)	GTU Quad 224 X1Y0-X1Y3
	HBM Bank 43		HBM Bank 83	

X19800-072619

Figure 1-141: XCVU35P and XCVU45P Banks

GTY Quad 131 X0Y28-X0Y31 P [LN]	CMAC X0Y4	HP I/O Bank 71 K	ILKN X1Y1	GTY Quad 231 X1Y28-X1Y31 H [RN]
GTY Quad 130 X0Y24-X0Y27 O [LN]	CMAC X0Y3	HP I/O Bank 70 J	SYSMON Configuration	GTY Quad 230 X1Y24-X1Y27 G [RN]
GTY Quad 129 X0Y20-X0Y23 N [LN] (RCAL)	ILKN X0Y0	HP I/O Bank 69 I	Configuration	GTY Quad 229 X1Y20-X1Y23 F [RN] (RCAL)
GTY Quad 128 X0Y16-X0Y19 M [LN]	CMAC X0Y2	HP I/O Bank 68 H	PCIE4 X0Y0	GTY Quad 228 X1Y16-X1Y19 E [RN]
SLR Crossing				
GTY Quad 127 X0Y12-X0Y15 L [LS]	PCIE4C X0Y1	HP I/O Bank 67 G	PCIE4C X1Y1	GTY Quad 227 X1Y12-X1Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11 K [LS]	CMAC X0Y1	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 C [RS]
GTY Quad 125 X0Y4-X0Y7 J [LS] (RCAL)	CMAC X0Y0	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 B [RS] (RCAL)
GTY Quad 124 X0Y0-X0Y3 I [LS]	PCIE4C X0Y0	HP I/O Bank 64 B	PCIE4C X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 A [RS]
	HBM Bank 43		HBM Bank 83	

X19801-072619

Figure 1-142: XCVU35P and XCVU45P Banks in FSVH2104 Package

GTY Quad 131 X0Y28-X0Y31 T [LC]	CMAC X0Y4	HP I/O Bank 71 J	ILKN X1Y1	GTY Quad 231 X1Y28-X1Y31 H [RC]
GTY Quad 130 X0Y24-X0Y27 S [LC]	CMAC X0Y3	HP I/O Bank 70 I	SYSMON Configuration	GTY Quad 230 X1Y24-X1Y27 G [RC]
GTY Quad 129 X0Y20-X0Y23 R [LC] (RCAL)	ILKN X0Y0	HP I/O Bank 69 G	Configuration	GTY Quad 229 X1Y20-X1Y23 F [RC] (RCAL)
GTY Quad 128 X0Y16-X0Y19 Q [LC]	CMAC X0Y2	HP I/O Bank 68 F	PCIE4 X0Y0	GTY Quad 228 X1Y16-X1Y19 E [RC]
SLR Crossing				
GTY Quad 127 X0Y12-X0Y15 P [LS]	PCIE4C X0Y1	HP I/O Bank 67 E	PCIE4C X1Y1	GTY Quad 227 X1Y12-X1Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11 O [LS]	CMAC X0Y1	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 C [RS]
GTY Quad 125 X0Y4-X0Y7 N [LS] (RCAL)	CMAC X0Y0	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 B [RS] (RCAL)
GTY Quad 124 X0Y0-X0Y3 M [LS]	PCIE4C X0Y0	HP I/O Bank 64 B	PCIE4C X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 A [RS]
	HBM Bank 43		HBM Bank 83	

X19802-072619

Figure 1-143: XCVU35P and XCVU45P Banks in FSVH2892 Package

## XCVU37P and XCVU47P Bank Diagrams

GTY Quad 135 X0Y44-X0Y47	CMAC X0Y7	HP I/O Bank 75	ILKN X1Y3	GTY Quad 235 X1Y44-X1Y47
GTY Quad 134 X0Y40-X0Y43	CMAC X0Y6	HP I/O Bank 74	SYSMON Configuration	GTY Quad 234 X1Y40-X1Y43
GTY Quad 133 X0Y36-X0Y39 (RCAL)	ILKN X0Y2	HP I/O Bank 73	Configuration	GTY Quad 233 X1Y36-X1Y39 (RCAL)
GTY Quad 132 X0Y32-X0Y35	CMAC X0Y5	HP I/O Bank 72	PCIE4 X0Y1	GTY Quad 232 X1Y32-X1Y35
SLR Crossing				
GTY Quad 131 X0Y28-X0Y31	CMAC X0Y4	HP I/O Bank 71	ILKN X1Y1	GTY Quad 231 X1Y28-X1Y31
GTY Quad 130 X0Y24-X0Y27	CMAC X0Y3	HP I/O Bank 70	SYSMON Configuration	GTY Quad 230 X1Y24-X1Y27
GTY Quad 129 X0Y20-X0Y23 (RCAL)	ILKN X0Y0	HP I/O Bank 69	Configuration	GTY Quad 229 X1Y20-X1Y23 (RCAL)
GTY Quad 128 X0Y16-X0Y19	CMAC X0Y2	HP I/O Bank 68	PCIE4 X0Y0	GTY Quad 228 X1Y16-X1Y19
SLR Crossing				
GTY Quad 127 X0Y12-X0Y15	PCIE4C X0Y1	HP I/O Bank 67	PCIE4C X1Y1	GTY Quad 227 X1Y12-X1Y15
GTY Quad 126 X0Y8-X0Y11	CMAC X0Y1	HP I/O Bank 66	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11
GTY Quad 125 X0Y4-X0Y7 (RCAL)	CMAC X0Y0	HP I/O Bank 65	Configuration	GTY Quad 225 X1Y4-X1Y7 (RCAL)
GTY Quad 124 X0Y0-X0Y3	PCIE4C X0Y0	HP I/O Bank 64	PCIE4C X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3
	HBM Bank 43		HBM Bank 83	

X19803-072619

Figure 1-144: XCVU37P and XCVU47P Banks

GTY Quad 135 X0Y44-X0Y47 X [LN]	CMAC X0Y7	HP I/O Bank 75 N	ILKN X1Y3	GTY Quad 235 X1Y44-X1Y47 L [RN]
GTY Quad 134 X0Y40-X0Y43 W [LN]	CMAC X0Y6	HP I/O Bank 74 M	SYSMON Configuration	GTY Quad 234 X1Y40-X1Y43 K [RN]
GTY Quad 133 X0Y36-X0Y39 V [LN] (RCAL)	ILKN X0Y2	HP I/O Bank 73 L	Configuration	GTY Quad 233 X1Y36-X1Y39 J [RN] (RCAL)
GTY Quad 132 X0Y32-X0Y35 U [LN]	CMAC X0Y5	HP I/O Bank 72 K	PCIE4 X0Y1	GTY Quad 232 X1Y32-X1Y35 I [RN]
SLR Crossing				
GTY Quad 131 X0Y28-X0Y31 T [LC]	CMAC X0Y4	HP I/O Bank 71 J	ILKN X1Y1	GTY Quad 231 X1Y28-X1Y31 H [RC]
GTY Quad 130 X0Y24-X0Y27 S [LC]	CMAC X0Y3	HP I/O Bank 70 I	SYSMON Configuration	GTY Quad 230 X1Y24-X1Y27 G [RC]
GTY Quad 129 X0Y20-X0Y23 R [LC] (RCAL)	ILKN X0Y0	HP I/O Bank 69 G	Configuration	GTY Quad 229 X1Y20-X1Y23 F [RC] (RCAL)
GTY Quad 128 X0Y16-X0Y19 Q [LC]	CMAC X0Y2	HP I/O Bank 68 F	PCIE4 X0Y0	GTY Quad 228 X1Y16-X1Y19 E [RC]
SLR Crossing				
GTY Quad 127 X0Y12-X0Y15 P [LS]	PCIE4C X0Y1	HP I/O Bank 67 E	PCIE4C X1Y1	GTY Quad 227 X1Y12-X1Y15 D [RS]
GTY Quad 126 X0Y8-X0Y11 O [LS]	CMAC X0Y1	HP I/O Bank 66 D	SYSMON Configuration	GTY Quad 226 X1Y8-X1Y11 C [RS]
GTY Quad 125 X0Y4-X0Y7 N [LS] (RCAL)	CMAC X0Y0	HP I/O Bank 65 C	Configuration	GTY Quad 225 X1Y4-X1Y7 B [RS] (RCAL)
GTY Quad 124 X0Y0-X0Y3 M [LS]	PCIE4C X0Y0	HP I/O Bank 64 B	PCIE4C X1Y0 (tandem)	GTY Quad 224 X1Y0-X1Y3 A [RS]
	HBM Bank 43		HBM Bank 83	

X19804-121620

Figure 1-145: XCVU37P and XCVU47P Banks in FSVH2892 Package

## XCVU57P Bank Diagrams

GTM Dual 135 X0Y7	CMAC X0Y7	HP I/O Bank 75	ILKN X1Y3	GTM Dual 235 X1Y7
GTM Dual 134 X0Y6	CMAC X0Y6	HP I/O Bank 74	SYSMON Configuration	GTM Dual 234 X1Y6
GTM Dual 133 X0Y5 (RCAL)	ILKN X0Y2	HP I/O Bank 73	Configuration	GTM Dual 233 X1Y5 (RCAL)
GTM Dual 132 X0Y4	CMAC X0Y5	HP I/O Bank 72	CMAC X0Y5	GTM Dual 232 X1Y4
SLR Crossing				
GTM Dual 131 X0Y3	CMAC X0Y4	HP I/O Bank 71	ILKN X1Y1	GTM Dual 231 X1Y3
GTM Dual 130 X0Y2	CMAC X0Y3	HP I/O Bank 70	SYSMON Configuration	GTM Dual 230 X1Y2
GTM Dual 129 X0Y1 (RCAL)	ILKN X0Y0	HP I/O Bank 69	Configuration	GTM Dual 229 X1Y1 (RCAL)
GTM Dual 128 X0Y0	CMAC X0Y2	HP I/O Bank 68	CMAC X1Y2	GTM Dual 228 X1Y0
SLR Crossing				
GTU Quad 127 X0Y12-X0Y15	PCIE4 X0Y1	HP I/O Bank 67	PCIE4 X1Y1	GTU Quad 227 X1Y12-X1Y15
GTU Quad 126 X0Y8-X0Y11	CMAC X0Y1	HP I/O Bank 66	SYSMON Configuration	GTU Quad 226 X1Y8-X1Y11
GTU Quad 125 X0Y4-X0Y7 (RCAL)	CMAC X0Y0	HP I/O Bank 65	Configuration	GTU Quad 225 X1Y4-X1Y7 (RCAL)
GTU Quad 124 X0Y0-X0Y3	PCIE4 X0Y0	HP I/O Bank 64	PCIE4 X1Y0 (tandem)	GTU Quad 224 X1Y0-X1Y3
	HBM Bank 43		HBM Bank 83	

X24993-122120

Figure 1-146: XCVU57P Banks

GTM Dual 135 X0Y7 X [LN]	CMAC X0Y7	HP I/O Bank 75 I	ILKN X1Y3	GTM Dual 235 X1Y7 L [RN]
GTM Dual 134 X0Y6 W [LN]	CMAC X0Y6	HP I/O Bank 74 J	SYSMON Configuration	GTM Dual 234 X1Y6 K [RN]
GTM Dual 133 X0Y5 V [LN] (RCAL)	ILKN X0Y2	HP I/O Bank 73 K	Configuration	GTM Dual 233 X1Y5 J [RN] (RCAL)
GTM Dual 132 X0Y4 U [LN]	CMAC X0Y5	HP I/O Bank 72 N	CMAC X0Y5	GTM Dual 232 X1Y4 I [RN]
SLR Crossing				
GTM Dual 131 X0Y3 T [LC]	CMAC X0Y4	HP I/O Bank 71 M	ILKN X1Y1	GTM Dual 231 X1Y3 H [RC]
GTM Dual 130 X0Y2 S [LC]	CMAC X0Y3	HP I/O Bank 70 L	SYSMON Configuration	GTM Dual 230 X1Y2 G [RC]
GTM Dual 129 X0Y1 R [LC] (RCAL)	ILKN X0Y0	HP I/O Bank 69 G	Configuration	GTM Dual 229 X1Y1 F [RC] (RCAL)
GTM Dual 128 X0Y0 Q [LC]	CMAC X0Y2	HP I/O Bank 68 F	CMAC X1Y2	GTM Dual 228 X1Y0 E [RC]
SLR Crossing				
GTU Quad 127 X0Y12-X0Y15 P [LS]	PCIE4 X0Y1	HP I/O Bank 67 E	PCIE4 X1Y1	GTU Quad 227 X1Y12-X1Y15 D [RS]
GTU Quad 126 X0Y8-X0Y11 O [LS]	CMAC X0Y1	HP I/O Bank 66 D	SYSMON Configuration	GTU Quad 226 X1Y8-X1Y11 C [RS]
GTU Quad 125 X0Y4-X0Y7 N [LS] (RCAL)	CMAC X0Y0	HP I/O Bank 65 C	Configuration	GTU Quad 225 X1Y4-X1Y7 B [RS] (RCAL)
GTU Quad 124 X0Y0-X0Y3 M [LS]	PCIE4 X0Y0	HP I/O Bank 64 B	PCIE4 X1Y0 (tandem)	GTU Quad 224 X1Y0-X1Y3 A [RS]
	HBM Bank 43		HBM Bank 83	

X24994-122120

Figure 1-147: XCVU57P Banks in FSVK2892 Package



# Package Files

---

## About ASCII Package Files

The ASCII package files for each package include a comma-separated-values (CSV) version and a text version optimized for a browser or text editor in fixed-width fonts. The information in each of the files includes:

- Device/Package name (*family-device-package*), with date and time of creation
- Seven columns containing data for each pin:
  - Pin—Pin location on the package.
  - Pin Name—The name of the assigned pin.
  - Memory Byte Group—Memory byte group between 0 and 3 split into upper (U) and lower (L) halves. For more information on the memory byte group, see the *UltraScale Architecture FPGAs Memory IP Product Guide* (PG150) [Ref 13].
  - Bank—Bank number.
  - I/O Type—CONFIG, HD, HR, HP, or GT (GTH, GTY, or GTM) depending on the I/O type. For more information on the I/O type, see the *UltraScale Architecture SelectIO Resources User Guide* (UG571) [Ref 5].
  - Super Logic Region—Number corresponding to the super logic region (SLR) in the devices implemented with stacked silicon interconnect (SSI) technology.
  - No-Connect—This list of devices is used for migration between devices that have the same package size and are not connected at that specific pin.
- Total number of pins in the package.

---

## Package Specifications Designations

Package specifications are designated as evaluation only, engineering sample, or production. Each designation is defined as follows.

### Evaluation Only

These package specifications are based on initial device specifications, package routability analysis and mechanical package construction. Package specifications with this designation are not stable and package pinouts are likely to change and these specifications should only be used for initial system level design feasibility.

### Engineering Sample

These package specifications are based on a released package design and validated with ES engineering sample (ES) devices. Package specifications with this designation are considered stable, however some pinout and mechanical specifications might change prior to the production release of the particular device. Package pinouts with this designation are to be used for PCB and Vivado designs using ES devices.

### Production

These package specifications are released coincident with production release of a particular device. Customers receive formal notification of any subsequent changes.

## ASCII Pinout Files

Links to the ASCII pinout information by device/package are listed in [Table 2-1](#). The pinouts of XQ devices are identical to the pinouts of their equivalent XC devices in footprint compatible package. Links in this table to XQ devices open the XC version of the pinout file. For example, the link to RBA676-XQKU040 opens the FBVA676-XCKU040 pinout file.

Download all available Kintex UltraScale, Kintex UltraScale+, Artix UltraScale+, Virtex UltraScale, and Virtex UltraScale+ FPGA package/device/pinout files at:

[www.xilinx.com/support/package-pinout-files/ultrascale-pkgs.html](http://www.xilinx.com/support/package-pinout-files/ultrascale-pkgs.html)

**Note:** All package files are ASCII files in TXT and CSV file format. Only the available files listed in [Table 2-1](#) are linked and consolidated in this ZIP file.

[www.xilinx.com/support/packagefiles/usapackages/usaall.zip](http://www.xilinx.com/support/packagefiles/usapackages/usaall.zip)



**IMPORTANT:** All packages are available with eutectic BGA balls. To order these packages, the device type starts with an XQ vs. XC, and the third digit in the package name is Q (for example: FFQA1156).

Table 2-1: Package/Device Pinout Files

Package	Device				
FBVA676	<a href="#">XCKU035</a> Production	<a href="#">XCKU040</a> Production			
FFVA676	<a href="#">XCKU3P</a> Production	<a href="#">XCKU5P</a> Production			
FFVB676	<a href="#">XCAU20P</a> Production	<a href="#">XCAU25P</a> Production	<a href="#">XCKU3P</a> Production	<a href="#">XCKU5P</a> Production	
FFRB676	<a href="#">XQKU5P</a> Production				
RBA676	<a href="#">XQKU040</a> Production				
SFVA784	<a href="#">XCKU035</a> Production	<a href="#">XCKU040</a> Production			
SFVB784	<a href="#">XCAU20P</a> Production	<a href="#">XCAU25P</a> Production	<a href="#">XCKU3P</a> Production	<a href="#">XCKU5P</a> Production	
SFRB784	<a href="#">XQKU5P</a> Production				
FBVA900	<a href="#">XCKU035</a> Production	<a href="#">XCKU040</a> Production			
FFVD900	<a href="#">XCKU3P</a> Production	<a href="#">XCKU5P</a> Production	<a href="#">XCKU11P</a> Production		

Table 2-1: Package/Device Pinout Files (Cont'd)

Package	Device						
FFVE900	XCKU9P Production	XCKU13P Production					
FFVA1156	XCKU025 Production	XCKU035 Production	XCKU040 Production	XCKU060 Production	XCKU095 Production	XCKU11P Production	XCKU15P Production
FFRA1156	XQKU15P Production						
RFA1156	XQKU040 Production	XQKU060 Production	XQKU095 Production				
VSVA1365	XCVU23P Engineering Sample						
FFVA1517	XCKU060 Production						
FLVA1517	XCKU085 Production	XCKU115 Production					
FFVC1517	XCKU095 Production	XCVU065 Production	XCVU080 Production	XCVU095 Production	XCVU3P Production		
FFRC1517	XQVU3P Production						
FFVD1517	XCVU080 Production	XCVU095 Production					
FLVD1517	XCKU115 Production	XCVU125 Production					
FFVE1517	XCKU11P Production	XCKU15P Production					
FFRE1517	XQKU15P Production						
RLD1517	XQKU115 Production						
FFVA1760	XCKU15P Production						
FFVB1760	XCKU095 Production	XCVU080 Production	XCVU095 Production				
FLVB1760	XCKU085 Production	XCKU115 Production	XCVU125 Production				
FFVE1760	XCKU15P Production						

Table 2-1: Package/Device Pinout Files (Cont'd)

Package	Device				
FFVJ1760	XCVU19P Engineering Sample				
FSVJ1760	XCVU23P Engineering Sample				
FLVD1924	XCKU115 Production				
FLVF1924	XCKU085 Production	XCKU115 Production			
FLGF1924	XCVU11P Production				
RLF1924	XQKU115 Production				
FSVH1924	XCVU31P Production				
FFVA2104	XCVU080 Production	XCVU095 Production			
FLVA2104	XCKU115 Production	XCVU125 Production	XCVU5P Production	XCVU7P Production	
FLRA2104	XQVU7P Production				
FLGA2104	XCVU9P Production				
FHGA2104	XCVU13P Production				
FFVB2104	XCKU095 Production	XCVU080 Production	XCVU095 Production	XCKU19P Engineering Sample	
FLVB2104	XCKU115 Production	XCVU125 Production	XCVU5P Production	XCVU7P Production	
FLRB2104	XQVU7P Production				
FLGB2104	XCVU160 Production	XCVU190 Production	XCVU9P Production	XCVU11P Production	
FHGB2104	XCVU13P Production				

Table 2-1: Package/Device Pinout Files (Cont'd)

Package	Device				
FFVC2104	XCVU095 Production				
FLVC2104	XCVU125 Production	XCVU5P Production	XCVU7P Production		
FLGC2104	XCVU160 Production	XCVU190 Production	XCVU9P Production	XCVU11P Production	
FLRC2104	XQVU11P Production				
FHGC2104	XCVU13P Production				
FIGD2104	XCVU13P Production	XCVU27P Production	XCVU29P Production		
FSGD2104	XCVU9P Production	XCVU11P Production			
FSVH2104	XCVU33P Production	XCVU35P Production	XCVU45P Production		
FLGB2377	XCVU440 Production				
FLGA2577	XCVU190 Production	XCVU9P Production	XCVU11P Production	XCVU13P Production	
FSGA2577	XCVU13P Production	XCVU27P Production	XCVU29P Production		
FLGA2892	XCVU440 Production				
FSVH2892	XCVU35P Production	XCVU37P Production	XCVU47P Production		
FSVK2892	XCVU57P Engineering Sample				
FSVA3824	XCVU19P Production				
FSVB3824	XCVU19P Production				

# Device Diagrams

## Summary

The diagrams in this chapter show a top-view perspective of the package pinout of each UltraScale and UltraScale+ device/package combination. [Table 3-1](#) through [Table 3-4](#) contain cross references to the device diagrams. The I/O-bank diagram shows the location of each user I/O and GTH/GTY transceiver and the respective bank or GT quad. The configuration-power diagram shows the location of every power pin and dedicated as well as multi-function configuration pin in the package. See [Package Specifications Designations in Chapter 2](#) for definitions of [Evaluation Only](#), [Engineering Sample](#), and [Production](#) device diagrams.



**IMPORTANT:** All packages are available with eutectic BGA balls. To order these packages, the device type starts with an XQ vs. XC, and the third digit in the package name is Q (for example: FFQA1156).

**Table 3-1: Cross-Reference to Kintex UltraScale and XQ Kintex UltraScale Device Diagrams by Package**

Package	Footprint Compatible Devices					Package Status
FBVA676	XCKU035 <a href="#">page 205</a>	XCKU040 <a href="#">page 205</a>				Production
RBA676	XQKU040 <a href="#">page 205</a>					Production
SFVA784	XCKU035 <a href="#">page 207</a>	XCKU040 <a href="#">page 207</a>				Production
FBVA900	XCKU035 <a href="#">page 209</a>	XCKU040 <a href="#">page 209</a>				Production
FFVA1156	XCKU025 <a href="#">page 211</a>	XCKU035 <a href="#">page 213</a>	XCKU040 <a href="#">page 215</a>	XCKU060 <a href="#">page 217</a>	XCKU095 <a href="#">page 219</a>	Production
RFA1156	XQKU040 <a href="#">page 215</a>	XQKU060 <a href="#">page 217</a>	XQKU095 <a href="#">page 219</a>			Production
FFVA1517	XCKU060 <a href="#">page 221</a>					Production

**Table 3-1: Cross-Reference to Kintex UltraScale and XQ Kintex UltraScale Device Diagrams by Package (Cont'd)**

Package	Footprint Compatible Devices			Package Status
FLVA1517	XCKU085 <a href="#">page 223</a>	XCKU115 <a href="#">page 223</a>		Production
FFVC1517	XCKU095 <a href="#">page 225</a>			Production
FLVD1517	XCKU115 <a href="#">page 227</a>			Production
RLD1517	XQKU115 <a href="#">page 227</a>			Production
FFVB1760	XCKU095 <a href="#">page 229</a>			Production
FLVB1760	XCKU085 <a href="#">page 231</a>	XCKU115 <a href="#">page 233</a>		Production
FLVD1924	XCKU115 <a href="#">page 235</a>			Production
FLVF1924	XCKU085 <a href="#">page 237</a>	XCKU115 <a href="#">page 239</a>		Production
RLF1924	XQKU115 <a href="#">page 239</a>			Production
FLVA2104	XCKU115 <a href="#">page 241</a>			Production
FFVB2104	XCKU095 <a href="#">page 243</a>			Production
FLVB2104	XCKU115 <a href="#">page 245</a>			Production



Table 3-2: Cross-Reference to Virtex UltraScale Device Diagrams by Package

Package	Footprint Compatible Devices			Package Status
FFVC1517	XCVU065 <a href="#">page 247</a>	XCVU080 <a href="#">page 249</a>	XCVU095 <a href="#">page 249</a>	Production
FFVD1517	XCVU080 <a href="#">page 251</a>	XCVU095 <a href="#">page 251</a>		Production
FLVD1517	XCVU125 <a href="#">page 253</a>			Production
FFVB1760	XCVU080 <a href="#">page 255</a>	XCVU095 <a href="#">page 255</a>		Production
FLVB1760	XCVU125 <a href="#">page 257</a>			Production
FFVA2104	XCVU080 <a href="#">page 259</a>	XCVU095 <a href="#">page 259</a>		Production
FLVA2104	XCVU125 <a href="#">page 261</a>			Production
FFVB2104	XCVU080 <a href="#">page 263</a>	XCVU095 <a href="#">page 263</a>		Production
FLVB2104	XCVU125 <a href="#">page 265</a>			Production
FLGB2104	XCVU160 <a href="#">page 267</a>	XCVU190 <a href="#">page 267</a>		Production
FFVC2104	XCVU095 <a href="#">page 269</a>			Production
FLVC2104	XCVU125 <a href="#">page 271</a>			Production
FLGC2104	XCVU160 <a href="#">page 273</a>	XCVU190 <a href="#">page 273</a>		Production
FLGB2377	XCVU440 <a href="#">page 275</a>			Production
FLGA2577	XCVU190 <a href="#">page 277</a>			Production
FLGA2892	XCVU440 <a href="#">page 279</a>			Production

**Table 3-3: Cross-Reference to Kintex UltraScale+ and XQ Kintex UltraScale+ Device Diagrams by Package**

Package	Footprint Compatible Devices			Package Status
FFVA676	XCKU3P <a href="#">page 289</a>	XCKU5P <a href="#">page 289</a>		Production
FFVB676	XCKU3P <a href="#">page 291</a>	XCKU5P <a href="#">page 291</a>		Production
FFRB676	XQKU5P <a href="#">page 291</a>			Production
SFVB784	XCKU3P <a href="#">page 293</a>	XCKU5P <a href="#">page 293</a>		Production
SFRB784	XQKU5P <a href="#">page 293</a>			Production
FFVD900	XCKU3P <a href="#">page 295</a>	XCKU5P <a href="#">page 295</a>	XCKU11P <a href="#">page 297</a>	Production
FFVE900	XCKU9P <a href="#">page 299</a>	XCKU13P <a href="#">page 301</a>		Production
FFVA1156	XCKU11P <a href="#">page 303</a>	XCKU15P <a href="#">page 305</a>		Production
FFRA1156	XQKU15P <a href="#">page 305</a>			Production
FFVE1517	XCKU11P <a href="#">page 307</a>	XCKU15P <a href="#">page 309</a>		Production
FFRE1517	XQKU15P <a href="#">page 309</a>			Production
FFVA1760	XCKU15P <a href="#">page 311</a>			Production
FFVE1760	XCKU15P <a href="#">page 313</a>			Production
FFVJ1760	XCKU19P <a href="#">page 315</a>			Engineering Sample
FFVB2104	XCKU19P <a href="#">page 317</a>			Engineering Sample

**Table 3-4: Cross-Reference to Virtex UltraScale+ and XQ Virtex UltraScale+ Device Diagrams by Package**

Package	Footprint Compatible Devices		Package Status
VSVA1365	XCVU23P <a href="#">page 384</a>		Engineering Sample
FFVC1517	XCVU3P <a href="#">page 320</a>		Production
FFRC1517	XQVU3P <a href="#">page 320</a>		Production
FSVJ1760	XCVU23P <a href="#">page 322</a>		Engineering Sample
FLGF1924	XCVU11P <a href="#">page 324</a>		Production
FSVH1924	XCVU31P <a href="#">page 326</a>		Production
FLVA2104	XCVU5P <a href="#">page 328</a>	XCVU7P <a href="#">page 328</a>	Production
FFRA2104	XQVU7P <a href="#">page 328</a>		Production
FLGA2104	XCVU9P <a href="#">page 330</a>		Production
FHGA2104	XCVU13P <a href="#">page 332</a>		Production
FLVB2104	XCVU5P <a href="#">page 334</a>	XCVU7P <a href="#">page 334</a>	Production
FLRB2104	XQVU7P <a href="#">page 334</a>		Production
FLGB2104	XCVU9P <a href="#">page 336</a>	XCVU11P <a href="#">page 338</a>	Production
FHGB2104	XCVU13P <a href="#">page 340</a>		Production
FLVC2104	XCVU5P <a href="#">page 342</a>	XCVU7P <a href="#">page 342</a>	Production
FLGC2104	XCVU9P <a href="#">page 344</a>	XCVU11P <a href="#">page 346</a>	Production
FLRC2104	XQVU11P <a href="#">page 346</a>		Production
FHGC2104	XCVU13P <a href="#">page 348</a>		Production


**Table 3-4: Cross-Reference to Virtex UltraScale+ and XQ Virtex UltraScale+ Device Diagrams by Package (Cont'd)**

Package	Footprint Compatible Devices				Package Status
FSGD2104	XCVU9P <a href="#">page 350</a>	XCVU11P <a href="#">page 352</a>			Production
FIGD2104	XCVU13P <a href="#">page 354</a>				Production
FIGD2104	XCVU27P <a href="#">page 356</a>	XCVU29P <a href="#">page 358</a>			Production
FSVH2104	XCVU33P <a href="#">page 360</a>	XCVU35P <a href="#">page 362</a>	XCVU45P <a href="#">page 362</a>		Production
FLGA2577	XCVU9P <a href="#">page 364</a>	XCVU11P <a href="#">page 366</a>	XCVU13P <a href="#">page 368</a>		Production
FSGA2577	XCVU13P <a href="#">page 368</a>				Production
FSGA2577	XCVU27P <a href="#">page 370</a>	XCVU29P <a href="#">page 372</a>			Production
FSVH2892	XCVU35P <a href="#">page 374</a>	XCVU37P <a href="#">page 376</a>	XCVU45P <a href="#">page 374</a>	XCVU47P <a href="#">page 376</a>	Production
FSVK2892	XCVU57P <a href="#">page 378</a>				Engineering Sample
FSVA3824	XCVU19P <a href="#">page 380</a>				Production
FSVB3824	XCVU19P <a href="#">page 382</a>				Production

**Table 3-5: Cross-Reference to Artix UltraScale+ Device Diagrams by Package**


Package	Footprint Compatible Devices			Package Status
FFVB676	XCAU20P <a href="#">page 281</a>			Production
	XCAU25P <a href="#">page 283</a>			Production
SFVB784	XCAU20P <a href="#">page 285</a>	XCAU25P <a href="#">page 287</a>		Production

# FBVA676 Package—XCKU035 and XCKU040 and RBA676 Package—XQKU040

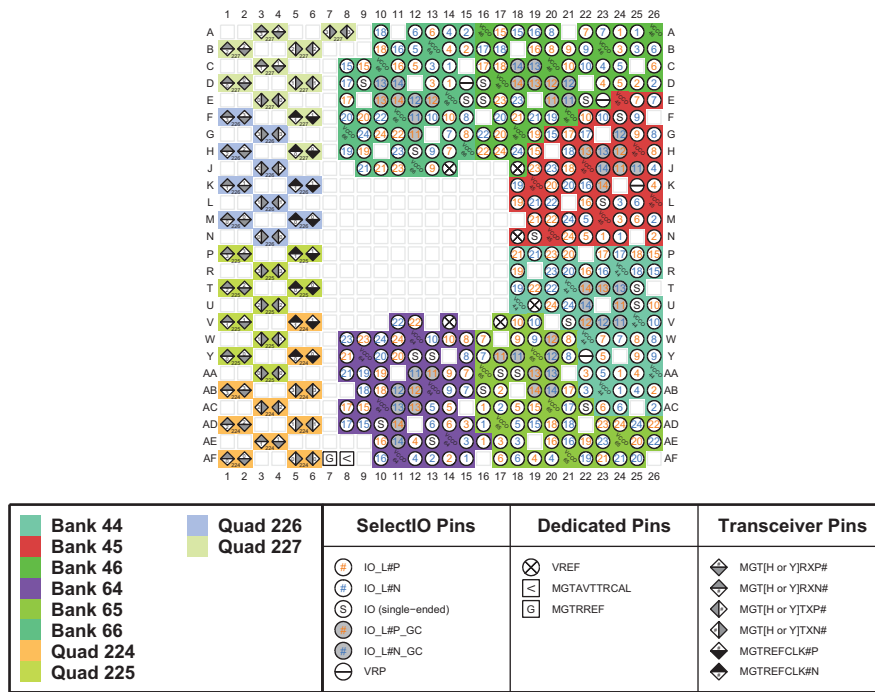

ug575\_c3\_01\_071314


Figure 3-1: FBVA676 Package—XCKU035 and XCKU040 and RBA676 Package—XQKU040 I/O Bank Diagram

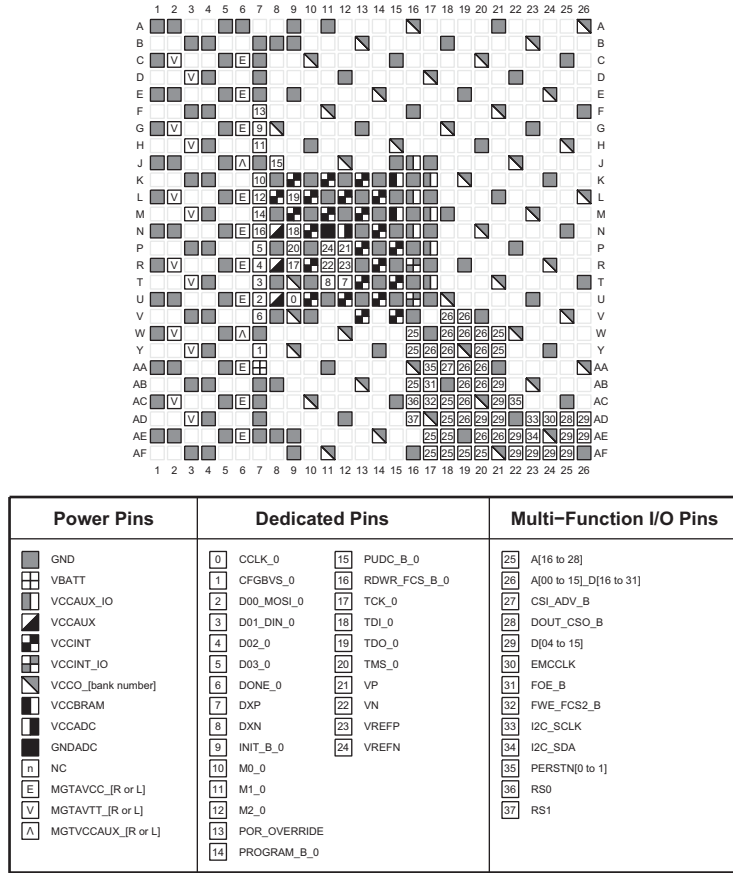

ug575\_c3\_02\_071314

Figure 3-2: FBVA676 Package—XCKU035 and XCKU040 and RBA676 Package—XQKU040 Configuration/Power Diagram

# SFVA784 (XCKU035 and XCKU040)

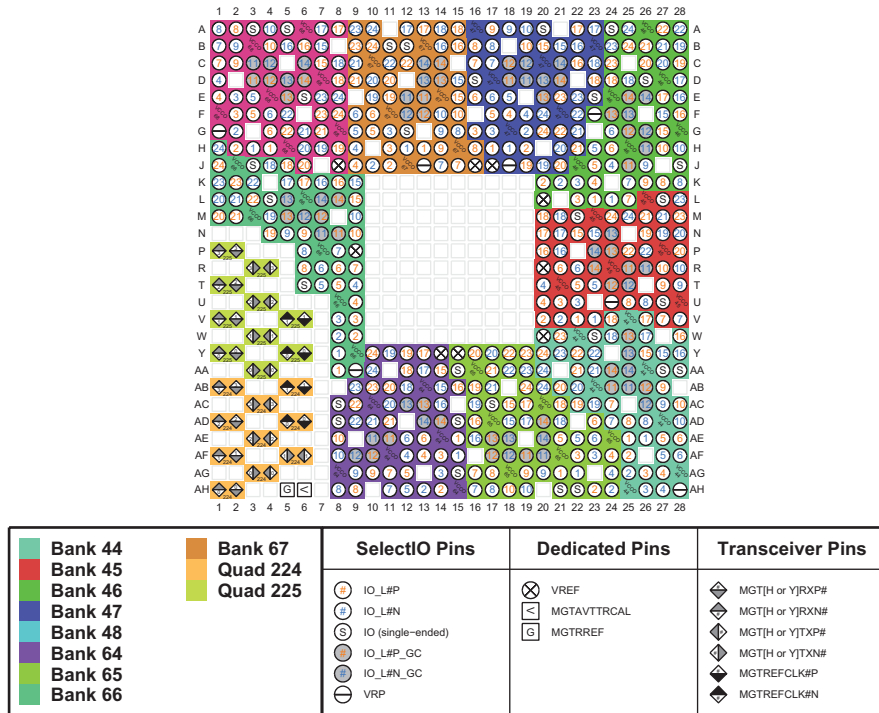

ug575\_c3\_03\_070615

Figure 3-3: SFVA784 Package—XCKU035 and XCKU040 I/O Bank Diagram


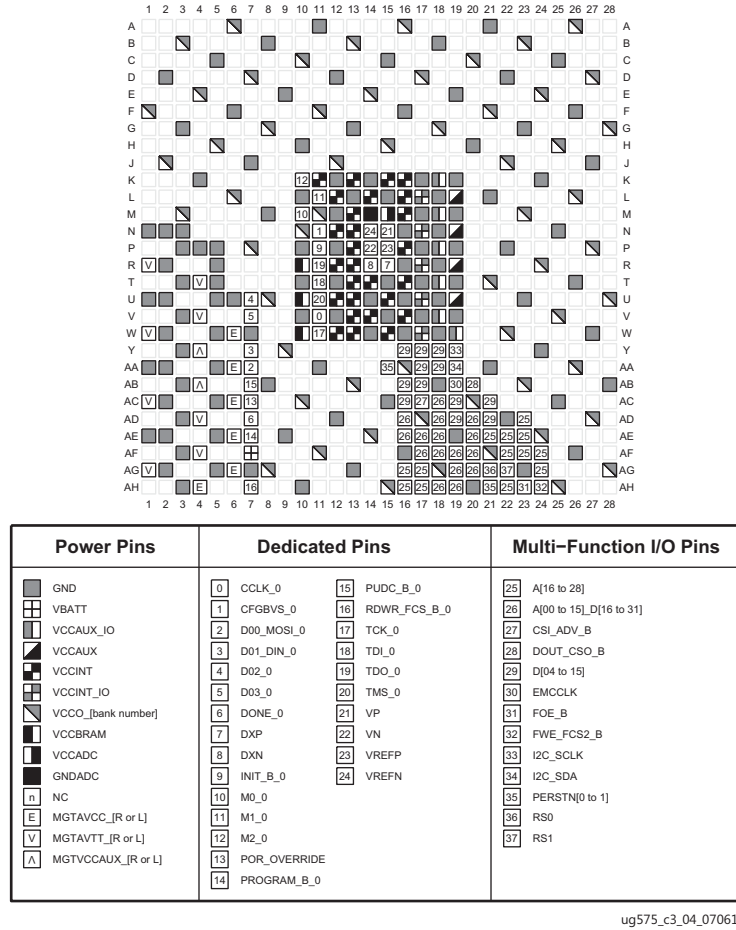


Figure 3-4: SFVA784 Package—XCKU035 and XCKU040 Configuration/Power Diagram




# FBVA900 (XCKU035 and XCKU040)

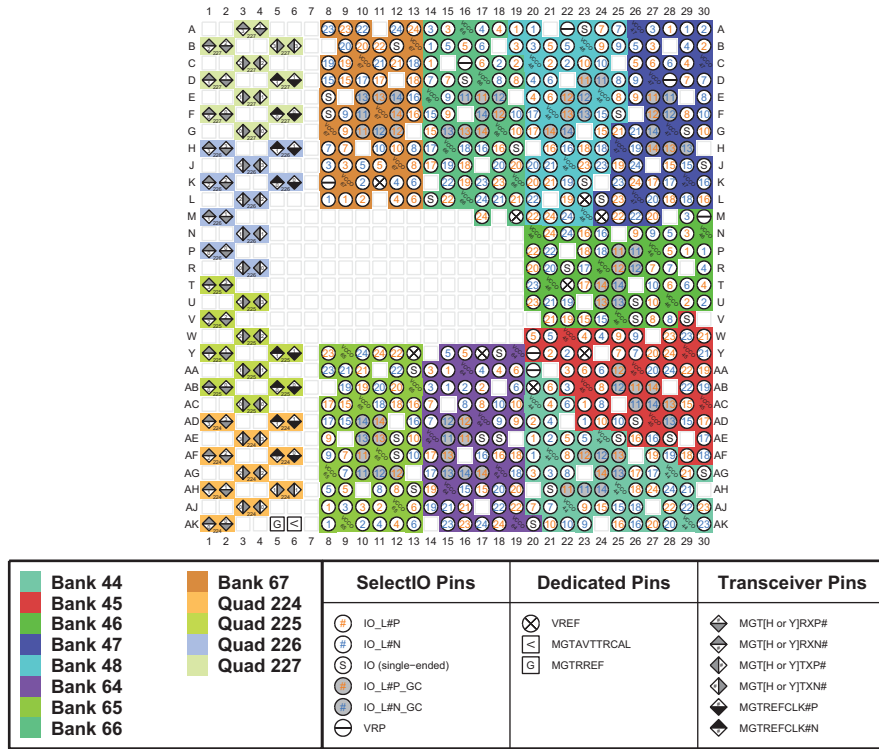

ug575\_c3\_05\_100715

Figure 3-5: FBVA900 Package—XCKU035 and XCKU040 I/O Bank Diagram

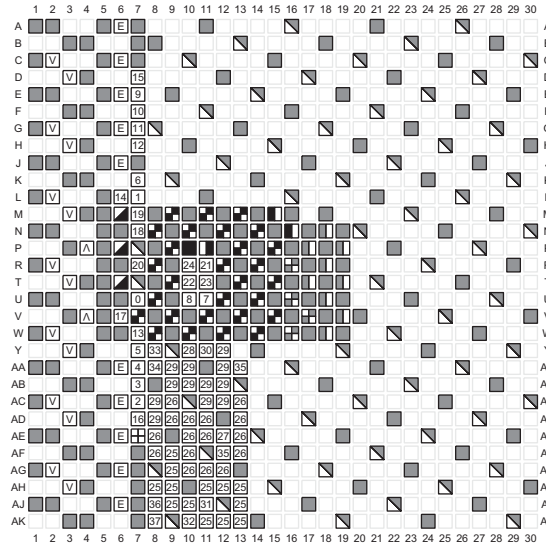


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	1 CFGBVS_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	2 D00_MOSI_0	27 CSI_ADV_B
VCCAUX	3 D01_DIN_0	28 DOUT_CSO_B
VCCINT	4 D02_0	29 D[04 to 15]
VCCINT_IO	5 D03_0	30 EMCLK
VCCO_[bank number]	6 DONE_0	31 FOE_B
VCCBRAM	7 DXP	32 FWE_FCS2_B
VCCADC	8 DXN	33 I2C_SCLK
GNDADC	9 INIT_B_0	34 I2C_SDA
n NC	10 M0_0	35 PERSTN[0 to 1]
E MGTAVCC_[R or L]	11 M1_0	36 RS0
V MGTAVTT_[R or L]	12 M2_0	37 RS1
A MGTVCCAUX_[R or L]	13 POR_OVERRIDE	
	14 PROGRAM_B_0	
	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_06\_100715


Figure 3-6: FBVA900 Package—XCKU035 and XCKU040 Configuration/Power Diagram

# FFVA1156 (XCKU025)

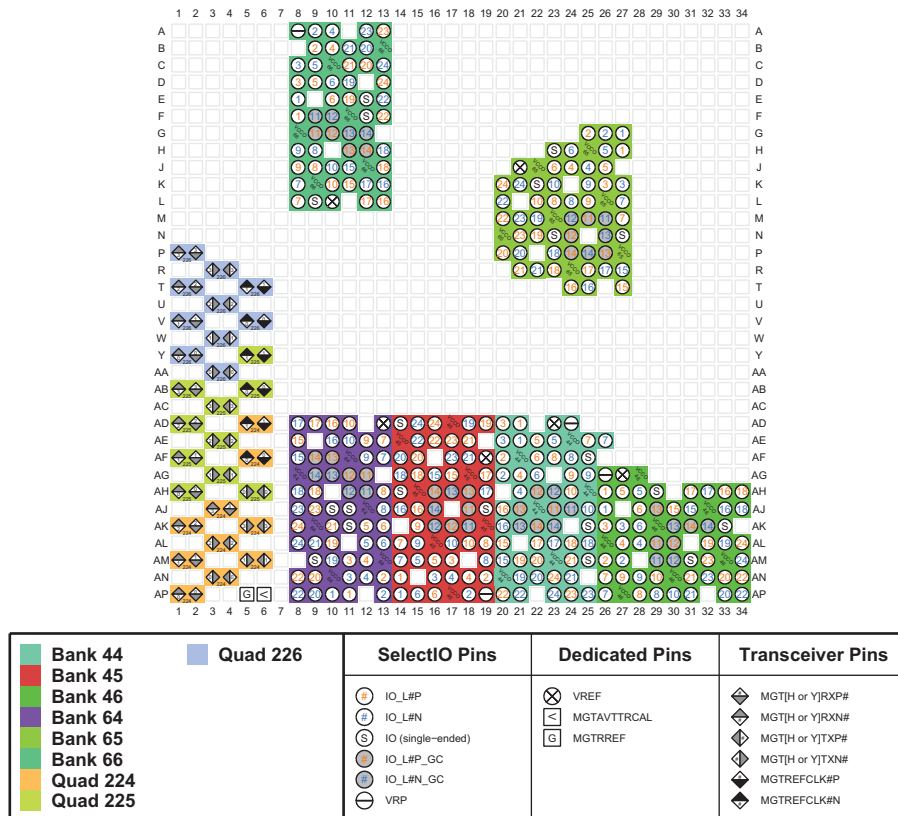

ug575\_c3\_07\_032416


Figure 3-7: FFVA1156 Package—XCKU025 I/O Bank Diagram

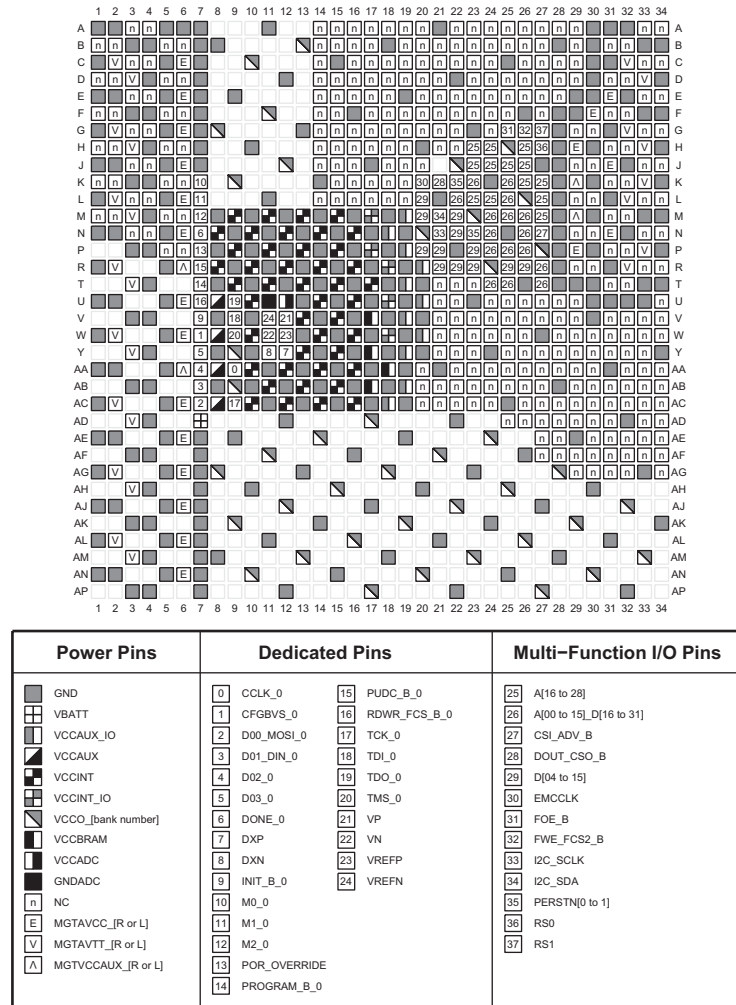

ug575\_c3\_08\_032416


Figure 3-8: FFVA1156 Package—XCKU025 Configuration/Power Diagram

# FFVA1156 (XCKU035)

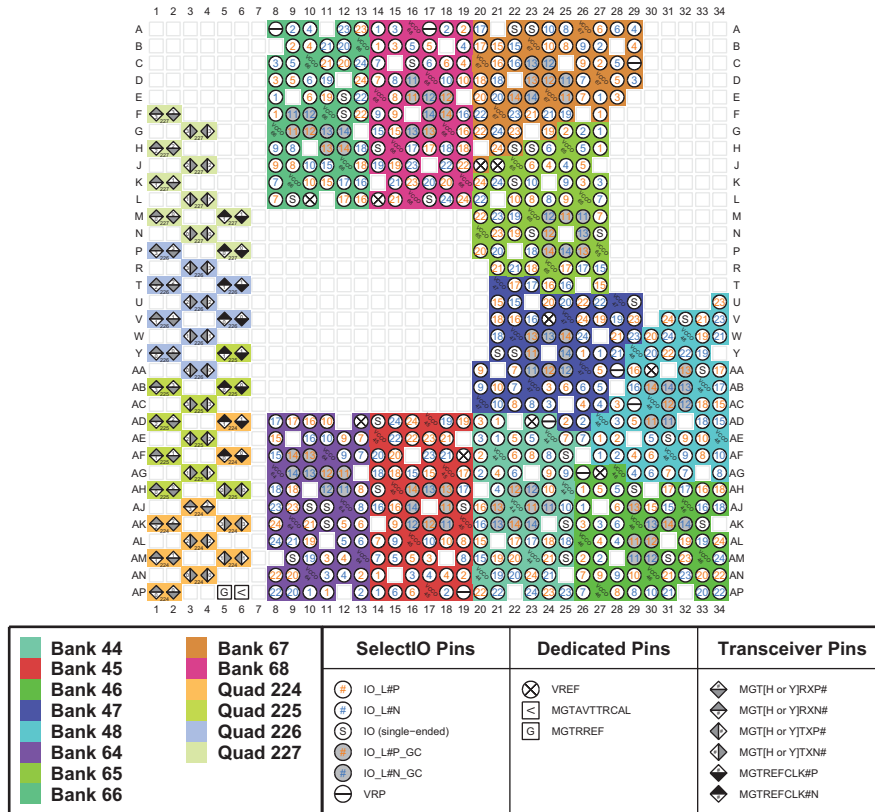

ug575\_c3\_09\_100715

Figure 3-9: FFVA1156 Package—XCKU035 I/O Bank Diagram

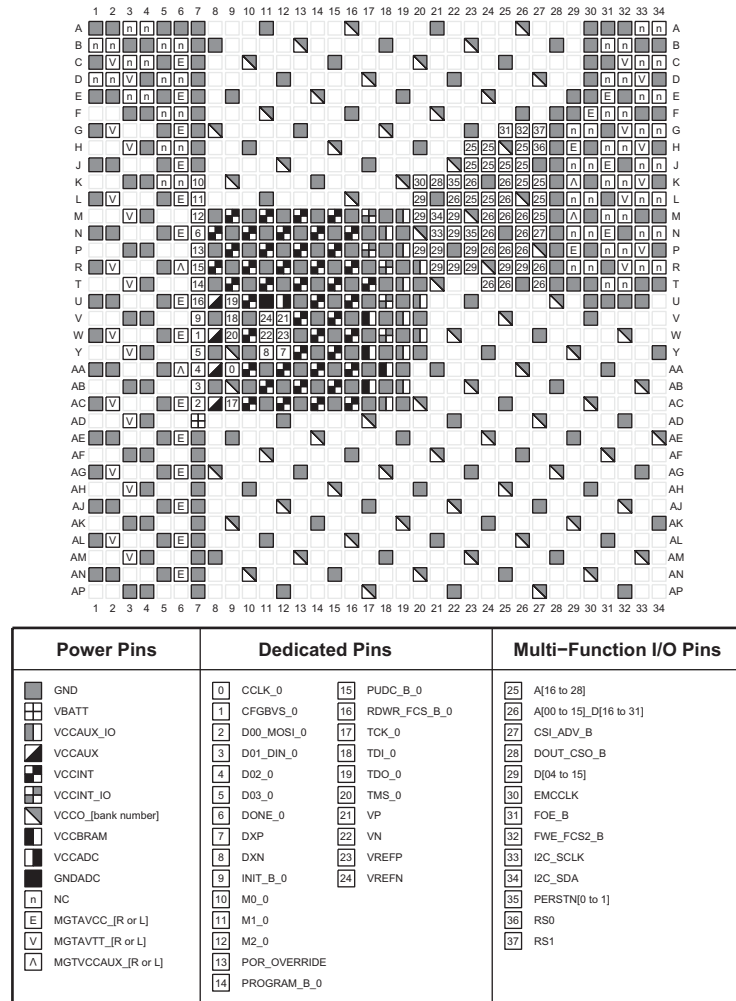

ug575\_c3\_10\_100715

Figure 3-10: FFVA1156 Package—XCKU035 Configuration/Power Diagram

# FFVA1156 (XCKU040) and RFA1156 (XQKU040)


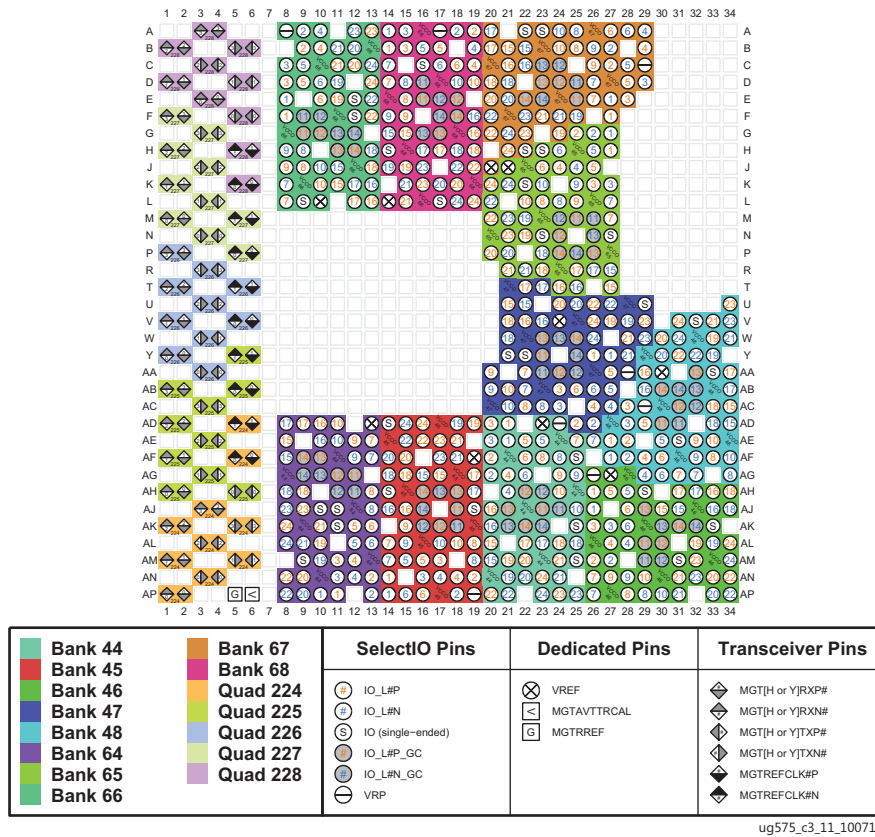


Figure 3-11: FFVA1156 Package—XCKU040 and RFA1156 Package—XQKU040 I/O Bank Diagram




ug575\_c3\_12\_100715

Figure 3-12: FFVA1156 Package—XCKU040 and RFA1156 Package—XQKU040 Configuration/Power Diagram

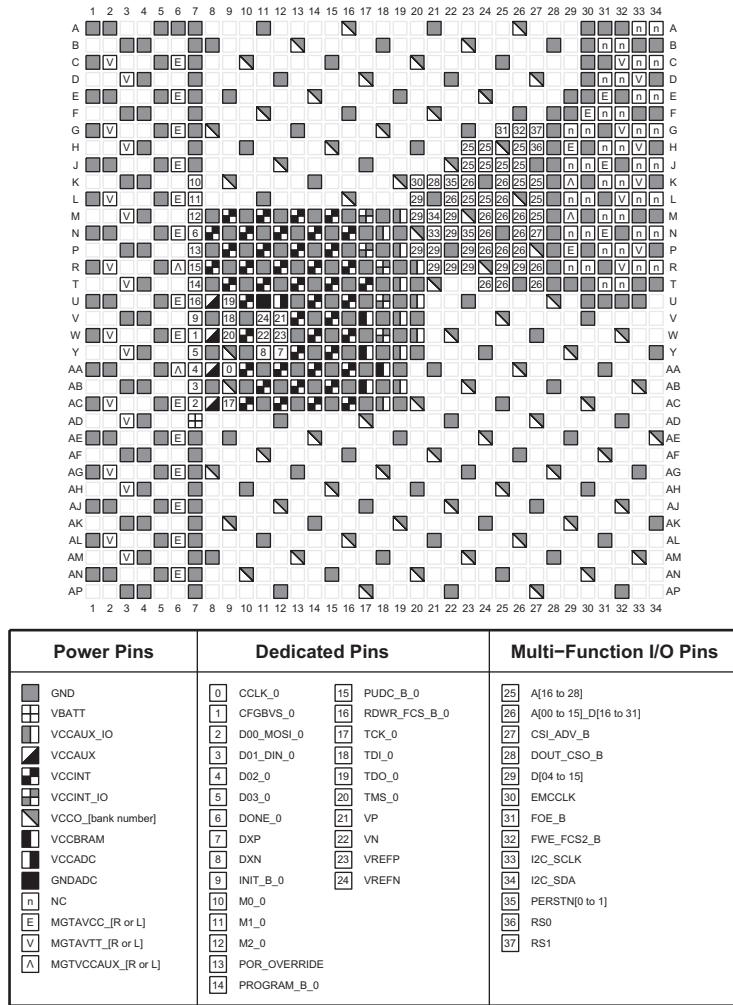


# FFVA1156 (XCKU060) and RFA1156 (XQKU060)

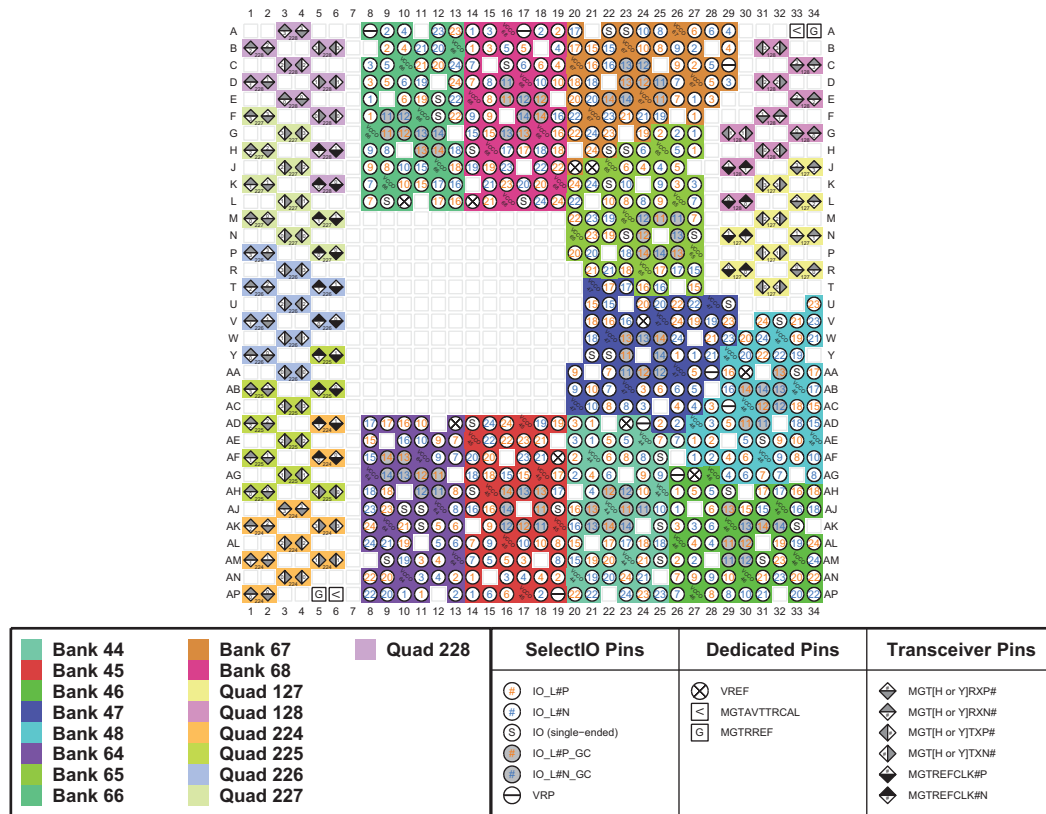

ug575\_c3\_13\_100715


Figure 3-13: FFVA1156 Package—XCKU060 and RFA1156 Package—XQKU060 I/O Bank Diagram

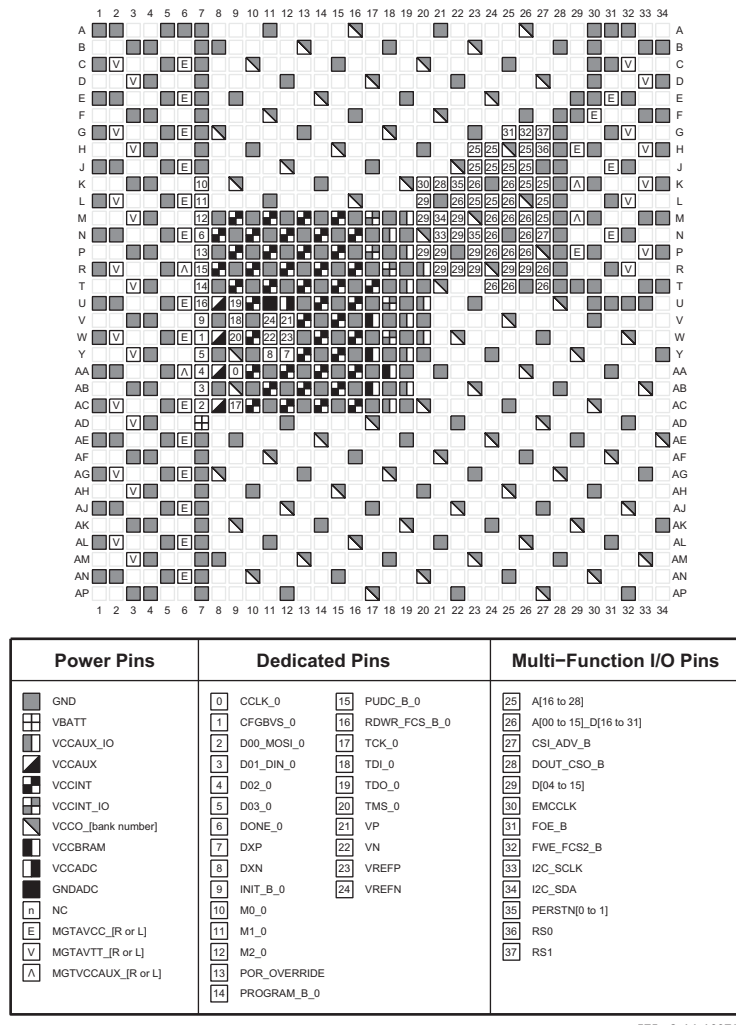

ug575\_c3\_14\_100715


Figure 3-14: FFVA1156 Package—XCKU060 and RFA1156 Package—XQKU060 Configuration/Power Diagram

# FFVA1156 (XCKU095) and RFA1156 (XQKU095)

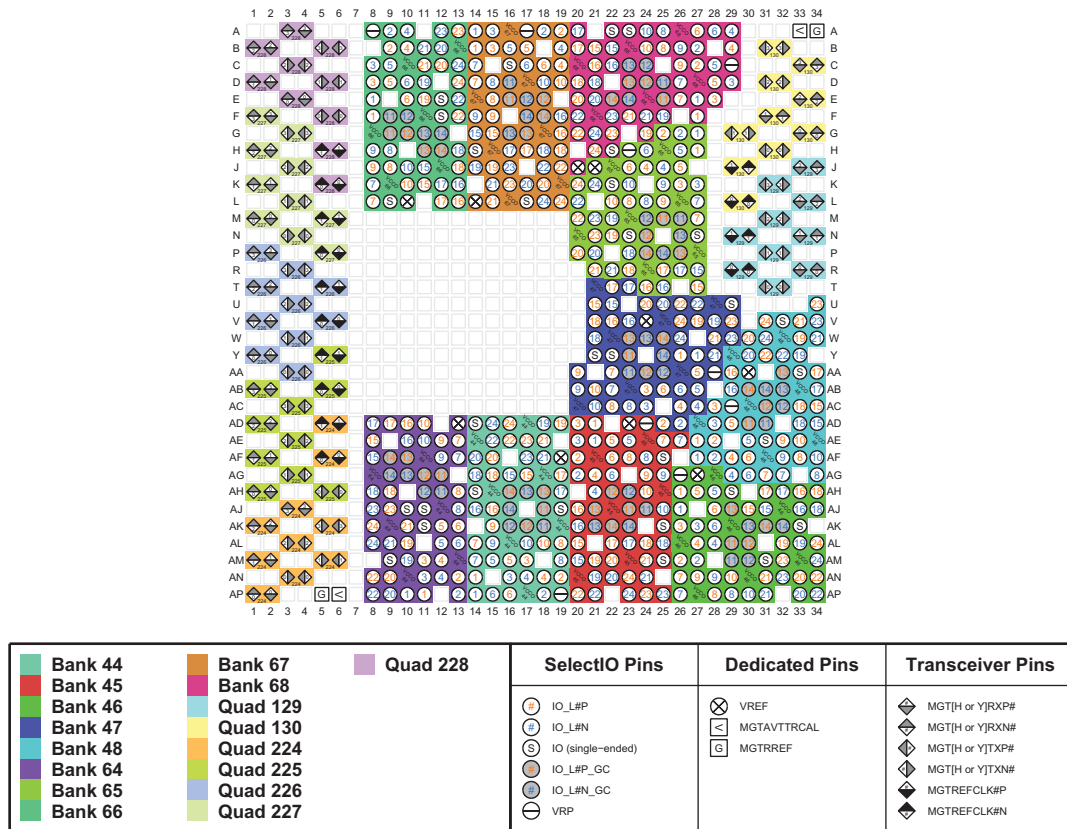

ug575\_c3\_15\_100715


Figure 3-15: FFVA1156 Package—XCKU095 and RFA1156 Package—XQKU095 I/O Bank Diagram

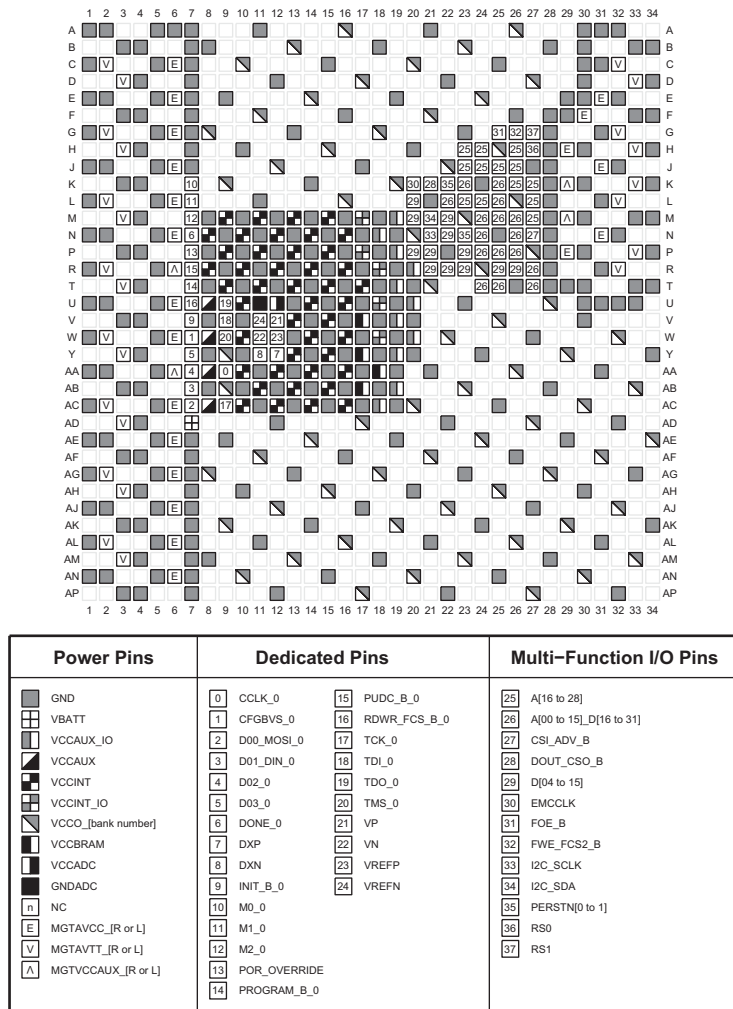

ug575\_c3\_16\_100715


Figure 3-16: FFVA1156 Package—XCKU095 and RFA1156 Package—XQKU095 Configuration/Power Diagram

# FFVA1517 (XCKU060)

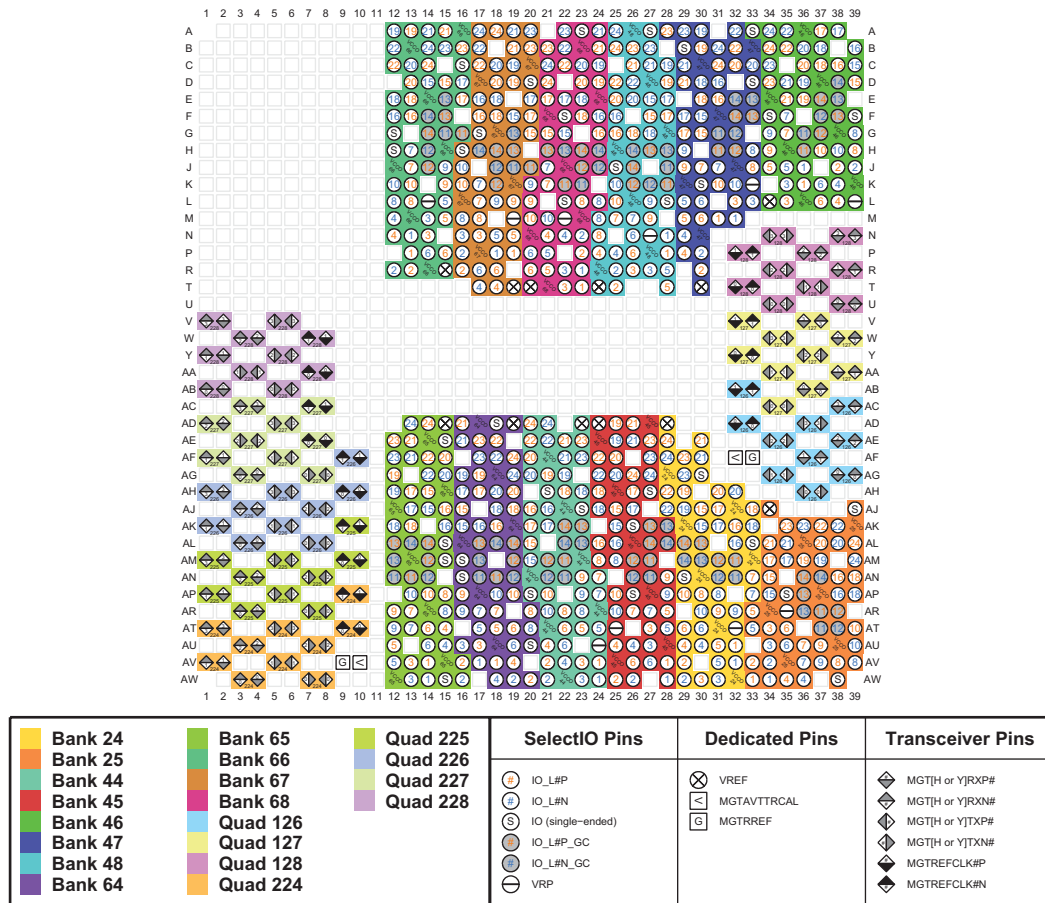

ug575\_c3\_17\_100715


Figure 3-17: FFVA1517 Package—XCKU060 I/O Bank Diagram

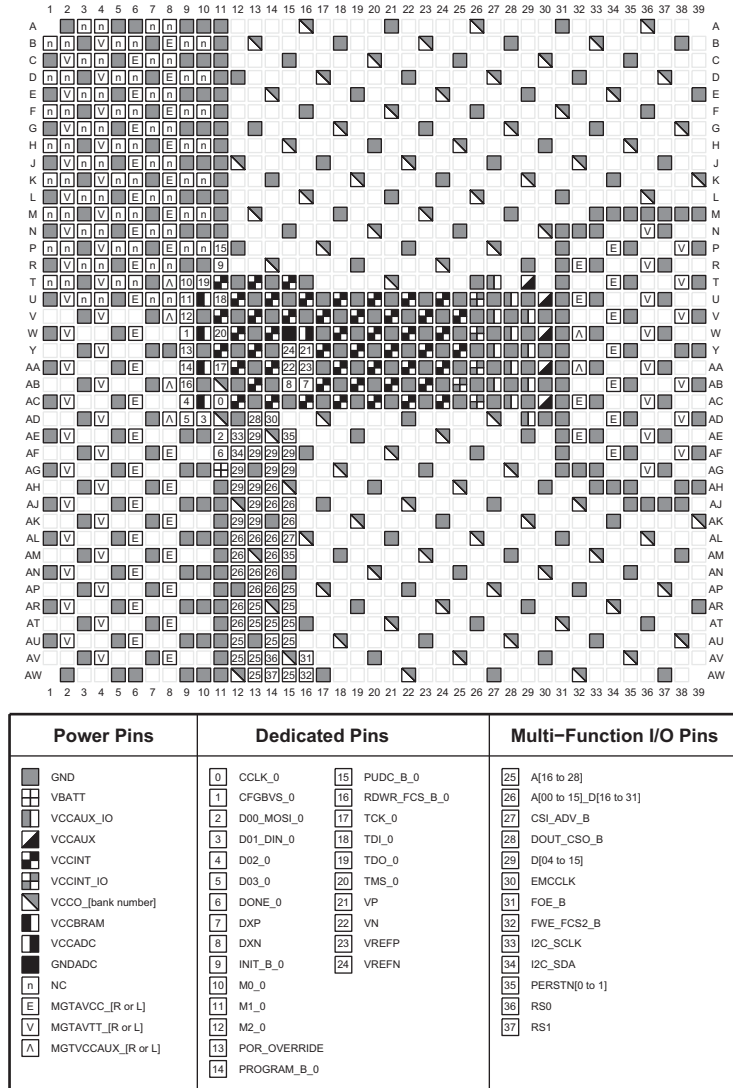

ug575\_c3\_18\_100715


Figure 3-18: FFVA1517 Package—XCKU060 Configuration/Power Diagram

# FLVA1517 (XCKU085 and XCKU115)

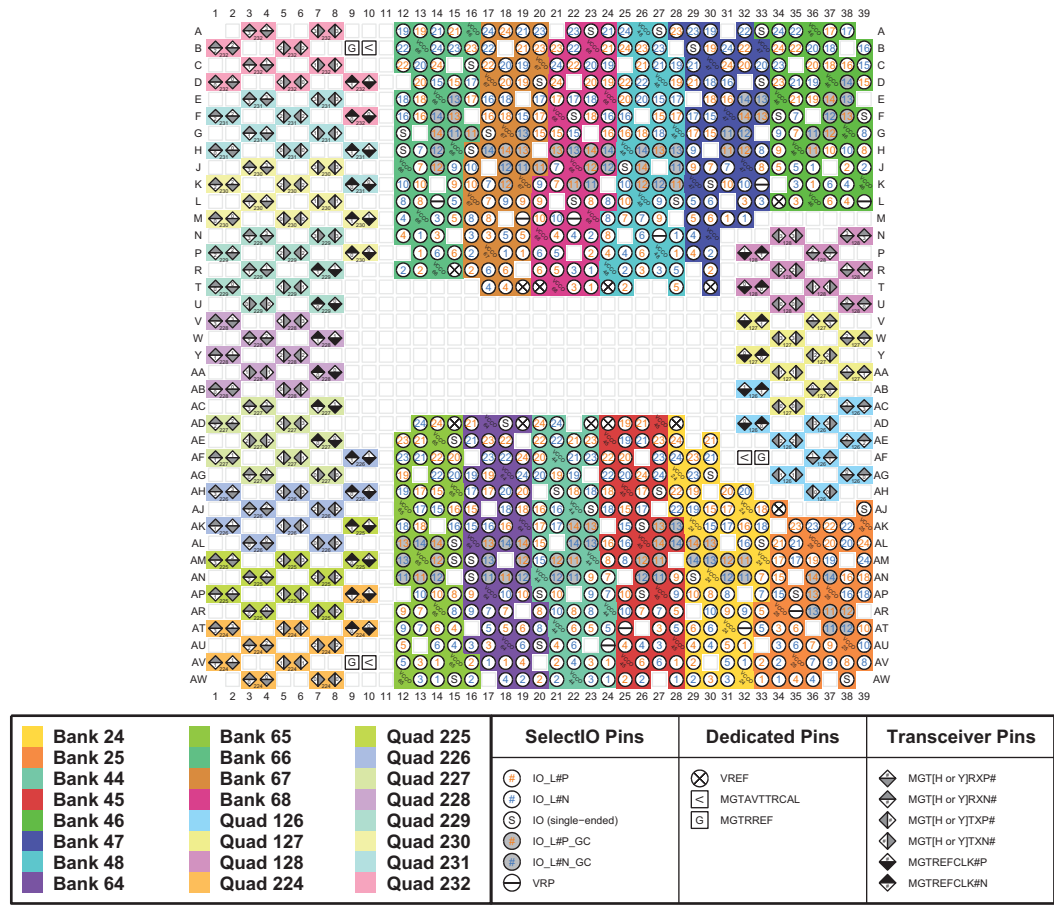

ug575\_c3\_19\_100715

Figure 3-19: FLVA1517 Package—XCKU085 and XCKU115 I/O Bank Diagram

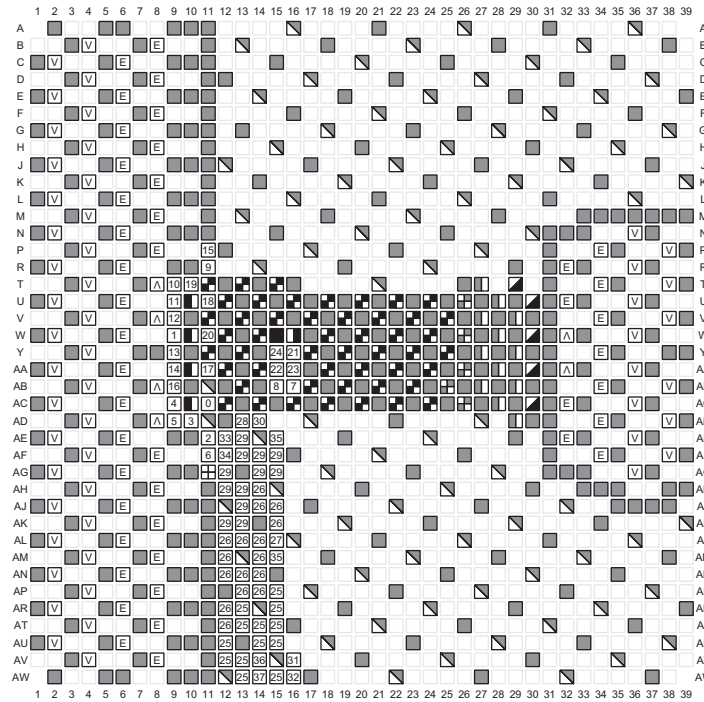


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	1 CFGBVS_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	2 D00_MOSI_0	27 CSI_ADV_B
VCCAUX	3 D01_DIN_0	28 DOUT_CSO_B
VCCINT	4 D02_0	29 D[04 to 15]
VCCINT_IO	5 D03_0	30 EMCCLK
VCCO_[bank number]	6 DONE_0	31 FOE_B
VCCBRAM	7 DXP	32 FWE_FCS2_B
VCCADC	8 DXN	33 I2C_SCLK
GNDADC	9 INIT_B_0	34 I2C_SDA
n NC	10 M0_0	35 PERSTN[0 to 1]
E MGTAVCC_[R or L]	11 M1_0	36 RS0
V MGTAVTT_[R or L]	12 M2_0	37 RS1
A MGTVCCAUX_[R or L]	13 POR_OVERRIDE	
	14 PROGRAM_B_0	
	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_20\_100715

Figure 3-20: FLVA1517 Package—XCKU085 and XCKU115 Configuration/Power Diagram




# FFVC1517 (XCKU095)

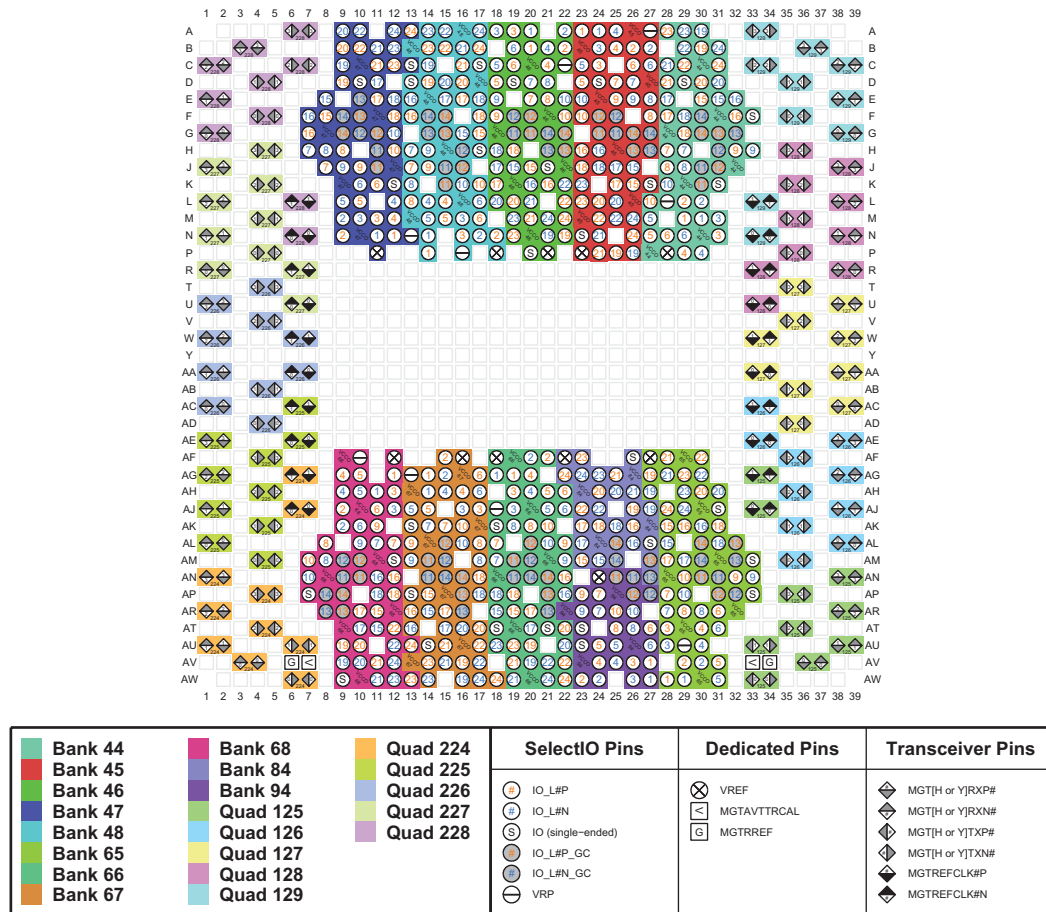

ug575\_c3\_21\_100715


Figure 3-21: FFVC1517 Package—XCKU095 I/O Bank Diagram

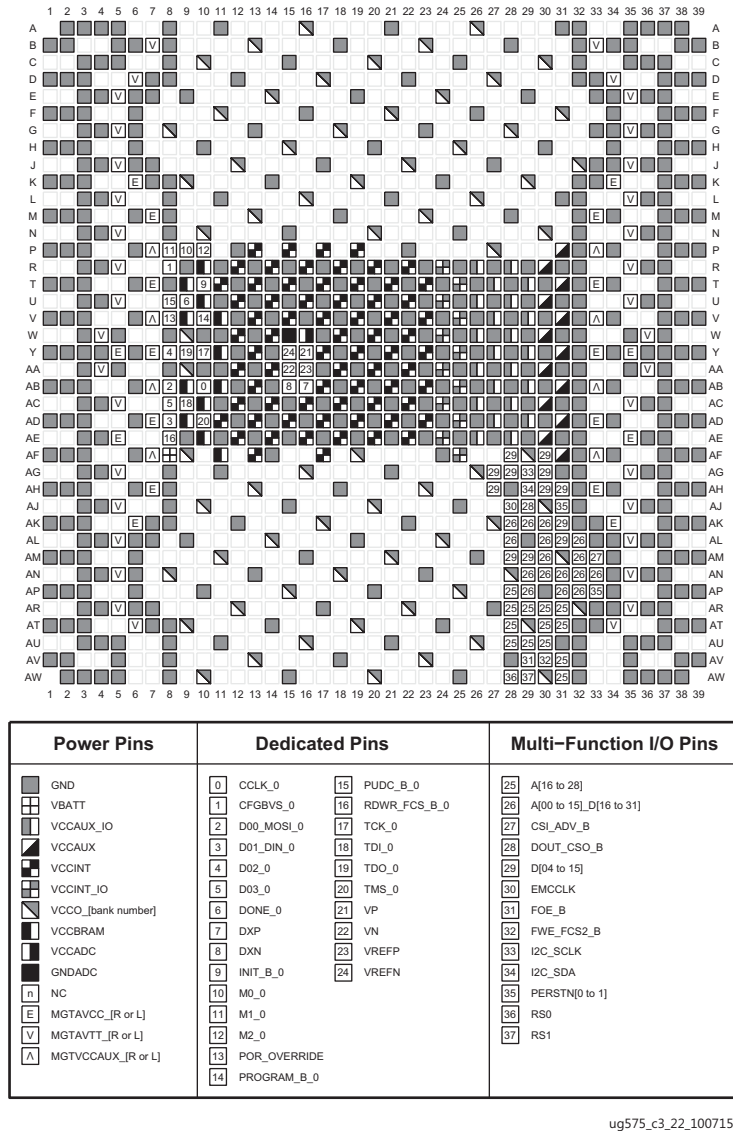

ug575\_c3\_22\_100715


Figure 3-22: FFVC1517 Package—XCKU095 Configuration/Power Diagram

# FLVD1517 (XCKU115) and RLD1517 (XQKU115)

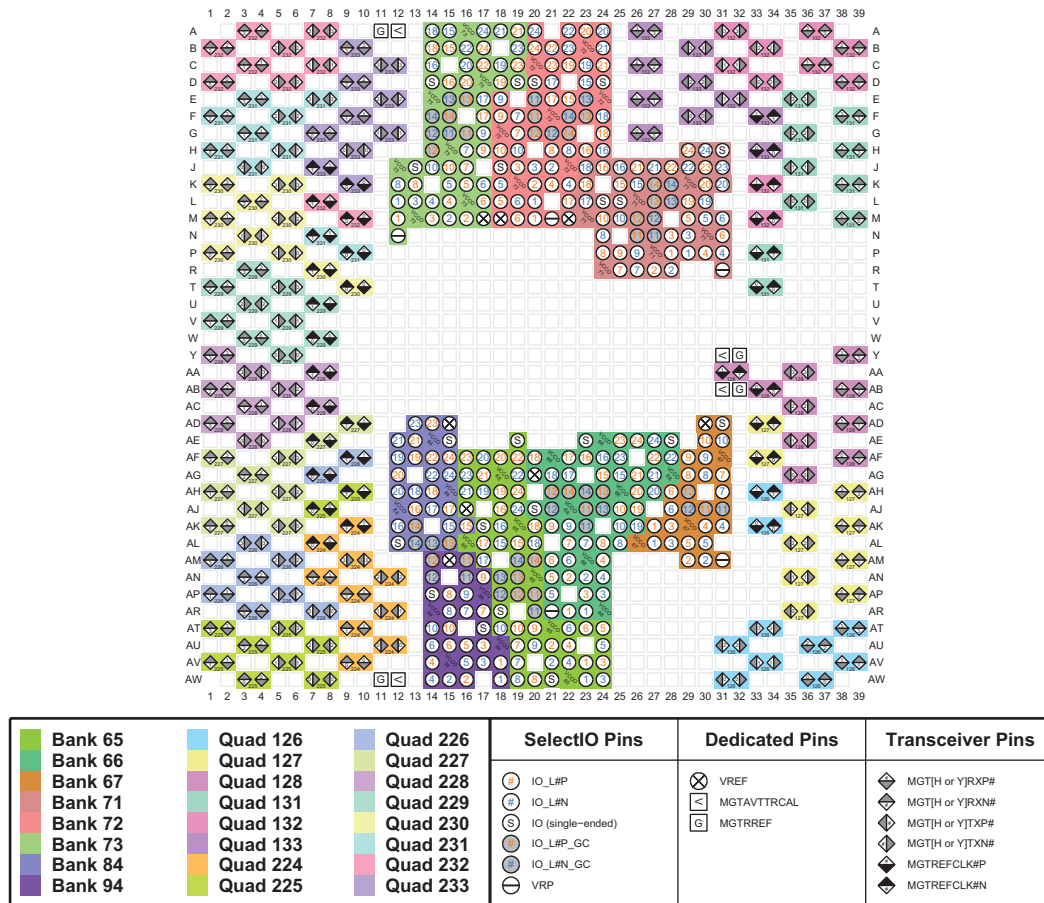

ug575\_c3\_23\_100715

Figure 3-23: FLVD1517 Package—XCKU115 and RLD1517 Package—XQKU115 I/O Bank Diagram

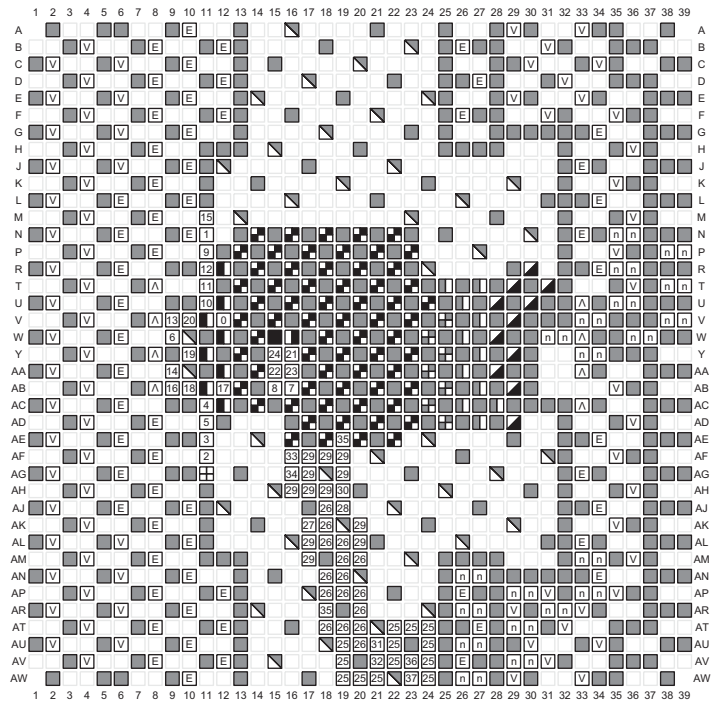


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	1 CFGBVS_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	2 D00_MOSI_0	27 CSI_ADV_B
VCCAUX	3 D01_DIN_0	28 DOUT_CSO_B
VCCINT	4 D02_0	29 D[04 to 15]
VCCINT_IO	5 D03_0	30 EMCCLK
VCCO_bank numberj	6 DONE_0	31 FOE_B
VCCBRAM	7 DXP	32 FWE_FCS2_B
VCCADC	8 DXN	33 I2C_SCLK
GNDADC	9 INIT_B_0	34 I2C_SDA
n NC	10 M0_0	35 PERSTN[0 to 1]
E MGTAVCC_[R or L]	11 M1_0	36 RS0
V MGTAVTT_[R or L]	12 M2_0	37 RS1
A MGTVCCAUX_[R or L]	13 POR_OVERRIDE	
	14 PROGRAM_B_0	
	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_24\_100715

Figure 3-24: FLVD1517 Package—XCKU115 and RLD1517 Package—XQKU115 Configuration/Power Diagram

# FFVB1760 (XCKU095)

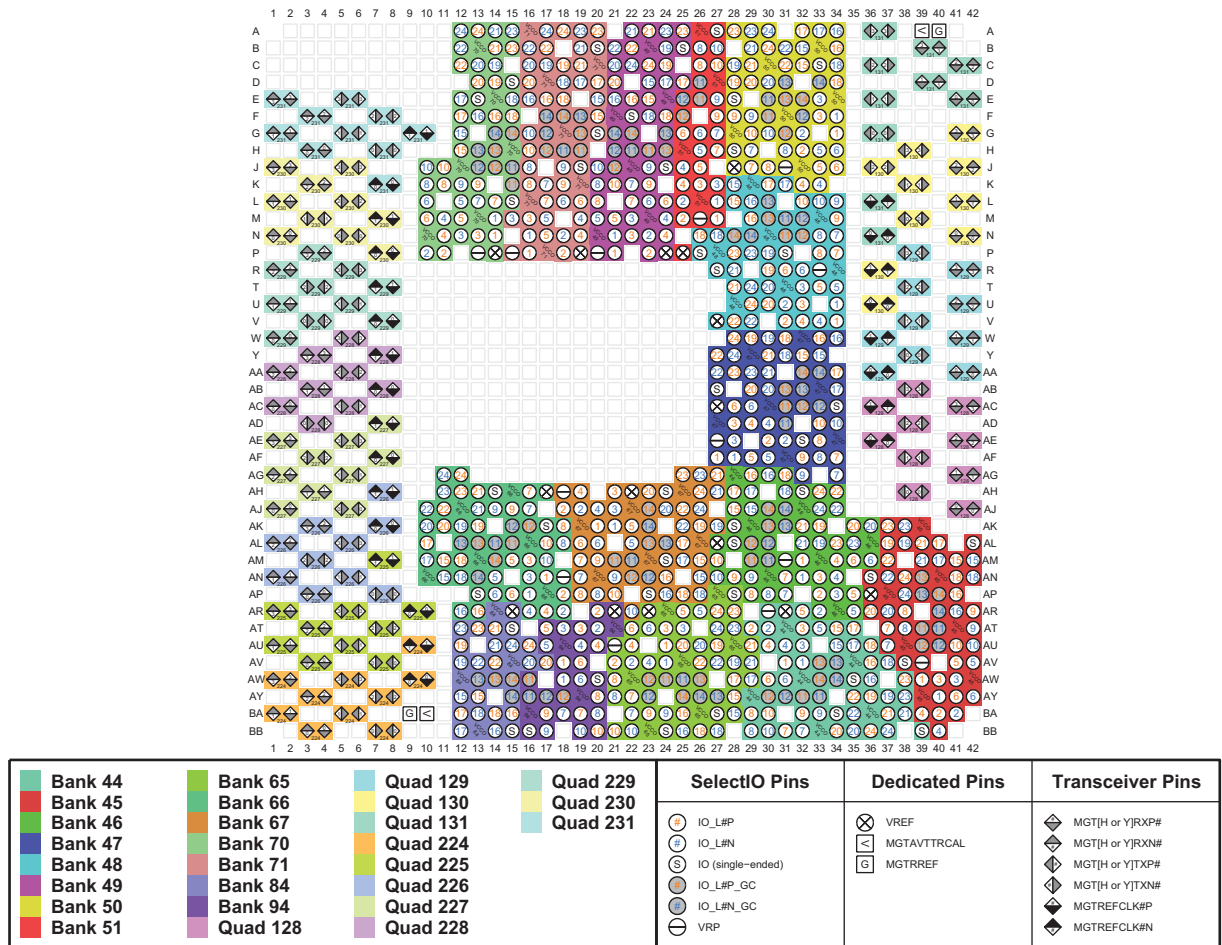


ug575\_c3\_25\_100715

Figure 3-25: FFVB1760 Package—XCKU095 I/O Bank Diagram




# FLVB1760 (XCKU085)

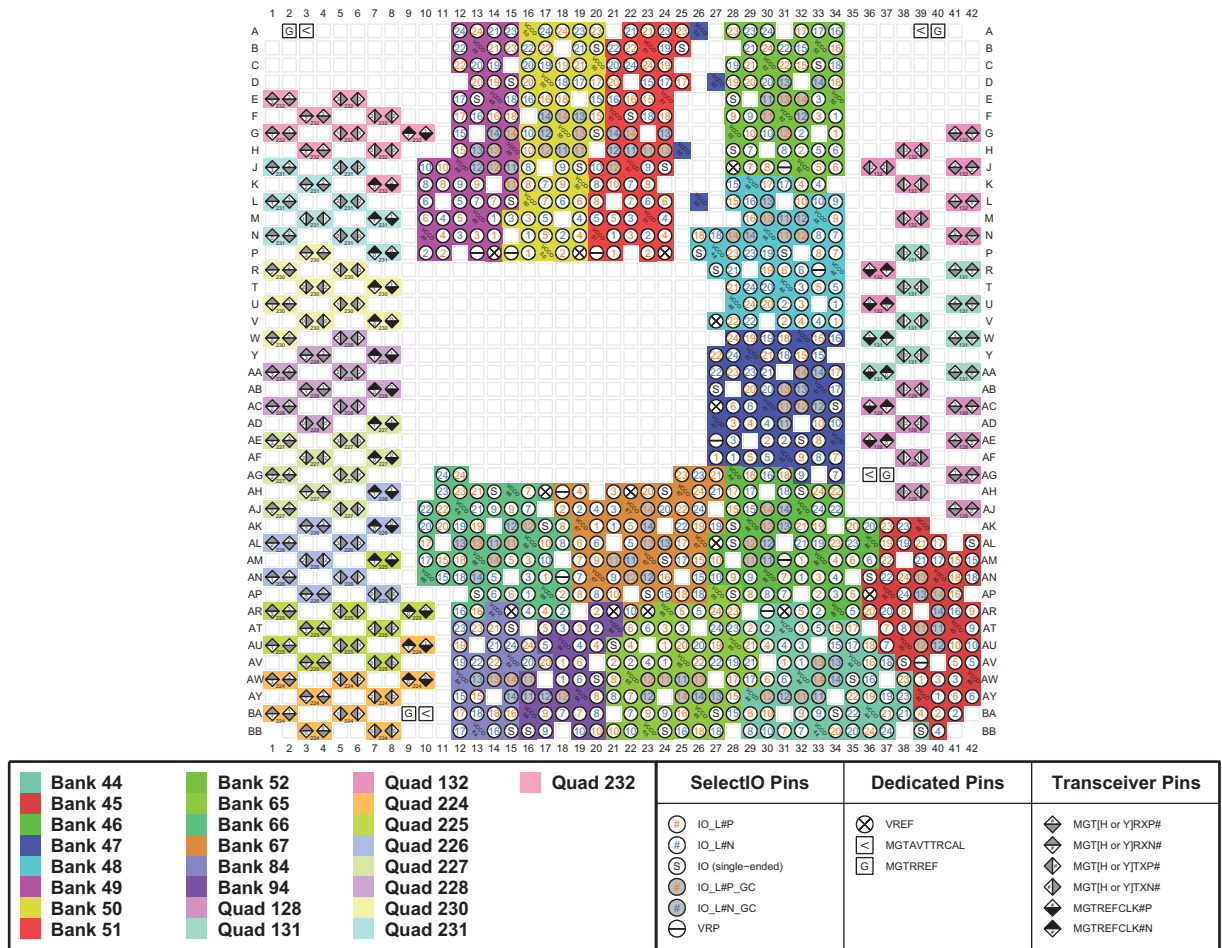

ug575\_c3\_27\_100715

Figure 3-27: FLVB1760 Package—XCKU085 I/O Bank Diagram

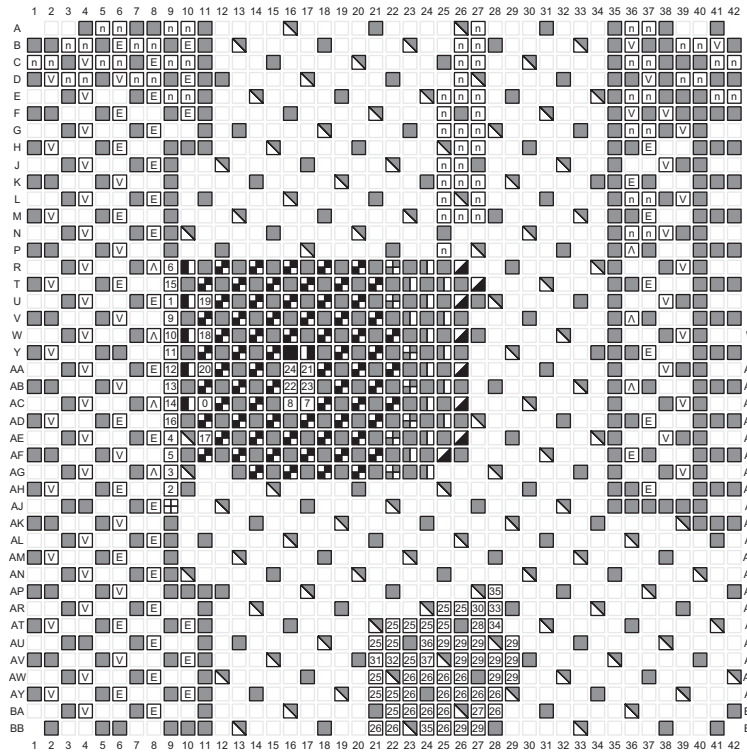


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	CCLK_0	A[16 to 28]
VBATT	CFGBVS_0	A[00 to 15]_D[16 to 31]
VCCAUX_IO	D00_MOSI_0	CSI_ADV_B
VCCAUX	D01_DIN_0	DOUT_CSO_B
VCCINT	D02_0	D[04 to 15]
VCCINT_IO	D03_0	EMCCLK
VCCO_[bank number]	DONE_0	F0E_B
VCCBRAM	DXP	FWE_FCS2_B
VCCADC	DXN	I2C_SCLK
GNDADC	INIT_B_0	I2C_SDA
NC	M0_0	PERSTN[0 to 1]
MGTAVCC_[R or L]	M1_0	RS0
MGTAVTT_[R or L]	M2_0	RS1
MGTVCCAUX_[R or L]	POR_OVERRIDE	
	PROGRAM_B_0	
	PUDC_B_0	
	RDWR_FCS_B_0	
	TCK_0	
	TDI_0	
	TDO_0	
	TMS_0	
	VP	
	VN	
	VREFP	
	VREFN	

ug575\_c3\_28\_100715

Figure 3-28: FLVB1760 Package—XCKU085 Configuration/Power Diagram




# FLVB1760 (XCKU115)

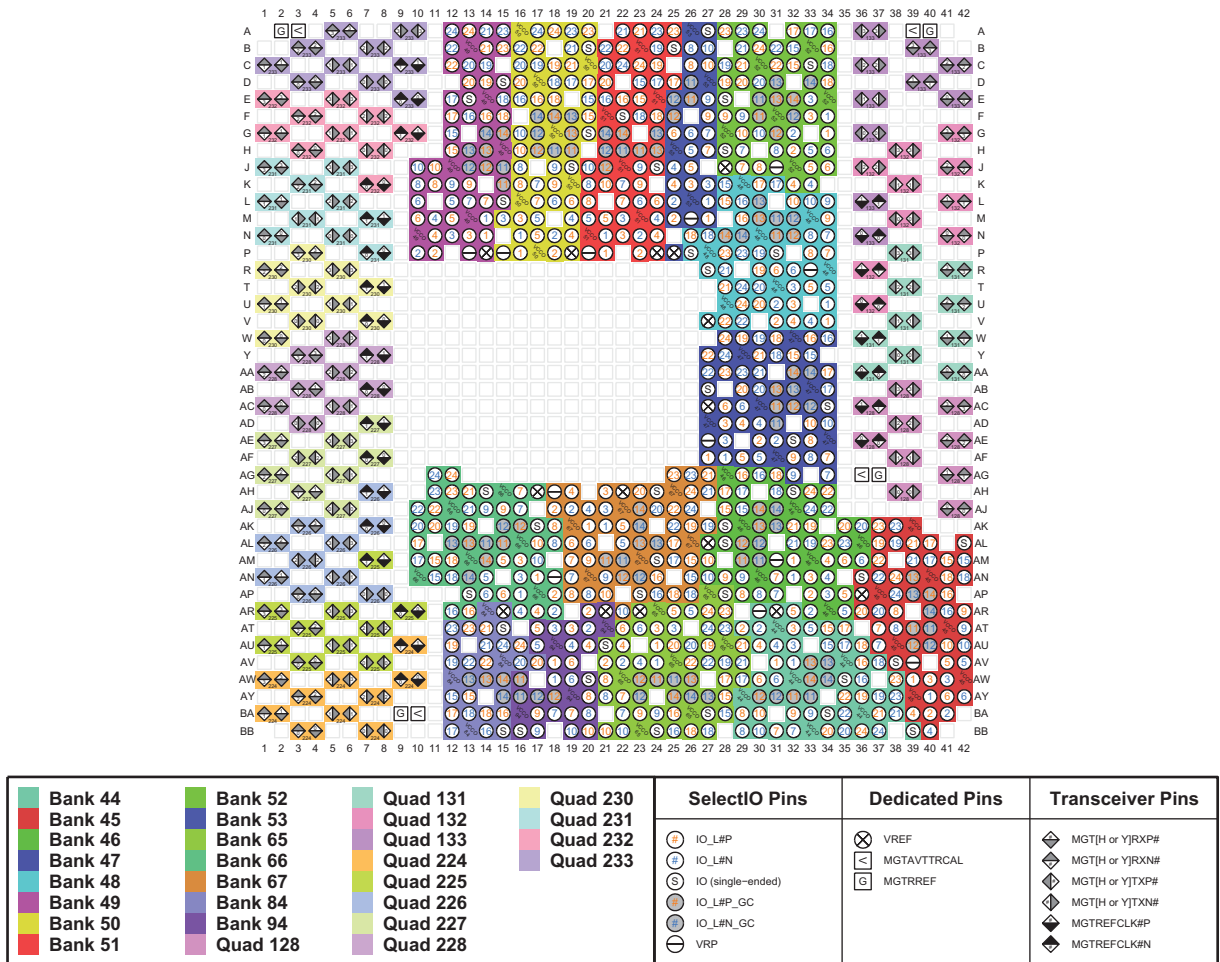

ug575\_c3\_29\_100715


Figure 3-29: FLVB1760 Package—XCKU115 I/O Bank Diagram

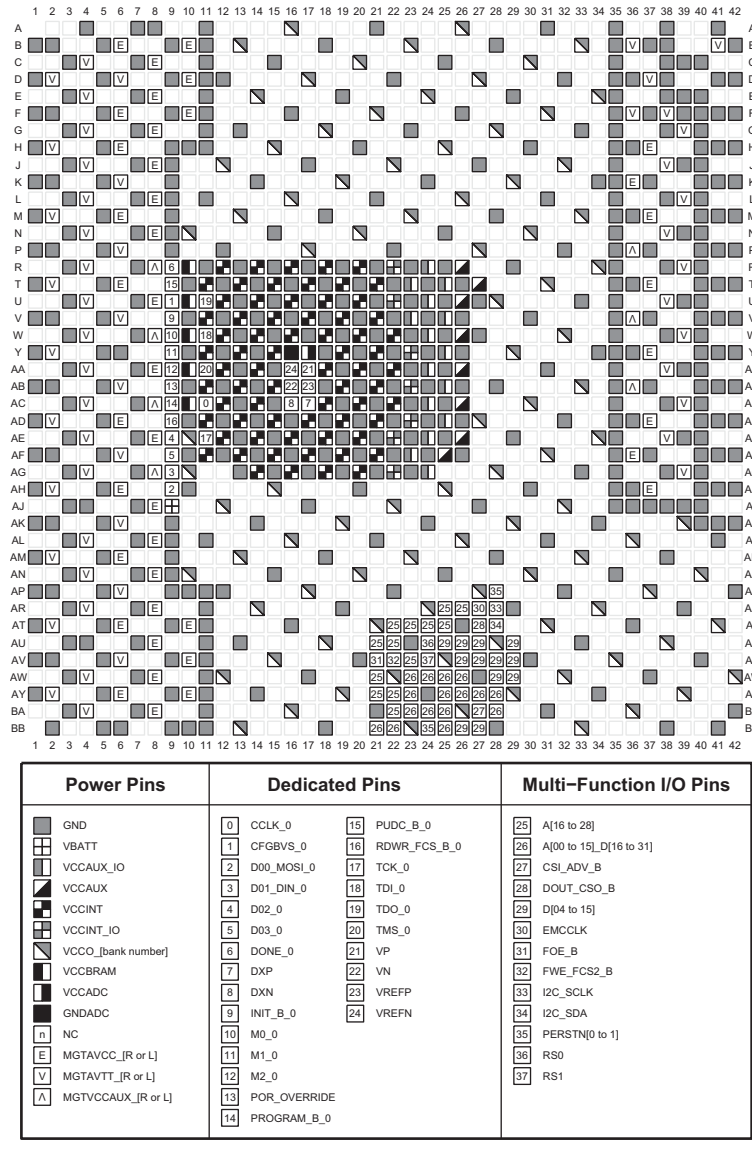

ug575\_c3\_30\_100715


Figure 3-30: FLVB1760 Package—XCKU115 Configuration/Power Diagram

# FLVD1924 (XCKU115)

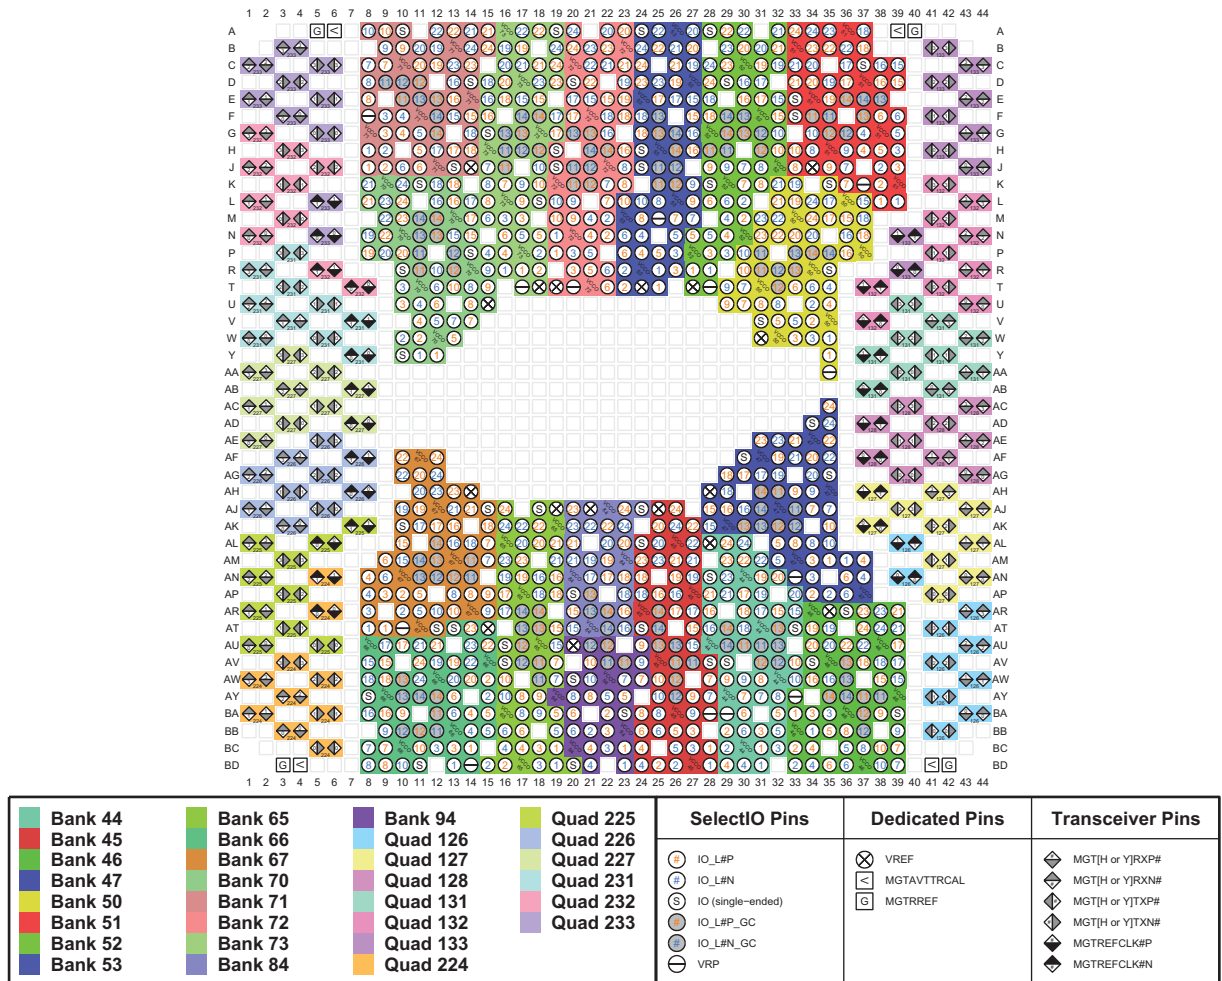

ug575\_c3\_31\_100715

Figure 3-31: FLVD1924 Package—XCKU115 I/O Bank Diagram

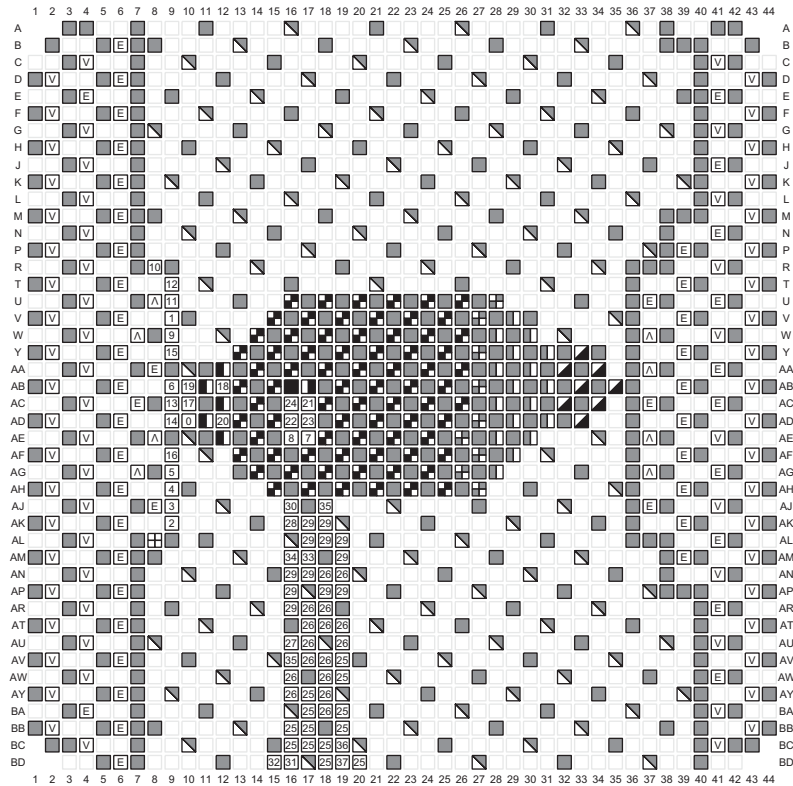


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBAT	1 CFGBVS_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	2 D00_MOSI_0	27 CSI_ADV_B
VCCAUX	3 D01_DIN_0	28 DOUT_CSO_B
VCCINT	4 D02_0	29 D[04 to 15]
VCCINT_IO	5 D03_0	30 EMCCLK
VCCO_[bank number]	6 DONE_0	31 FOE_B
VCCBRAM	7 DXP	32 FWE_FCS2_B
VCCADC	8 DXN	33 I2C_SCLK
GNDADC	9 INIT_B_0	34 I2C_SDA
NC	10 M0_0	35 PERSTN[0 to 1]
MGTAVCC_[R or L]	11 M1_0	36 RSO
MGTAVTT_[R or L]	12 M2_0	37 RS1
MGTVCCAUX_[R or L]	13 POR_OVERRIDE	
	14 PROGRAM_B_0	
	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_32\_100715


Figure 3-32: FLVD1924 Package—XCKU115 Configuration/Power Diagram

# FLVF1924 (XCKU085)

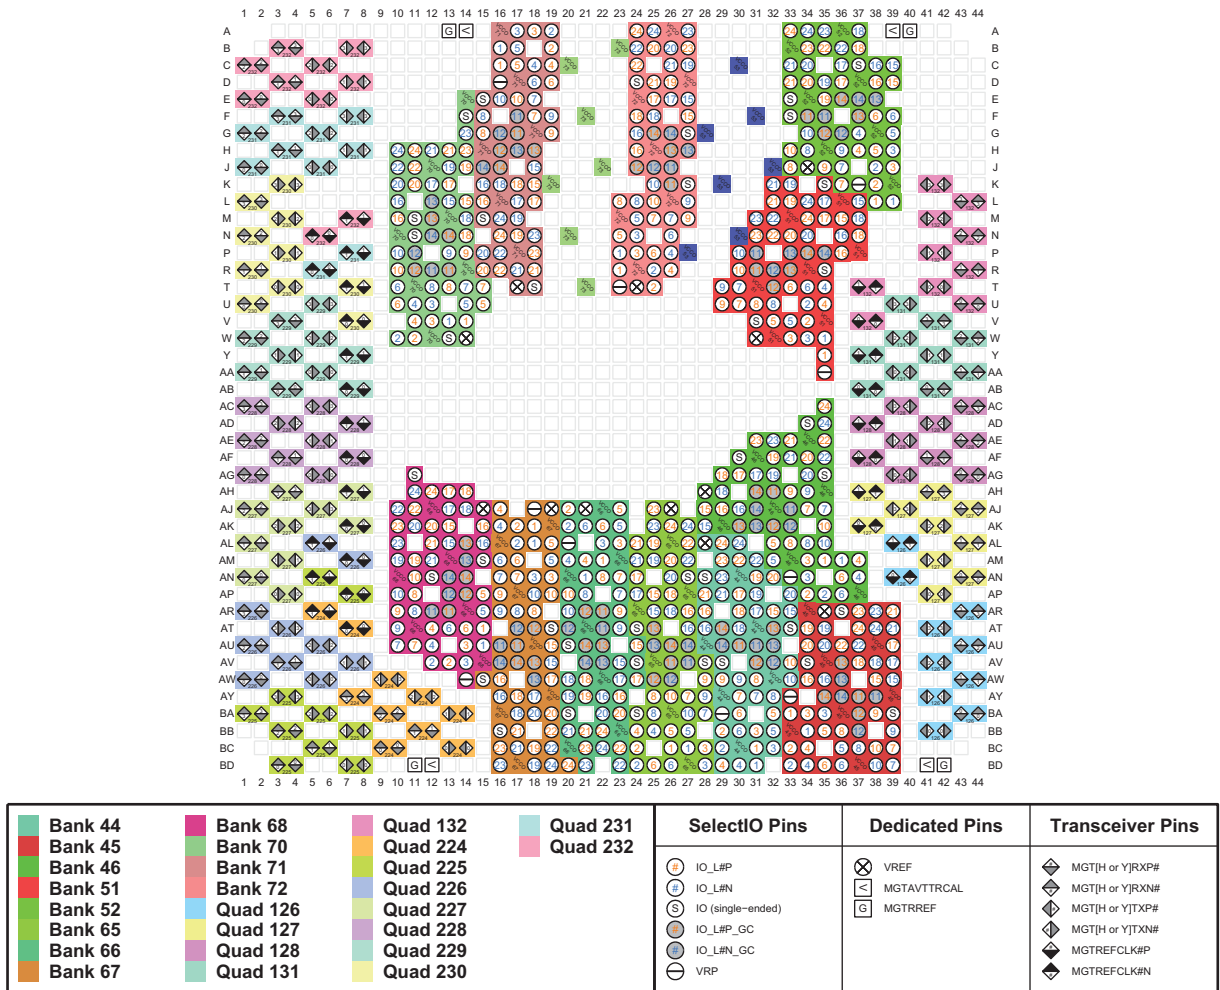

ug575\_c3\_33\_100715

Figure 3-33: FLVF1924 Package—XCKU085 I/O Bank Diagram

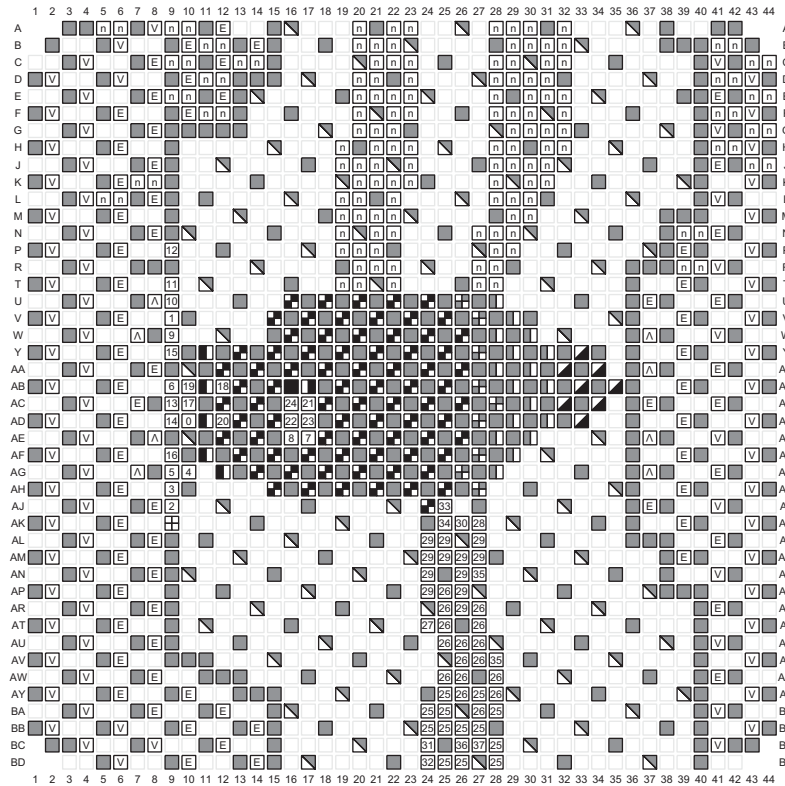


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	1 CFGBVS_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	2 D00_MOSI_0	27 CSI_ADV_B
VCCAUX	3 D01_DIN_0	28 DOUT_CSO_B
VCCINT	4 D02_0	29 D[04 to 15]
VCCINT_IO	5 D03_0	30 EMCLK
VCCO_[bank number]	6 DONE_0	31 FOE_B
VCCBRAM	7 DXP	32 FWE_FCS2_B
VCCADC	8 DXN	33 I2C_SCLK
GNDADC	9 INIT_B_0	34 I2C_SDA
NC	10 M0_0	35 PERSTN[0 to 1]
MGTAVCC_[R or L]	11 M1_0	36 RSO
MGTAVTT_[R or L]	12 M2_0	37 RS1
MGTVCCAUX_[R or L]	13 POR_OVERRIDE	
	14 PROGRAM_B_0	
	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFF	
	24 VREFN	

ug575\_e3\_34\_100715


Figure 3-34: FLVF1924 Package—XCKU085 Configuration/Power Diagram

# FLVF1924 (XCKU115) and RLF1924 (XQKU115)

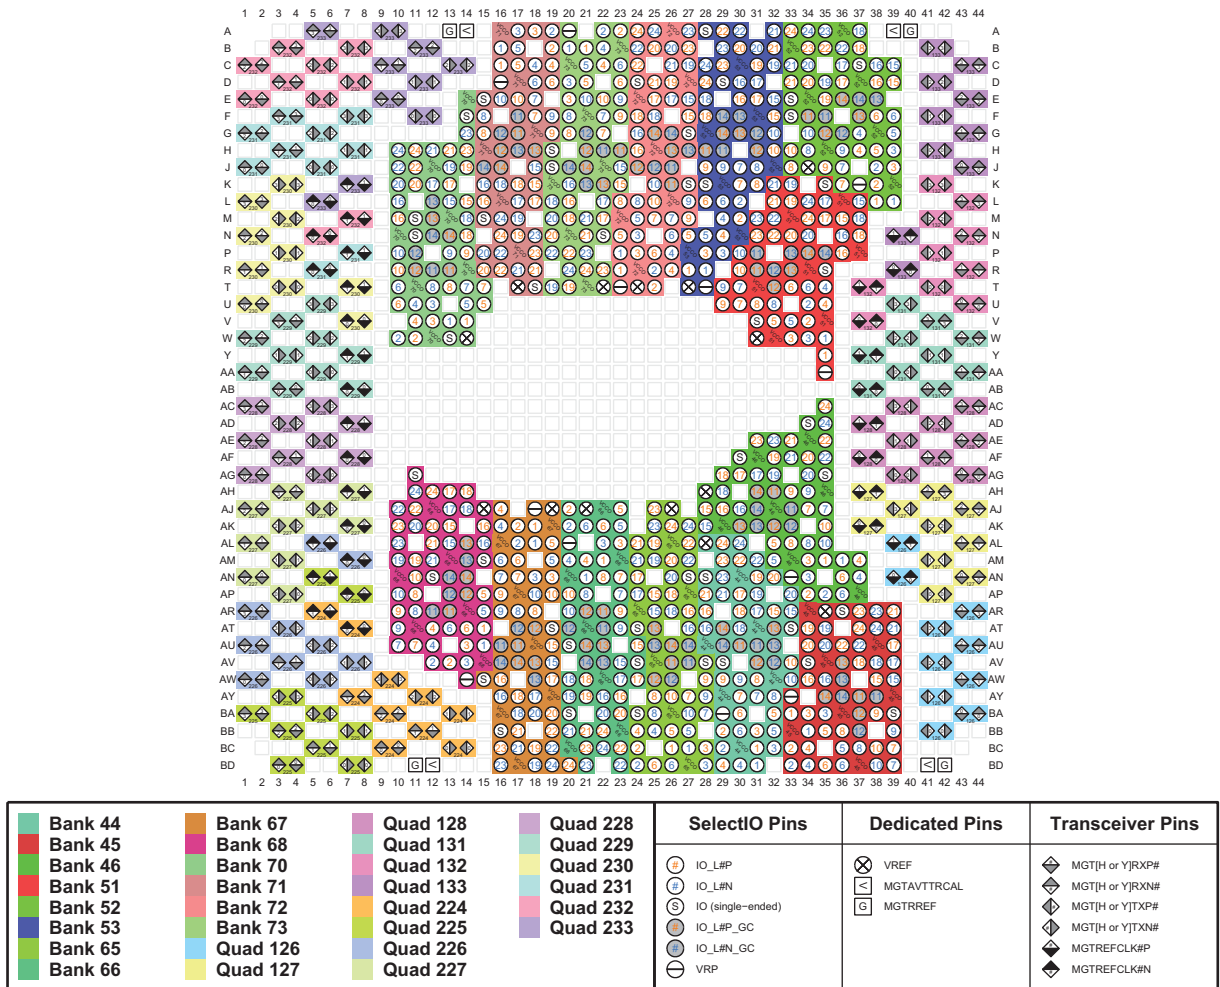

ug575\_c3\_35\_100715

Figure 3-35: FLVF1924 Package—XCKU115 and RLF1924 Package—XQKU115 I/O Bank Diagram

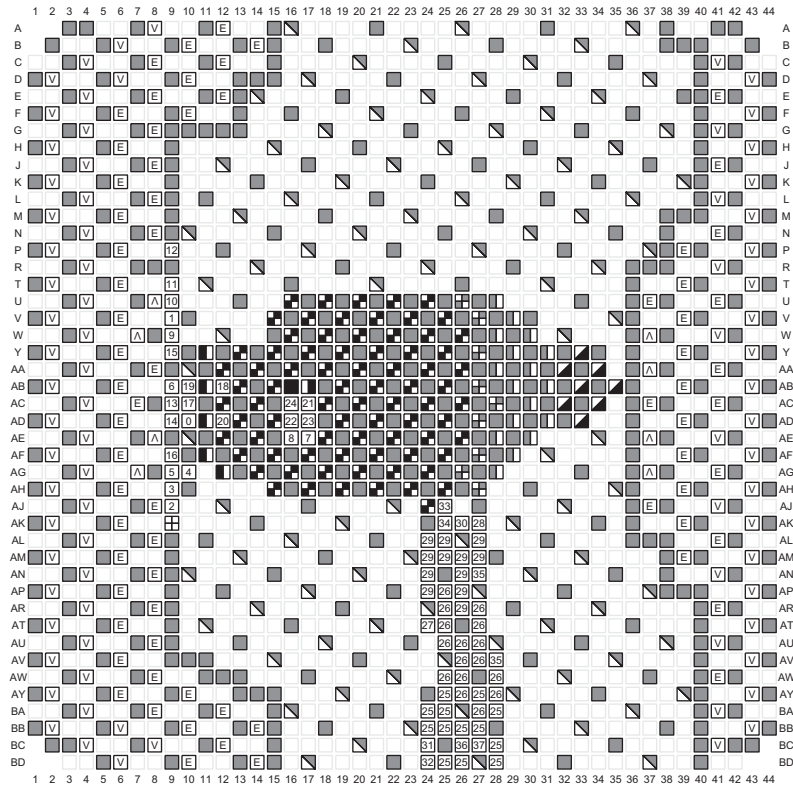

Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	1 CFGBVS_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	2 D00_MOSL_0	27 CSI_ADV_B
VCCAUX	3 D01_DIN_0	28 DOUT_CSO_B
VCCINT	4 D02_0	29 D[4 to 15]
VCCINT_IO	5 D03_0	30 EMCCLK
VCCO_[bank number]	6 DONE_0	31 F0E_B
VCCBRAM	7 DXP	32 FWE_FCS2_B
VCCADC	8 DXN	33 I2C_SCLK
GNDADC	9 INIT_B_0	34 I2C_SDA
NC	10 M0_0	35 PERSTN[0 to 1]
MGTAVCC_[R or L]	11 M1_0	36 RS0
MGTAVTT_[R or L]	12 M2_0	37 RS1
MGTVCCAUX_[R or L]	13 POR_OVERRIDE	
	14 PROGRAM_B_0	
	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	
	25 A[16 to 28]	
	26 A[00 to 15]_D[16 to 31]	
	27 CSI_ADV_B	
	28 DOUT_CSO_B	
	29 D[4 to 15]	
	30 EMCCLK	
	31 F0E_B	
	32 FWE_FCS2_B	
	33 I2C_SCLK	
	34 I2C_SDA	
	35 PERSTN[0 to 1]	
	36 RS0	
	37 RS1	

ug575\_c3\_36\_100715

Figure 3-36: FLVF1924 Package—XCKU115 and RLF1924 Package—XQKU115 Configuration/Power Diagram



# FLVA2104 (XCKU115)


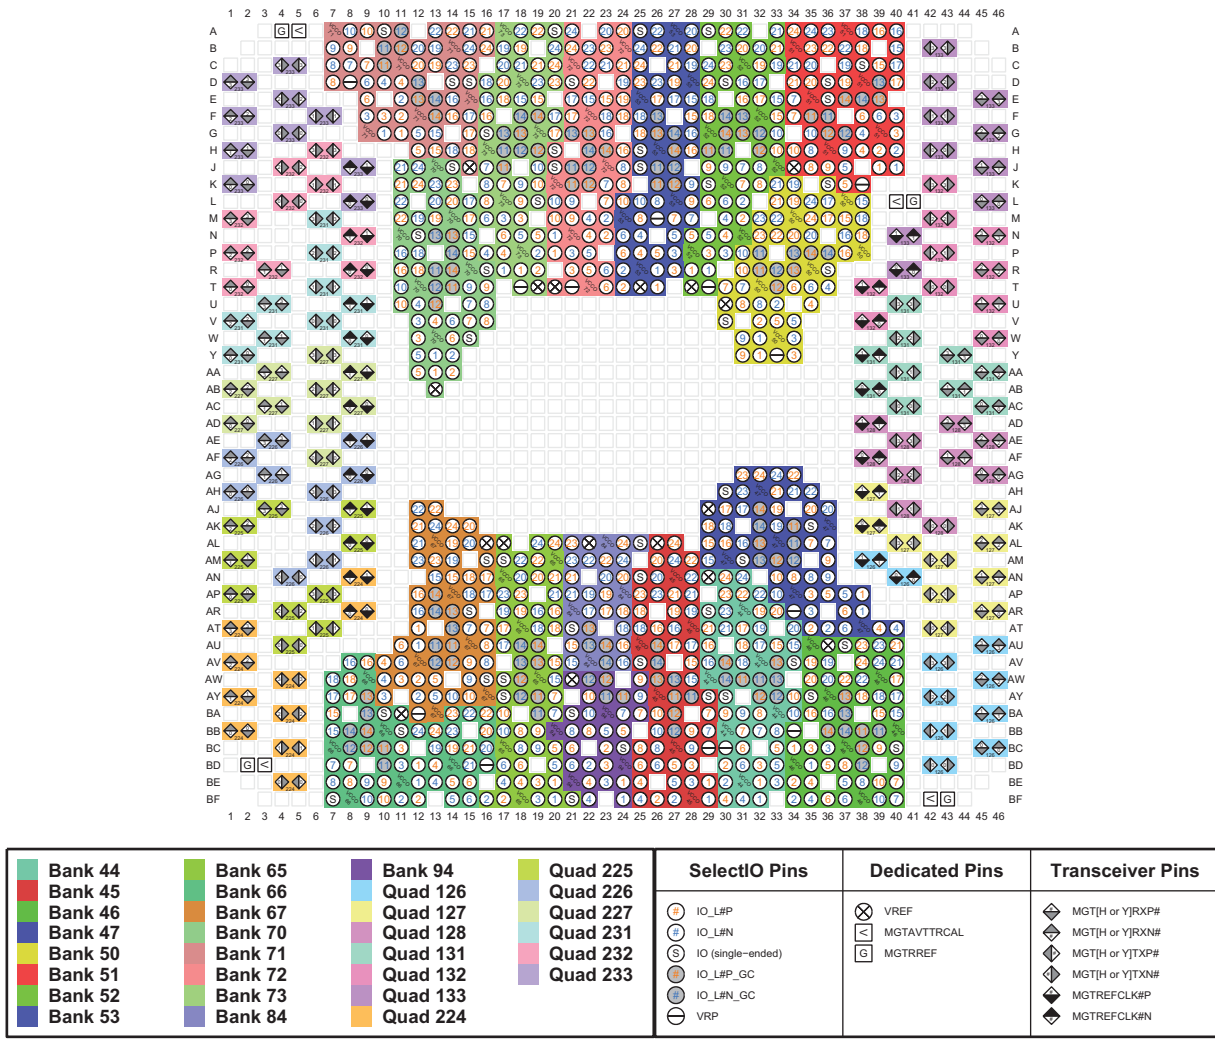



Figure 3-37: FLVA2104 Package—XCKU115 I/O Bank Diagram

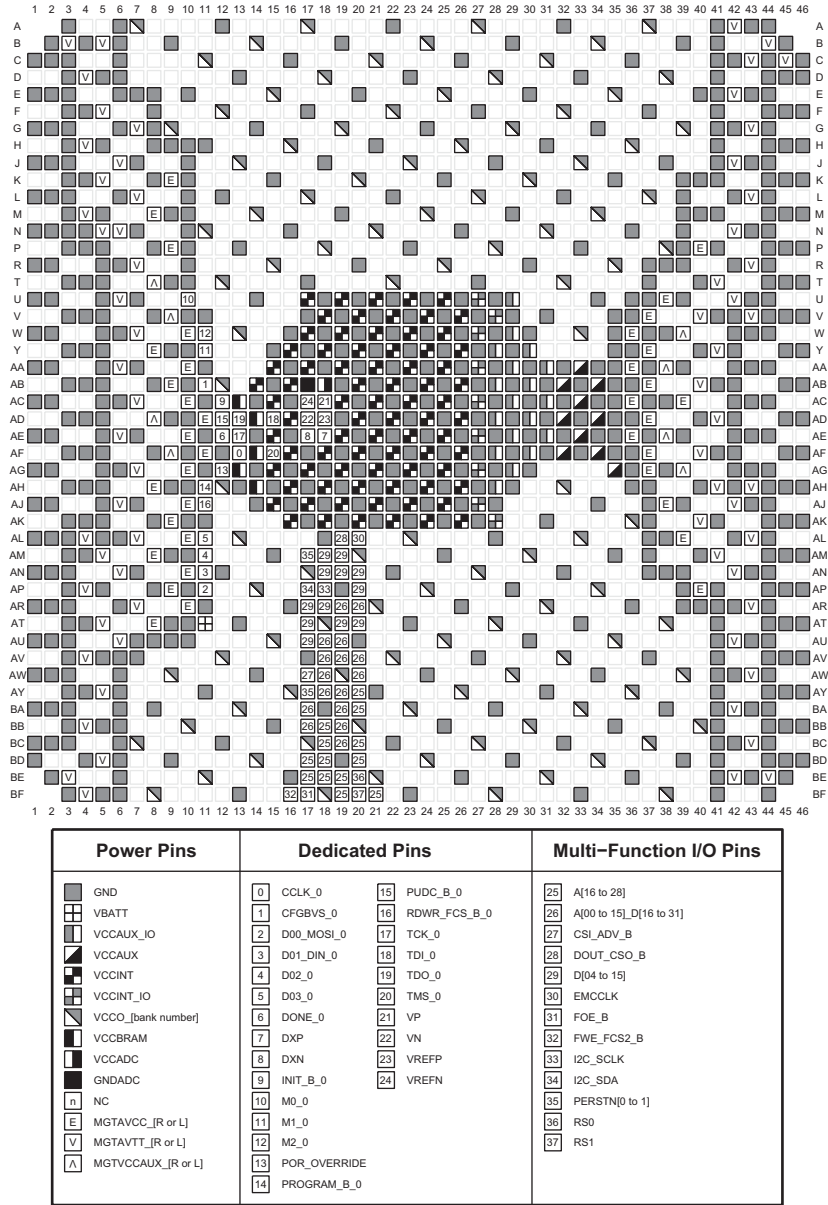

ug575\_c3\_38\_100715


Figure 3-38: FLVA2104 Package—XCKU115 Configuration/Power Diagram

# FFVB2104 (XCKU095)

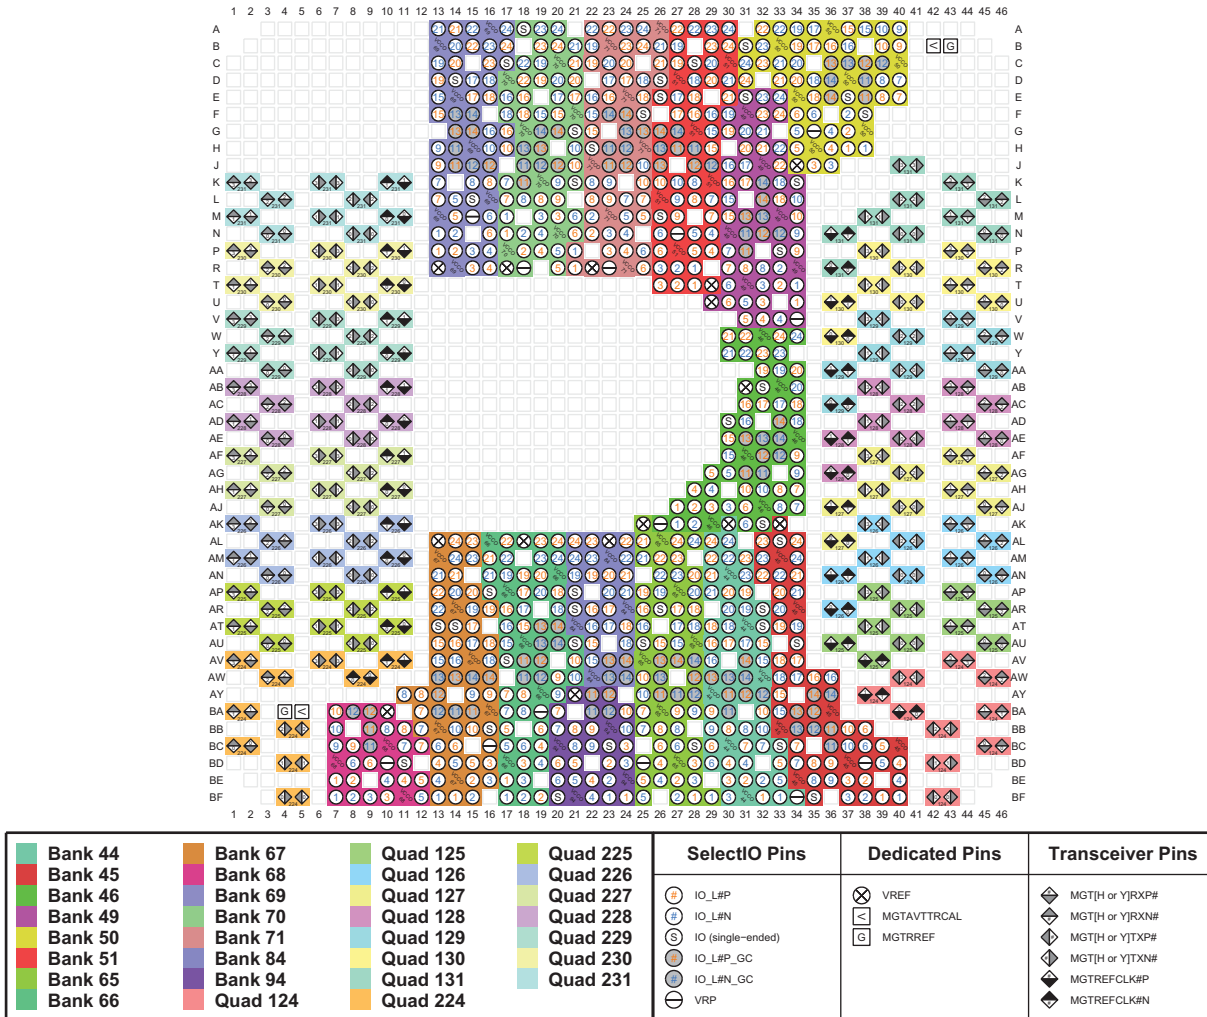

ug575\_c3\_39\_100715

Figure 3-39: FFVB2104 Package—XCKU095 I/O Bank Diagram

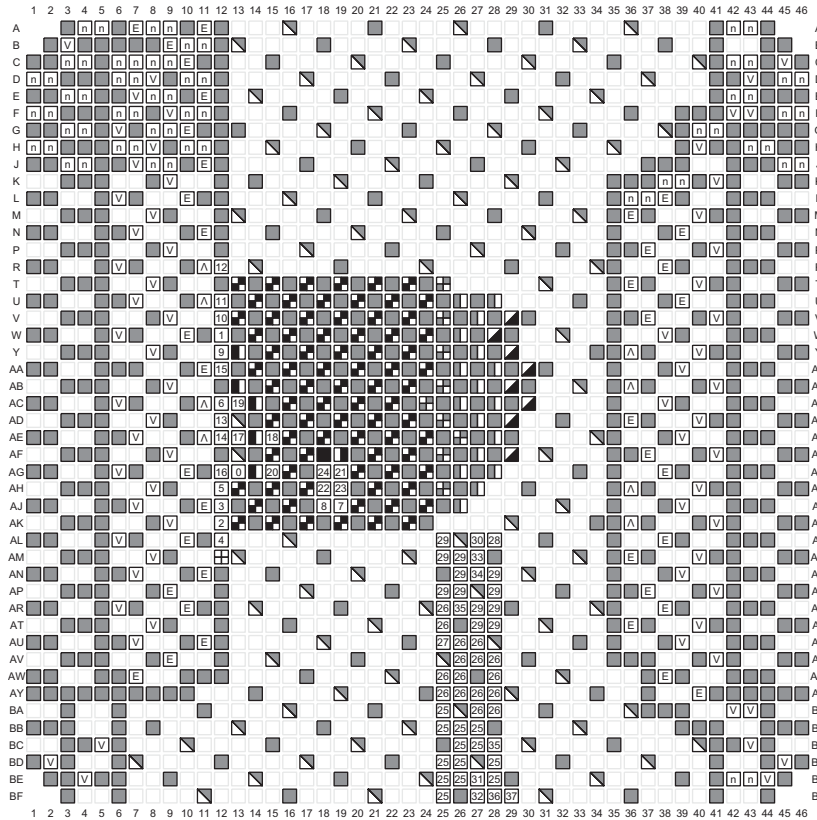


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	1 CFGBVS_0	26 A[0 to 15]_D[16 to 31]
VCCAUX_IO	2 D00_MOSI_0	27 CSL_ADV_B
VCCAUX	3 D01_DIN_0	28 DOUT_CSO_B
VCCINT	4 D02_0	29 D[4 to 15]
VCCINT_IO	5 D03_0	30 EMCCLK
VCCO_[bank number]	6 DONE_0	31 FOE_B
VCCBRAM	7 DXP	32 FWE_FCS2_B
VCCADC	8 DXN	33 I2C_SCLK
GNDADC	9 INIT_B_0	34 I2C_SDA
n NC	10 M0_0	35 PERSTN[0 to 1]
E MGTAVCC_[R or L]	11 M1_0	36 RS0
V MGTAVTT_[R or L]	12 M2_0	37 RS1
A MGTVCCAUX_[R or L]	13 POR_OVERRIDE	
	14 PROGRAM_B_0	
	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_40\_100715


Figure 3-40: FFVB2104 Package—XCKU095 Configuration/Power Diagram

# FLVB2104 (XCKU115)

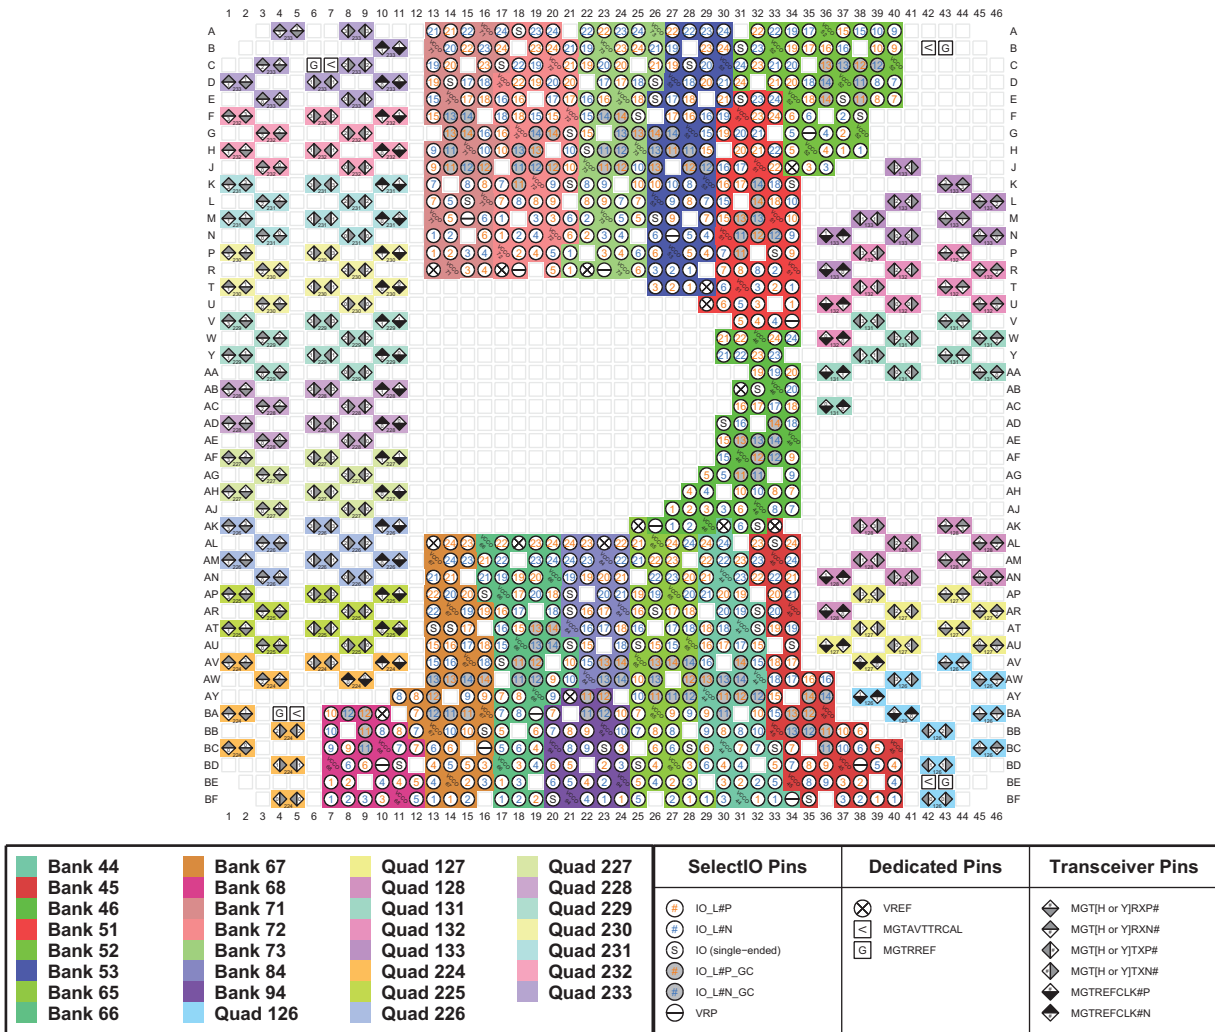

ug575\_c3\_41\_100715

Figure 3-41: FLVB2104 Package—XCKU115 I/O Bank Diagram

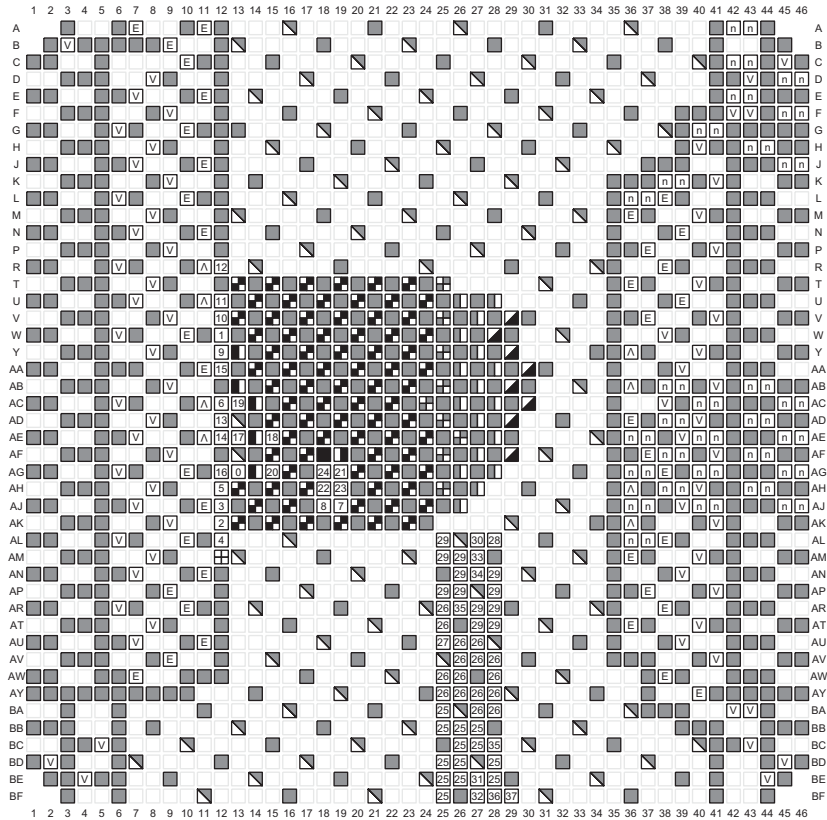


Power Pins	Dedicated Pins	Multi-Function I/O Pins
<ul style="list-style-type: none"> <li> GND</li> <li> VBATT</li> <li> VCCAUX_IO</li> <li> VCCAUX</li> <li> VCCINT</li> <li> VCCINT_IO</li> <li> VCCO_[bank number]</li> <li> VCCBRAM</li> <li> VCCADC</li> <li> GNDADC</li> <li> NC</li> <li> MGTAVCC_[R or L]</li> <li> MGTAVTT_[R or L]</li> <li> MGTVCCAUX_[R or L]</li> </ul>	<ul style="list-style-type: none"> <li> 0 CCLK_0</li> <li> 1 CFGBVS_0</li> <li> 2 D00_MOSI_0</li> <li> 3 D01_DIN_0</li> <li> 4 D02_0</li> <li> 5 D03_0</li> <li> 6 DONE_0</li> <li> 7 DXP</li> <li> 8 DXN</li> <li> 9 INIT_B_0</li> <li> 10 M0_0</li> <li> 11 M1_0</li> <li> 12 M2_0</li> <li> 13 POR_OVERRIDE</li> <li> 14 PROGRAM_B_0</li> <li> 15 PUDC_B_0</li> <li> 16 RDWR_FCS_B_0</li> <li> 17 TCK_0</li> <li> 18 TDI_0</li> <li> 19 TDO_0</li> <li> 20 TMS_0</li> <li> 21 VP</li> <li> 22 VN</li> <li> 23 VREFP</li> <li> 24 VREFN</li> </ul>	<ul style="list-style-type: none"> <li> 25 A[16 to 28]</li> <li> 26 A[00 to 15]_D[16 to 31]</li> <li> 27 CSI_ADV_B</li> <li> 28 DOUT_CSO_B</li> <li> 29 D[04 to 15]</li> <li> 30 EMCCLK</li> <li> 31 FOE_B</li> <li> 32 FWE_FCS2_B</li> <li> 33 I2C_SCLK</li> <li> 34 I2C_SDA</li> <li> 35 PERSTN[0 to 1]</li> <li> 36 RSO</li> <li> 37 RS1</li> </ul>

ug575\_c3\_42\_100715


Figure 3-42: FLVB2104 Package—XCKU115 Configuration/Power Diagram

# FFVC1517 (XCVU065)

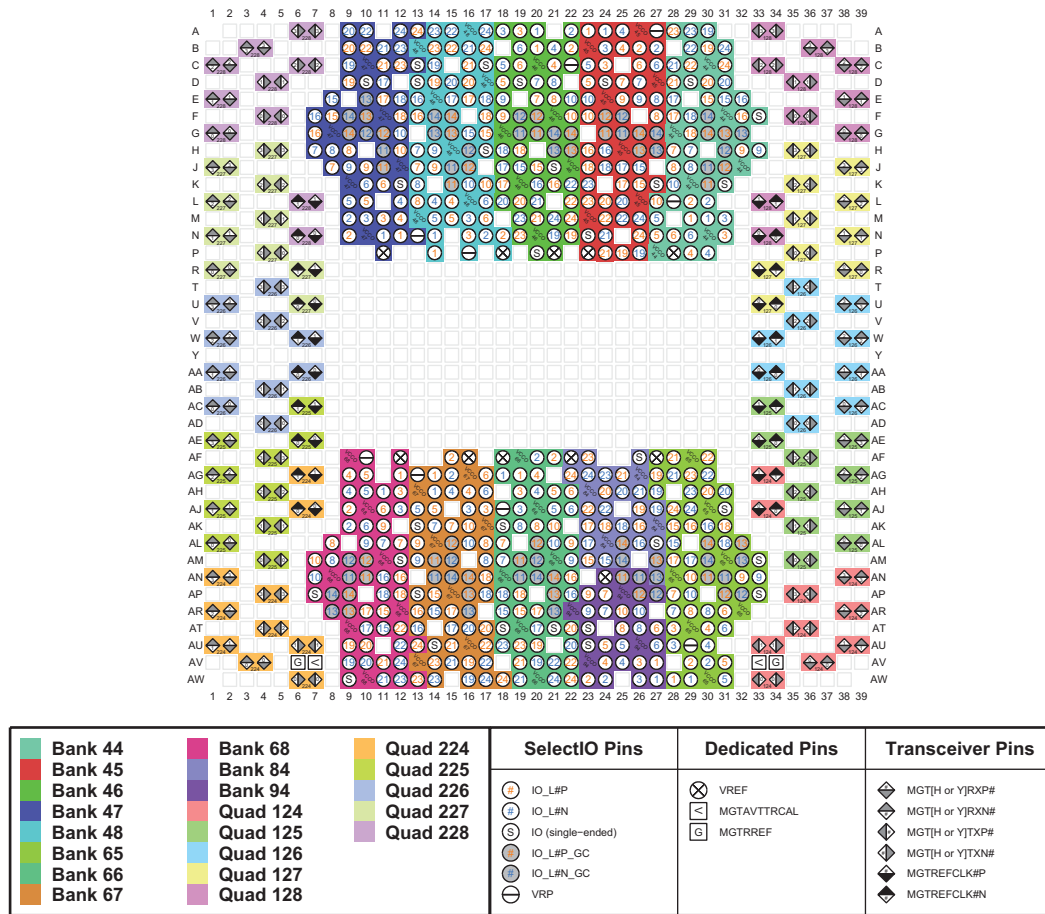

ug575\_c3\_43\_100815

Figure 3-43: FFVC1517 Package—XCVU065 I/O Bank Diagram

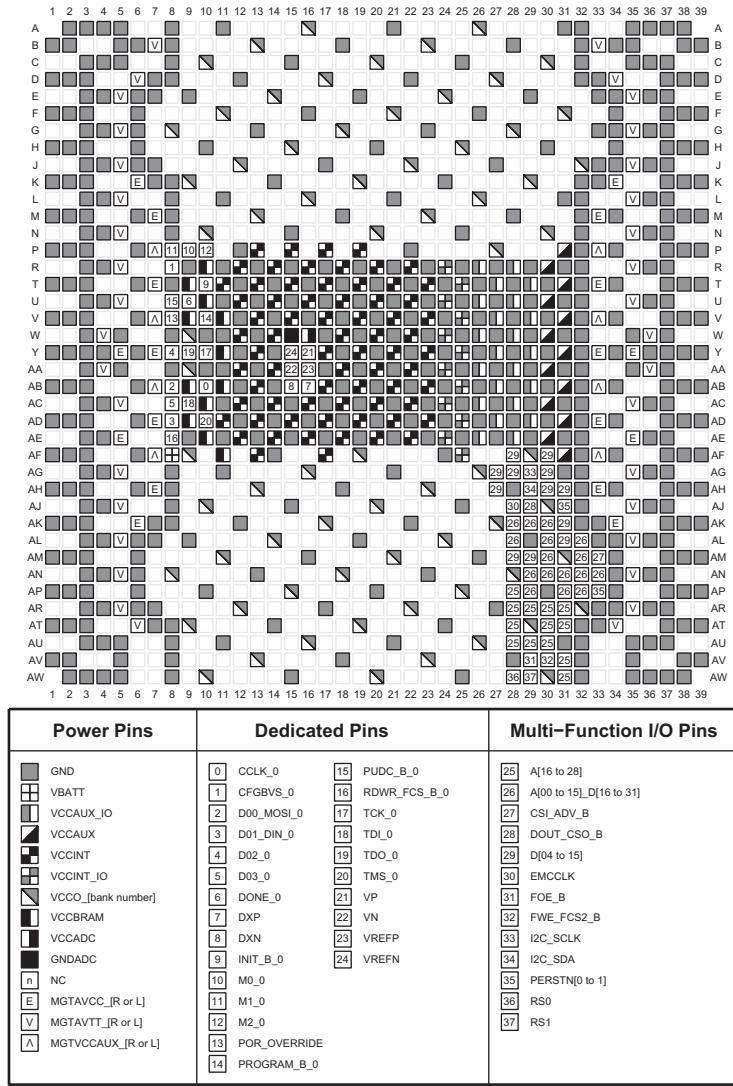


ug575\_c3\_44\_100815

Figure 3-44: FFVC1517 Package—XCVU065 Configuration/Power Diagram




# FFVC1517 (XCVU080 and XCVU095)

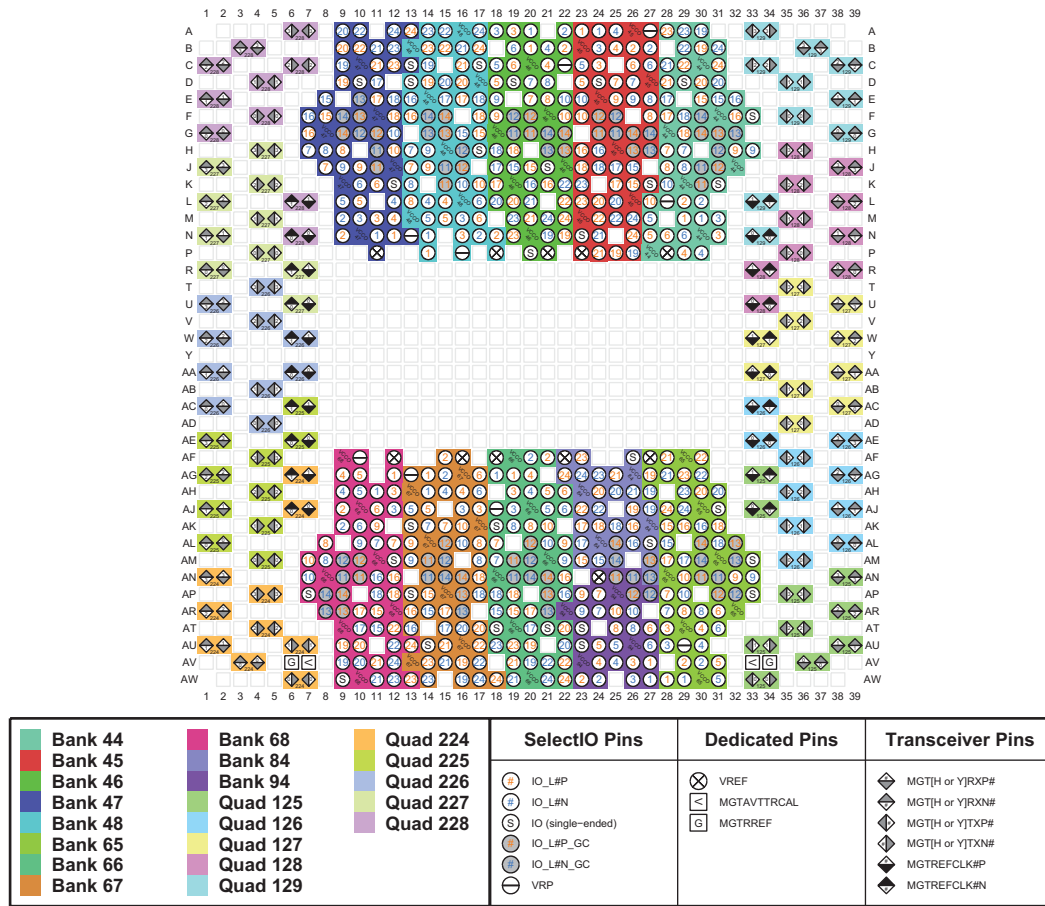

ug575\_c3\_45\_100815


Figure 3-45: FFVC1517 Package—I/O Bank Diagram

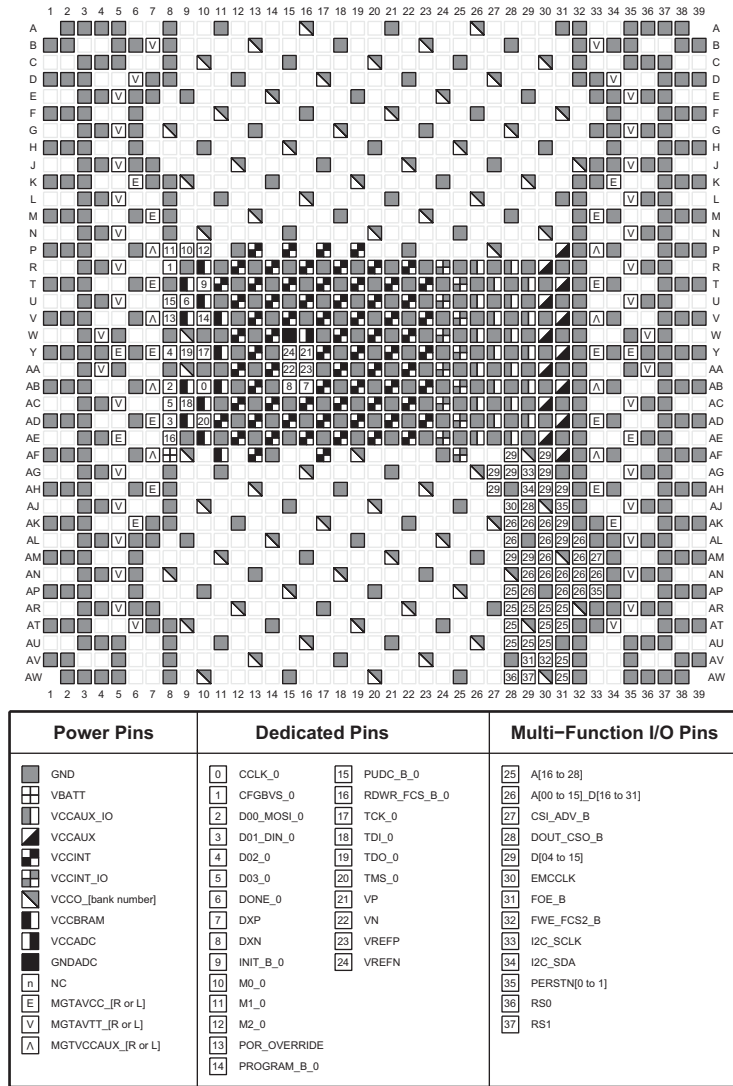

ug575\_c3\_46\_100815


Figure 3-46: FFVC1517 Package—XCVU080 and XCVU095 Configuration/Power Diagram

# FFVD1517 (XCVU080 and XCVU095)

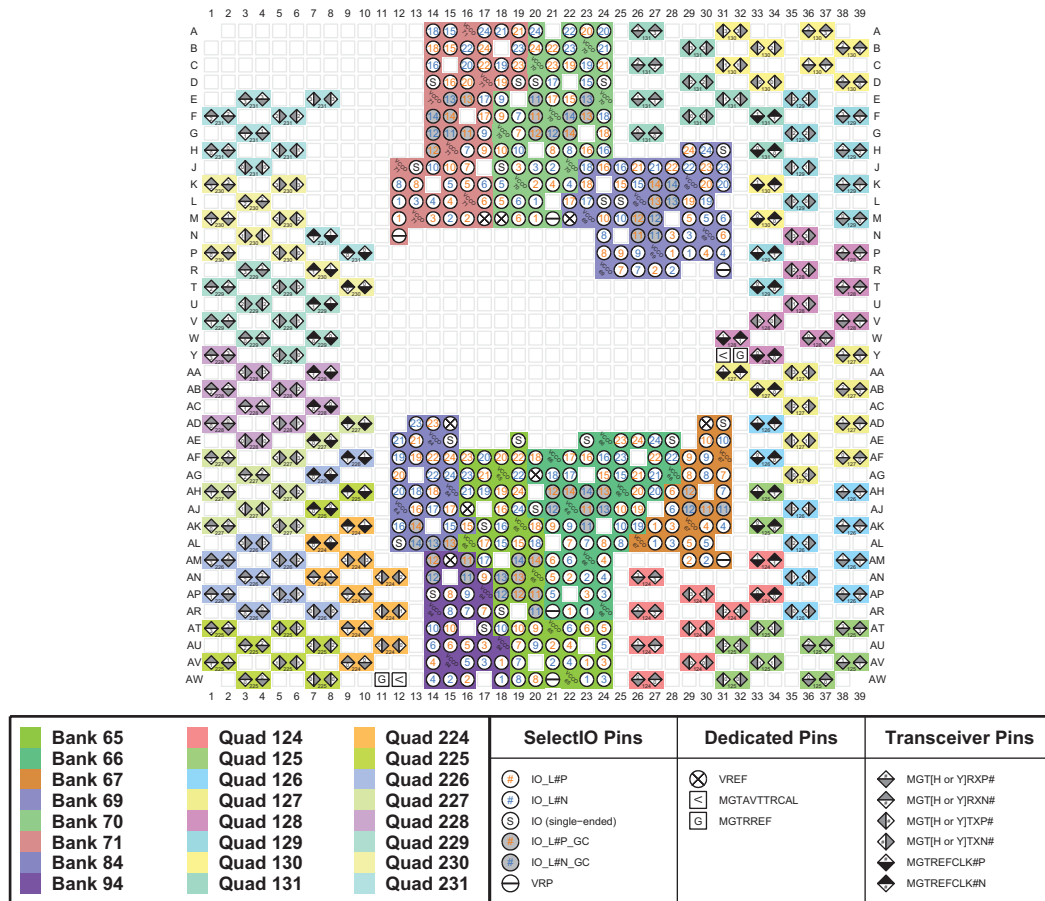

ug575\_c3\_47\_100815

Figure 3-47: FFVD1517 Package—I/O Bank Diagram

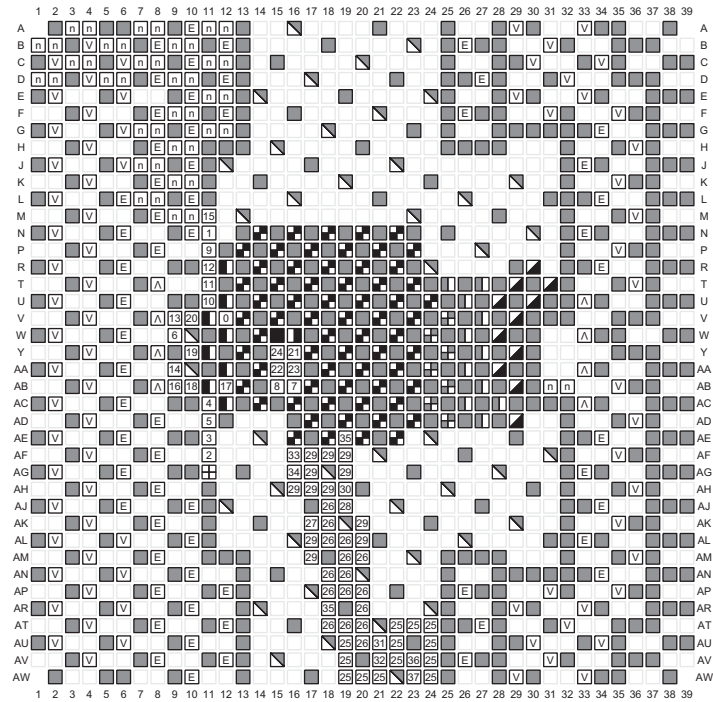


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	1 CFGBVS_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	2 D00_MOSI_0	27 CSI_ADV_B
VCCAUX	3 D01_DIN_0	28 DOUT_CSO_B
VCCINT	4 D02_0	29 D[04 to 15]
VCCINT_IO	5 D03_0	30 EMCCLK
VCCO_[bank number]	6 DONE_0	31 FOE_B
VCCBRAM	7 DXP	32 FWE_FCS2_B
VCCADC	8 DXN	33 I2C_SCLK
GNDADC	9 INIT_B_0	34 I2C_SDA
n NC	10 M0_0	35 PERSTN[0 to 1]
E MGTAVCC_[R or L]	11 M1_0	36 RS0
V MGTAVTT_[R or L]	12 M2_0	37 RS1
A MGTVCCAUX_[R or L]	13 POR_OVERRIDE	
	14 PROGRAM_B_0	
	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_48\_100815

Figure 3-48: FFVD1517 Package—XCVU080 and XCVU095 Configuration/Power Diagram

# FLVD1517 (XCVU125)

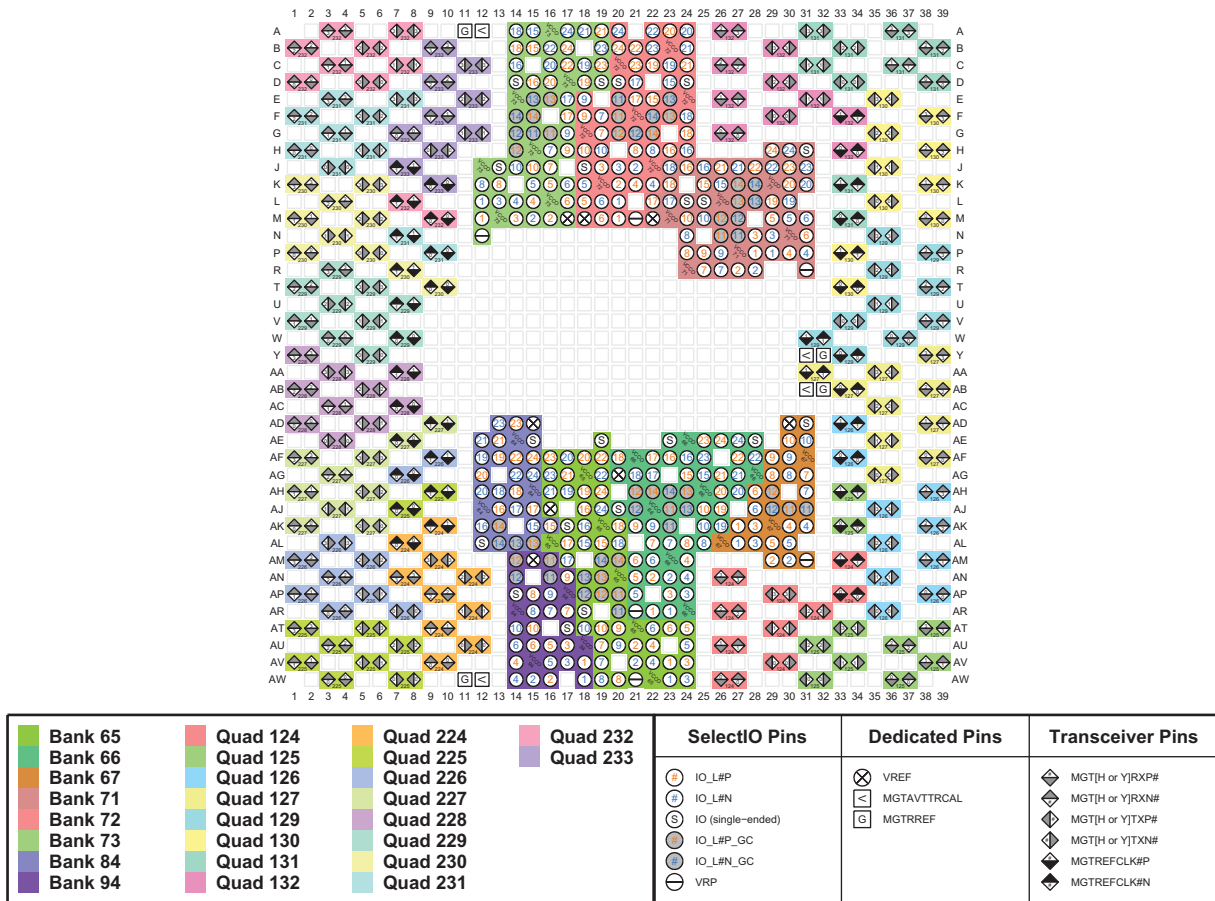

ug575\_c3\_49\_100815

Figure 3-49: FLVD1517 Package—XCVU125 I/O Bank Diagram


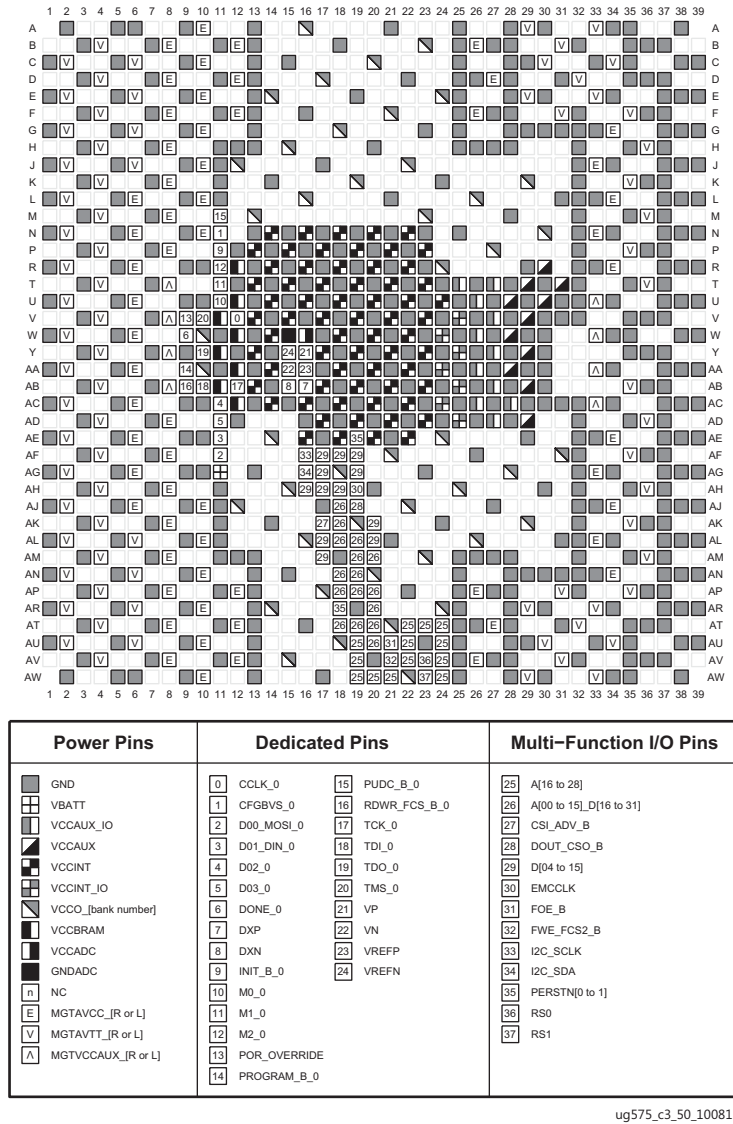


Figure 3-50: FLVD1517 Package—XCVU125 Configuration/Power Diagram

# FFVB1760 (XCVU080 and XCVU095)

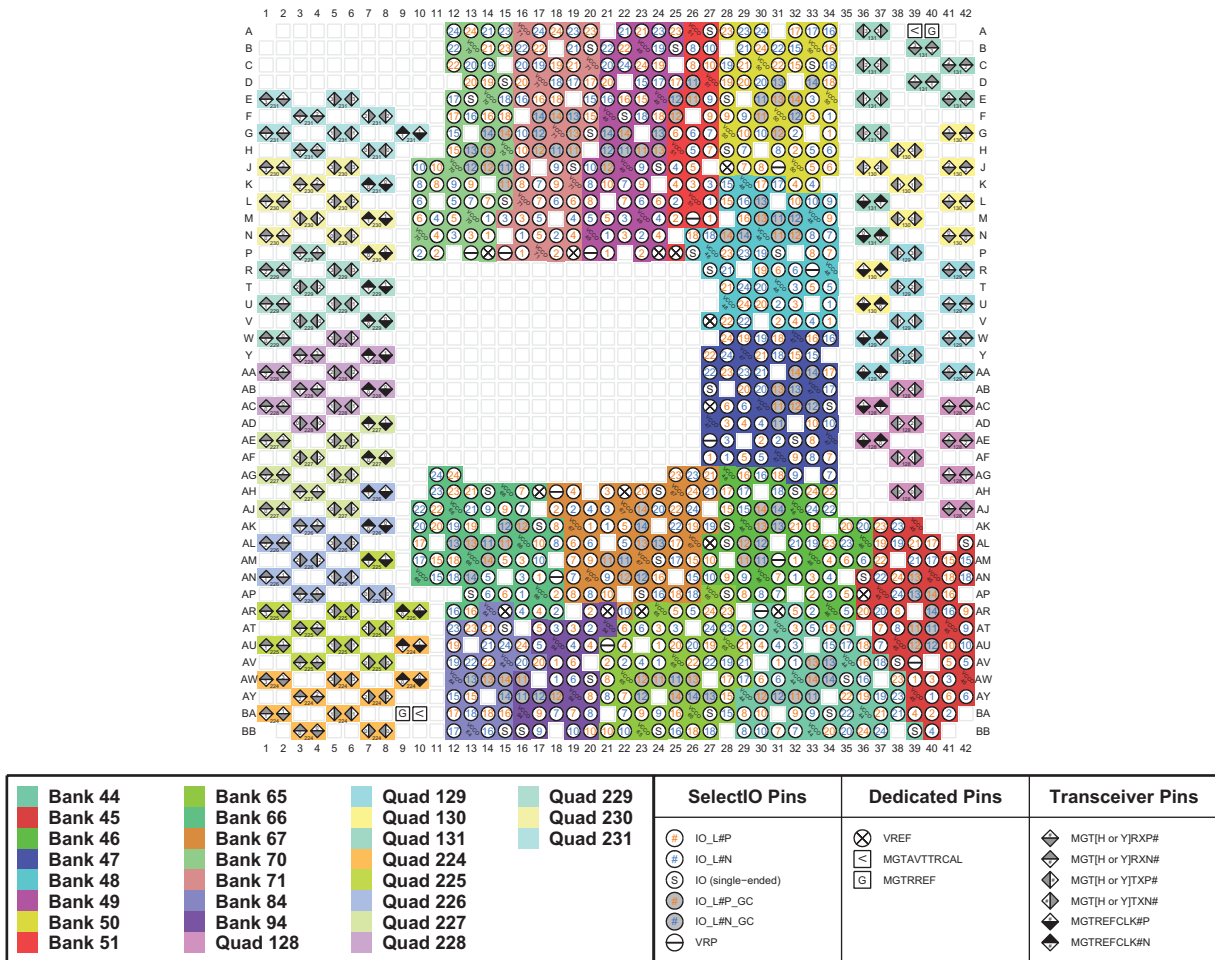

ug575\_c3\_51\_100815

Figure 3-51: FFVB1760 Package—XCVU080 and XCVU095 I/O Bank Diagram


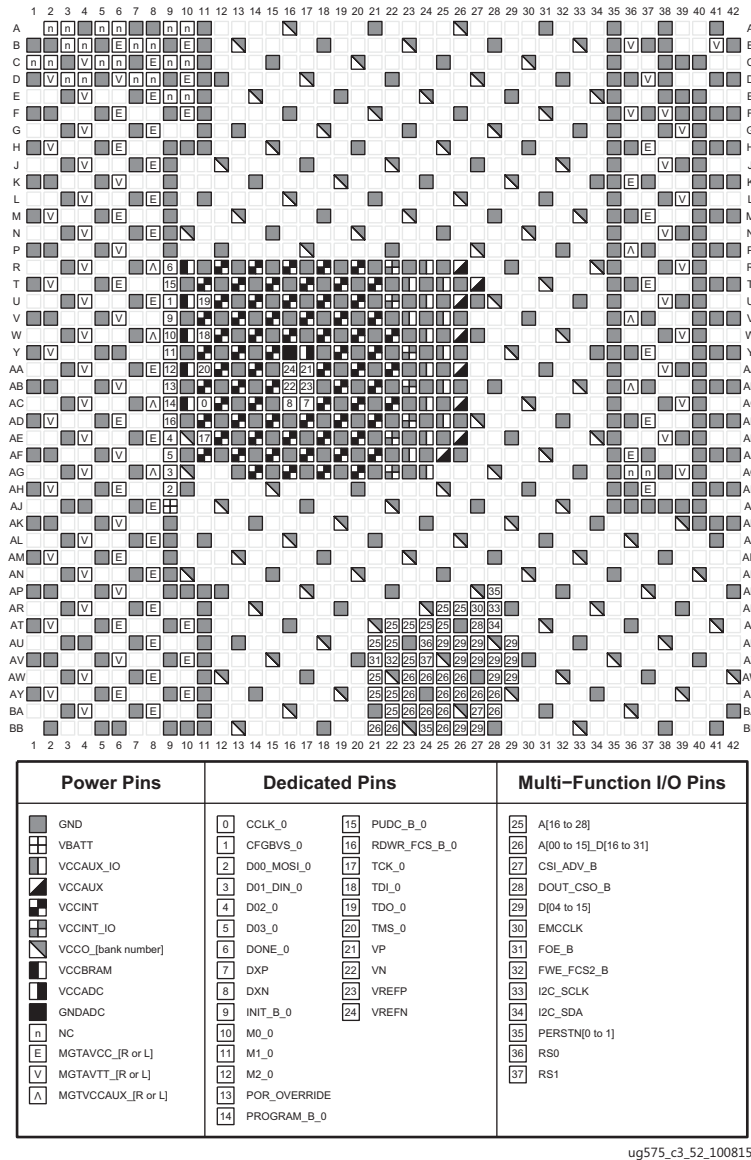


Figure 3-52: FFVB1760 Package—XCVU080 and XCVU095 Configuration/Power Diagram




# FLVB1760 (XCVU125)

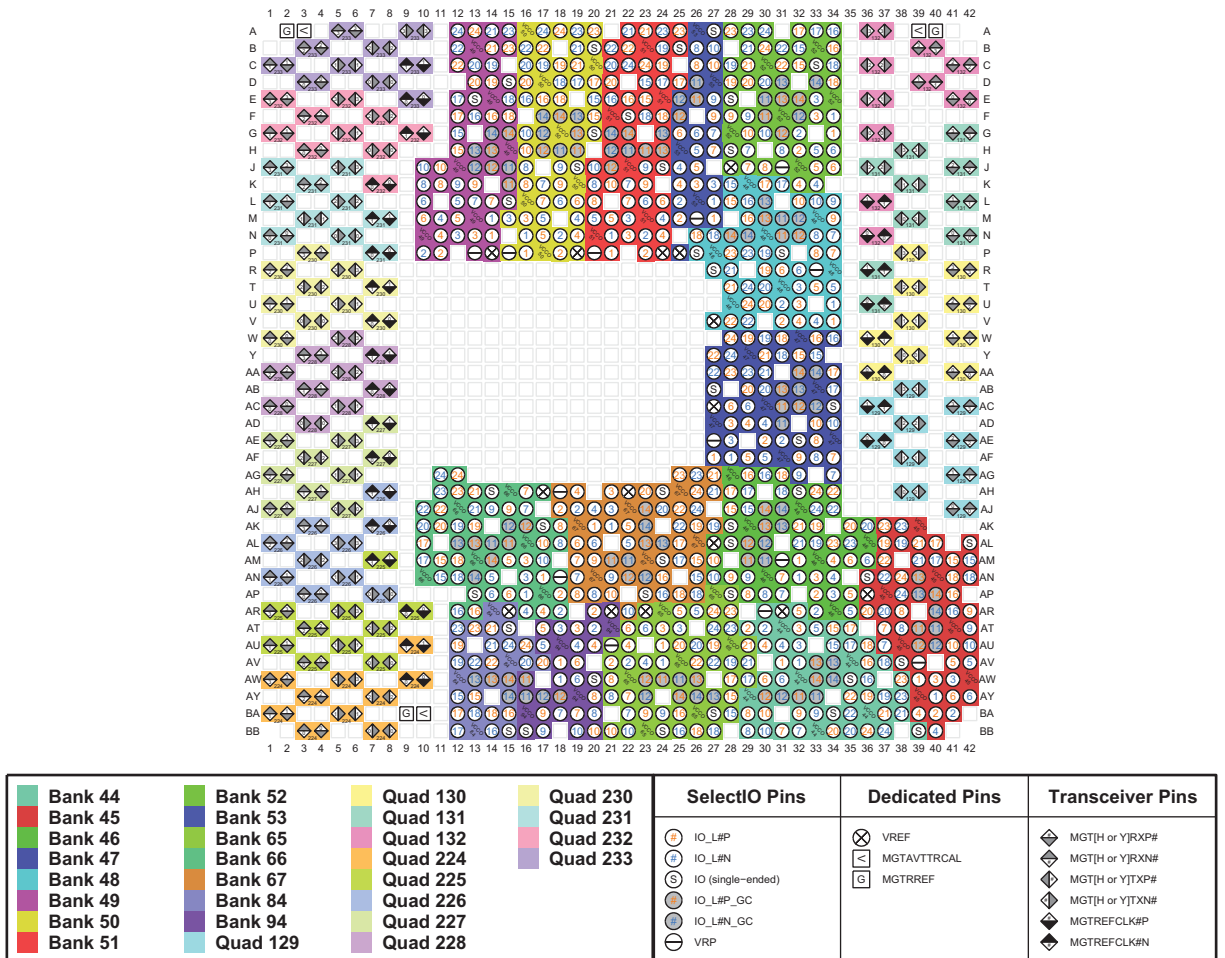

ug575\_c3\_53\_100815

Figure 3-53: FLVB1760 Package—XCVU125 I/O Bank Diagram

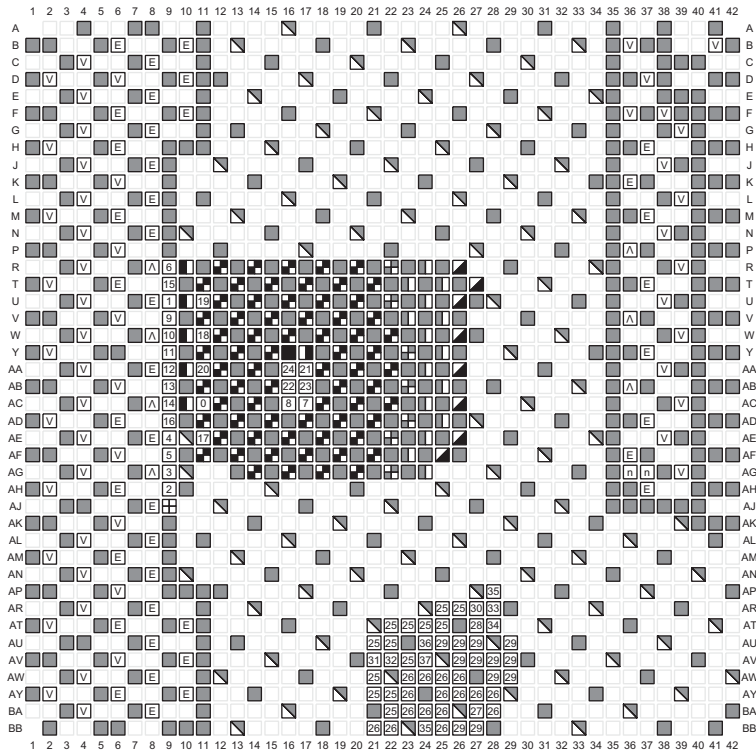


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	1 CFGBVS_0	26 A[0 to 15], D[16 to 31]
VCCAUX_IO	2 D00_MOSI_0	27 CSI_ADV_B
VCCAUX	3 D01_DIN_0	28 DOUT_CSO_B
VCCINT	4 D02_0	29 D[04 to 15]
VCCINT_IO	5 D03_0	30 EMCCLK
VCCO_[bank number]	6 DONE_0	31 F0E_B
VCCBRAM	7 DXP	32 FWE_FCS2_B
VCCADC	8 DXN	33 I2C_SCLK
GNDADC	9 INIT_B_0	34 I2C_SDA
NC	10 M0_0	35 PERSTN[0 to 1]
MGTAVCC_[R or L]	11 M1_0	36 RSO
MGTAVTT_[R or L]	12 M2_0	37 RS1
MGTVCCAUX_[R or L]	13 POR_OVERRIDE	
	14 PROGRAM_B_0	
	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_54\_100815


Figure 3-54: FLVB1760 Package—XCVU125 Configuration/Power Diagram

# FFVA2104 (XCVU080 and XCVU095)

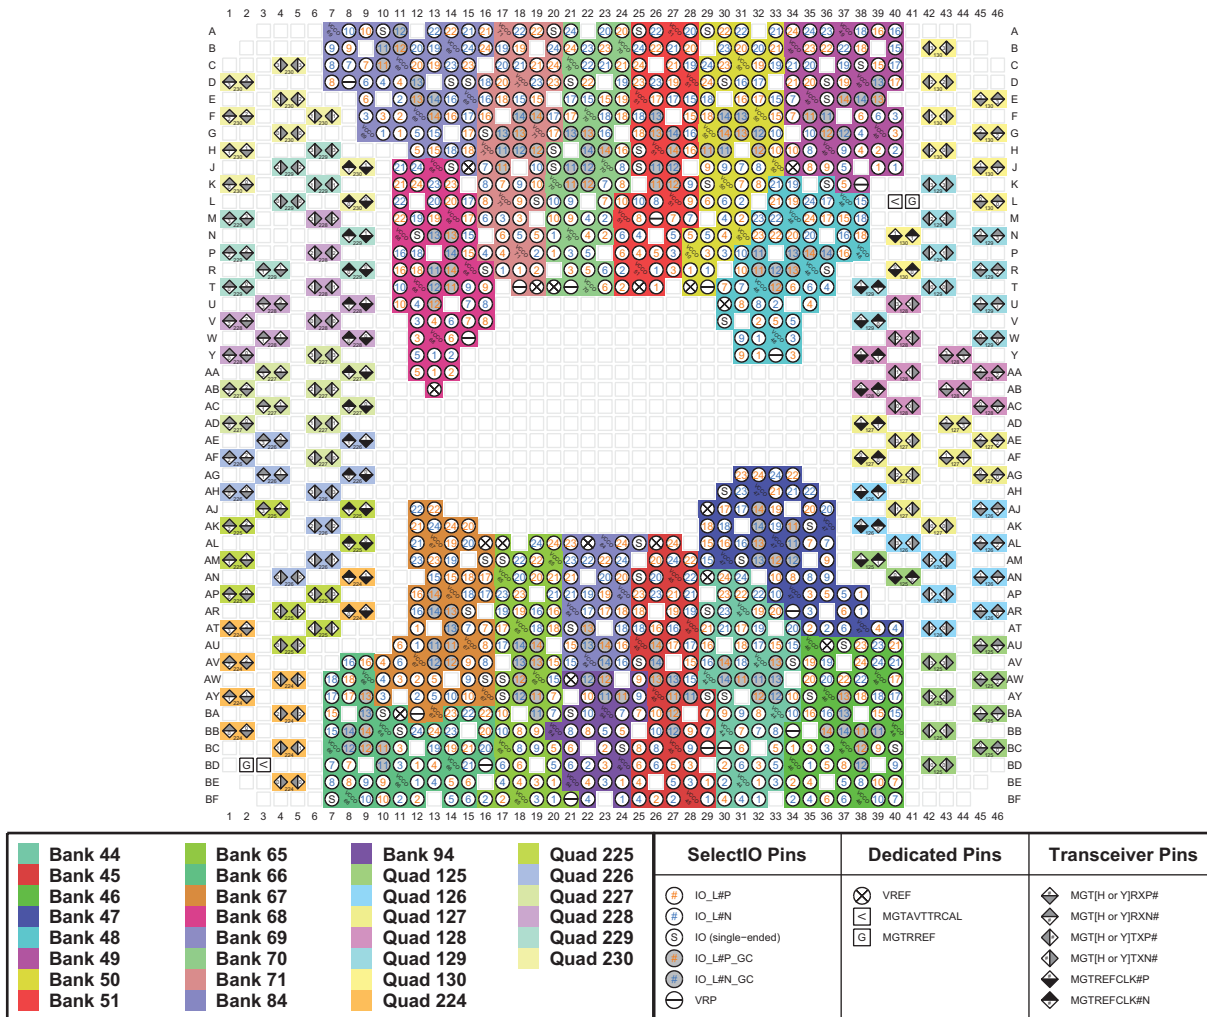

ug575\_c3\_55\_100815

Figure 3-55: FFVA2104 Package—XCVU080 and XCVU095 I/O Bank Diagram

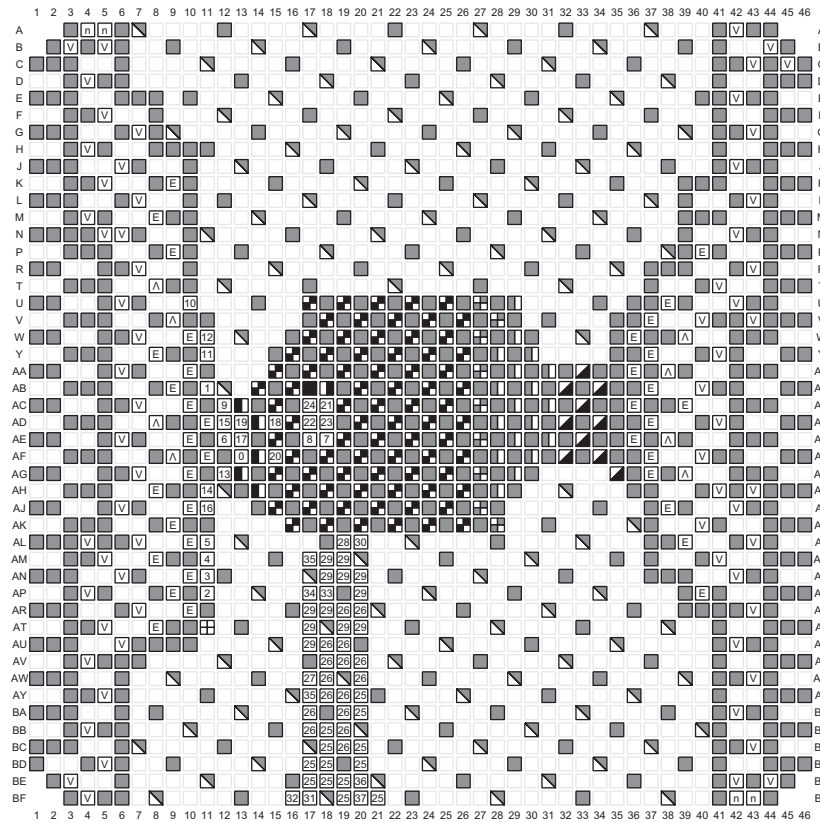


Power Pins	Dedicated Pins		Multi-Function I/O Pins
■ GND	0 CCLK_0	15 PUDC_B_0	25 A[16 to 28]
⊕ VBATT	1 CFGBVS_0	16 RDWR_FCS_B_0	26 A[00 to 15]_D[16 to 31]
▢ VCCAUX_IO	2 D00_MOSI_0	17 TCK_0	27 CSI_ADV_B
▣ VCCAUX	3 D01_DIN_0	18 TDI_0	28 DOUT_CSO_B
▤ VCCINT	4 D02_0	19 TDO_0	29 D[04 to 15]
▥ VCCINT_IO	5 D03_0	20 TMS_0	30 EMCLK
▦ VCCO_[bank number]	6 DONE_0	21 VP	31 F0E_B
▧ VCCBRAM	7 DXP	22 VN	32 FWE_FCS2_B
▨ VCCADC	8 DXN	23 VREFP	33 I2C_SCLK
▩ GNDADC	9 INIT_B_0	24 VREFN	34 I2C_SDA
⊞ NC	10 M0_0		35 PERSTN[0 to 1]
⊟ MGTAVCC_[R or L]	11 M1_0		36 RS0
⊠ MGTAVTT_[R or L]	12 M2_0		37 RS1
⊡ MGTVCCAUX_[R or L]	13 POR_OVERRIDE		
	14 PROGRAM_B_0		

ug575\_c3\_56\_100815


Figure 3-56: FFVA2104 Package—XCVU080 and XCVU095 Configuration/Power Diagram

# FLVA2104 (XCVU125)

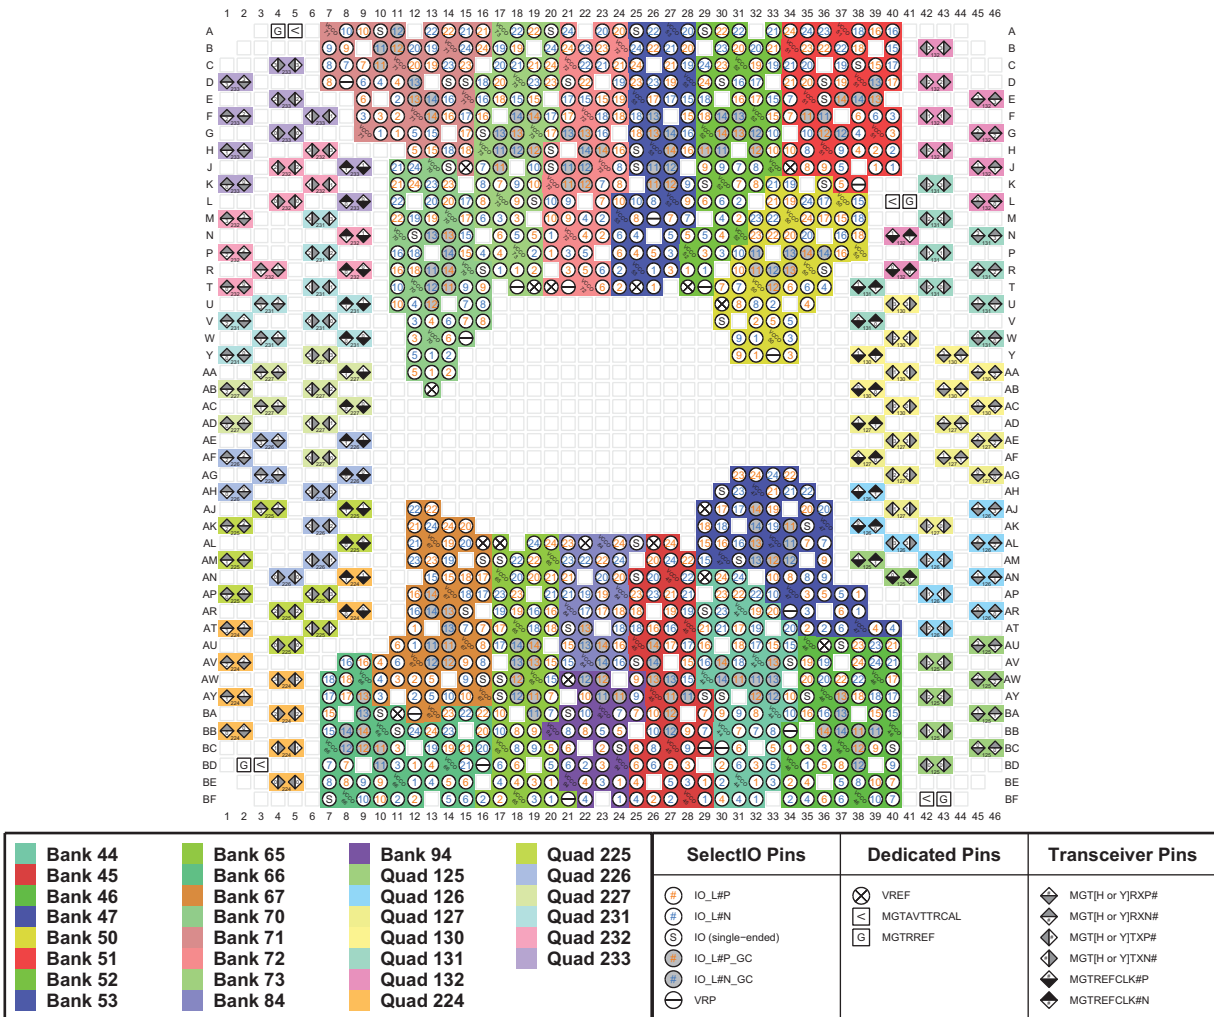

ug575\_c3\_57\_100815

Figure 3-57: FLVA2104 Package—XCVU125 I/O Bank Diagram

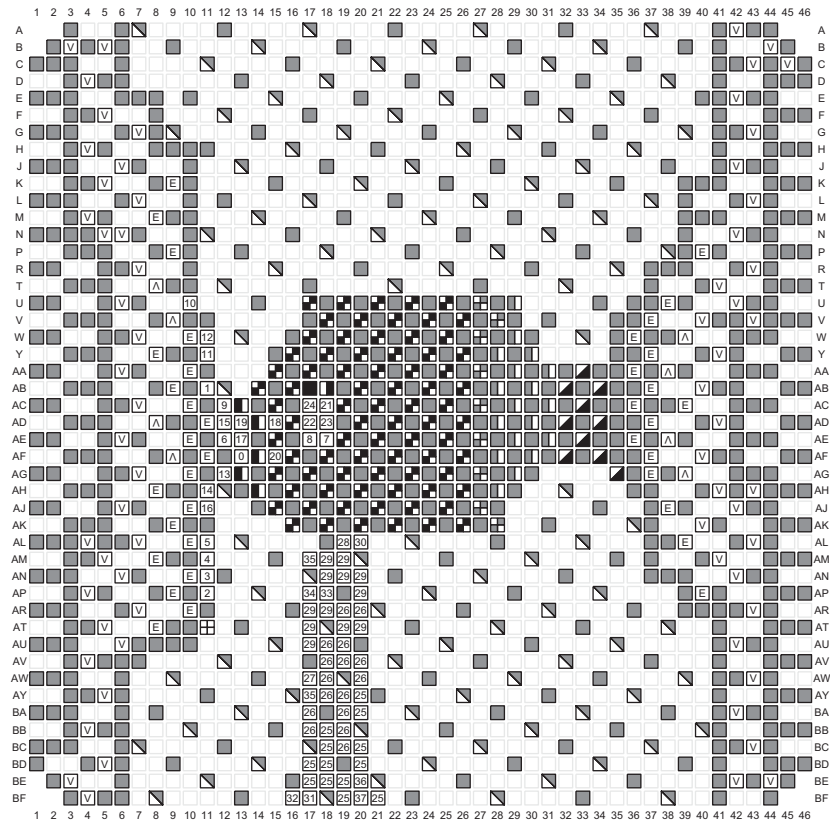


Power Pins	Dedicated Pins	Multi-Function I/O Pins
<ul style="list-style-type: none"> <li> GND</li> <li> VBATT</li> <li> VCCAUX_IO</li> <li> VCCAUX</li> <li> VCCINT</li> <li> VCCINT_IO</li> <li> VCCO_[bank number]</li> <li> VCCBRAM</li> <li> VCCADC</li> <li> GNDADC</li> <li> NC</li> <li> MGTAVCC_[R or L]</li> <li> MGTAVTT_[R or L]</li> <li> MGTVCCAUX_[R or L]</li> </ul>	<ul style="list-style-type: none"> <li> 0 CCLK_0</li> <li> 1 CFGBVS_0</li> <li> 2 D00_MOSI_0</li> <li> 3 D01_DIN_0</li> <li> 4 D02_0</li> <li> 5 D03_0</li> <li> 6 DONE_0</li> <li> 7 DXP</li> <li> 8 DXN</li> <li> 9 INIT_B_0</li> <li> 10 M0_0</li> <li> 11 M1_0</li> <li> 12 M2_0</li> <li> 13 POR_OVERRIDE</li> <li> 14 PROGRAM_B_0</li> <li> 15 PUDC_B_0</li> <li> 16 RDWR_FCS_B_0</li> <li> 17 TCK_0</li> <li> 18 TDI_0</li> <li> 19 TDO_0</li> <li> 20 TMS_0</li> <li> 21 VP</li> <li> 22 VN</li> <li> 23 VREFP</li> <li> 24 VREFN</li> </ul>	<ul style="list-style-type: none"> <li> 25 A[16 to 28]</li> <li> 26 A[00 to 15]_D[16 to 31]</li> <li> 27 CSI_ADV_B</li> <li> 28 DOUT_CSO_B</li> <li> 29 D[04 to 15]</li> <li> 30 EMCLK</li> <li> 31 FOE_B</li> <li> 32 FWE_FCS2_B</li> <li> 33 I2C_SCLK</li> <li> 34 I2C_SDA</li> <li> 35 PERSTN[0 to 1]</li> <li> 36 RSO</li> <li> 37 RS1</li> </ul>

ug575\_c3\_58\_100815


Figure 3-58: FLVA2104 Package—XCVU125 Configuration/Power Diagram

# FFVB2104 (XCVU080 and XCVU095)

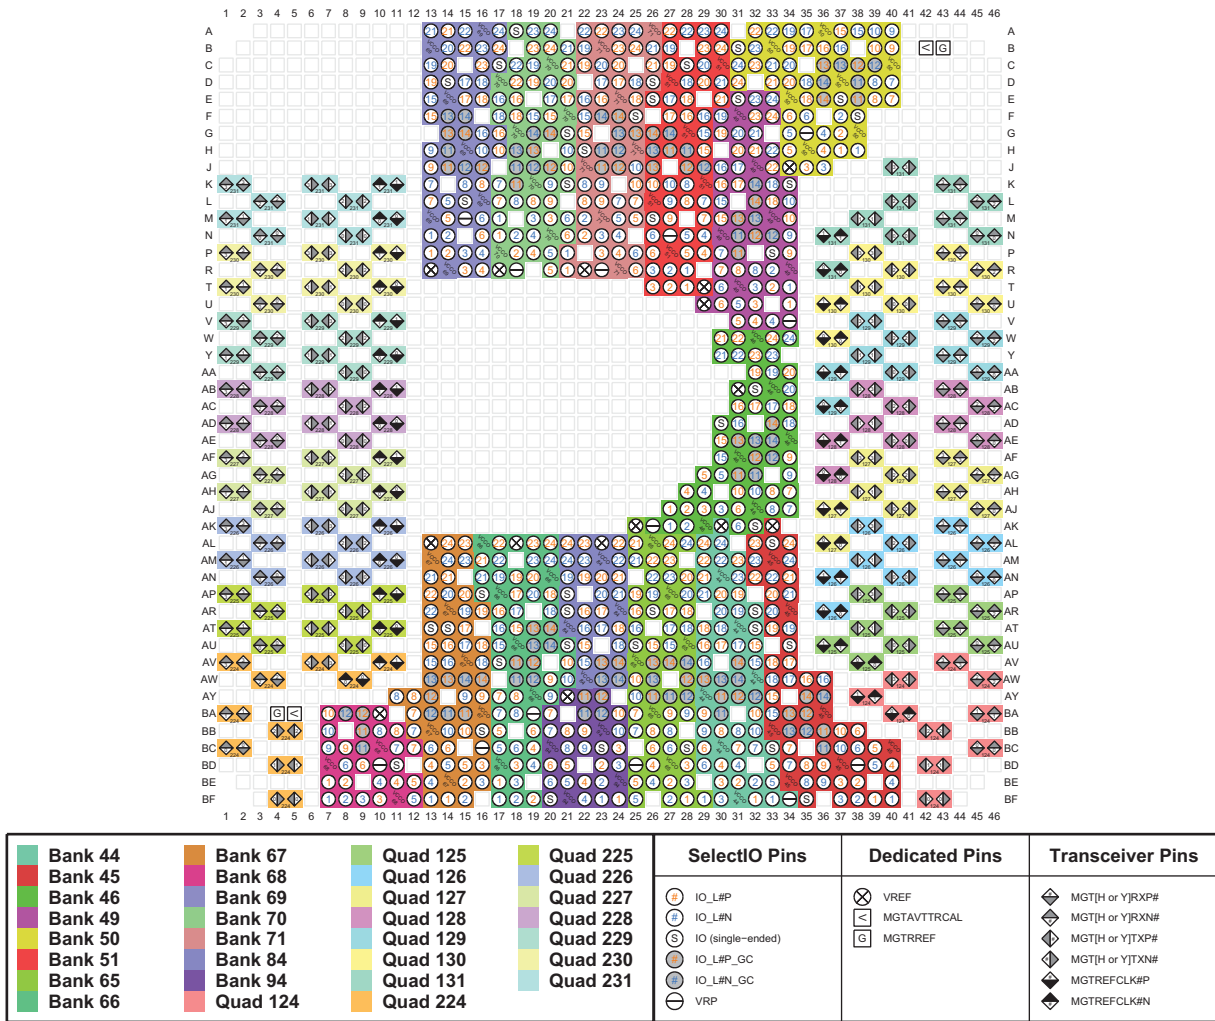

ug575\_c3\_59\_100815

Figure 3-59: FFVB2104 Package—XCVU080 and XCVU095 I/O Bank Diagram

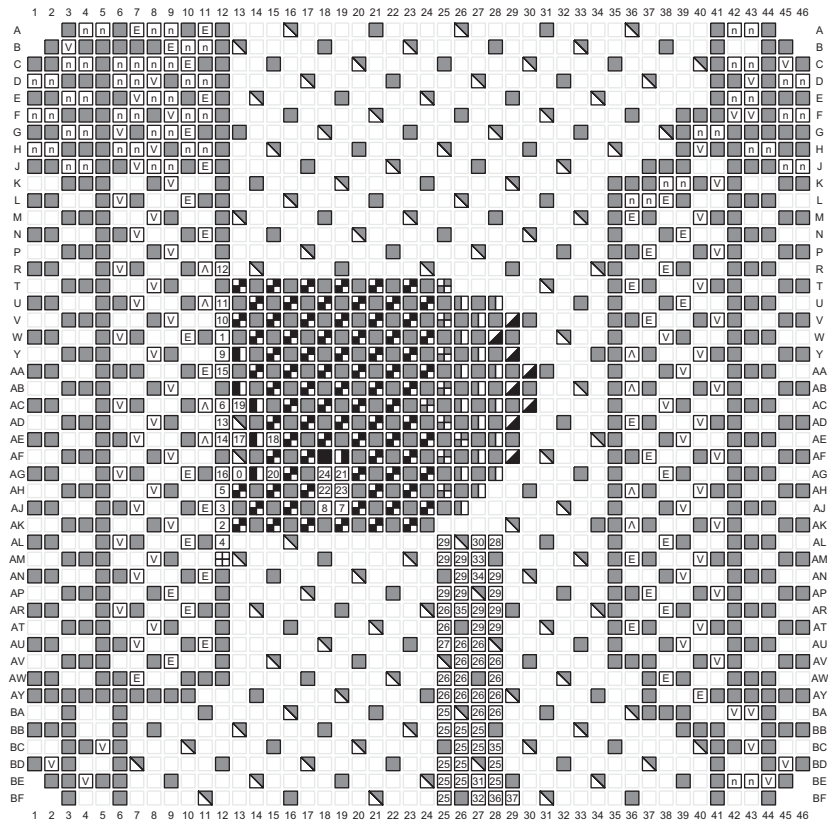


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	1 CFGBVS_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	2 D00_MOSI_0	27 CSI_ADV_B
VCCAUX	3 D01_DIN_0	28 DOUT_CSO_B
VCCINT	4 D02_0	29 D[04 to 15]
VCCINT_IO	5 D03_0	30 EMCCLK
VCCO_[bank number]	6 DONE_0	31 FOE_B
VCCBRAM	7 DXP	32 FWE_FCS2_B
VCCADC	8 DXN	33 I2C_SCLK
GNDADC	9 INIT_B_0	34 I2C_SDA
NC	10 M0_0	35 PERSTN[0 to 1]
MGTAVCC_[R or L]	11 M1_0	36 R50
MGTAVTT_[R or L]	12 M2_0	37 RS1
MGTVCCAUX_[R or L]	13 POR_OVERRIDE	
	14 PROGRAM_B_0	
	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_60\_100815

Figure 3-60: FFVB2104 Package—XCVU080 and XCVU095 Configuration/Power Diagram




# FLVB2104 (XCVU125)

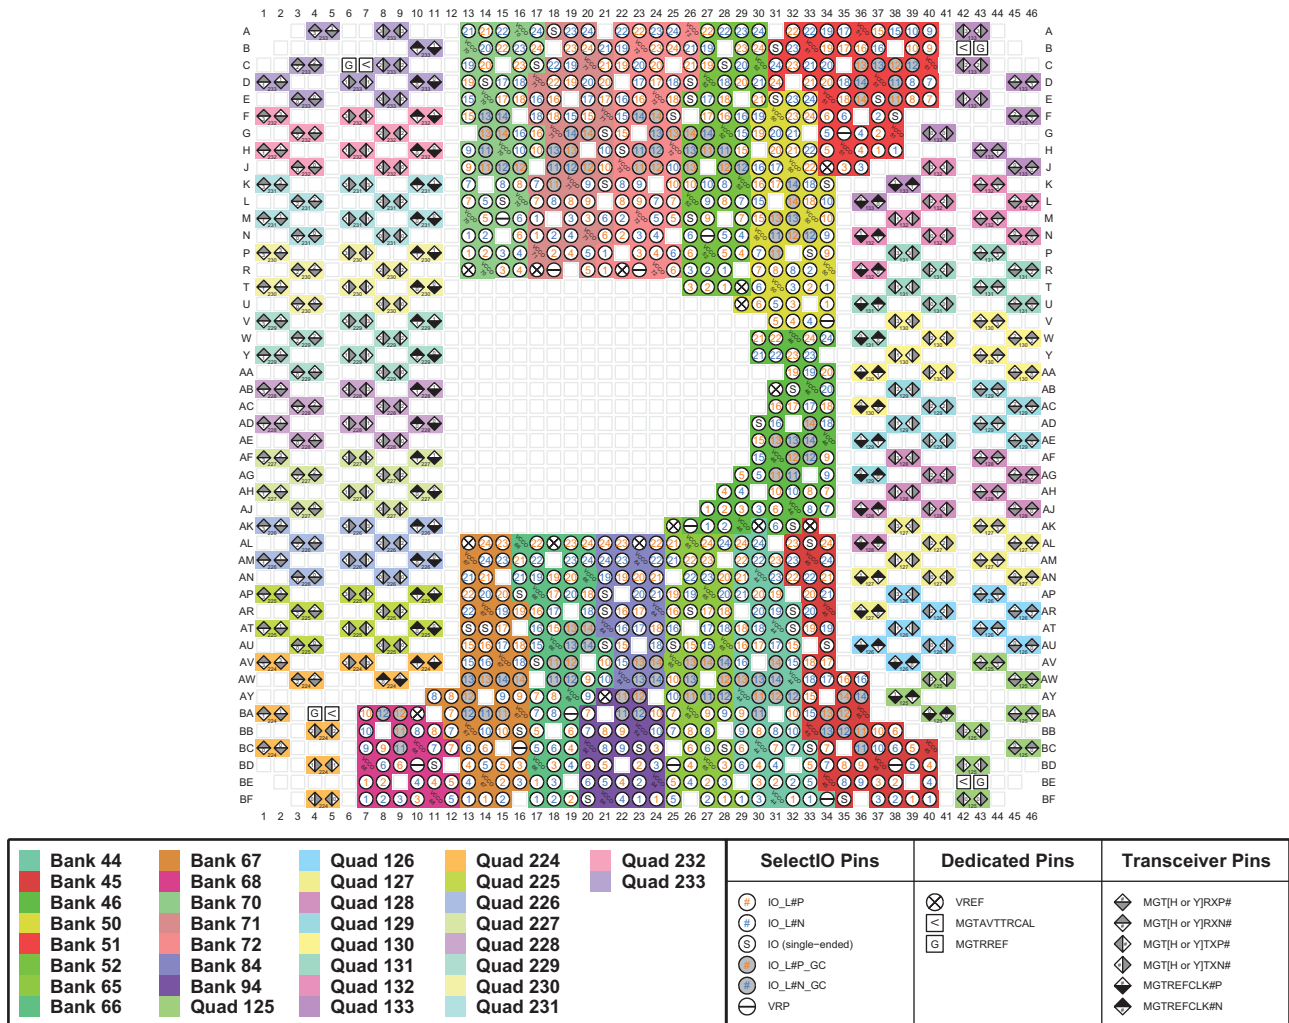

ug575\_c3\_61\_100815


Figure 3-61: FLVB2104 Package—XCVU125 I/O Bank Diagram

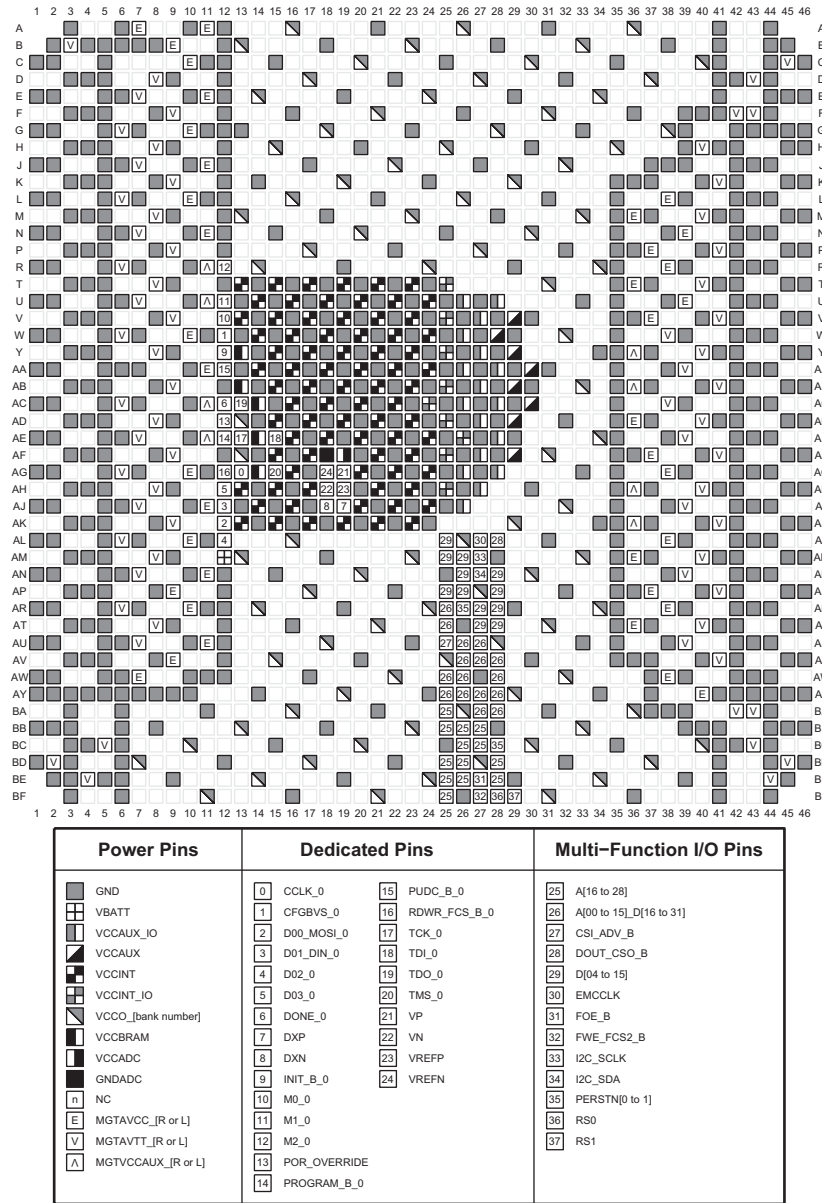

ug575\_c3\_62\_100815

Figure 3-62: FLVB2104 Package—XCVU125 Configuration/Power Diagram

# FLGB2104 (XCVU160 and XCVU190)

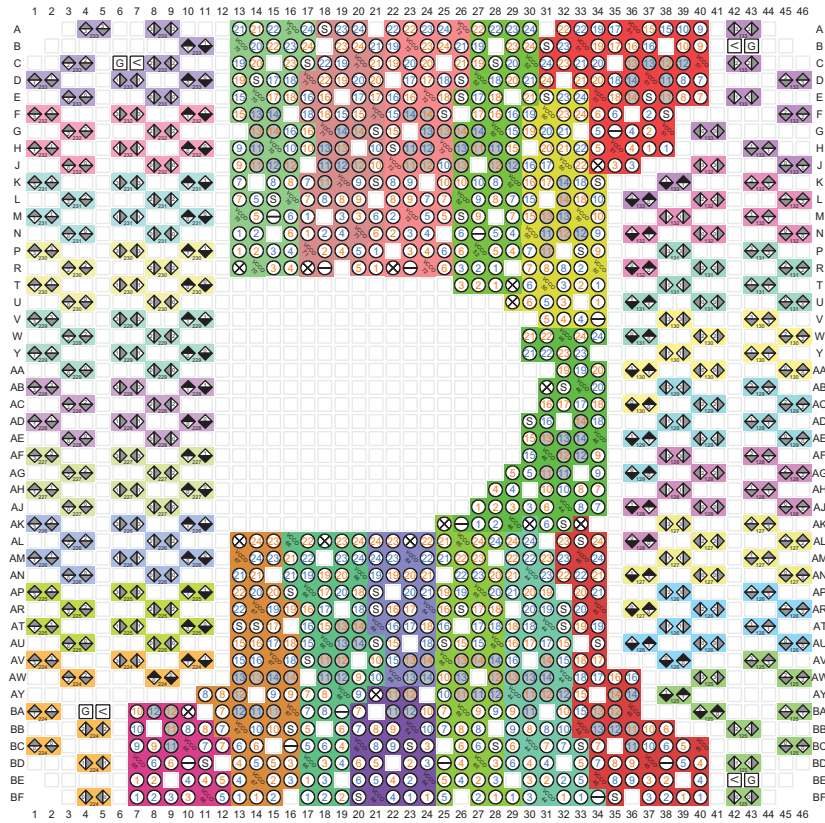


Bank 44	Bank 67	Quad 126	Quad 224	Quad 232
Bank 45	Bank 68	Quad 127	Quad 225	Quad 233
Bank 46	Bank 70	Quad 128	Quad 226	
Bank 50	Bank 71	Quad 129	Quad 227	
Bank 51	Bank 72	Quad 130	Quad 228	
Bank 52	Bank 84	Quad 131	Quad 229	
Bank 65	Bank 94	Quad 132	Quad 230	
Bank 66	Quad 125	Quad 133	Quad 231	

SelectIO Pins	Dedicated Pins	Transceiver Pins
IO_L#P	VREF	MGT[H or Y]RXP#
IO_L#N	MGTAVTTRCAL	MGT[H or Y]RXN#
IO (single-ended)	MGTREF	MGT[H or Y]TXP#
IO_L#P_GC		MGT[H or Y]TXN#
IO_L#N_GC		MGTREFCLK#P
VRP		MGTREFCLK#N

ug575\_c3\_63\_100815

Figure 3-63: FLGB2104 Package—XCVU160 and XCVU190 I/O Bank Diagram

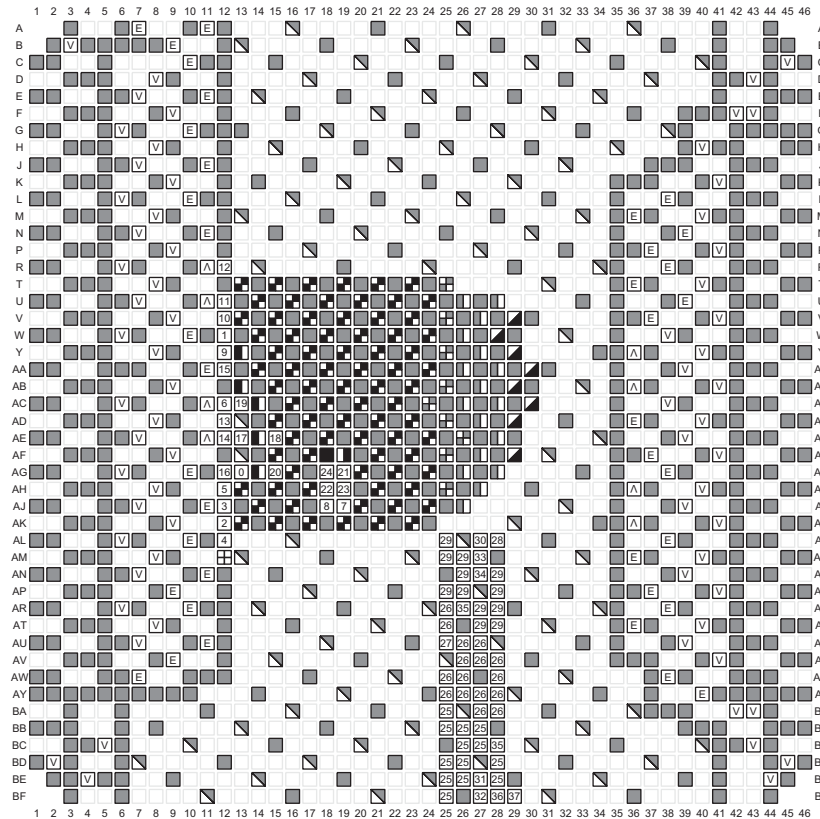


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	CCLK_0	A[16 to 28]
VBATT	CFGBVS_0	A[00 to 15]_D[16 to 31]
VCCAUX_IO	D00_MOSI_0	CSI_ADV_B
VCCAUX	D01_DIN_0	DOUT_CSO_B
VCCINT	D02_0	D[04 to 15]
VCCINT_IO	D03_0	EMCCLK
VCCO [bank number]	DONE_0	FOE_B
VCCBRAM	DXP	FWE_FCS2_B
VCCADC	DXN	I2C_SCLK
GNDADC	INIT_B_0	I2C_SDA
NC	M0_0	PERSTN[0 to 1]
MGTAVCC_[R or L]	M1_0	RSO
MGTAVTT_[R or L]	M2_0	RS1
MGTVCCAUX_[R or L]	POR_OVERRIDE	
	PROGRAM_B_0	
	PUDC_B_0	
	RDWR_FCS_B_0	
	TCK_0	
	TDI_0	
	TDO_0	
	TMS_0	
	VP	
	VN	
	VREFP	
	VREFN	

ug575\_c3\_64\_100815


Figure 3-64: FLGB2104 Package—XCVU160 and XCVU190 Configuration/Power Diagram

# FFVC2104 (XCVU095)

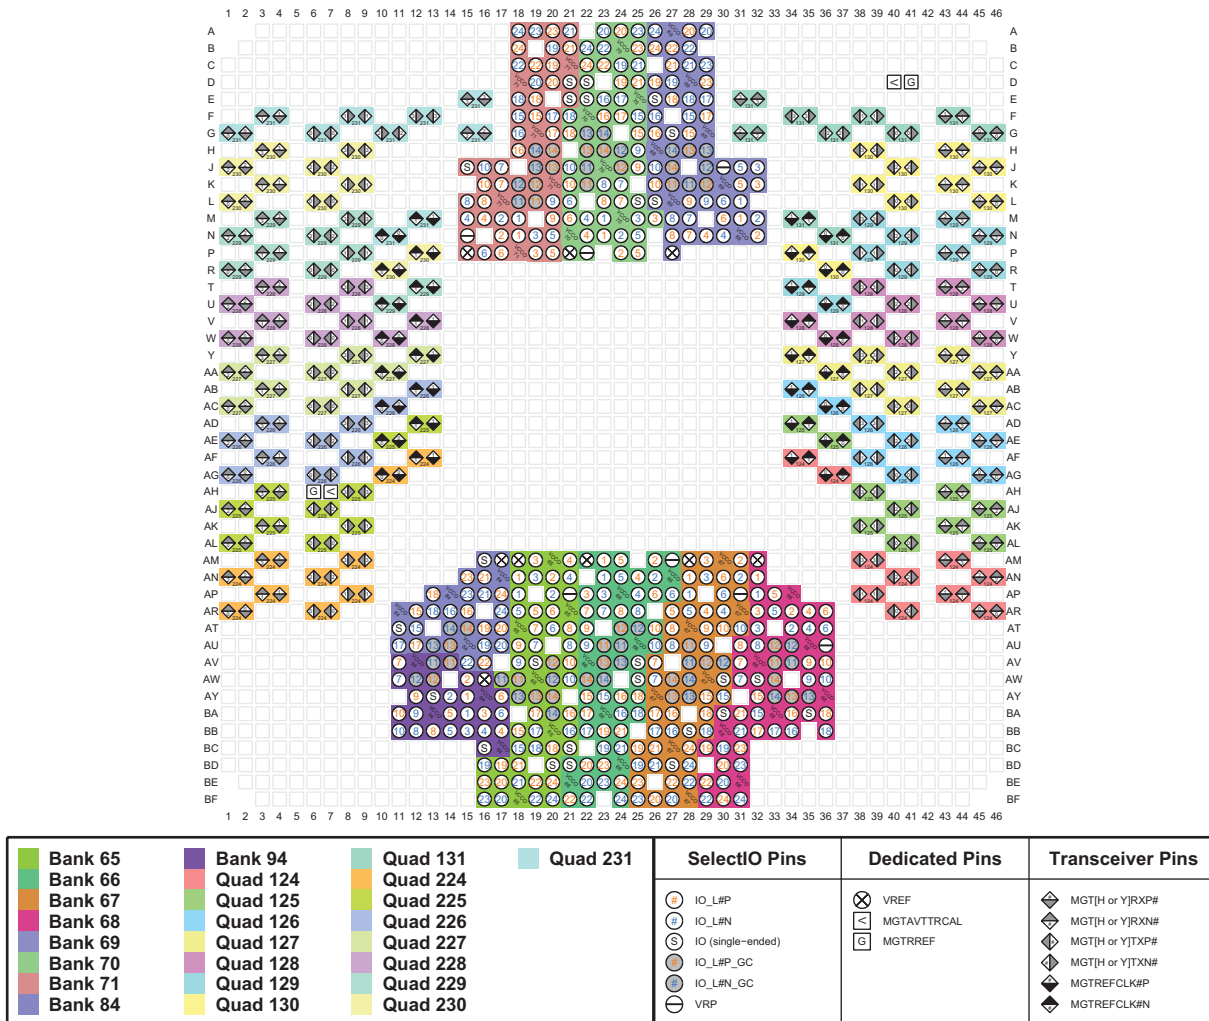

ug575\_c3\_65\_100815

Figure 3-65: FFVC2104 Package—XCVU095 I/O Bank Diagram

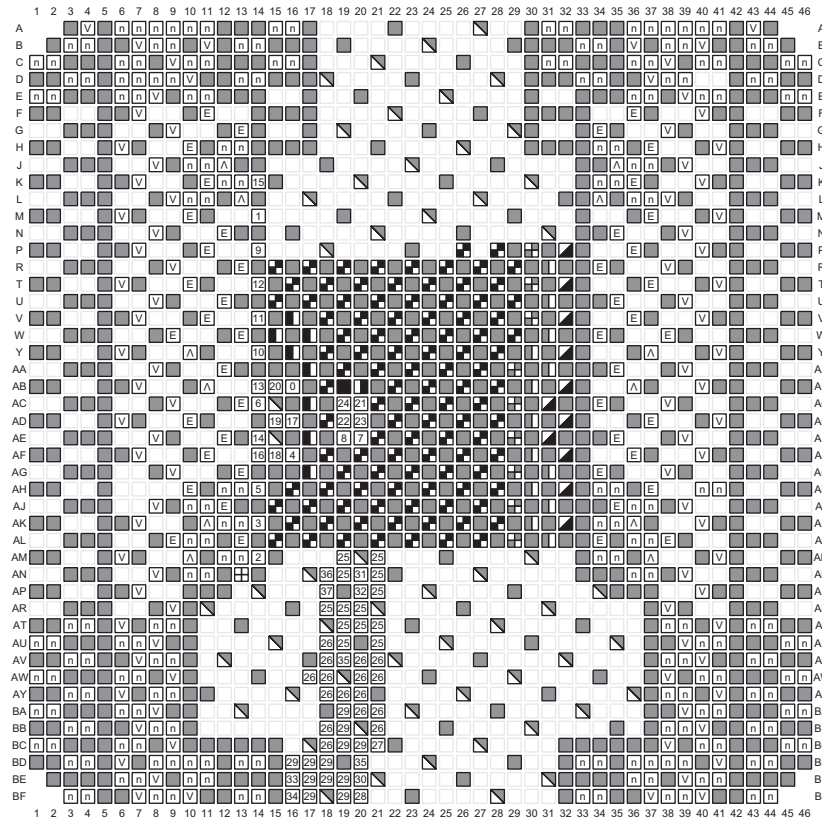


Power Pins	Dedicated Pins		Multi-Function I/O Pins
GND	0 CCLK_0	15 PUDC_B_0	25 A[16 to 28]
VBATT	1 CFGBVS_0	16 RDWR_FCS_B_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	2 D00_MOSI_0	17 TCK_0	27 CSI_ADV_B
VCCAUX	3 D01_DIN_0	18 TDI_0	28 DOUT_CSO_B
VCCINT	4 D02_0	19 TDO_0	29 D[04 to 15]
VCCINT_IO	5 D03_0	20 TMS_0	30 EMCCLK
VCCO [bank number]	6 DONE_0	21 VP	31 FOE_B
VCCBRAM	7 DXP	22 VN	32 FWE_FCS2_B
VCCADC	8 DXN	23 VREFF	33 I2C_SCLK
GNDADC	9 INIT_B_0	24 VREFN	34 I2C_SDA
NC	10 M0_0		35 PERSTN[0 to 1]
MGTAVCC [R or L]	11 M1_0		36 RSO
MGTAVTT [R or L]	12 M2_0		37 RS1
MGTVCCAUX [R or L]	13 POR_OVERRIDE		
	14 PROGRAM_B_0		

ug575\_c3\_66\_100815


Figure 3-66: FFVC2104 Package—XCVU095 Configuration/Power Diagram

# FLVC2104 (XCVU125)

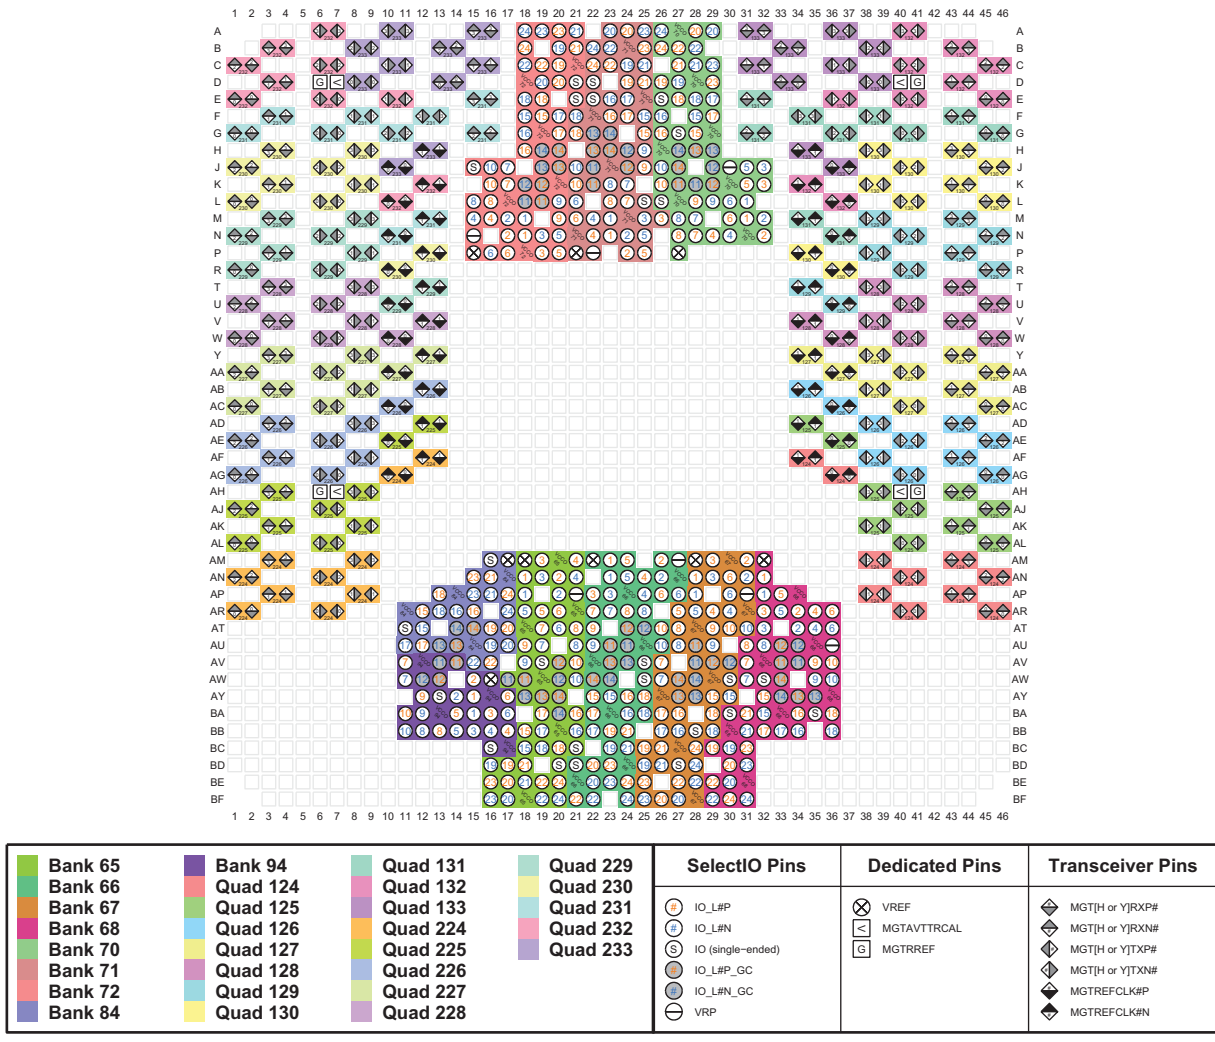

ug575\_c3\_67\_100815

Figure 3-67: FLVC2104 Package—XCVU125 I/O Bank Diagram

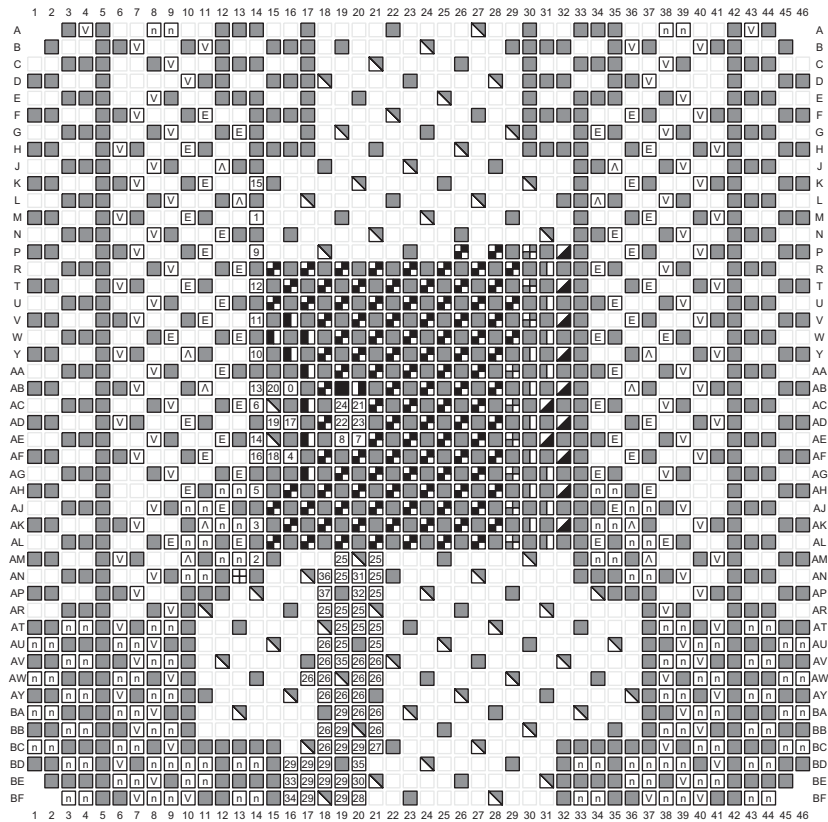


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	1 CFGBVS_0	26 A[00 to 15], D[16 to 31]
VCCAUX_IO	2 D00_MOSI_0	27 CSI_ADV_B
VCCAUX	3 D01_DIN_0	28 DOUT_CSO_B
VCCINT	4 D02_0	29 D[04 to 15]
VCCINT_IO	5 D03_0	30 EMCCLK
VCCO_[bank number]	6 DONE_0	31 FOE_B
VCCBRAM	7 DXP	32 FWE_FCS2_B
VCCADC	8 DXN	33 I2C_SCLK
GNDADC	9 INIT_B_0	34 I2C_SDA
NC	10 M0_0	35 PERSTN[0 to 1]
MGTAVCC_[R or L]	11 M1_0	36 RSO
MGTAVTT_[R or L]	12 M2_0	37 RS1
MGTVCCAUX_[R or L]	13 POR_OVERRIDE	
	14 PROGRAM_B_0	
	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_68\_100815

Figure 3-68: FLVC2104 Package—XCVU125 Configuration/Power Diagram




# FLGC2104 (XCVU160 and XCVU190)

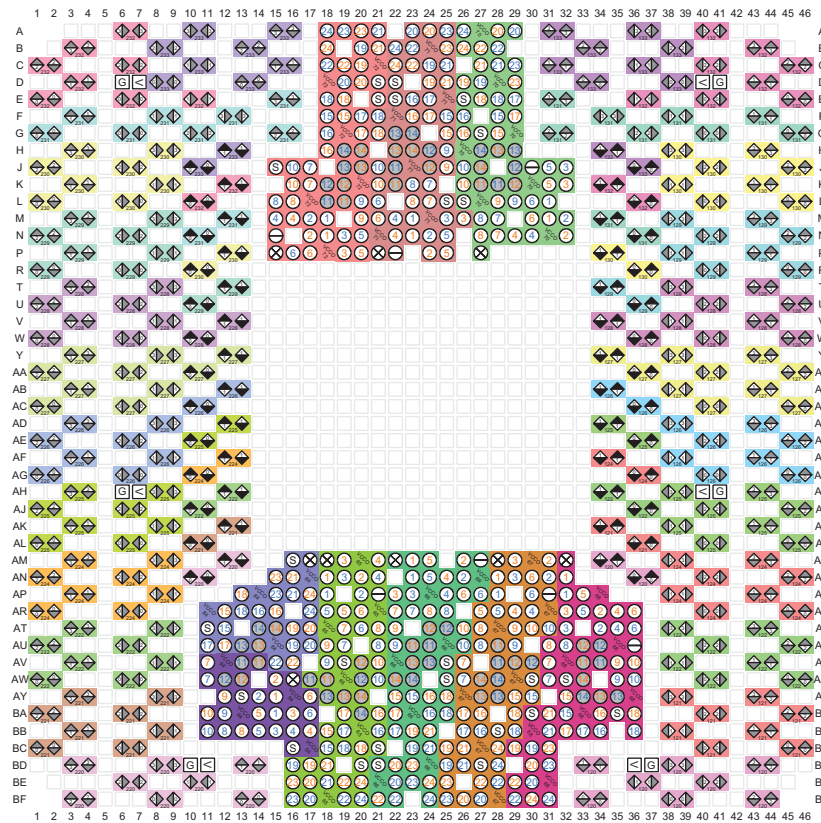

<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #90EE90; border: 1px solid black; margin-right: 5px;"></span> Bank 65</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FFD700; border: 1px solid black; margin-right: 5px;"></span> Bank 66</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FF69B4; border: 1px solid black; margin-right: 5px;"></span> Bank 67</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FF6347; border: 1px solid black; margin-right: 5px;"></span> Bank 68</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #90EE90; border: 1px solid black; margin-right: 5px;"></span> Bank 70</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FF6347; border: 1px solid black; margin-right: 5px;"></span> Bank 71</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FF6347; border: 1px solid black; margin-right: 5px;"></span> Bank 72</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #4169E1; border: 1px solid black; margin-right: 5px;"></span> Bank 84</li> </ul>	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #800080; border: 1px solid black; margin-right: 5px;"></span> Bank 94</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FFB6C1; border: 1px solid black; margin-right: 5px;"></span> Quad 120</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FFB6C1; border: 1px solid black; margin-right: 5px;"></span> Quad 121</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #90EE90; border: 1px solid black; margin-right: 5px;"></span> Quad 122</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FF6347; border: 1px solid black; margin-right: 5px;"></span> Quad 124</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FF6347; border: 1px solid black; margin-right: 5px;"></span> Quad 125</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #90EE90; border: 1px solid black; margin-right: 5px;"></span> Quad 126</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FFD700; border: 1px solid black; margin-right: 5px;"></span> Quad 127</li> </ul>	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FFB6C1; border: 1px solid black; margin-right: 5px;"></span> Quad 128</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #90EE90; border: 1px solid black; margin-right: 5px;"></span> Quad 129</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FFB6C1; border: 1px solid black; margin-right: 5px;"></span> Quad 130</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #90EE90; border: 1px solid black; margin-right: 5px;"></span> Quad 131</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FFB6C1; border: 1px solid black; margin-right: 5px;"></span> Quad 132</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FFB6C1; border: 1px solid black; margin-right: 5px;"></span> Quad 133</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FFB6C1; border: 1px solid black; margin-right: 5px;"></span> Quad 220</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FFB6C1; border: 1px solid black; margin-right: 5px;"></span> Quad 221</li> </ul>	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #90EE90; border: 1px solid black; margin-right: 5px;"></span> Quad 222</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FFD700; border: 1px solid black; margin-right: 5px;"></span> Quad 224</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #FFD700; border: 1px solid black; margin-right: 5px;"></span> Quad 225</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #90EE90; border: 1px solid black; margin-right: 5px;"></span> Quad 226</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #90EE90; border: 1px solid black; margin-right: 5px;"></span> Quad 227</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #90EE90; border: 1px solid black; margin-right: 5px;"></span> Quad 228</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #90EE90; border: 1px solid black; margin-right: 5px;"></span> Quad 229</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #90EE90; border: 1px solid black; margin-right: 5px;"></span> Quad 230</li> </ul>	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #ADD8E6; border: 1px solid black; margin-right: 5px;"></span> Quad 231</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #ADD8E6; border: 1px solid black; margin-right: 5px;"></span> Quad 232</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #ADD8E6; border: 1px solid black; margin-right: 5px;"></span> Quad 233</li> </ul>	<b>SelectIO Pins</b> <ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> IO_L#P</li> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> IO_L#N</li> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> IO (single-ended)</li> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> IO_L#P_GC</li> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> IO_L#N_GC</li> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> VRP</li> </ul>	<b>Dedicated Pins</b> <ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> VREF</li> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> MGTAVTTRCAL</li> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> MGTREF</li> </ul>	<b>Transceiver Pins</b> <ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> MGT[H or Y]RXP#</li> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> MGT[H or Y]RXN#</li> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> MGT[H or Y]TXP#</li> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> MGT[H or Y]TXN#</li> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> MGTREFCLK#P</li> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> MGTREFCLK#N</li> </ul>
--	---	--	--	---	---	---	--

ug575\_c3\_69\_100815

Figure 3-69: FLGC2104 Package—XCVU160 and XCVU190 I/O Bank Diagram

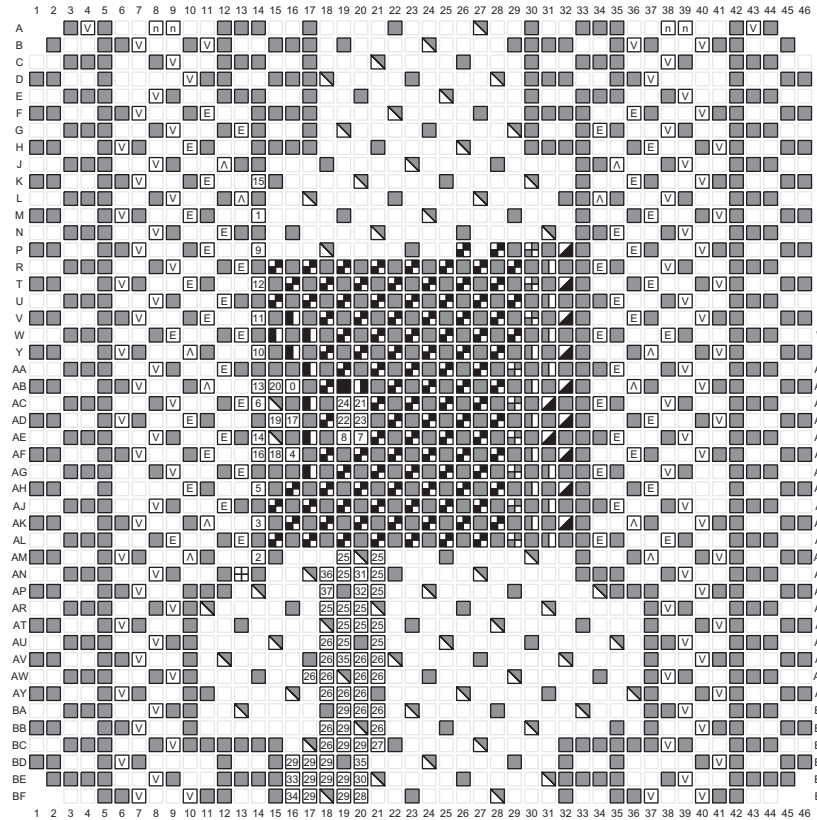


Power Pins	Dedicated Pins	Multi-Function I/O Pins
■ GND	0 CCLK_0	25 A[16 to 28]
⊕ VBAT	1 CFGBVS_0	26 A[00 to 15]_D[16 to 31]
▤ VCCAUX_IO	2 D00_MOSI_0	27 CSI_ADV_B
▥ VCCAUX	3 D01_DIN_0	28 DOUT_CSO_B
▦ VCCINT	4 D02_0	29 D[04 to 15]
▧ VCCINT_IO	5 D03_0	30 EMCCLK
▨ VCCO_[bank number]	6 DONE_0	31 FOE_B
▩ VCCBRAM	7 DXP	32 FWE_FCS2_B
▪ VCCADC	8 DXN	33 I2C_SCLK
▫ GNDADC	9 INIT_B_0	34 I2C_SDA
n NC	10 M0_0	35 PERSTN[0 to 1]
E MGTAVCC_[R or L]	11 M1_0	36 RS0
V MGTAVTT_[R or L]	12 M2_0	37 RS1
Λ MGTVOCAUX_[R or L]	13 POR_OVERRIDE	
	14 PROGRAM_B_0	
	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_70\_100815

Figure 3-70: FLGC2104 Package—XCVU160 and XCVU190 Configuration/Power Diagram

# FLGB2377 (XCVU440)

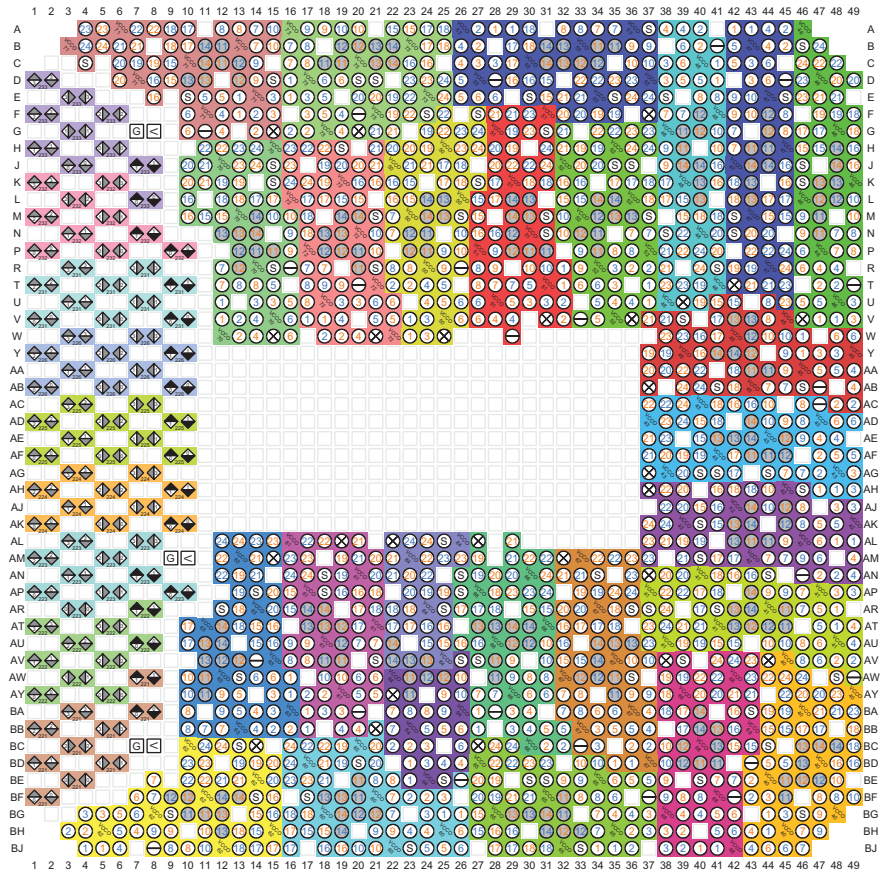


Bank 40	Bank 50	Bank 65	Bank 84	Quad 231
Bank 41	Bank 51	Bank 66	Bank 94	Quad 232
Bank 42	Bank 52	Bank 67	Quad 221	Quad 233
Bank 43	Bank 53	Bank 68	Quad 222	
Bank 45	Bank 60	Bank 70	Quad 223	
Bank 46	Bank 61	Bank 71	Quad 224	
Bank 47	Bank 62	Bank 72	Quad 225	
Bank 48	Bank 63	Bank 73	Quad 226	

SelectIO Pins	Dedicated Pins	Transceiver Pins
IO_L#P	VREF	MGTH or YRXP#
IO_L#N	MGTAVTTRCAL	MGTH or YRXN#
IO (single-ended)	MGTREF	MGTH or YTXP#
IO_L#P_GC		MGTH or YTXN#
IO_L#N_GC		MGTREFCLK#P
VRP		MGTREFCLK#N

ug575\_c3\_71\_100815

Figure 3-71: FLGB2377 Package—XCVU440 I/O Bank Diagram

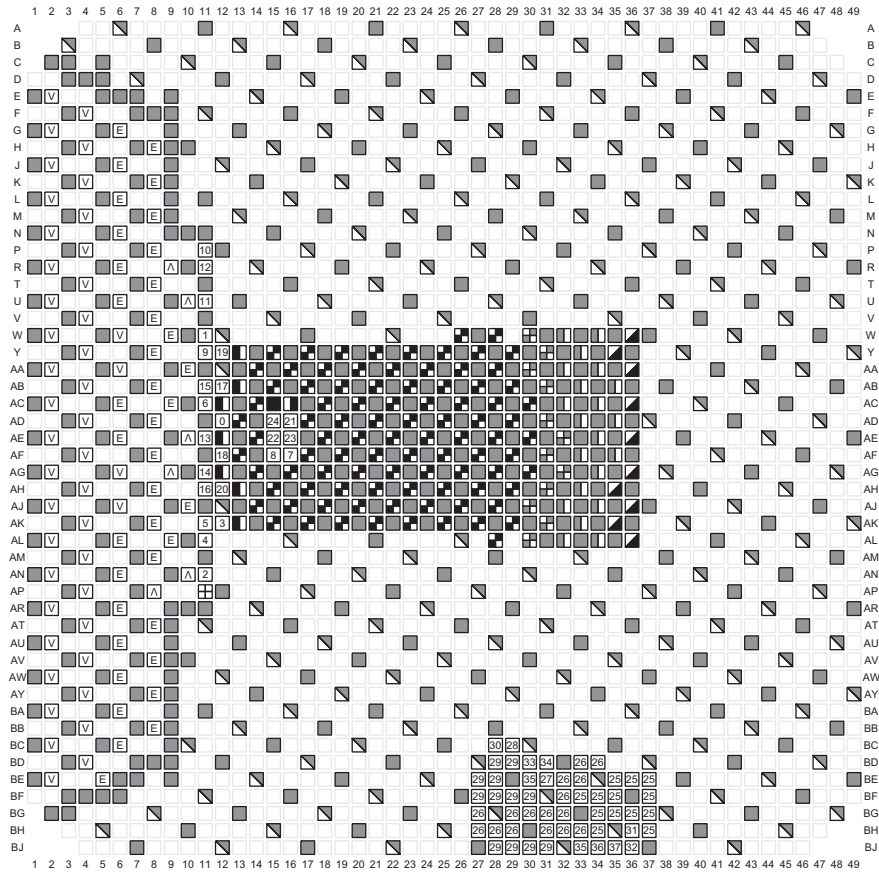


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	1 CFGBVS_0	26 A[0 to 15]_D[16 to 31]
VCCAUX_IO	2 D00_MOSI_0	27 CSI_ADV_B
VCCAUX	3 D01_DIN_0	28 DOUT_CSO_B
VCCINT	4 D02_0	29 D[04 to 15]
VCCINT_IO	5 D03_0	30 EMCCLK
VCCO_[bank number]	6 DONE_0	31 FOE_B
VCCBRAM	7 DXP	32 FWE_FCS2_B
VCCADC	8 DXN	33 I2C_SCLK
GNDADC	9 INIT_B_0	34 I2C_SDA
n NC	10 M0_0	35 PERSTN[0 to 1]
E MGTAVCC_[R or L]	11 M1_0	36 RS0
V MGTAVTT_[R or L]	12 M2_0	37 RS1
A MGTVCCAUX_[R or L]	13 POR_OVERRIDE	
	14 PROGRAM_B_0	
	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_72\_100815


Figure 3-72: FLGB2377 Package—XCVU440 Configuration/Power Diagram

# FLGA2577 (XCVU190)

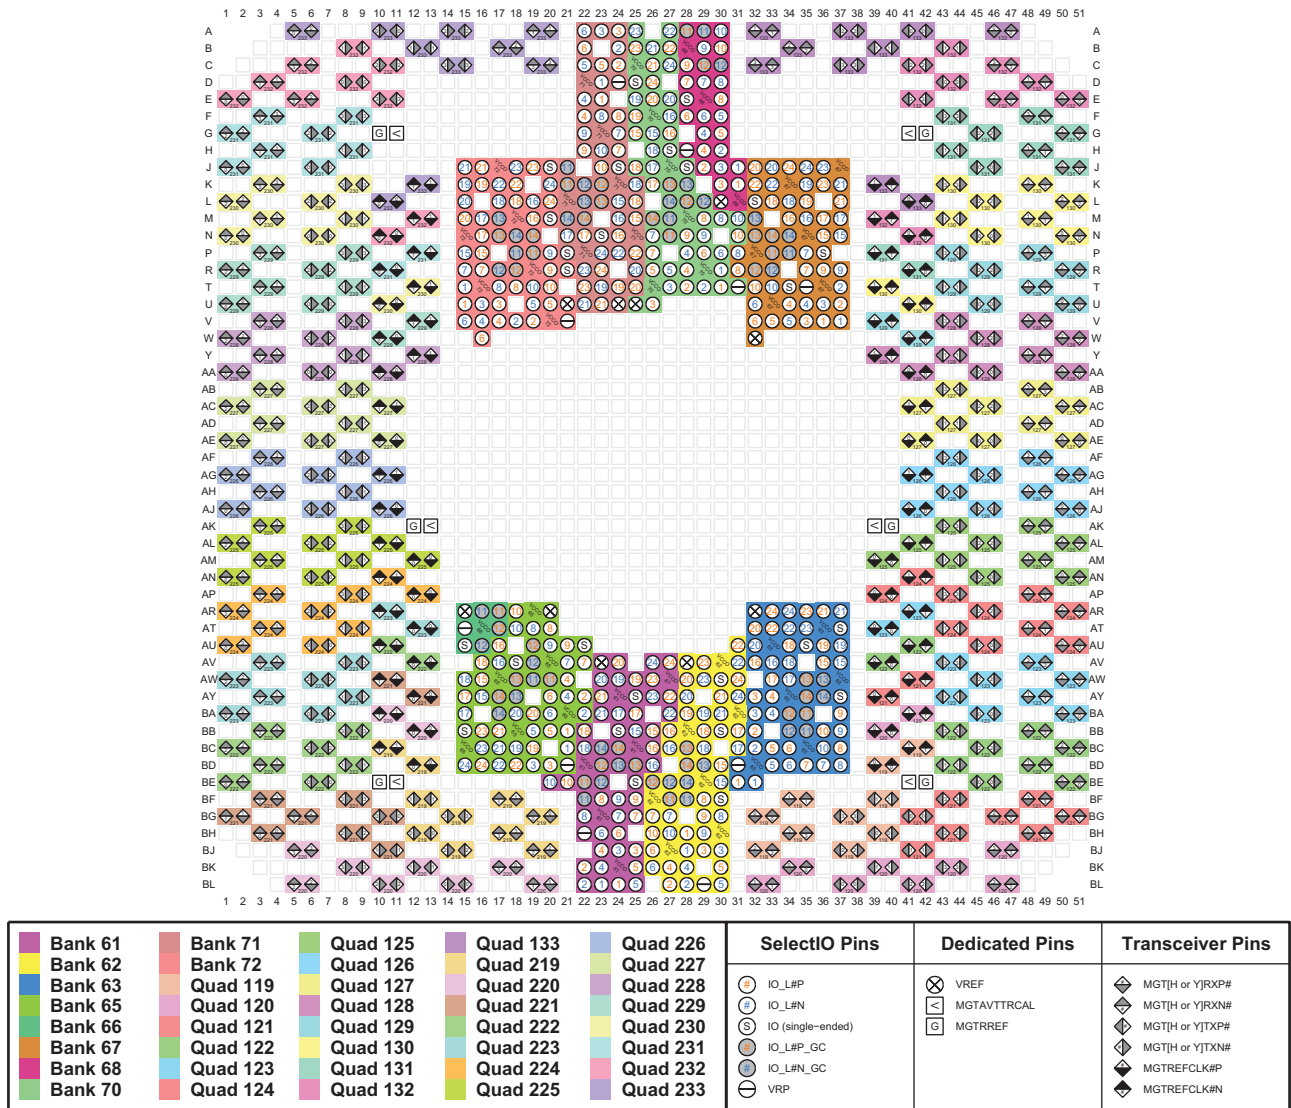

ug575\_c3\_73\_100815

Figure 3-73: FLGA2577 Package—XCVU190 I/O Bank Diagram

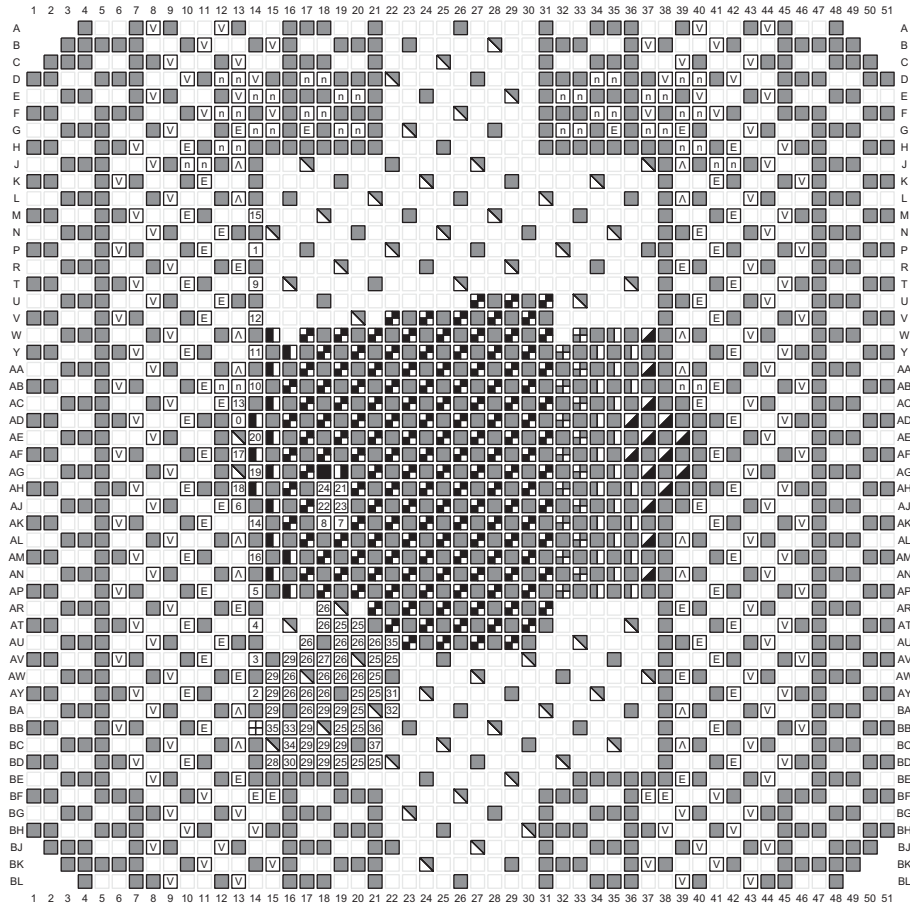


Power Pins	Dedicated Pins		Multi-Function I/O Pins
■ GND	0 CCLK_0	15 PUDC_B_0	25 A[16 to 28]
⊕ VBATT	1 CFGBVS_0	16 RDWR_FCS_B_0	26 A[00 to 15]_D[16 to 31]
○ VCCAUX_IO	2 D00_MOSI_0	17 TCK_0	27 CSI_ADV_B
△ VCCAUX	3 D01_DIN_0	18 TDI_0	28 DOUT_CSO_B
■ VCCINT	4 D02_0	19 TDO_0	29 D[04 to 15]
⊕ VCCINT_IO	5 D03_0	20 TMS_0	30 EMCCLK
⊕ VCCO_[bank number]	6 DONE_0	21 VP	31 FOE_B
■ VCCBRAM	7 DXP	22 VN	32 FWE_FCS2_B
■ VCCADC	8 DXN	23 VREFP	33 I2C_SCLK
■ GNDADC	9 INIT_B_0	24 VREFN	34 I2C_SDA
□ NC	10 M0_0		35 PERSTN[0 to 1]
⊕ MGTA VCC_[R or L]	11 M1_0		36 RS0
⊕ MGTA VTT_[R or L]	12 M2_0		37 RS1
⊕ MGTVCCAUX_[R or L]	13 POR_OVERRIDE		
	14 PROGRAM_B_0		

ug575\_c3\_74\_100815

Figure 3-74: FLGA2577 Package—XCVU190 Configuration/Power Diagram


# FLGA2892 (XCVU440)

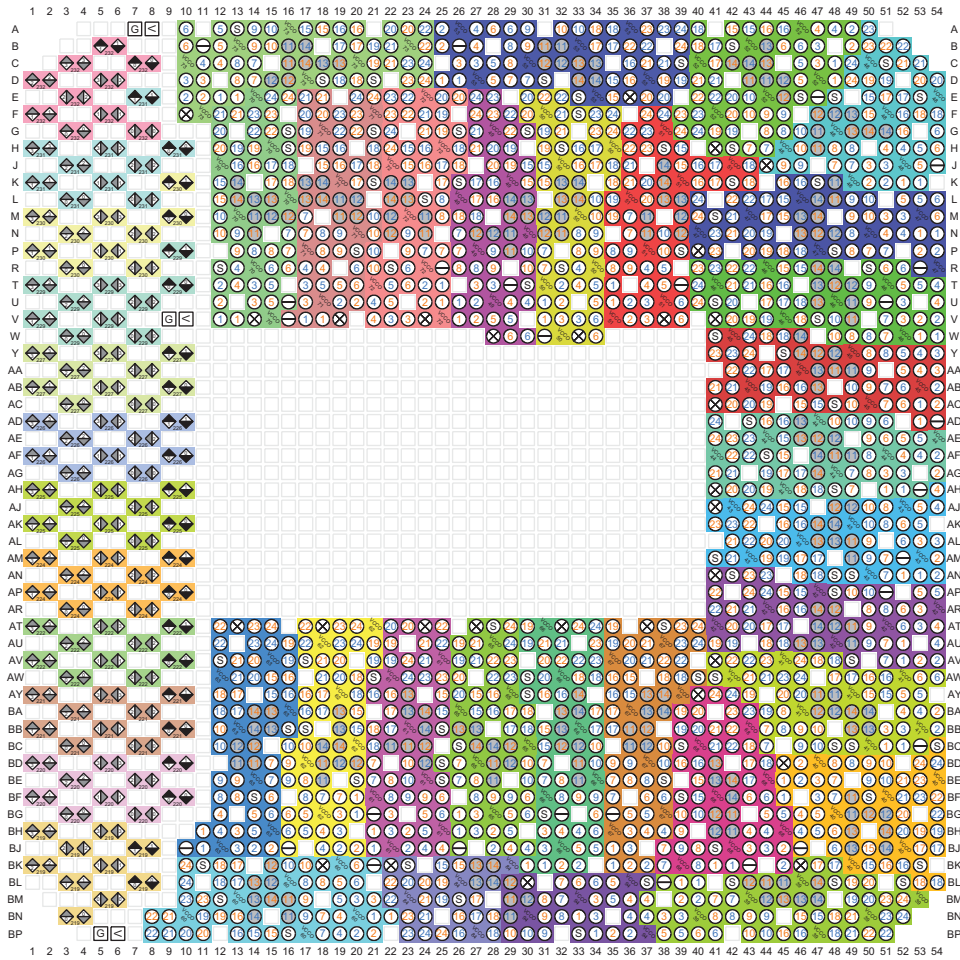

Bank		Quad		SelectIO Pins	Dedicated Pins	Transceiver Pins
	Bank 39		Quad 232			
	Bank 40		Quad 224			
	Bank 41		Quad 225			
	Bank 42		Quad 226			
	Bank 43		Quad 227			
	Bank 44		Quad 229			
	Bank 45		Quad 230			
	Bank 46		Quad 231			
	Bank 47					
	Bank 48					
	Bank 49					
	Bank 50					
	Bank 51					
	Bank 52					
	Bank 53					
	Bank 60					
	Bank 61					
	Bank 62					
	Bank 63					
	Bank 65					
	Bank 66					
	Bank 67					
	Bank 68					
	Bank 70					
	Bank 71					
	Bank 72					
	Bank 73					
	Bank 74					
	Bank 75					
	Bank 76					
	Bank 77					
	Bank 78					
	Bank 79					
	Bank 80					
	Bank 81					
	Bank 82					
	Bank 83					
	Bank 84					
	Bank 85					
	Bank 86					
	Bank 87					
	Bank 88					
	Bank 89					
	Bank 90					
	Bank 91					
	Bank 92					
	Bank 93					
	Bank 94					
	Bank 95					
	Bank 96					
	Bank 97					
	Bank 98					
	Bank 99					
	Bank 100					

ug575\_c3\_75\_100815

Figure 3-75: FLGA2892 Package—XCVU440 I/O Bank Diagram

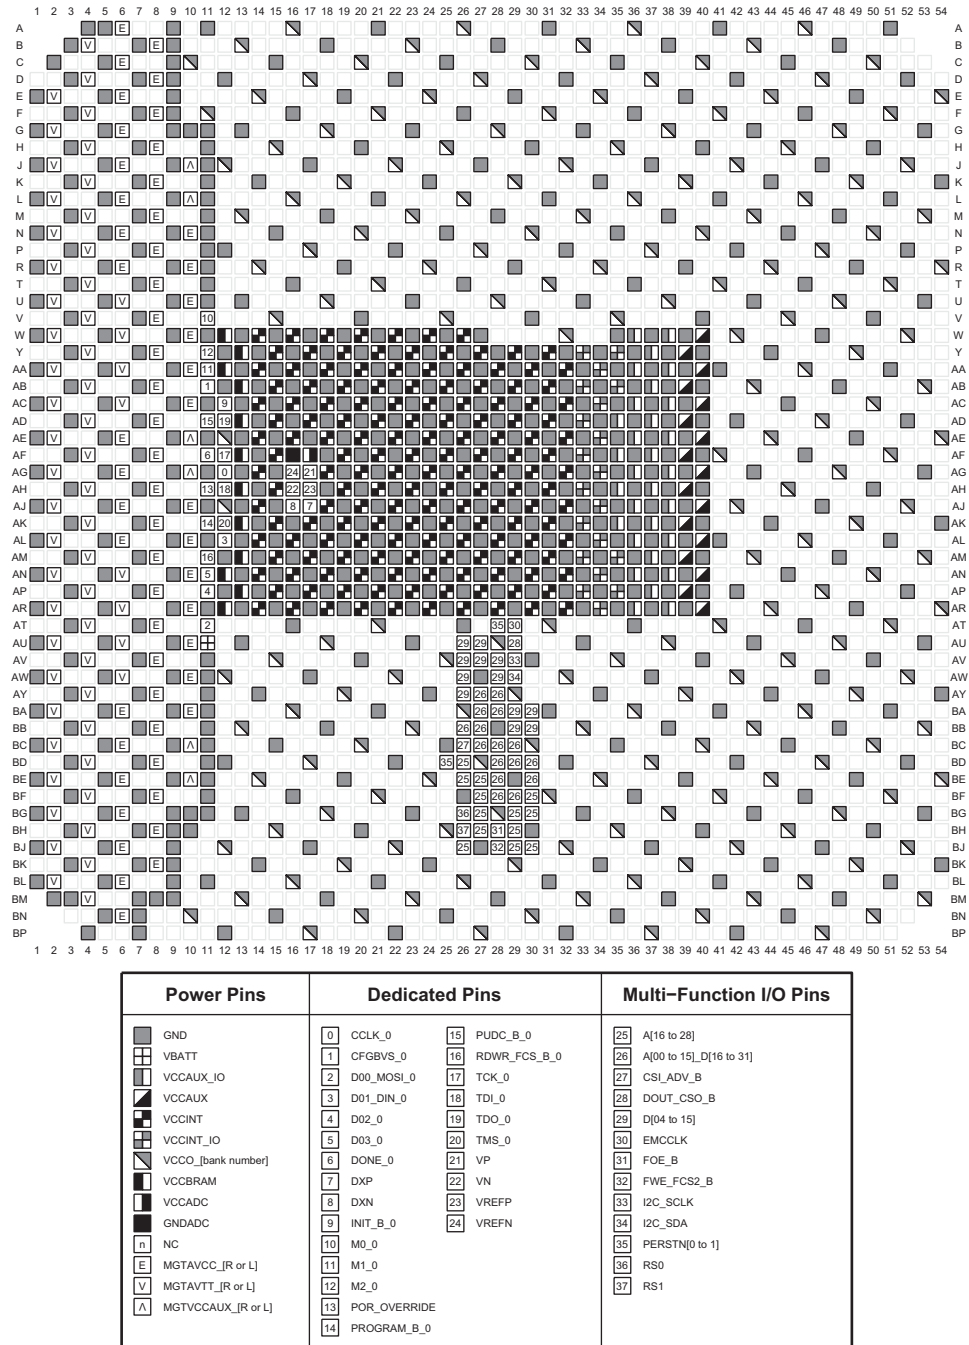

ug575\_c3\_76\_100815

Figure 3-76: FLGA2892 Package—XCVU440 Configuration/Power Diagram



# FFVB676 (XCAU20P)

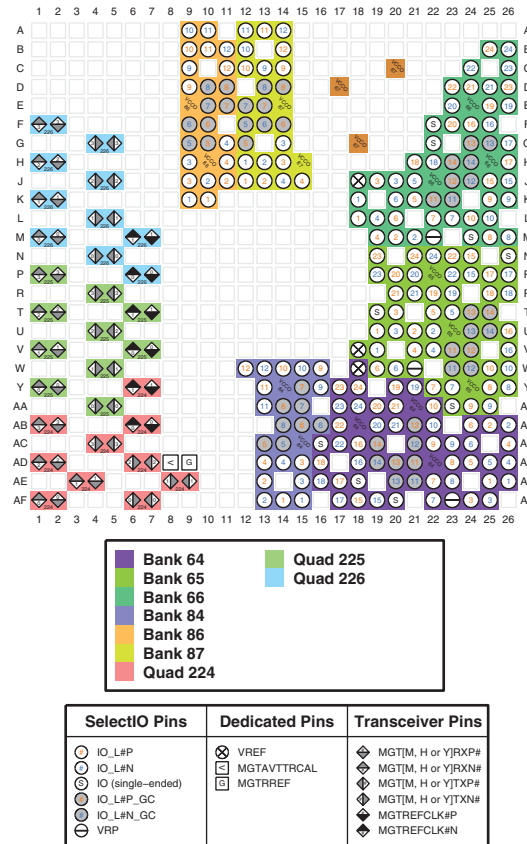


Figure 3-77: FFVB676 Package—XCAU20P I/O Bank Diagram


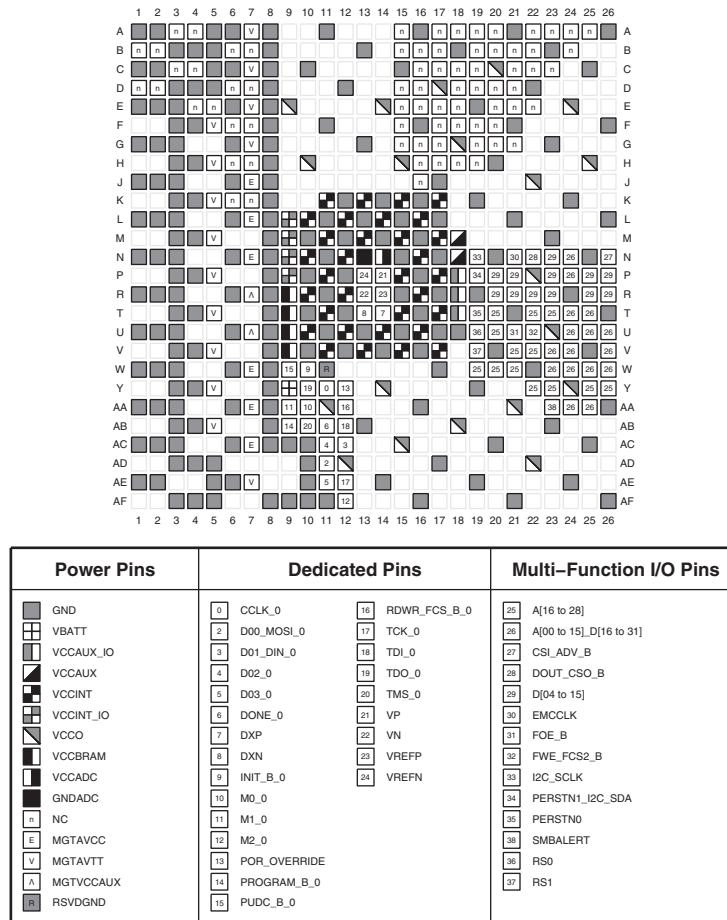


Figure 3-78: FFVB676 Package— XCAU20P Configuration/Power Diagram

# FFVB676 (XCAU25P)

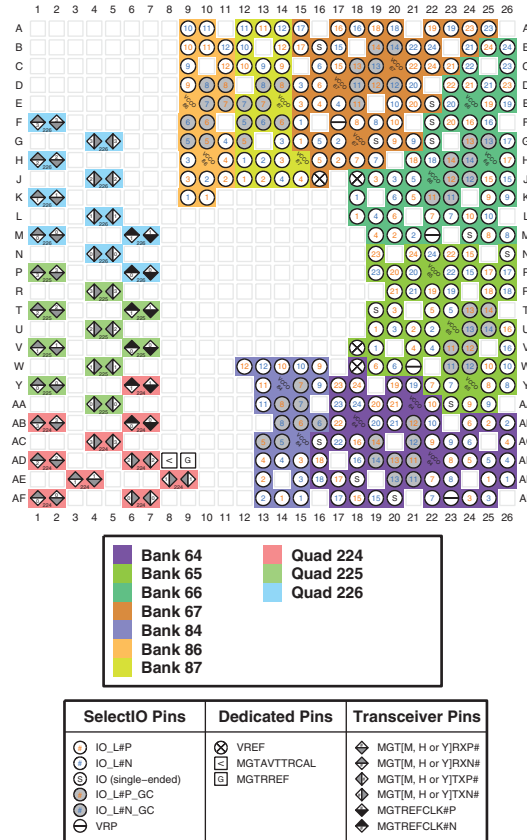

ug575\_c3\_xcau25pffb676\_071921

Figure 3-79: FFVB676 Package—XCAU25P I/O Bank Diagram


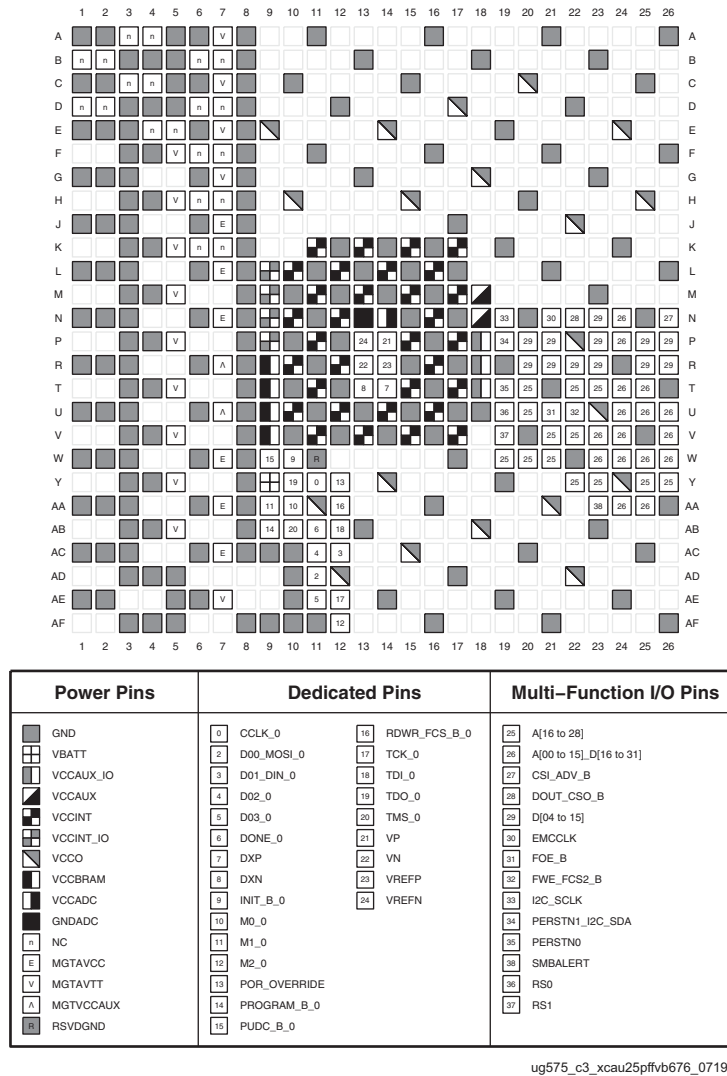



Figure 3-80: FFVB676 Package— XCAU25P Configuration/Power Diagram

# SFVB784 (XCAU20P)

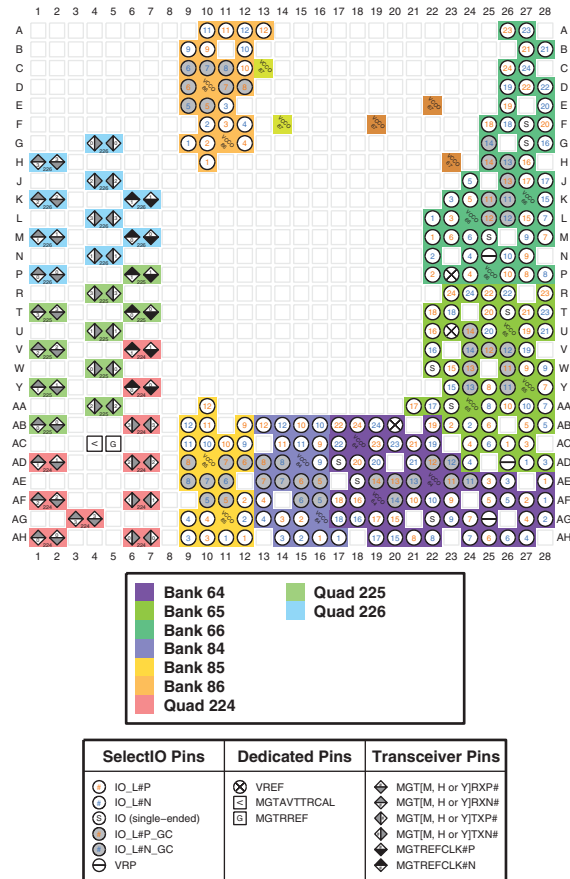

ug575\_c3\_xcau20psfvb784\_071921


Figure 3-81: SFVB784 Package—XCAU20P I/O Bank Diagram

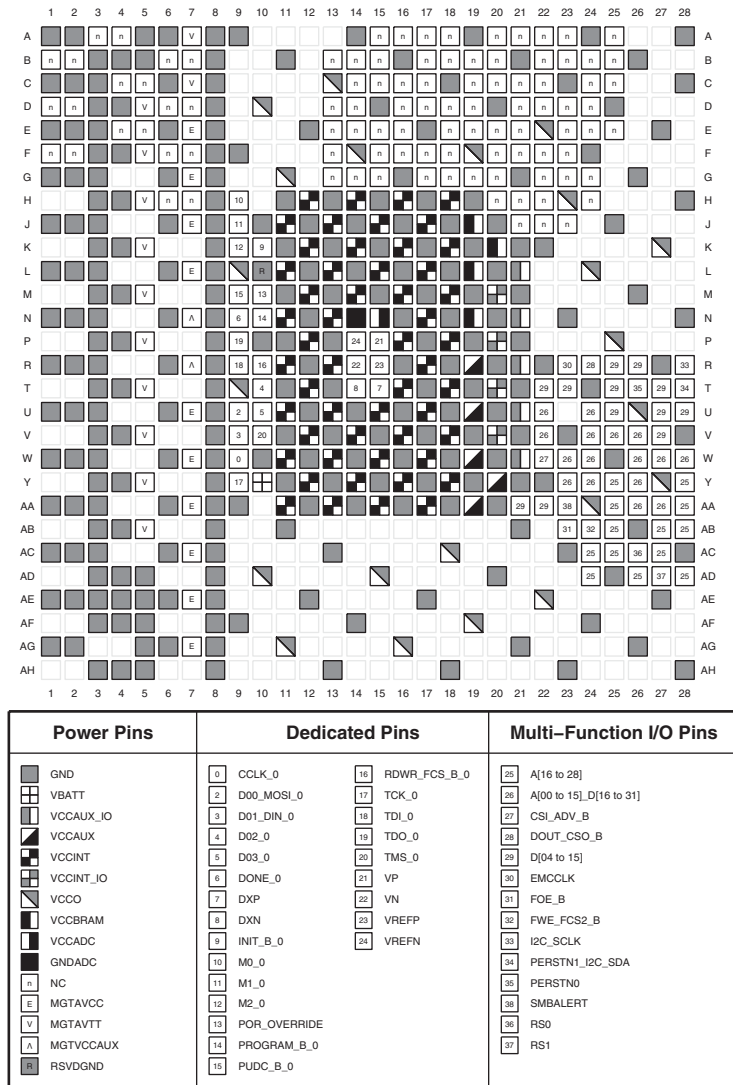

ug575\_c3\_xcau20psfvb784\_071921

Figure 3-82: SFVB784 Package—XCAU20P Configuration/Power Diagram

# SFVB784 (XCAU25P)

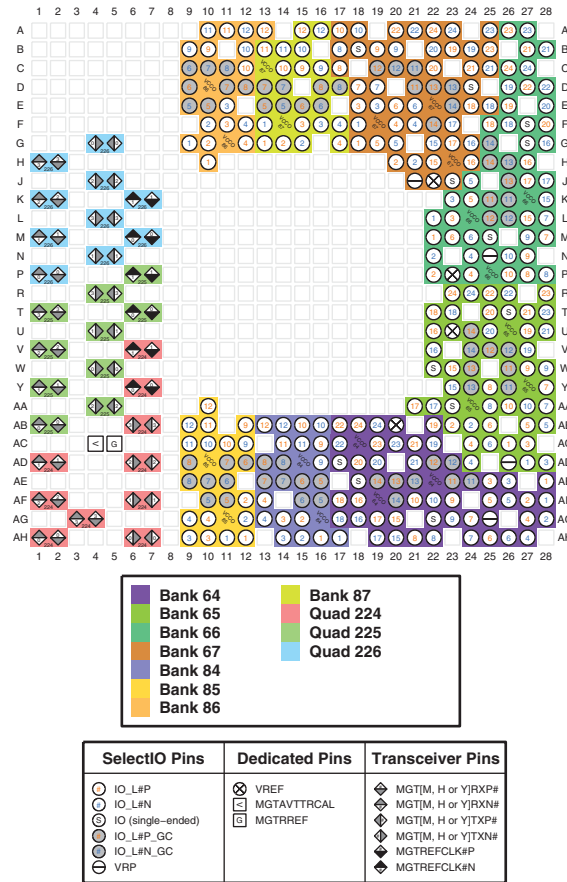

ug575\_c3\_xcau25pfvb784\_071921

Figure 3-83: SFVB784 Package—XCAU25P I/O Bank Diagram


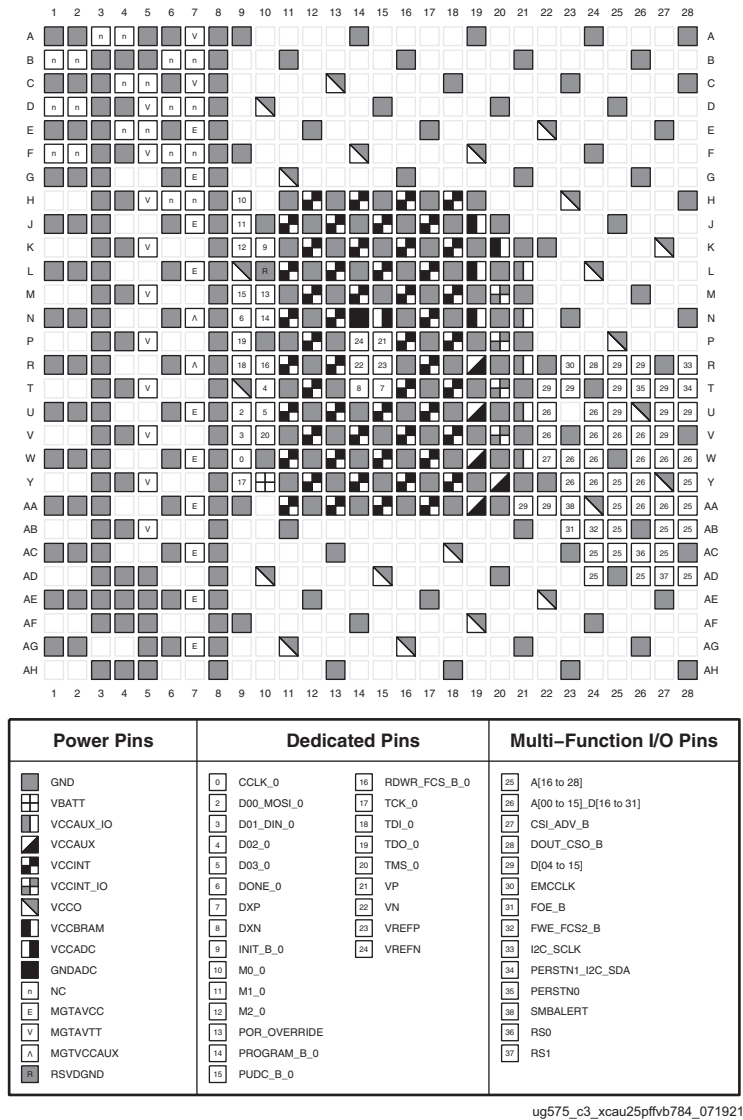


Figure 3-84: SFVB784 Package—XCAU25P Configuration/Power Diagram




# FFVA676 (XCKU3P and XCKU5P)

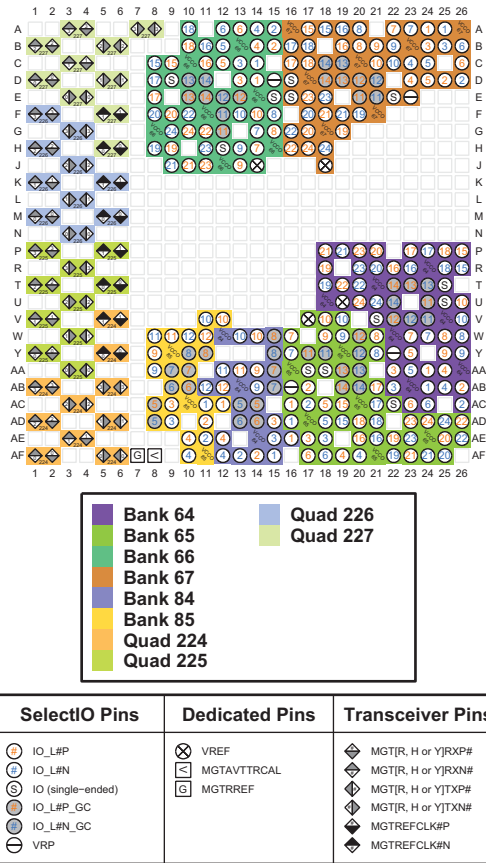

ug575\_c3\_100\_030817

Figure 3-85: FFVA676 Package—XCKU3P and XCKU5P I/O Bank Diagram

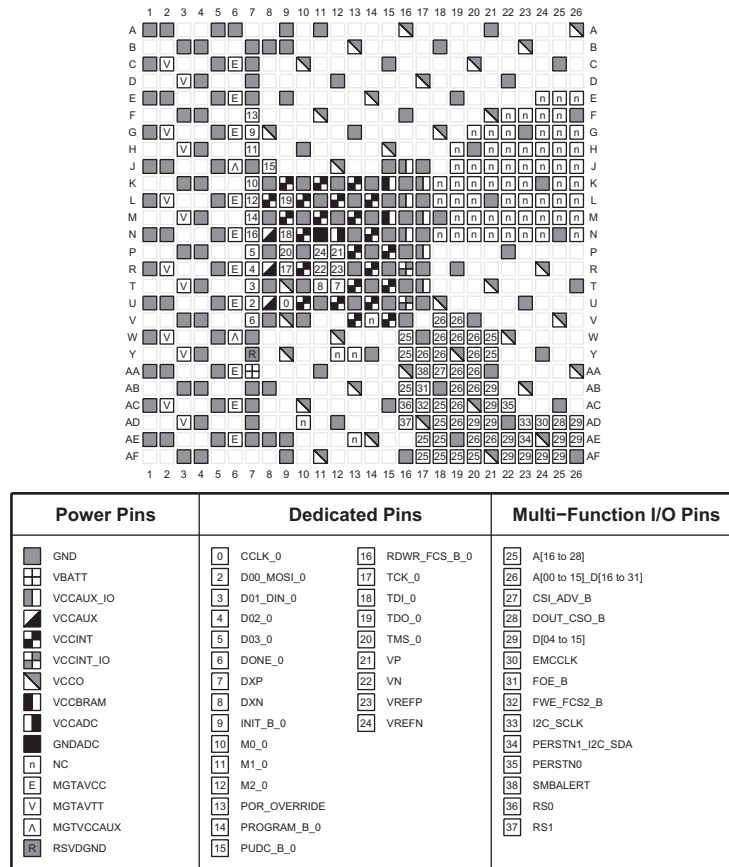

ug575\_c3\_100\_030817

Figure 3-86: FFVA676 Package—XCKU3P and XCKU5P Configuration/Power Diagram

# FFVB676 (XCKU3P and XCKU5P) and FFRB676 (XQKU5P)

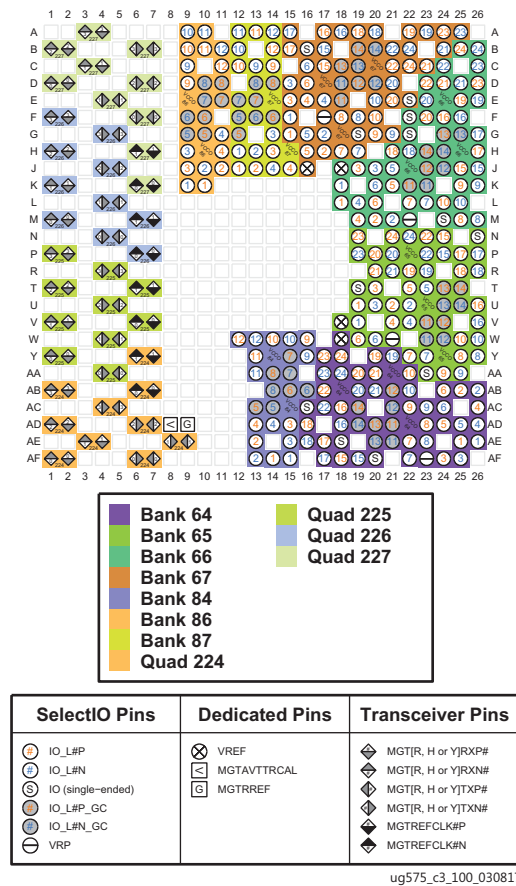


Figure 3-87: FFVB676 Package—XCKU3P and XCKU5P and FFRB676 Package—XQKU5P I/O Bank Diagram

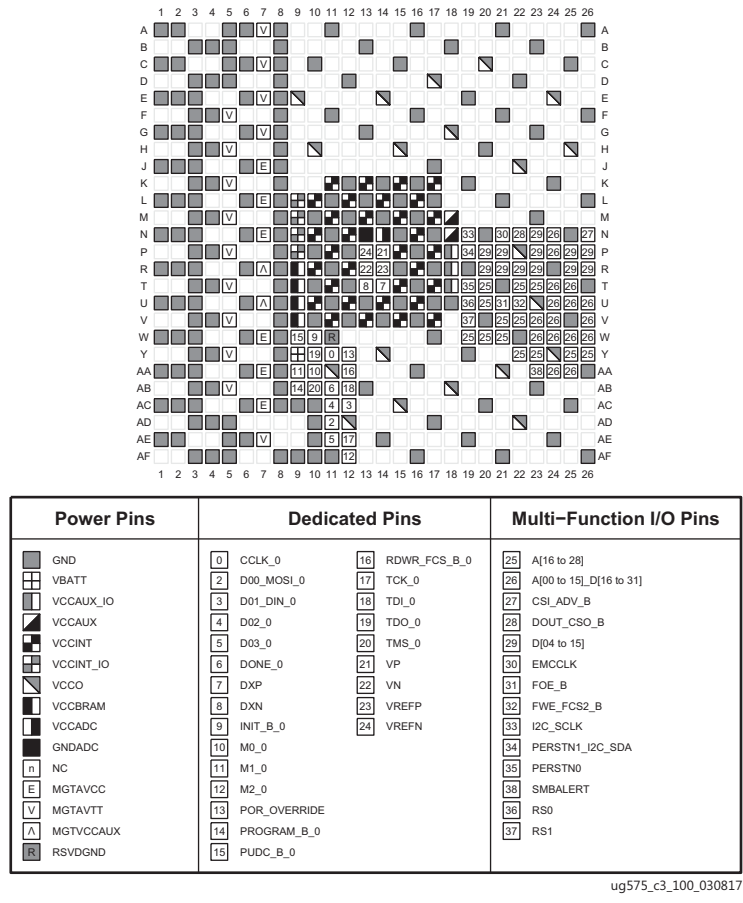


Figure 3-88: FFVB676 Package—XCKU3P and XCKU5P and FFRB676 Package—XQKU5P Configuration/Power Diagram

# SFVB784 (XCKU3P and XCKU5P) and SFRB784 (XQKU5P)

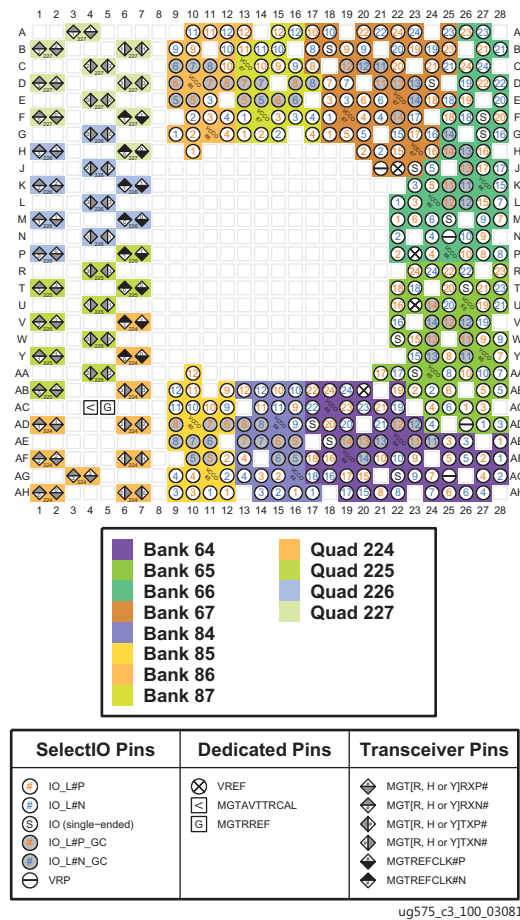


Figure 3-89: SFVB784 Package—XCKU3P and XCKU5P and SFRB784 Package—XQKU5P I/O Bank Diagram


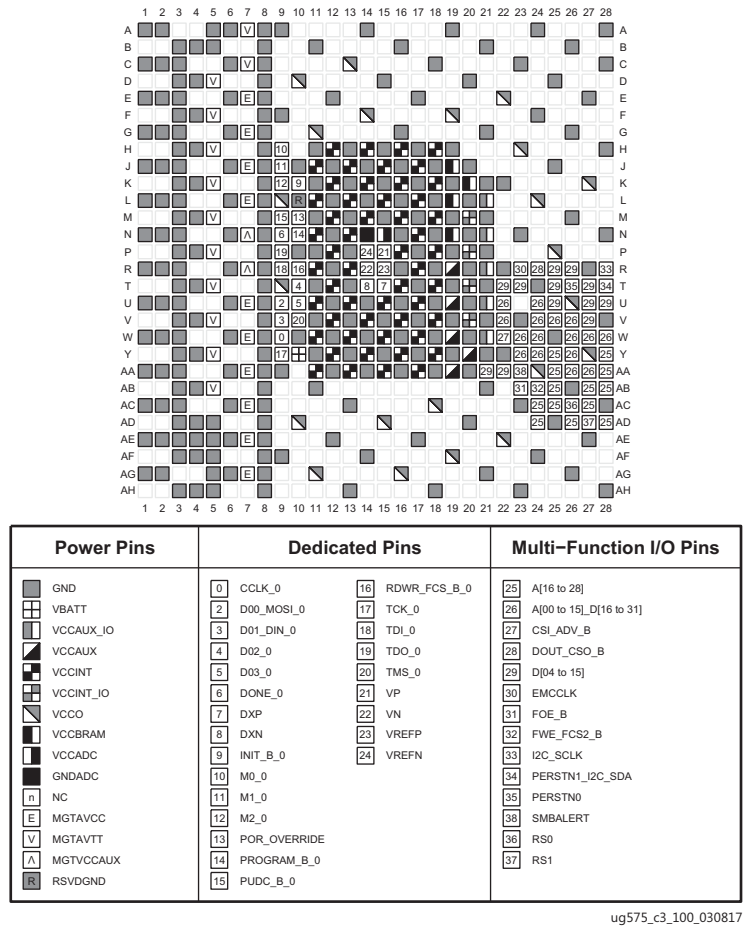



Figure 3-90: SFVB784 Package—XCKU3P and XCKU5P and SFRB784 Package—XQKU5P Configuration/Power Diagram

# FFVD900 (XCKU3P and XCKU5P)

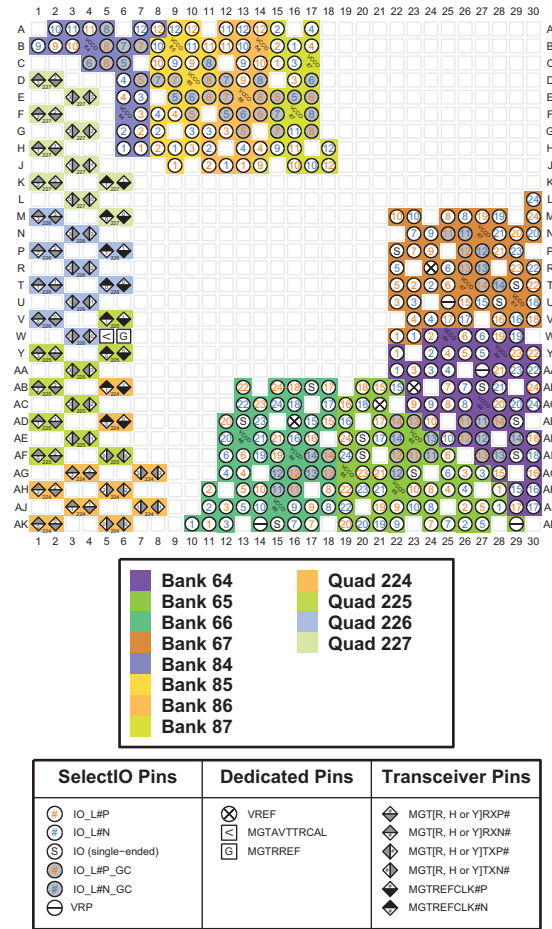

ug575\_c3\_100\_030817

Figure 3-91: FFVD900 Package—XCKU3P and XCKU5P I/O Bank Diagram

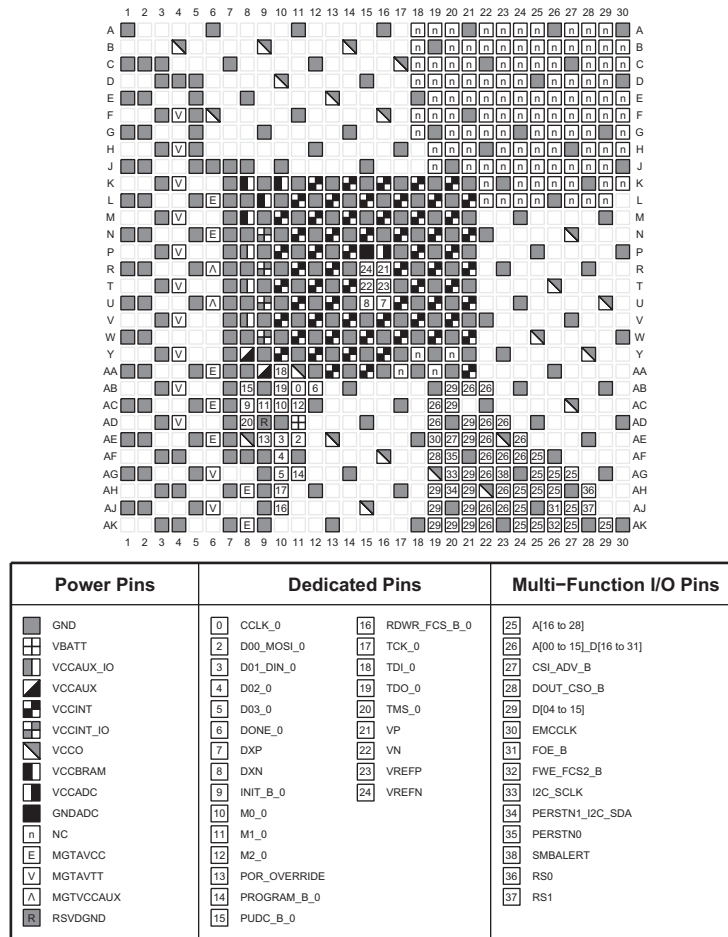


ug575\_c3\_100\_030817

Figure 3-92: FFVD900 Package—XCKU3P and XCKU5P Configuration/Power Diagram



# FFVD900 (XCKU11P)

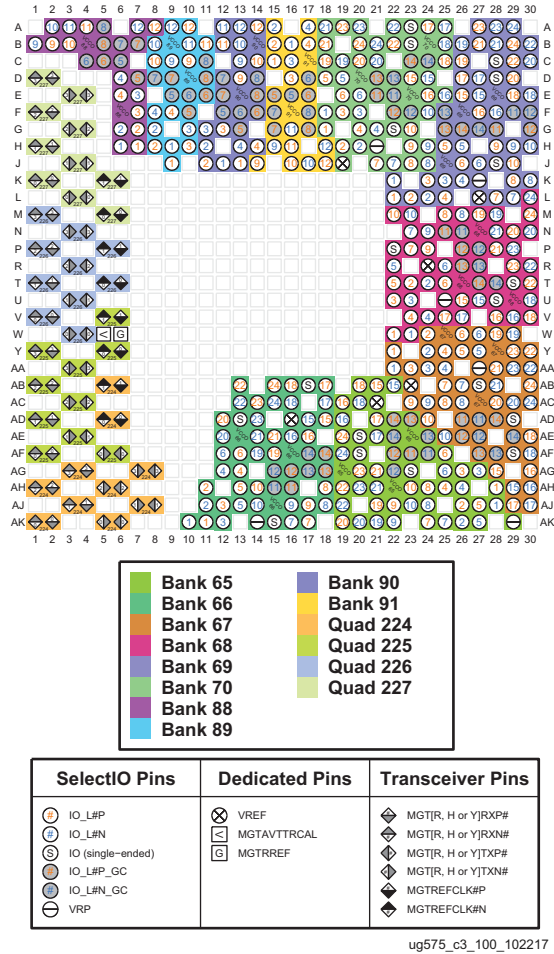

ug575\_c3\_100\_102217

Figure 3-93: FFVD900 Package—XCKU11P I/O Bank Diagram


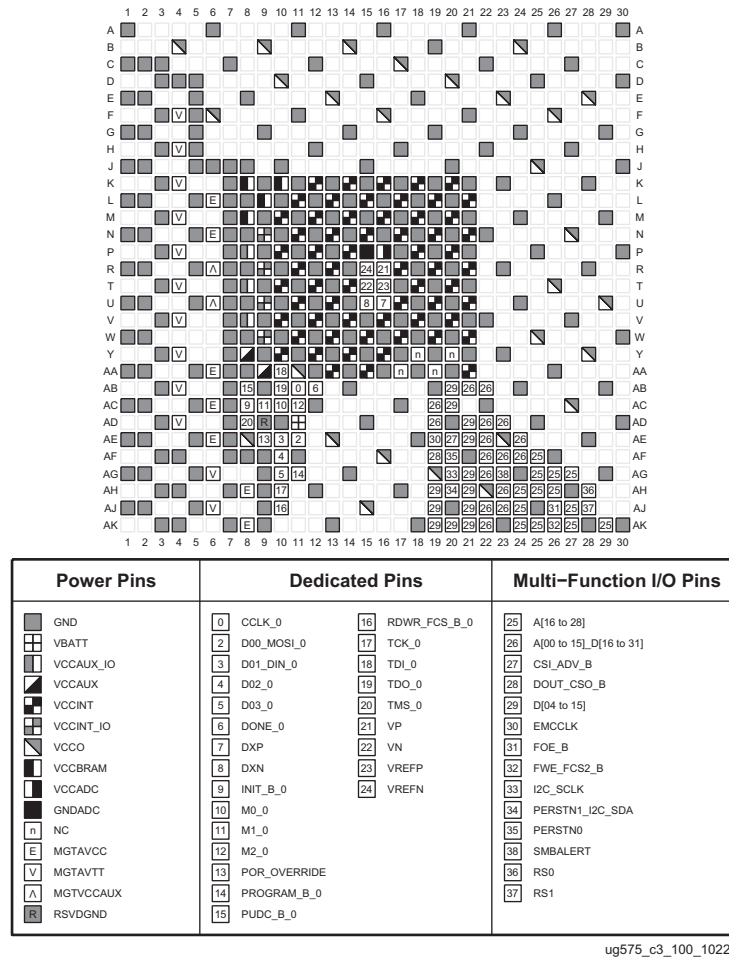


Figure 3-94: FFVD900 Package—XCKU11P Configuration/Power Diagram

# FFVE900 (XCKU9P)

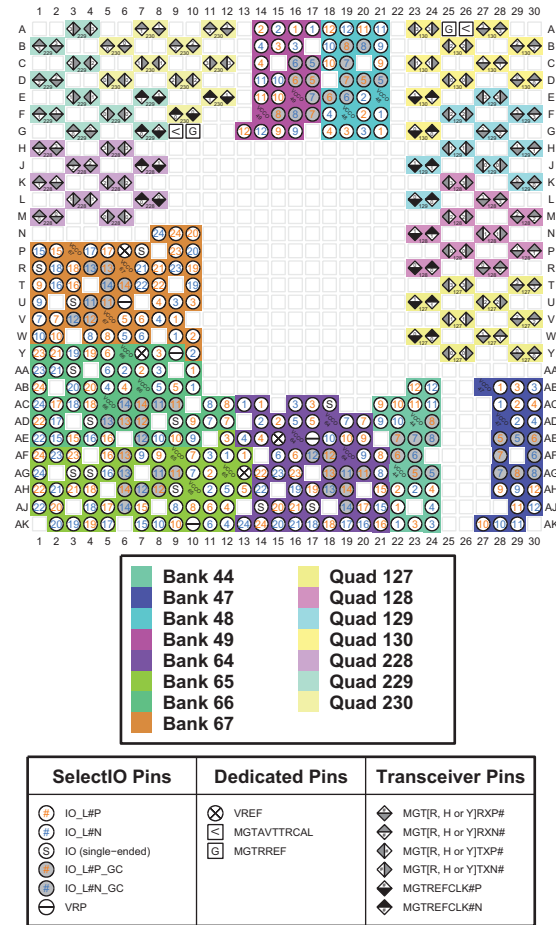

ug575\_c3\_100\_030817

Figure 3-95: FFVE900 Package—XCKU9P I/O Bank Diagram


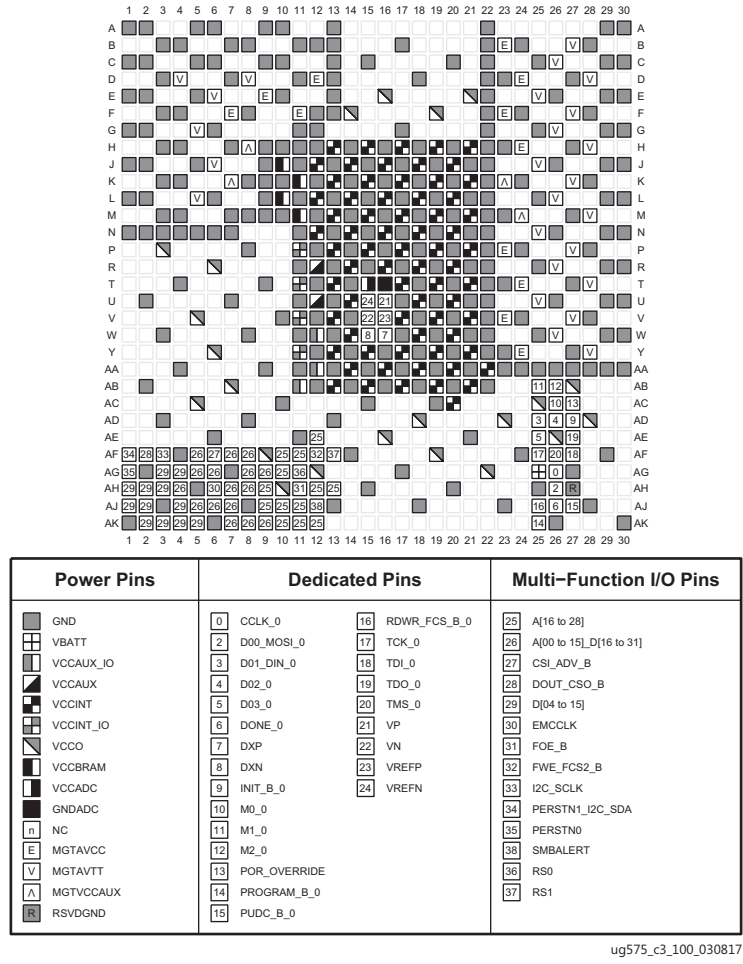



Figure 3-96: FFVE900 Package—XCKU9P Configuration/Power Diagram

# FFVE900 (XCKU13P)

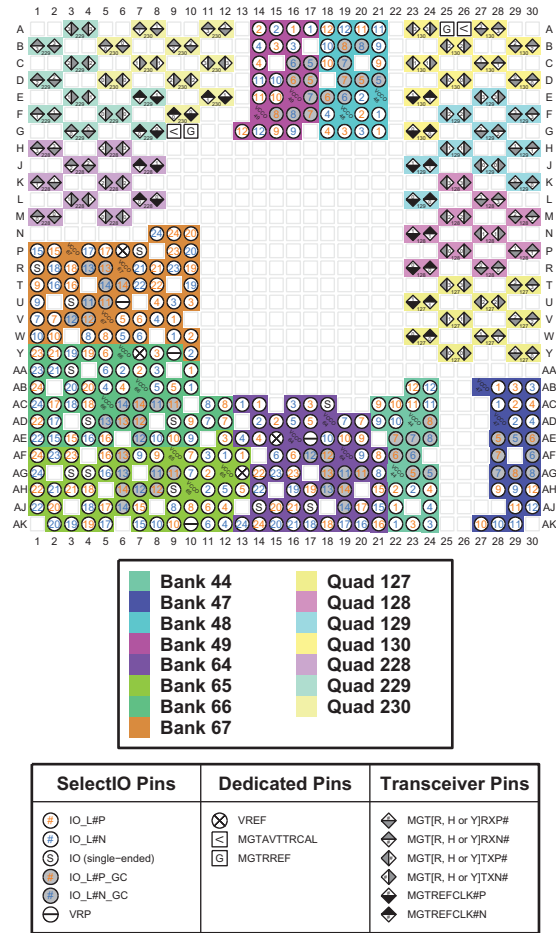

ug575\_c3\_100\_030817


Figure 3-97: FFVE900 Package—XCKU13P I/O Bank Diagram

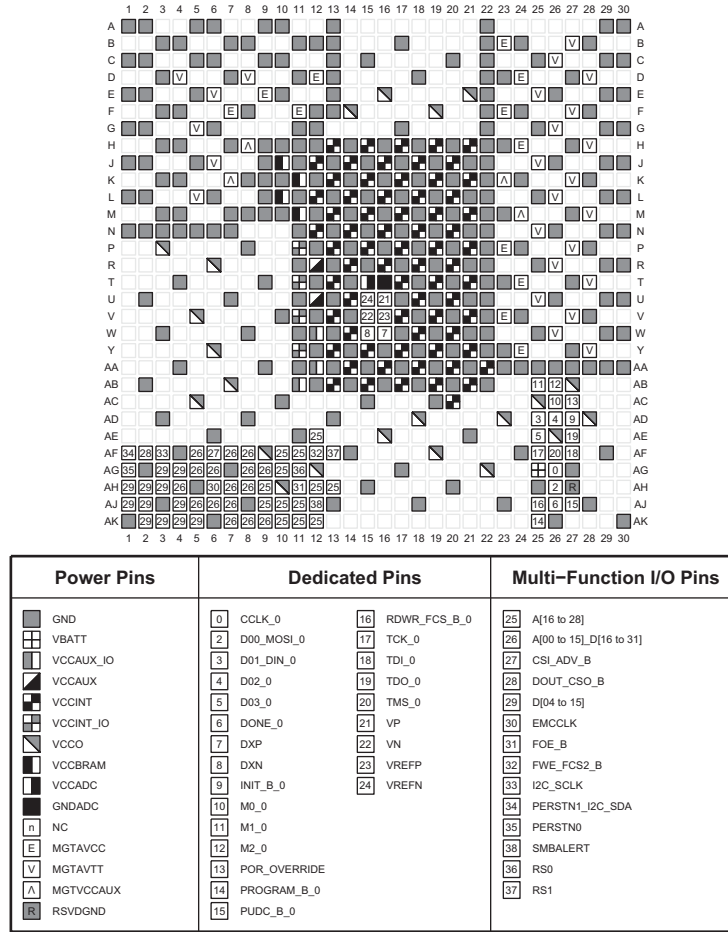

ug575\_c3\_100\_030817


Figure 3-98: FFVE900 Package—XCKU13P Configuration/Power Diagram

# FFVA1156 (XCKU11P)

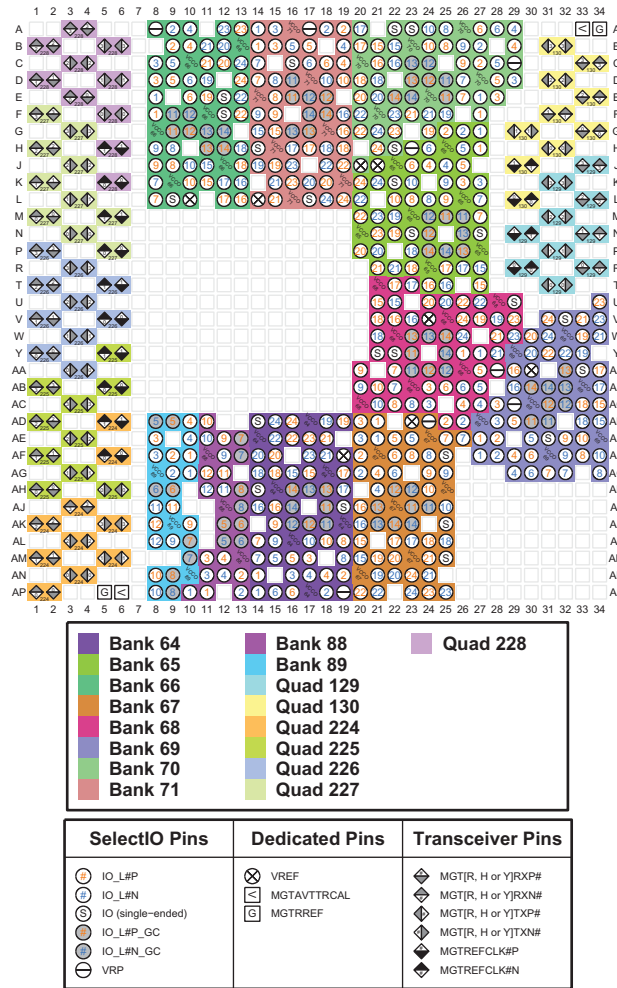

ug575\_c3\_100\_062217

Figure 3-99: FFVA1156 Package—XCKU11P I/O Bank Diagram

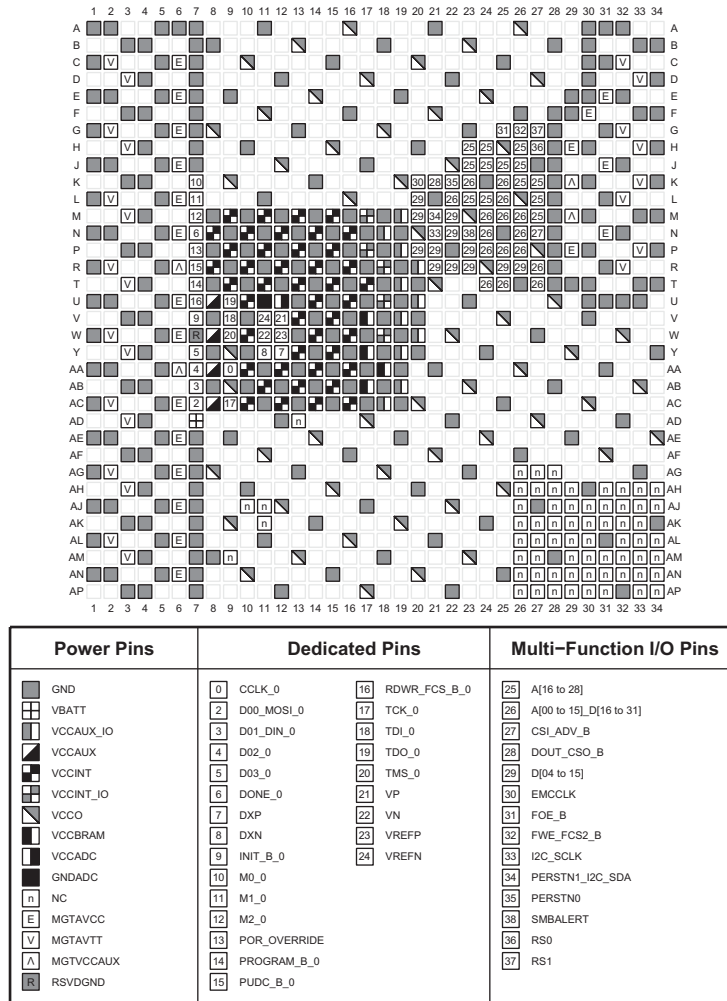

ug575\_c3\_100\_062217

Figure 3-100: FFVA1156 Package—XCKU11P Configuration/Power Diagram



# FFVA1156 (XCKU15P) and FFRA1156 (XQKU15P)


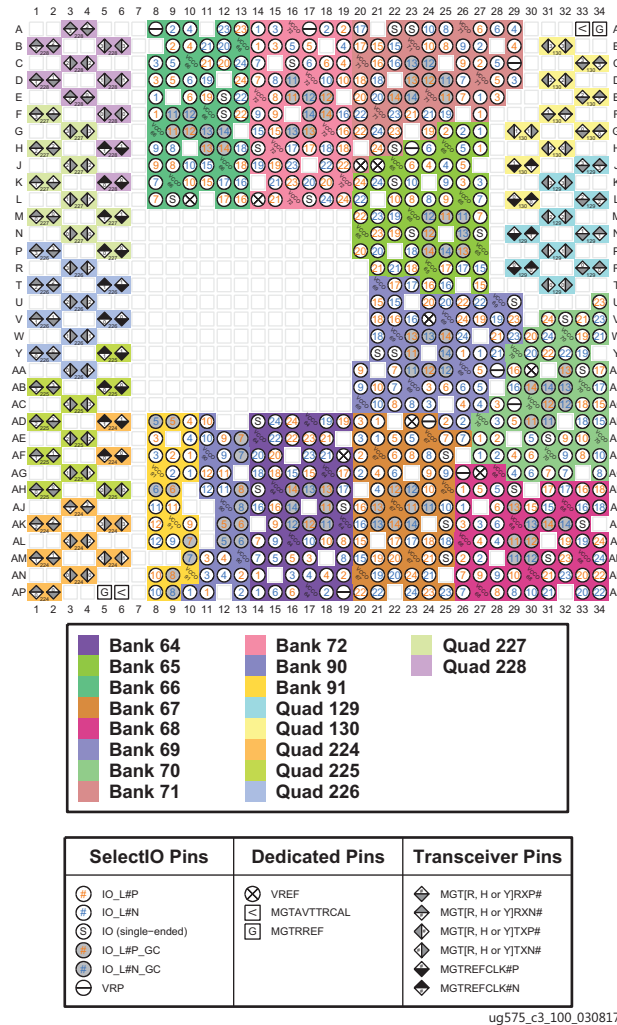



Figure 3-101: FFVA1156 Package—XCKU15P and FFRA1156 Package—XQKU15P I/O Bank Diagram

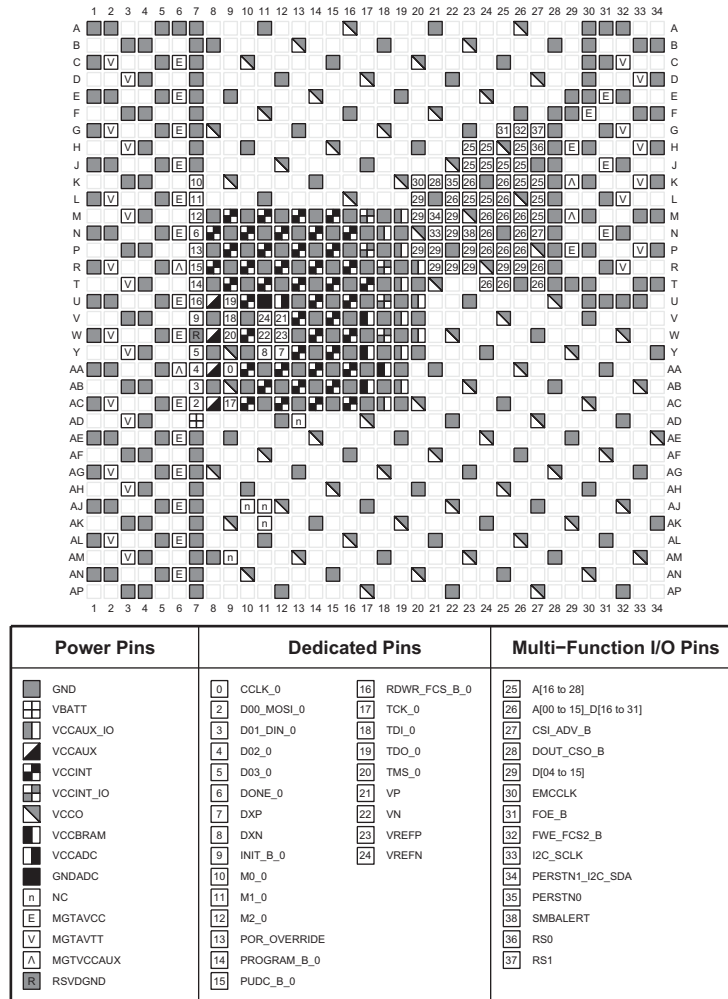

ug575\_c3\_100\_030817

Figure 3-102: FFVA1156 Package—XCKU15P and FFRA1156 Package—XQKU15P Configuration/Power Diagram

# FFVE1517 (XCKU11P)

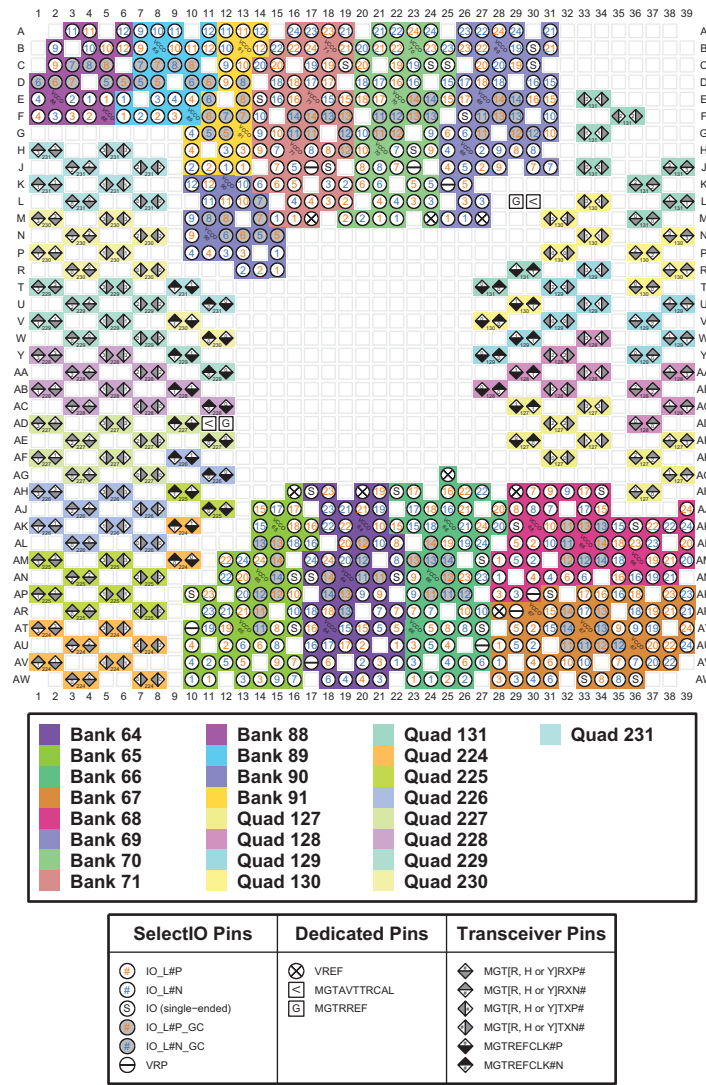

ug575\_c3\_100\_062217

Figure 3-103: FFVE1517 Package—XCKU11P I/O Bank Diagram


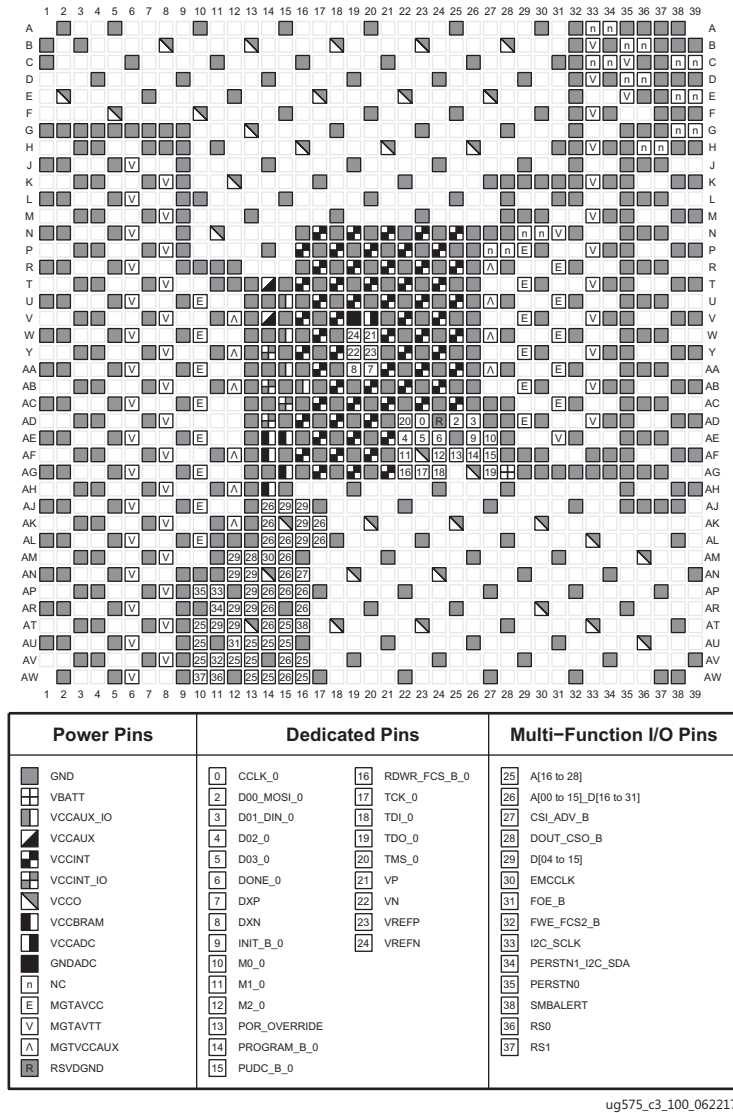



Figure 3-104: FFVE1517 Package—XCKU11P Configuration/Power Diagram

# FFVE1517 (XCKU15P) and FFRE1517 (XQKU15P)

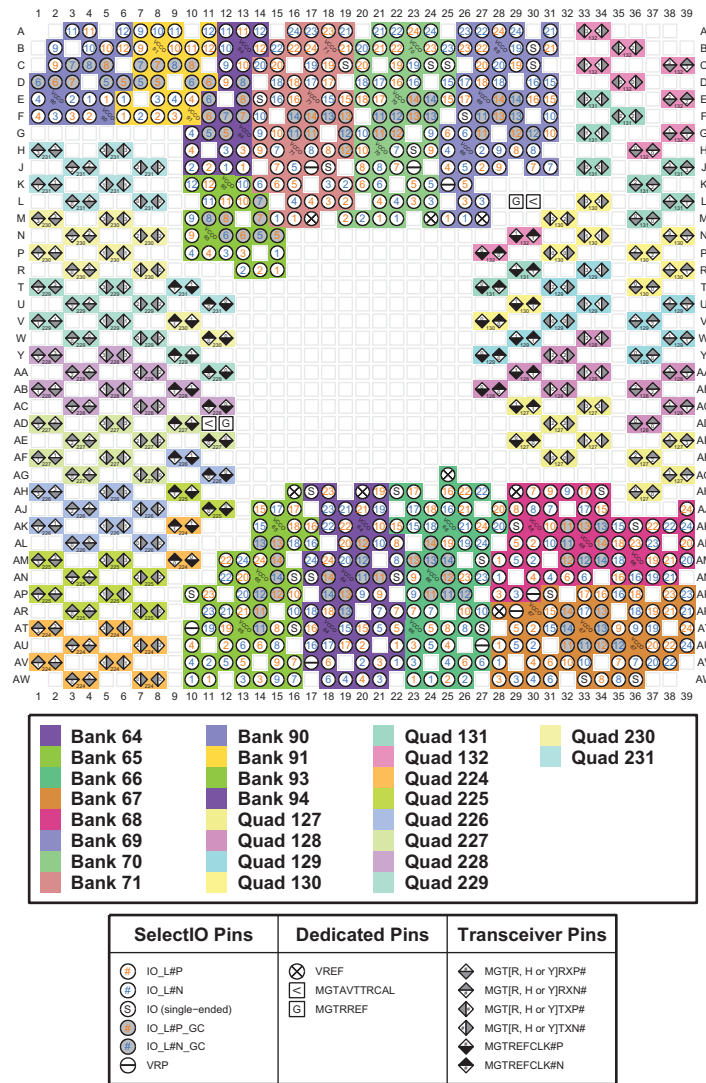

ug575\_c3\_100\_030817


Figure 3-105: FFVE1517 Package—XCKU15P and FFRE1517 Package—XQKU15P I/O Bank Diagram

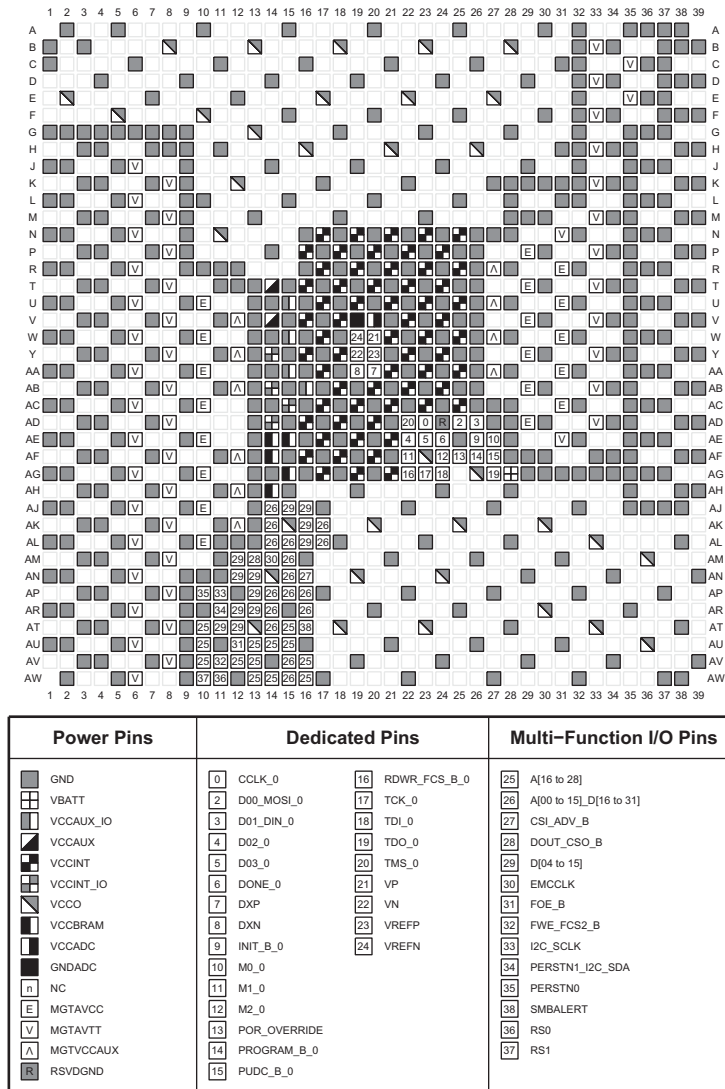

ug575\_c3\_100\_030817


Figure 3-106: FFVE1517 Package—XCKU15P and FFRE1517 Package—XQKU15P Configuration/Power Diagram

# FFVA1760 (XCKU15P)

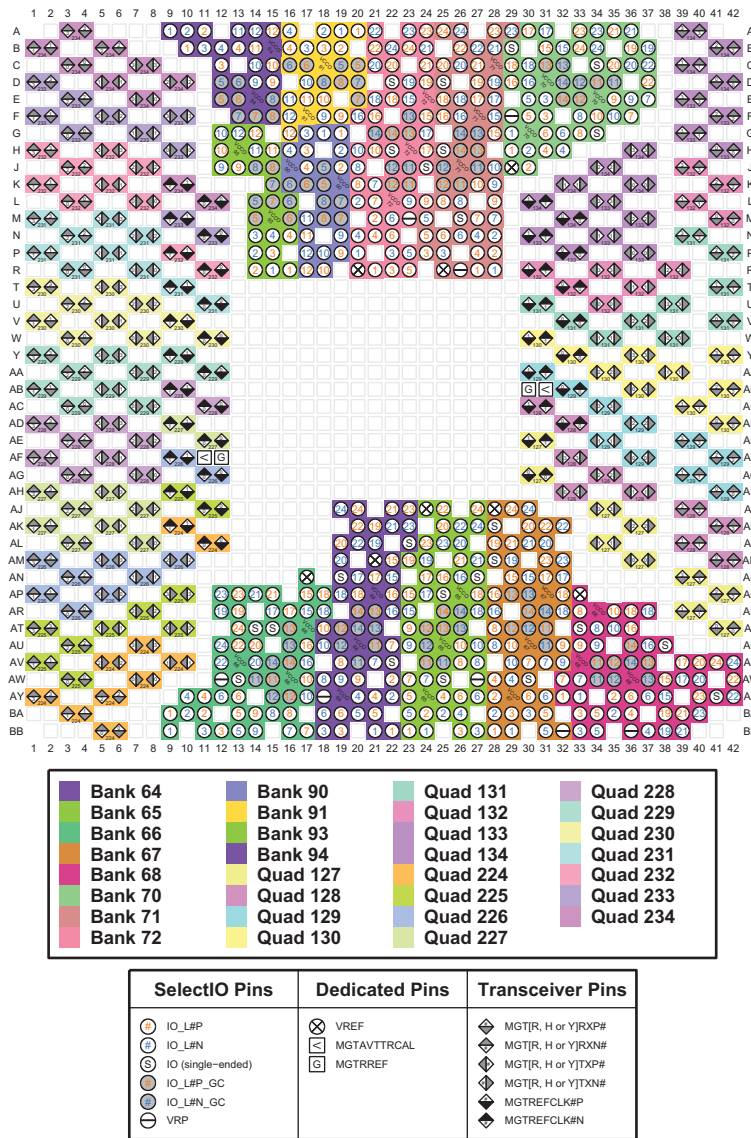

ug575\_c3\_100\_030817

Figure 3-107: FFVA1760 Package—XCKU15P I/O Bank Diagram

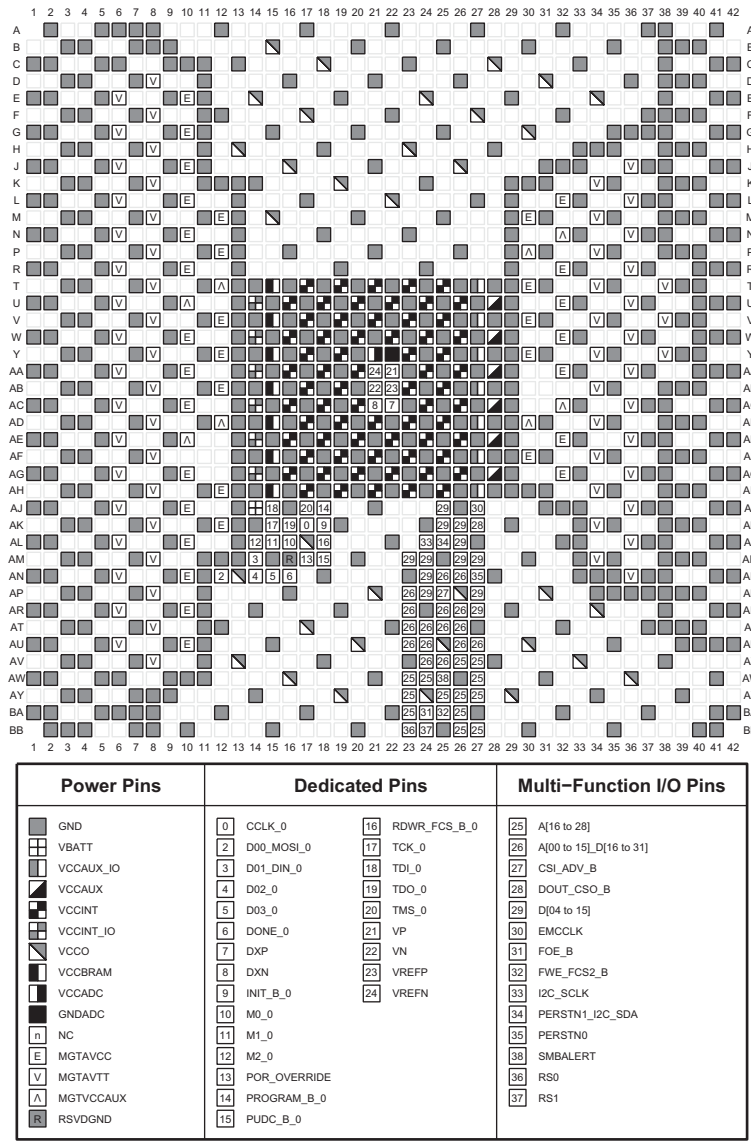


ug575\_c3\_100\_030817

Figure 3-108: FFVA1760 Package—XCKU15P Configuration/Power Diagram




# FFVE1760 (XCKU15P)

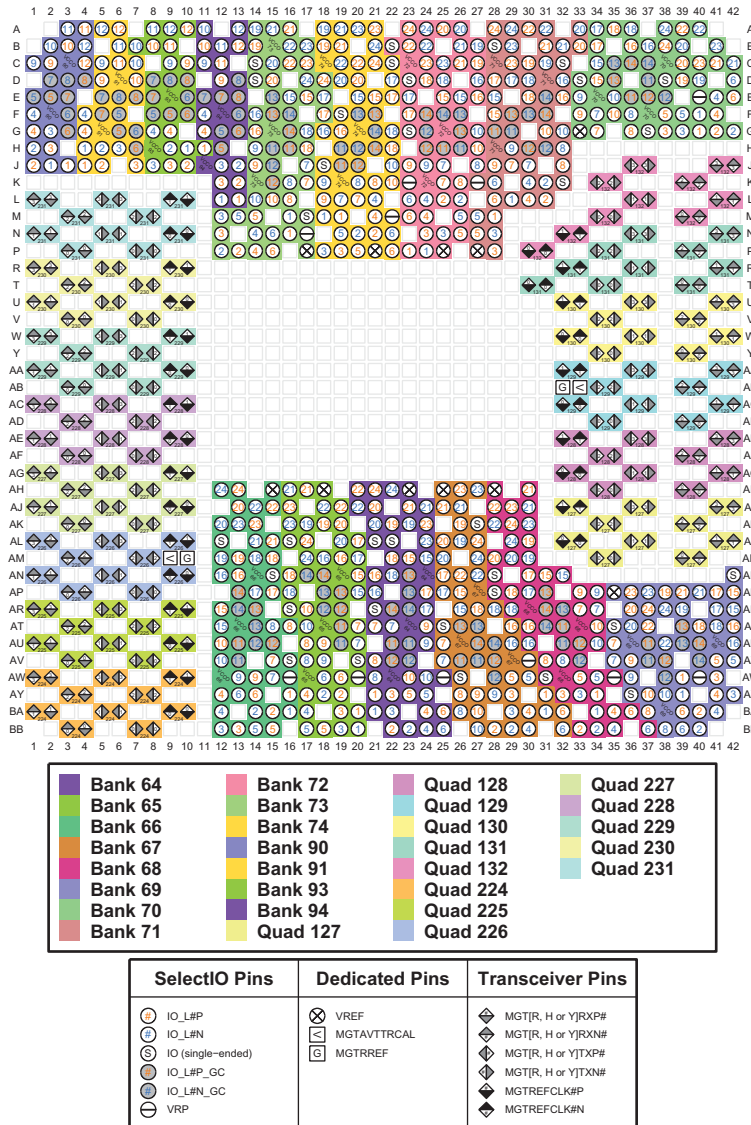

ug575\_c3\_100\_030817

Figure 3-109: FFVE1760 Package—XCKU15P I/O Bank Diagram

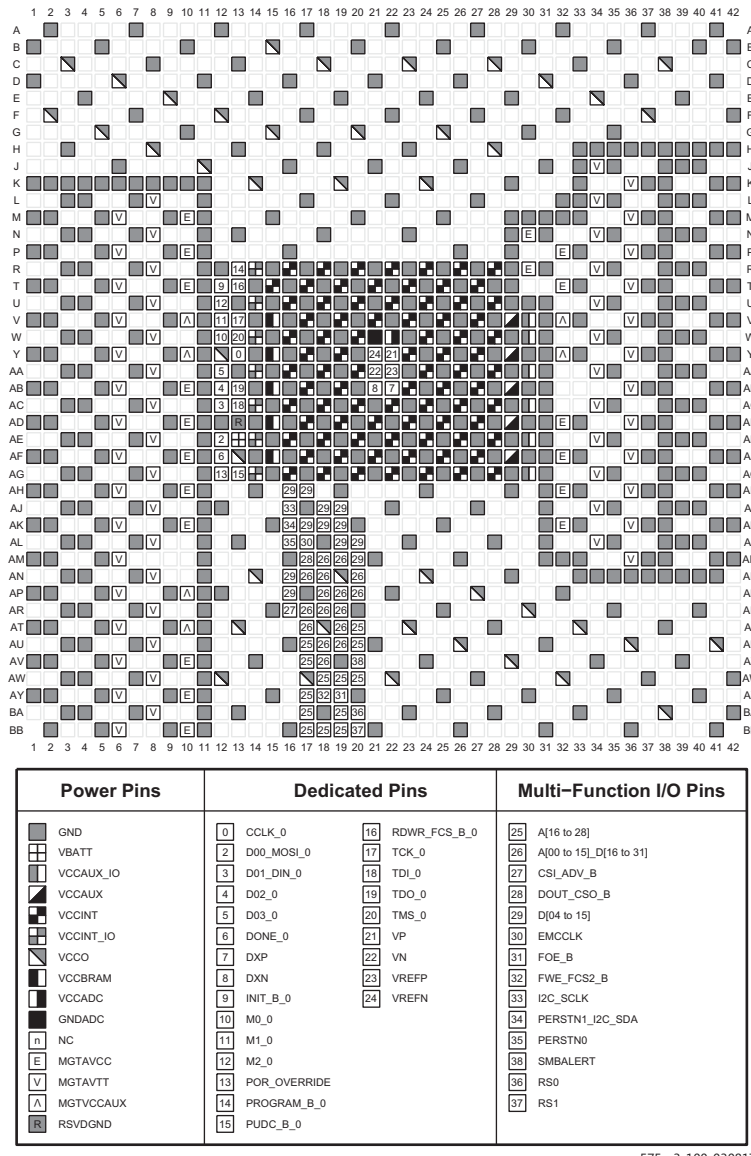

ug575\_c3\_100\_030817

Figure 3-109: FFVE1760 Package—XCKU15P Configuration/Power Diagram

# FFVJ1760 (XCKU19P)

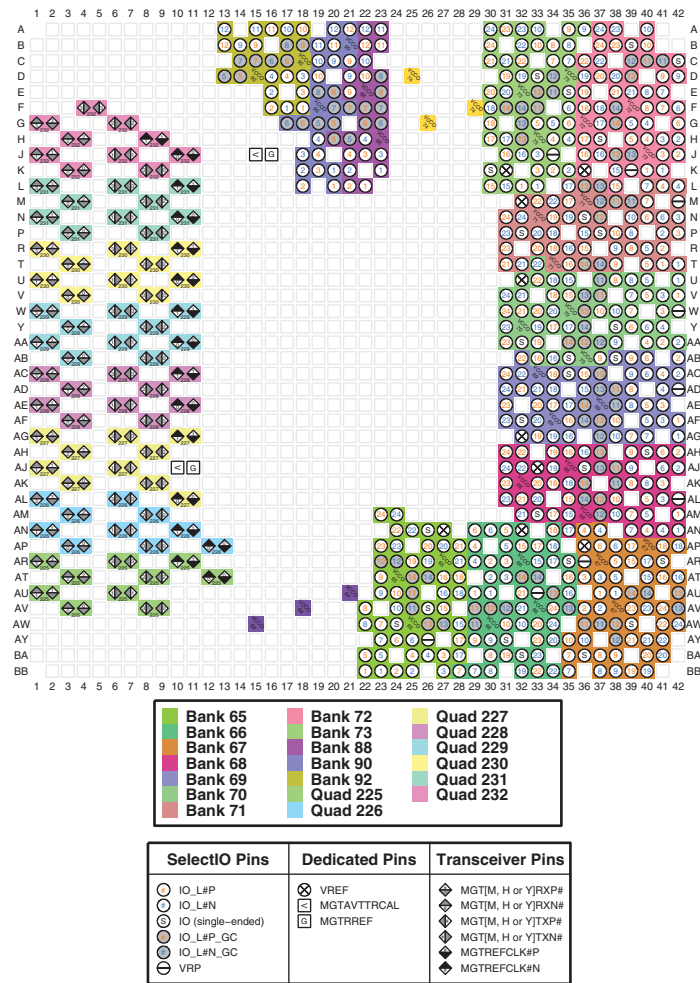


Figure 3-110: FFVJ1760 Package—XCKU19P I/O Bank Diagram


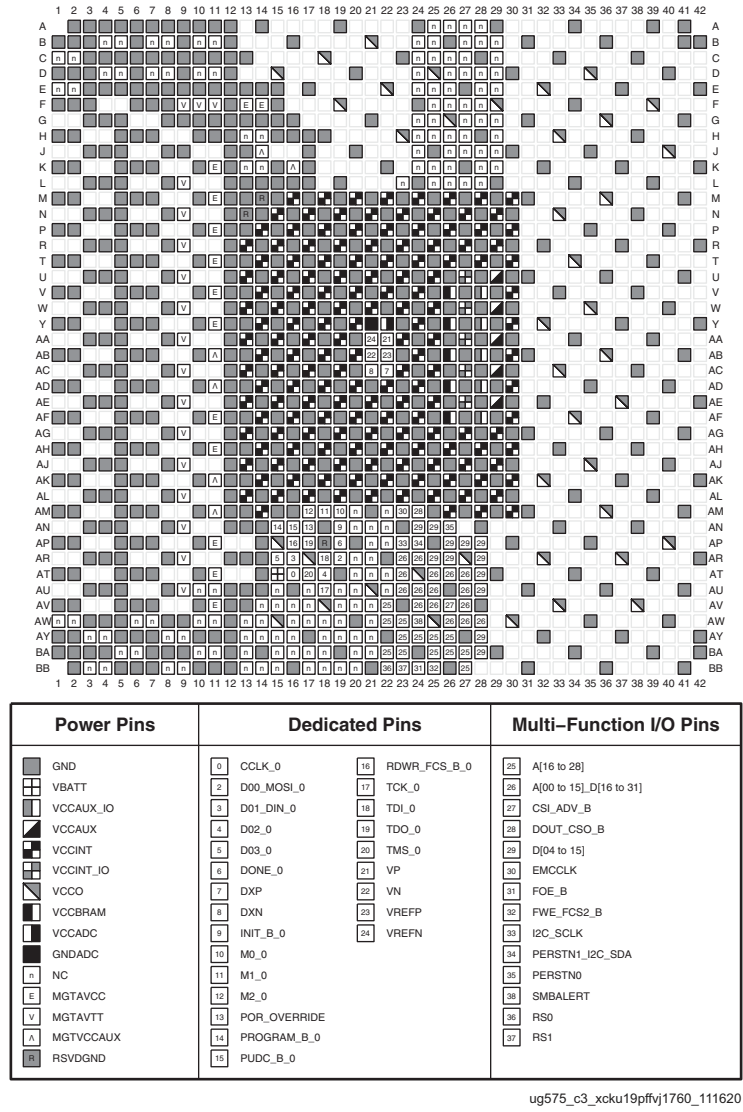


Figure 3-111: FFVJ1760 Package—XCKU19P Configuration/Power Diagram

# FFVB2104 (XCKU19P)

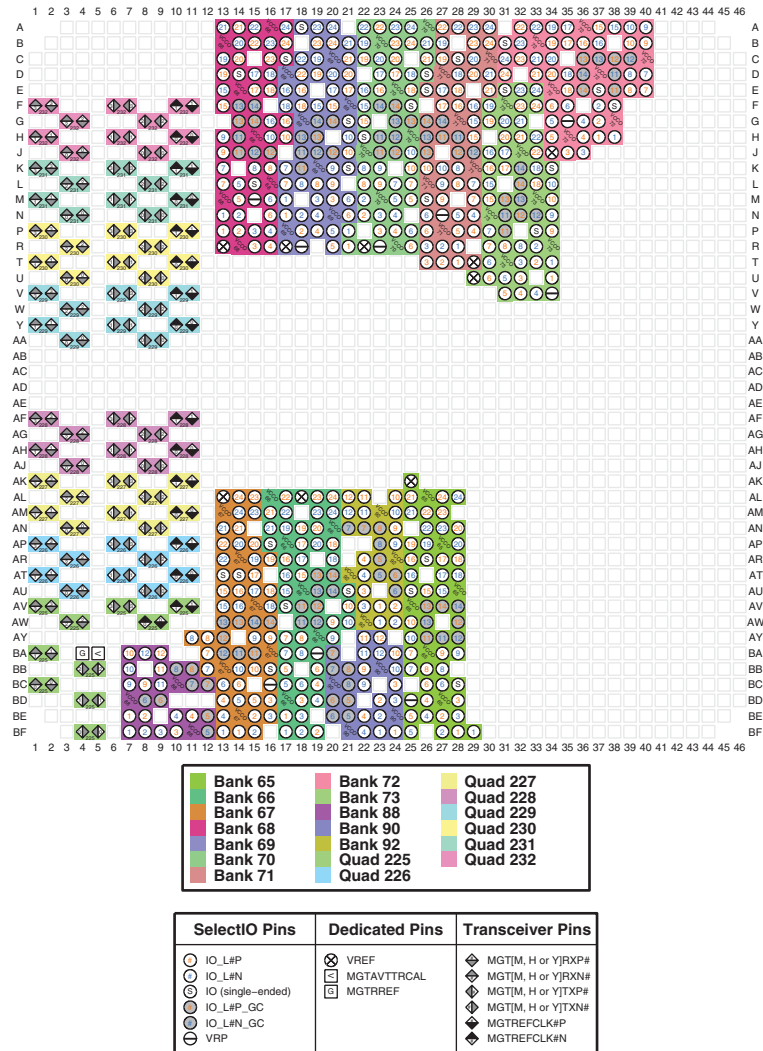

ug575\_c3\_xcku19pffvb2104\_083020

Figure 3-112: FFVB2104 Package—XCKU19P I/O Bank Diagram


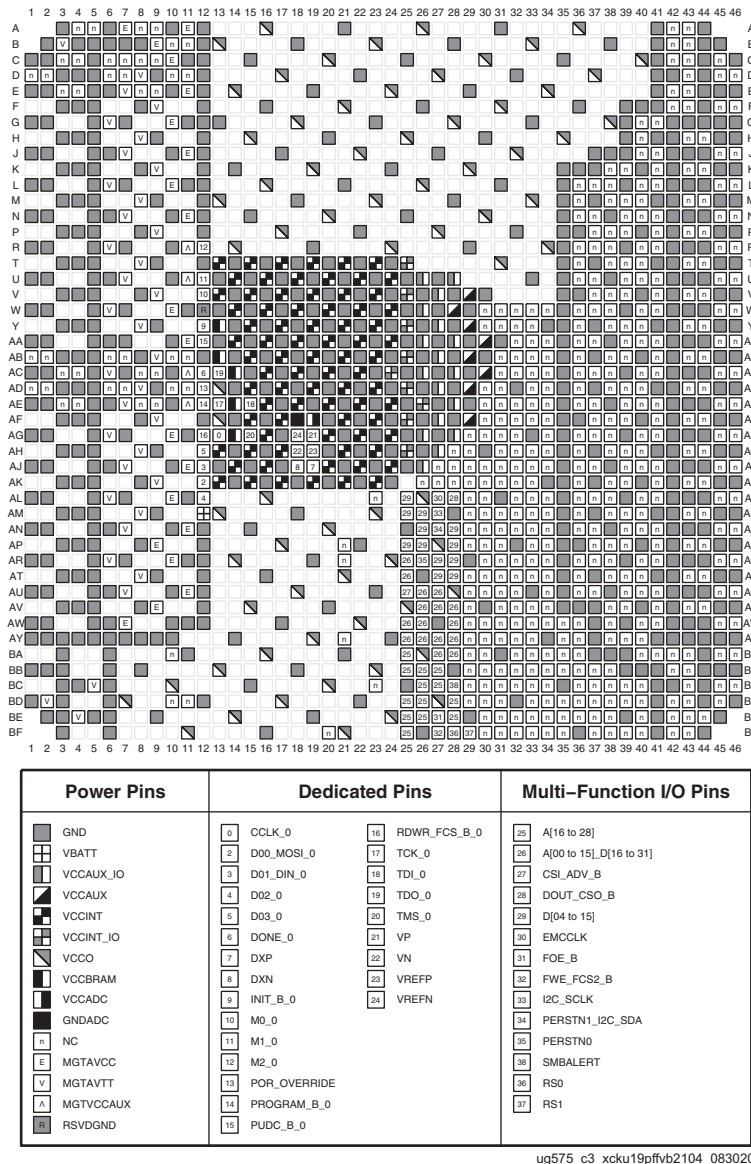


Figure 3-113: FFVB2104 Package—XCKU19P Configuration/Power Diagram


# FFVC1517 (XCVU3P) and FFRC1517 (XQVU3P)

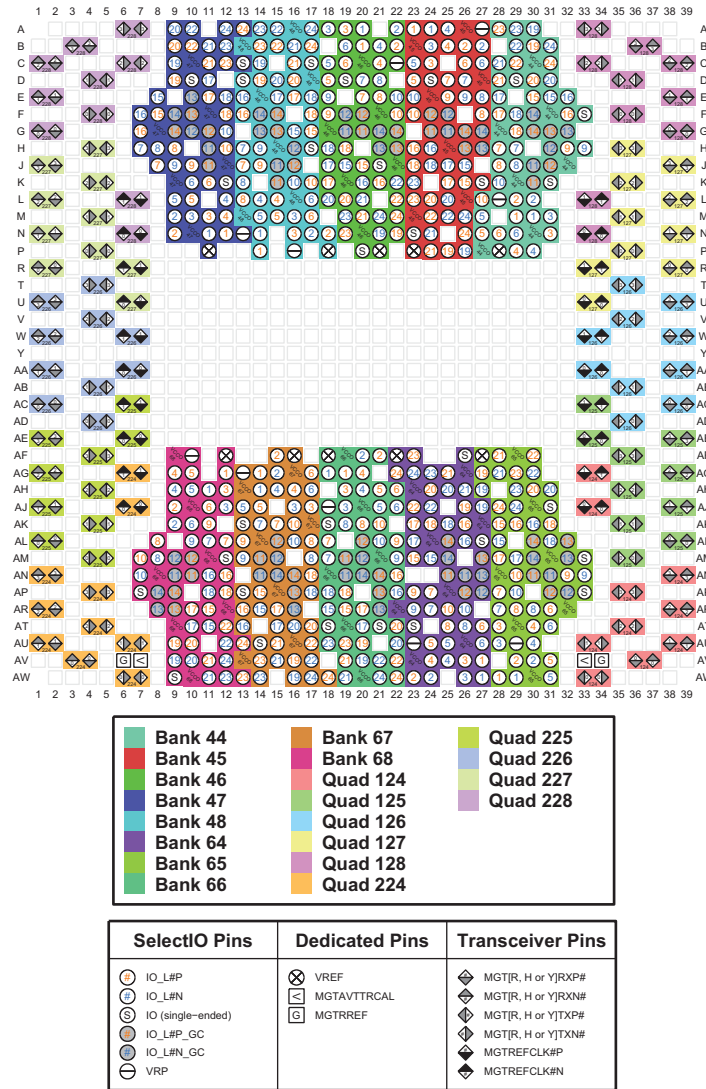

ug575\_c3\_100\_030817

Figure 3-114: FFVC1517 Package—XCVU3P and FFRC1517 Package—XQVU3P I/O Bank Diagram


# FFVC1517 (XCVU3P) and FFRC1517 (XQVU3P)

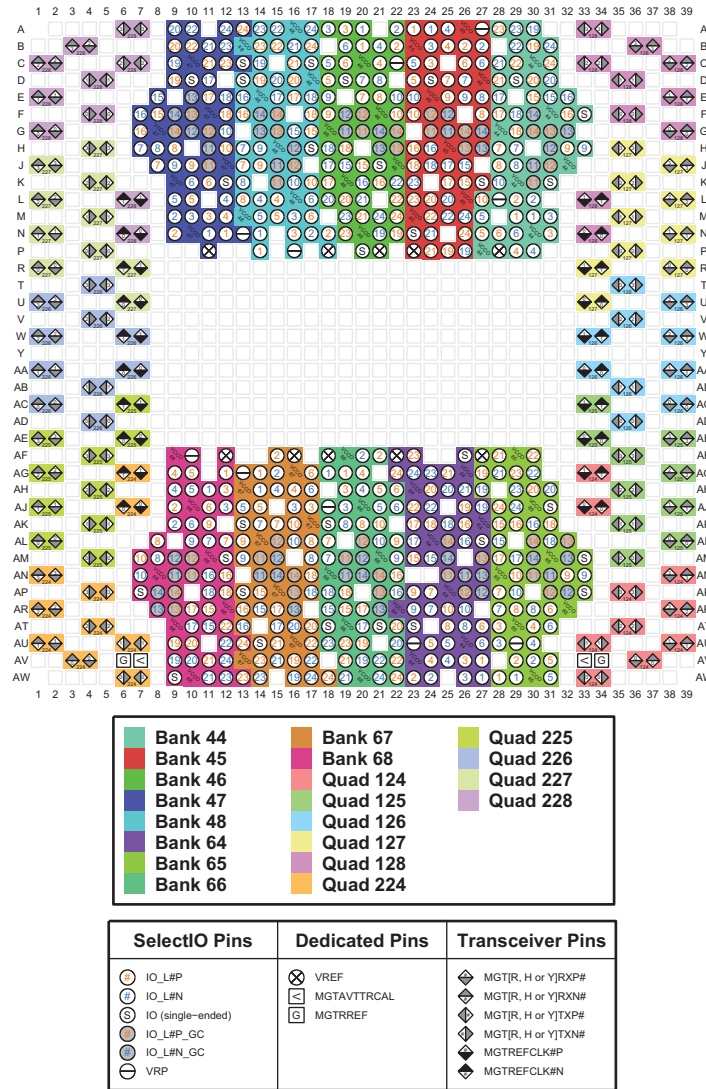

ug575\_c3\_100\_030817

Figure 3-115: FFVC1517 Package—XCVU3P and FFRC1517 Package—XQVU3P I/O Bank Diagram




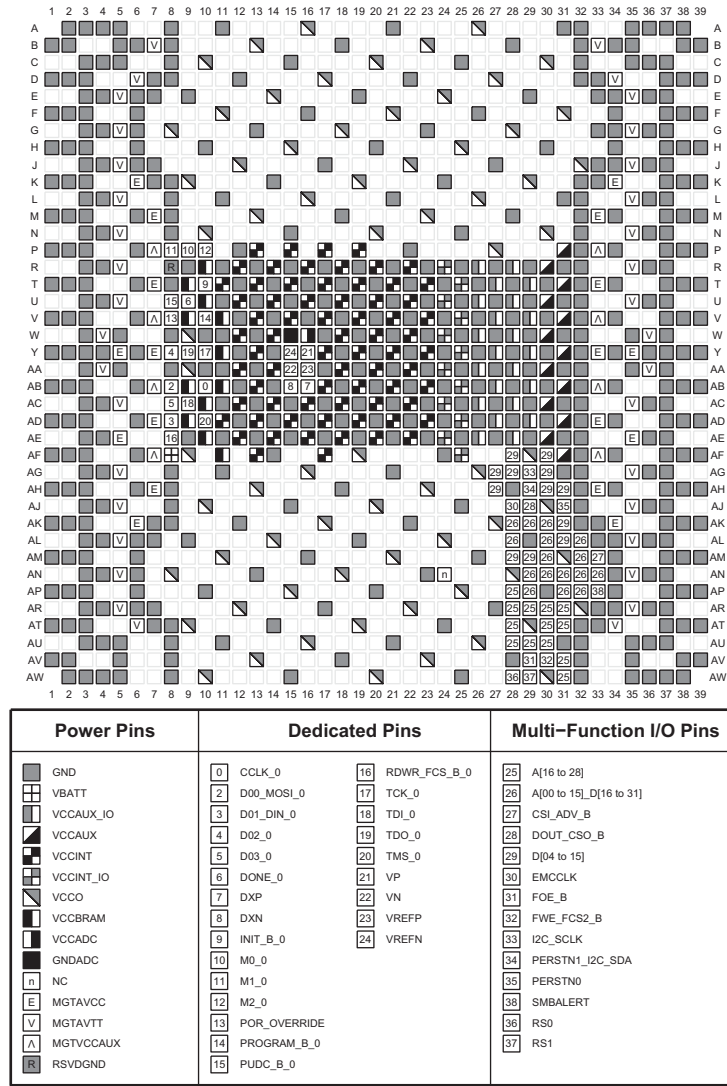

ug575\_c3\_100\_030817

Figure 3-116: FVC1517 Package—XCVU3P and FRC1517 Package—XQVU3P Configuration/Power Diagram

# FSVJ1760 (XCVU23P)

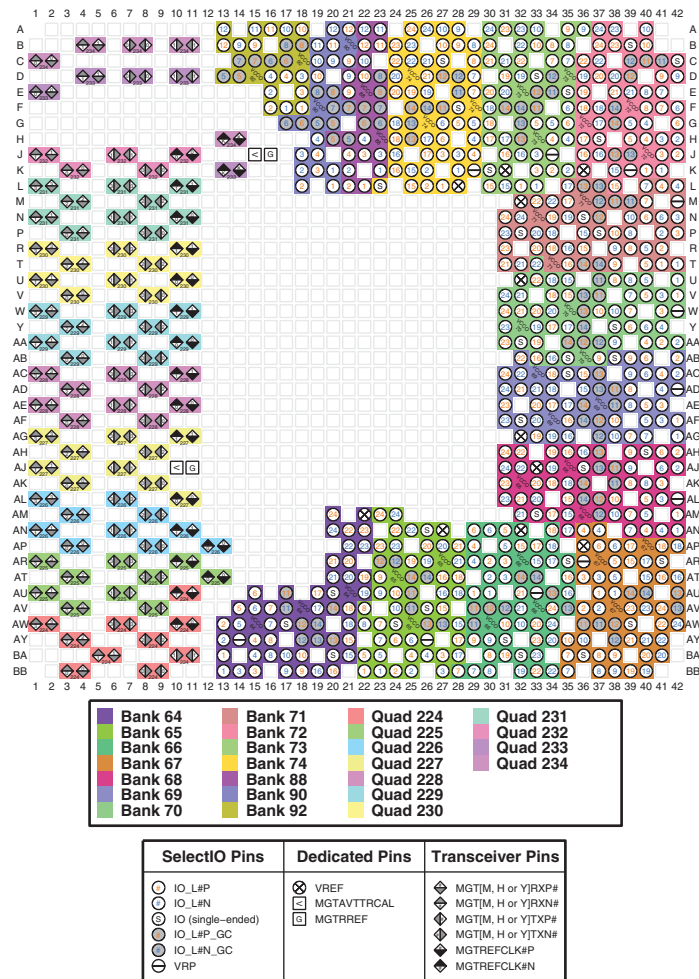

ug575\_c3\_xcvu23pvsj1760\_083020

Figure 3-117: FSVJ1760 Package—XCVU23P I/O Bank Diagram


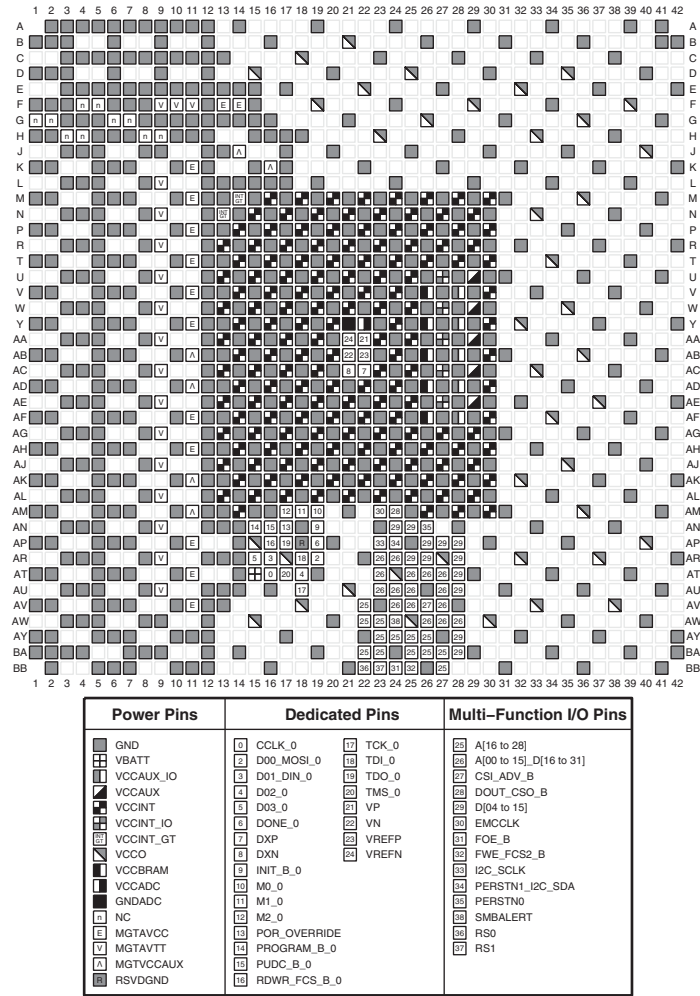



Figure 3-118: FSVJ1760 Package—XCVU23P Configuration/Power Diagram

# FLGF1924 (XCVU11P)

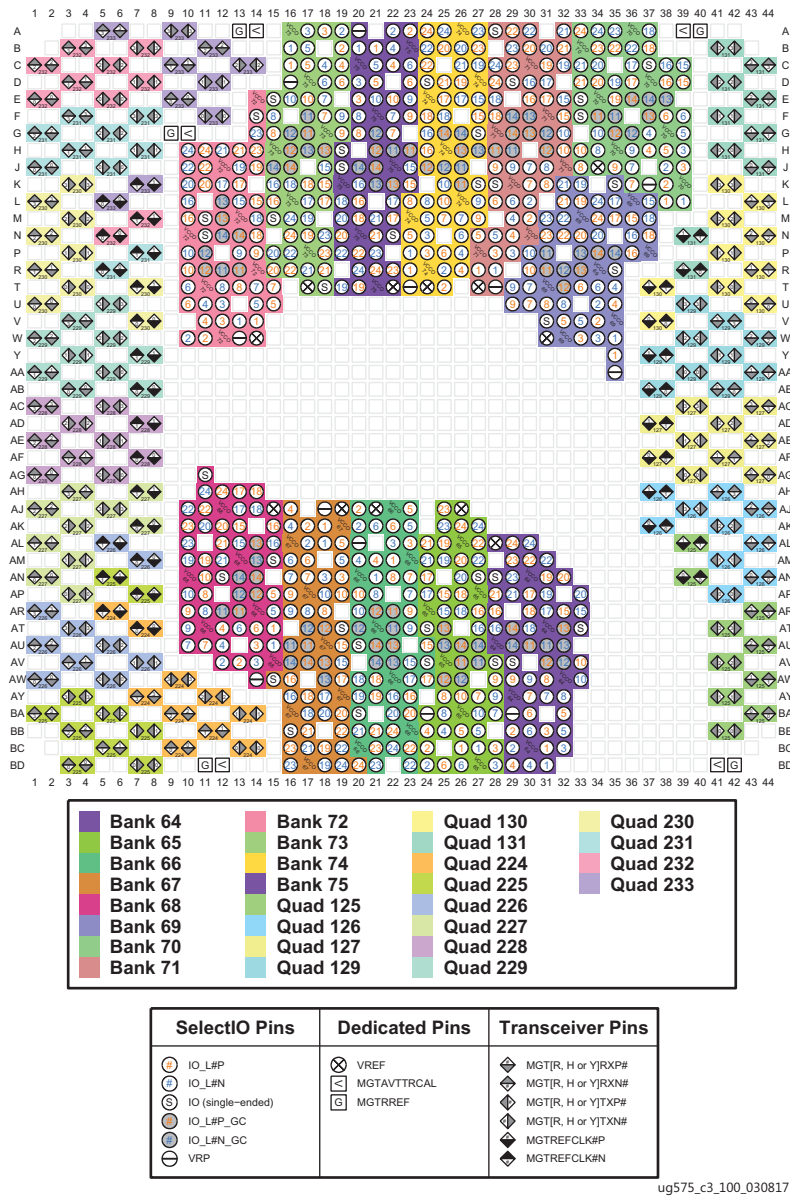

ug575\_c3\_100\_030817

Figure 3-119: FLGF1924 Package—XCVU11P I/O Bank Diagram

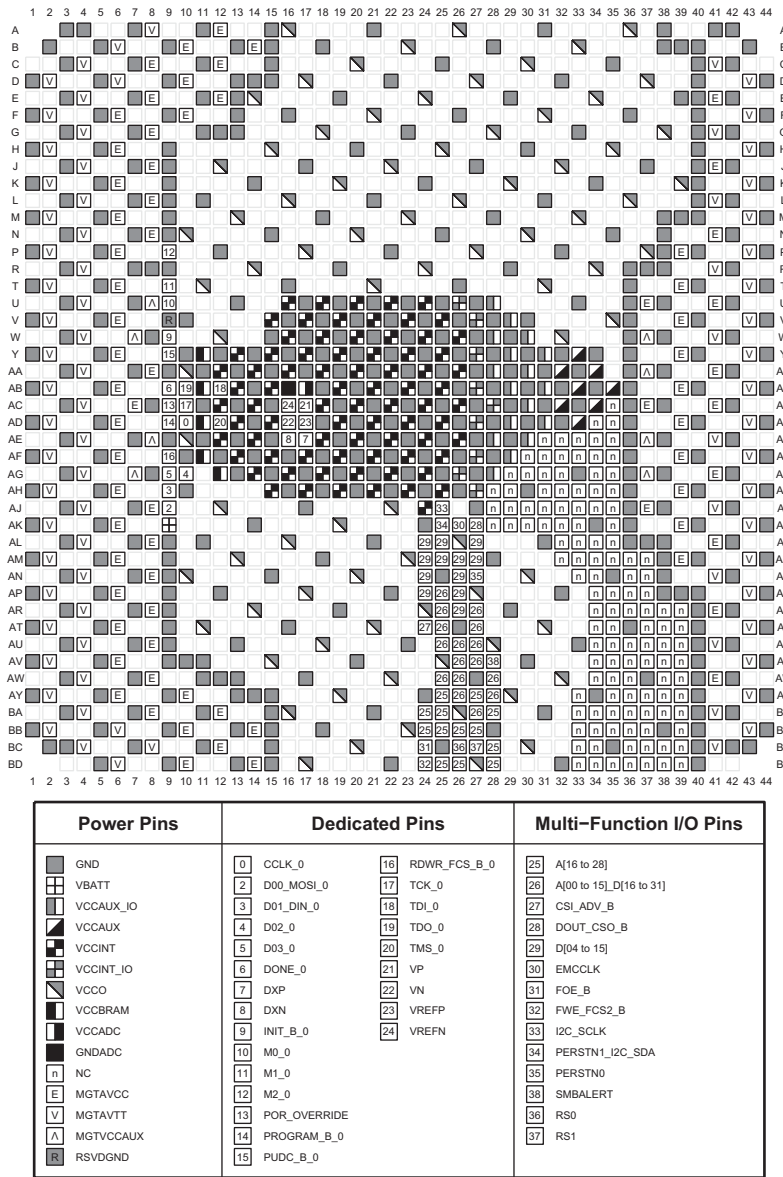

ug575\_c3\_100\_030817

Figure 3-120: FLGF1924 Package—XCVU11P Configuration/Power Diagram

# FSVH1924 (XCVU31P)


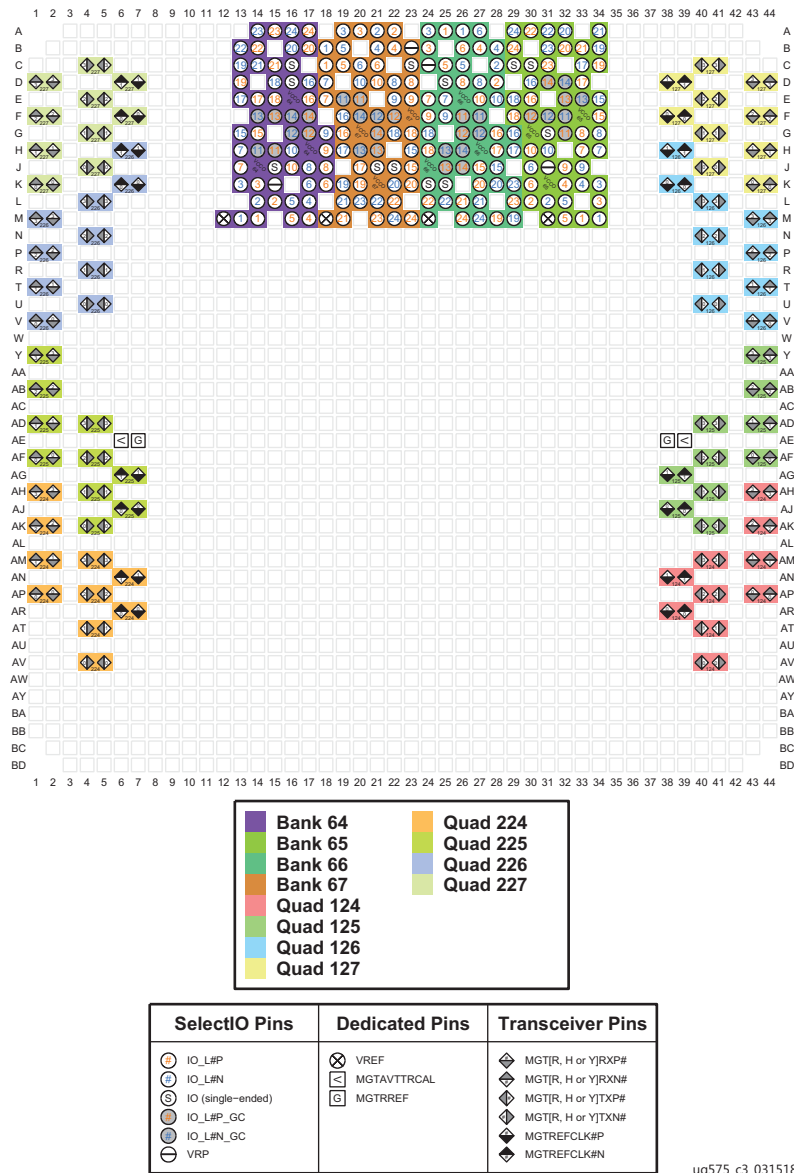



Figure 3-121: FSVH1924 Package—XCVU31P I/O Bank Diagram

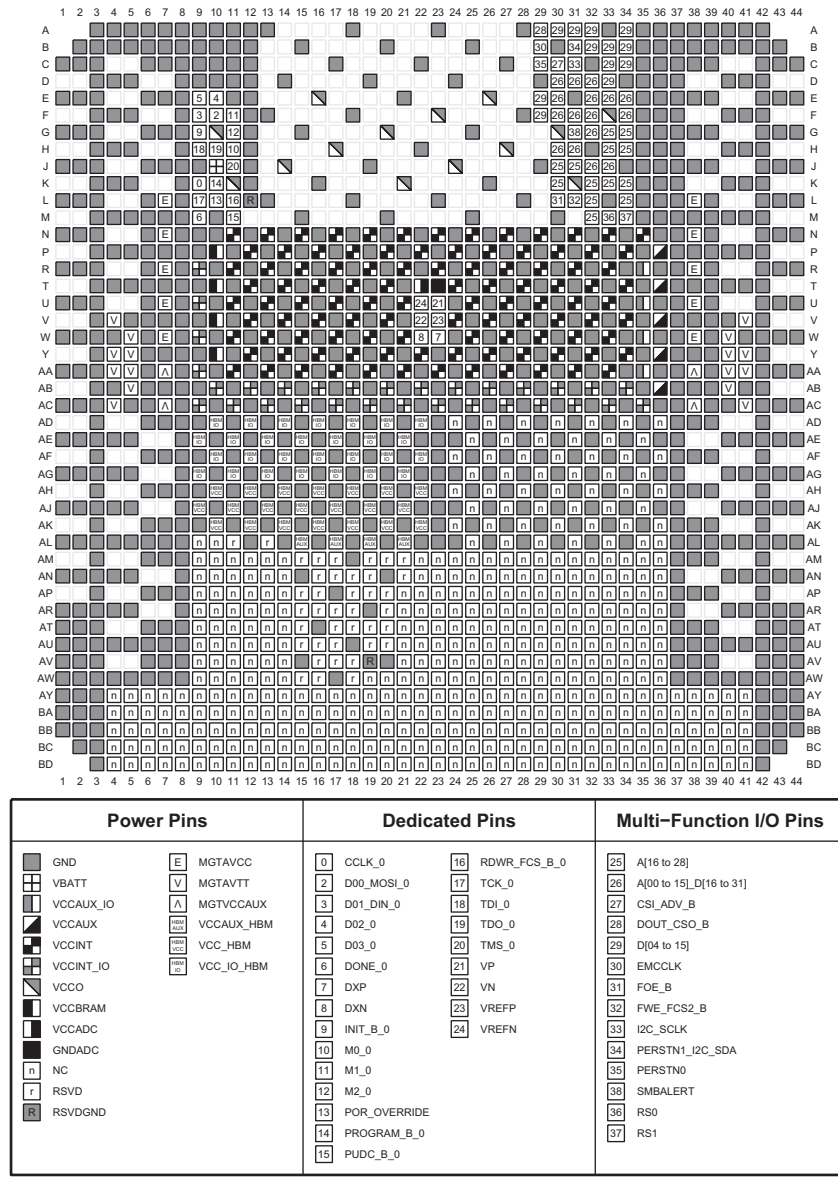

ug575\_c3\_031518

Figure 3-122: FSVH1924 Package—XCVU31P Configuration/Power Diagram


# FLVA2104 (XCVU5P and XCVU7P) and FLRA2104 (XQVU7P)

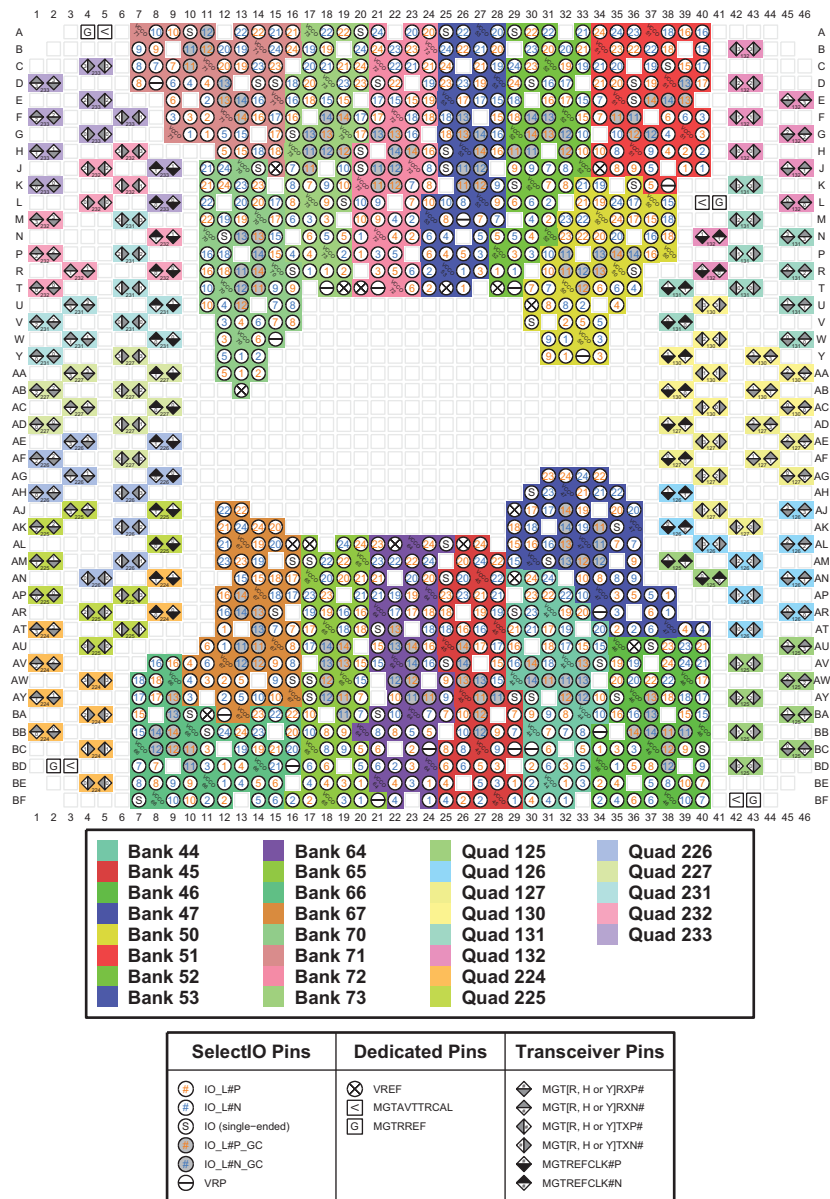

ug575\_c3\_100\_030817

Figure 3-123: FLVA2104 Package—XCVU5P and XCVU7P and FLRA2104 Package—XQVU7P I/O Bank Diagram



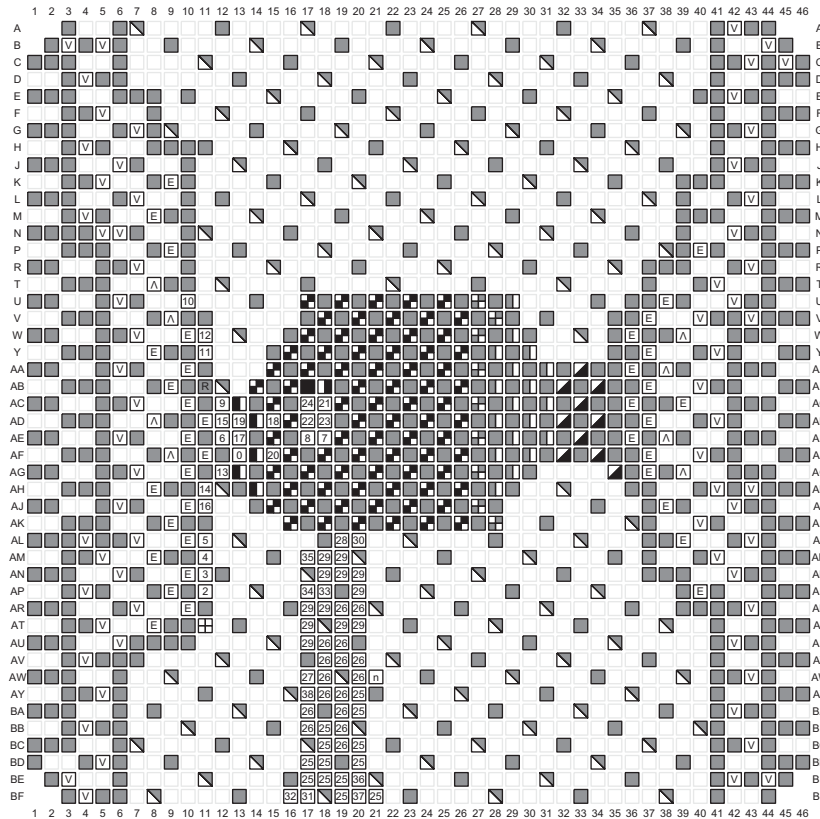


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	2 D00_MOSI_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	3 D01_DIN_0	27 CSI_ADV_B
VCCAUX	4 D02_0	28 DOUT_CSO_B
VCCINT	5 D03_0	29 D[04 to 15]
VCCINT_IO	6 DONE_0	30 EMCCLK
VCCO	7 DXP	31 FOE_B
VCCBRAM	8 DXN	32 FWE_FCS2_B
VCCADC	9 INIT_B_0	33 I2C_SCLK
GNDADC	10 M0_0	34 PERSTN1_I2C_SDA
NC	11 M1_0	35 PERSTN0
MGTAVCC	12 M2_0	36 SMBALERT
MGTAVTT	13 POR_OVERRIDE	37 RS0
MGTVCCAUX	14 PROGRAM_B_0	
RSVGDND	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_100\_030817


Figure 3-124: FLVA2104 Package—XCVU5P and XCVU7P and FLRA2104 Package—XQVU7P Configuration/Power Diagram

# FLGA2104 (XCVU9P)

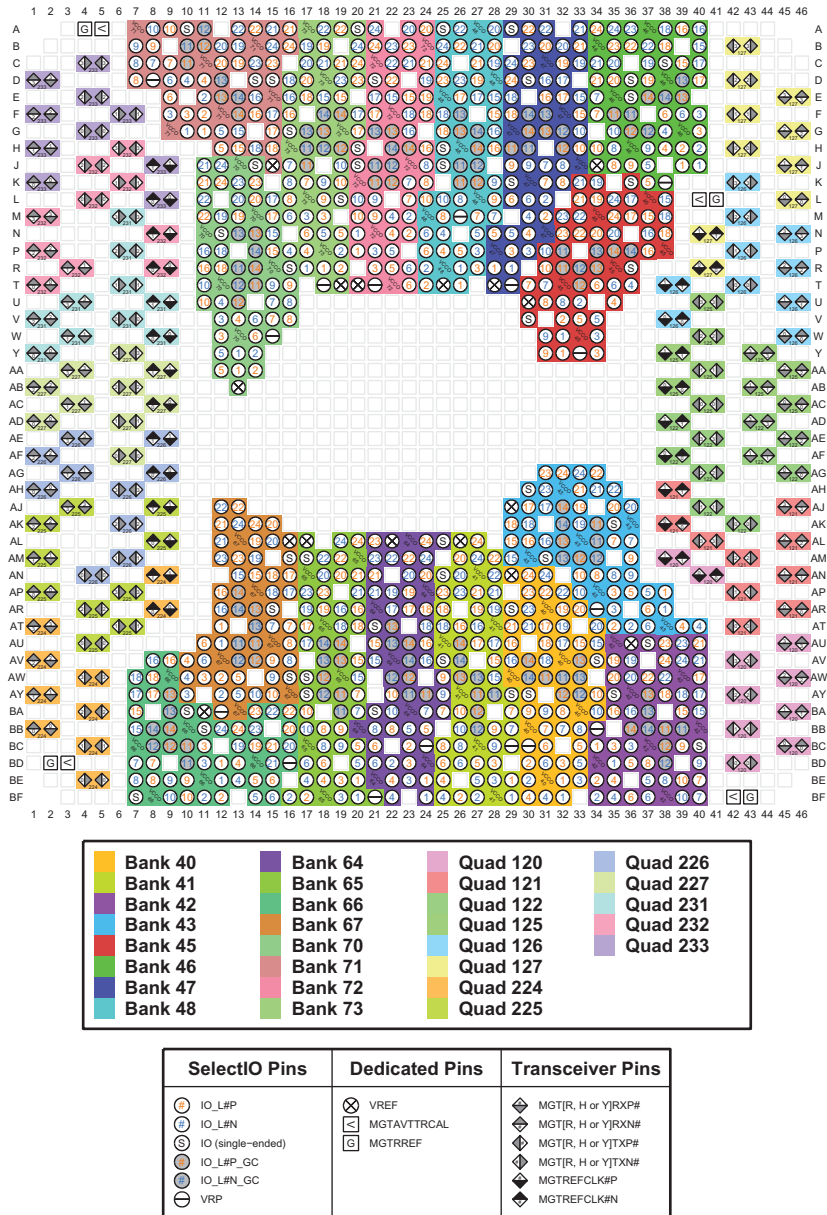

ug575\_c3\_100\_030817

Figure 3-125: FLGA2104 Package—XCVU9P I/O Bank Diagram

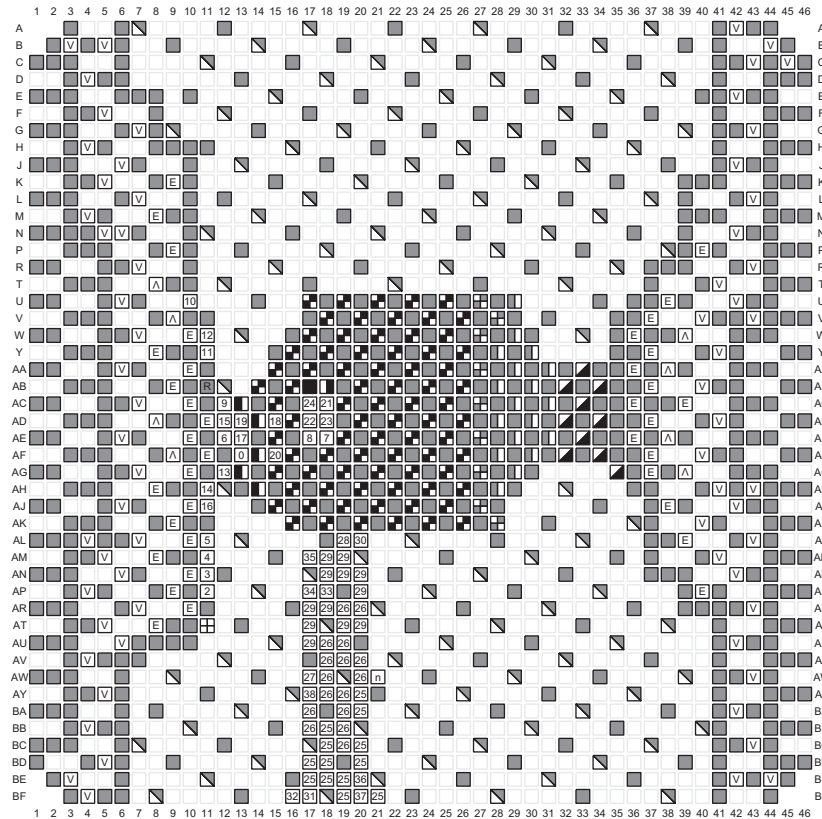


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	2 D00_MOSI_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	3 D01_DIN_0	27 CSI_ADV_B
VCCAUX	4 D02_0	28 DOUT_CSO_B
VCCINT	5 D03_0	29 D[04 to 15]
VCCINT_IO	6 DONE_0	30 EMCCLK
VCCO	7 DXP	31 FOE_B
VCCBRAM	8 DXN	32 FWE_FCS2_B
VCCADC	9 INIT_B_0	33 I2C_SCLK
GNDADC	10 M0_0	34 PERSTN1_I2C_SDA
NC	11 M1_0	35 PERSTN0
MGTAVCC	12 M2_0	38 SMBALERT
MGTAVTT	13 POR_OVERRIDE	36 RSO
MGTVCCAUX	14 PROGRAM_B_0	37 RS1
RSVDGND	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_100\_030817


Figure 3-126: FLGA2104 Package—XCVU9P Configuration/Power Diagram

# FHGA2104 (XCVU13P)

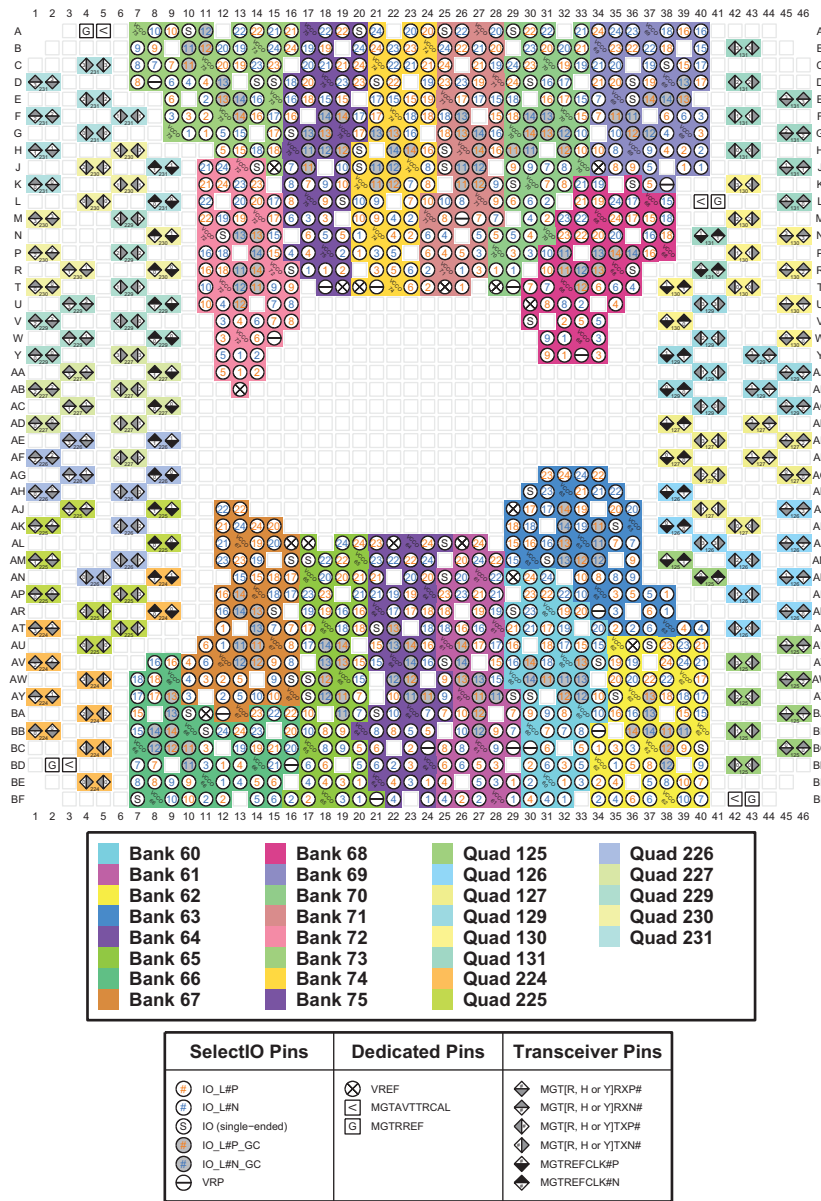

ug575\_c3\_100\_062217

Figure 3-127: FHGA2104 Package—XCVU13P I/O Bank Diagram

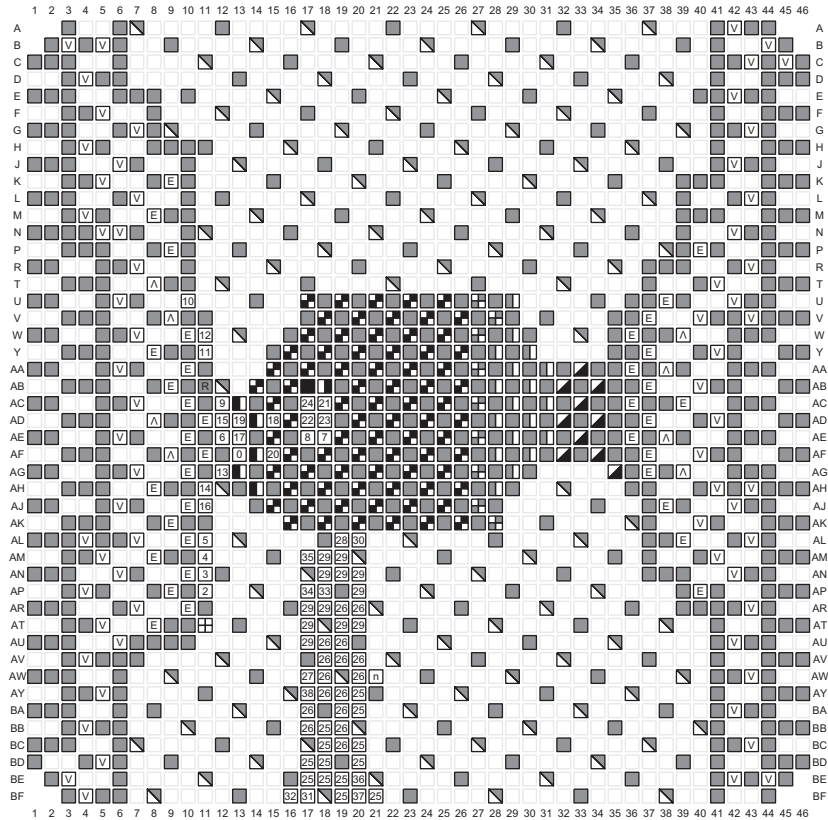


Power Pins	Dedicated Pins	Multi-Function I/O Pins
■ GND	0 CCLK_0	25 A[16 to 28]
⊕ VBAT	2 D00_MOSI_0	26 A[00 to 15], D[16 to 31]
▤ VCCAUX_IO	3 D01_DIN_0	27 CSI_ADV_B
▥ VCCAUX	4 D02_0	28 DOUT_CSO_B
▦ VCCINT	5 D03_0	29 D[04 to 15]
▧ VCCINT_IO	6 DONE_0	30 EMCCLK
▨ VCCO	7 DXP	31 FOE_B
▩ VCCBRAM	8 DXN	32 FWE_FCS2_B
▪ VCCADC	9 INIT_B_0	33 I2C_SCLK
▫ GNDADC	10 M0_0	34 PERSTN1_I2C_SDA
▬ NC	11 M1_0	35 PERSTN0
▭ MGTAVCC	12 M2_0	38 SMBALERT
▮ MGTAVTT	13 POR_OVERRIDE	36 RSO
▯ MGTVCCAUX	14 PROGRAM_B_0	37 RS1
▰ RSVGDND	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_100\_062217


Figure 3-128: FHGA2104 Package—XCVU13P Configuration/Power Diagram

# FLVB2104 (XCVU5P and XCVU7P) and FLRB2104 (XQVU7P)

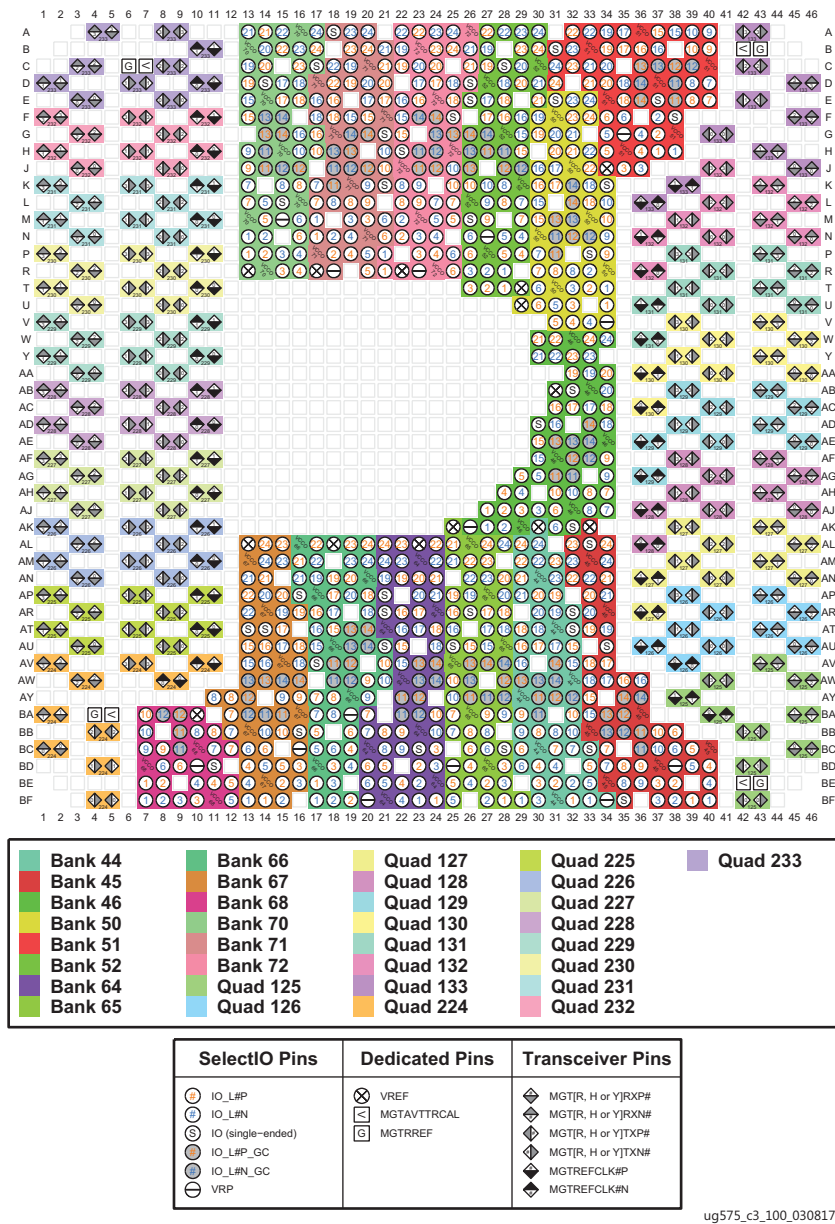

ug575\_c3\_100\_030817

Figure 3-129: FLVB2104 Package—XCVU5P and XCVU7P and FLRB2104 Package—XQVU7P I/O Bank Diagram

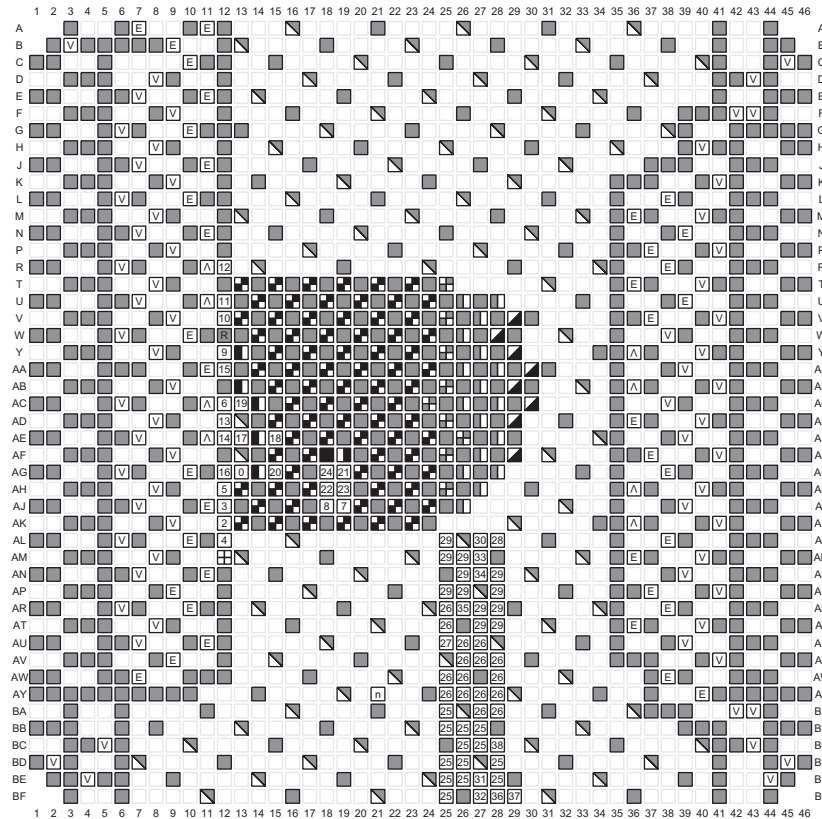

Power Pins	Dedicated Pins	Multi-Function I/O Pins
■ GND	0 CCLK_0	25 A[16 to 28]
⊕ VBATT	2 D00_MOSI_0	26 A[00 to 15]_D[16 to 31]
▢ VCCAUX_IO	3 D01_DIN_0	27 CSI_ADV_B
▣ VCCAUX	4 D02_0	28 DOUT_CSO_B
▤ VCCINT	5 D03_0	29 D[04 to 15]
▥ VCCINT_IO	6 DONE_0	30 EMCCLK
▦ VCCO	7 DXP	31 FOE_B
▧ VCCBRAM	8 DXN	32 FWE_FCS2_B
▨ VCCADC	9 INIT_B_0	33 I2C_SCLK
▩ GNDADC	10 M0_0	34 PERSTN1_I2C_SDA
▫ NC	11 M1_0	35 PERSTN0
▬ MGTAVCC	12 M2_0	38 SMBALERT
▭ MGTAVTT	13 POR_OVERRIDE	36 RS0
▮ MGTVCCAUX	14 PROGRAM_B_0	37 RS1
▯ RSVDGND	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_100\_030817

Figure 3-130: FLVB2104 Package—XCVU5P and XCVU7P and FLRB2104 Package—XQVU7P Configuration/Power Diagram

# FLGB2104 (XCVU9P)

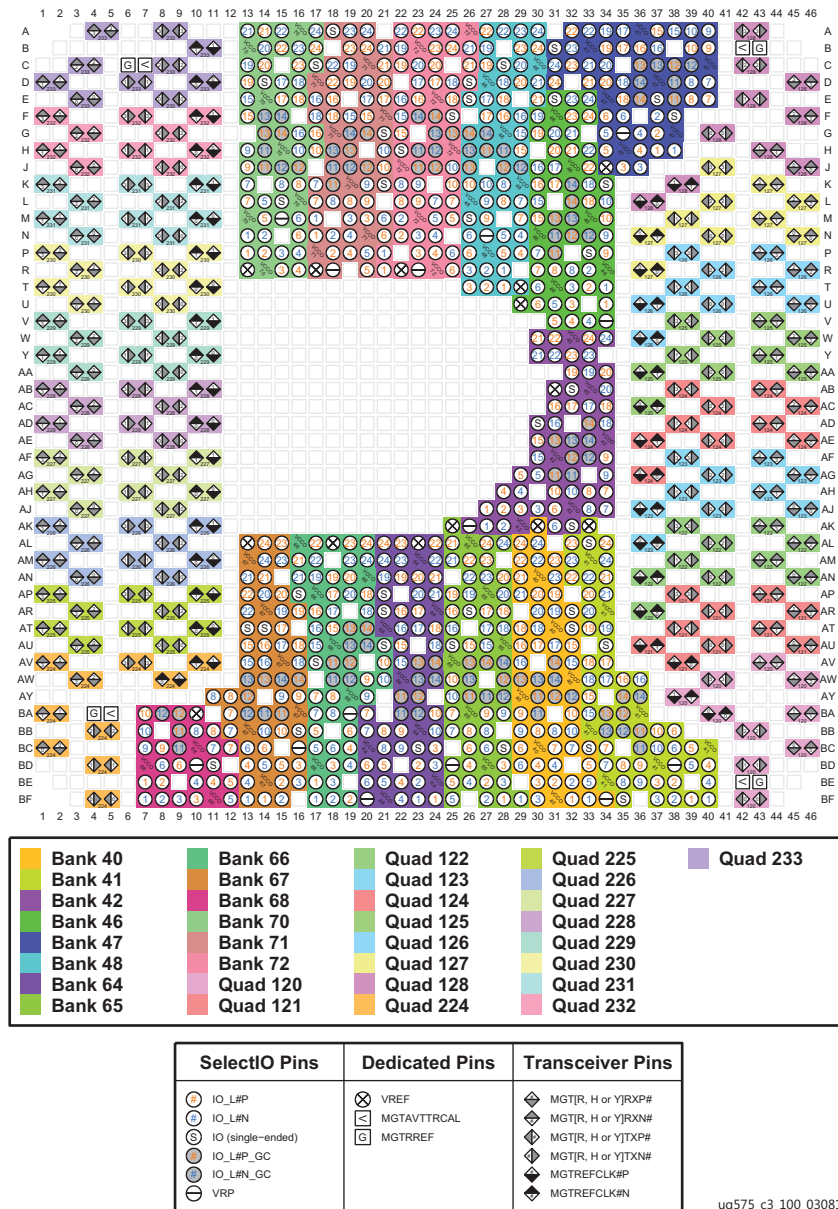


Figure 3-131: FLGB2104 Package—XCVU9P I/O Bank Diagram





# FLGB2104 (XCVU11P)


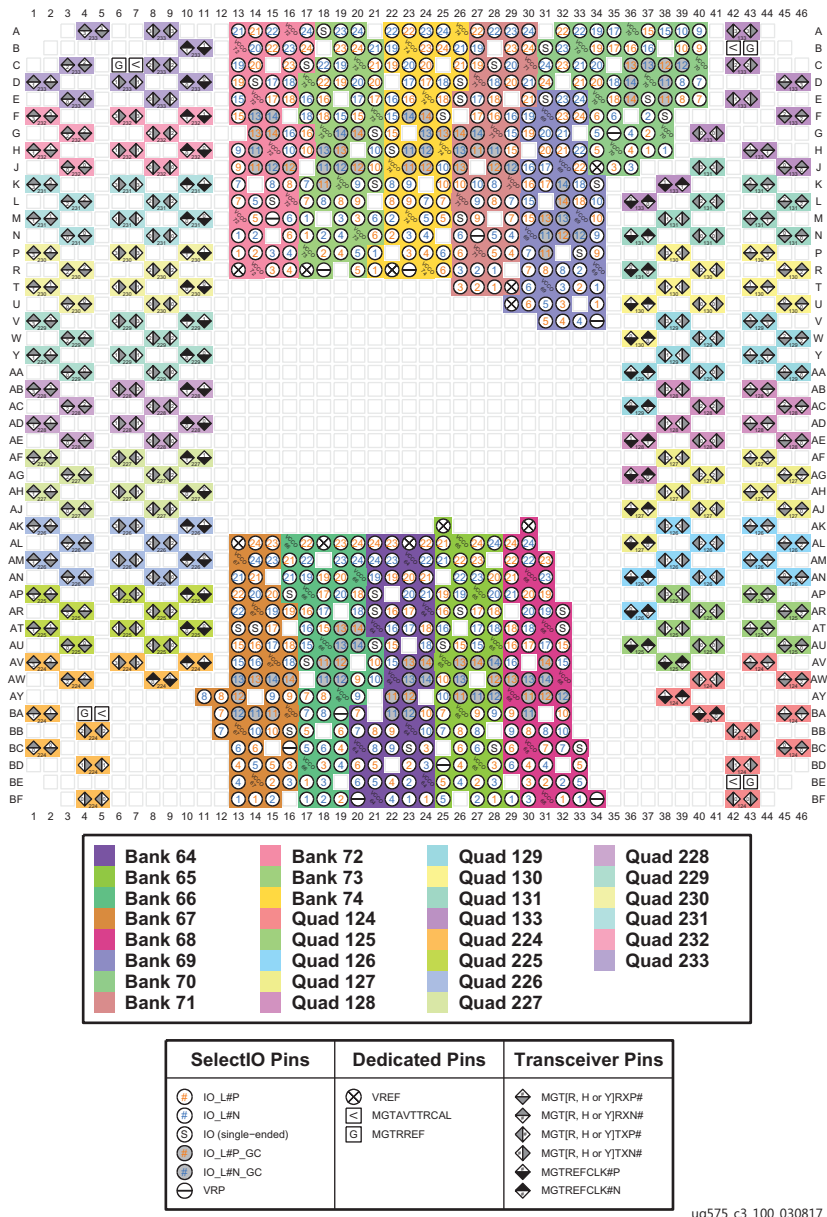


Figure 3-133: FLGB2104 Package—XCVU11P I/O Bank Diagram

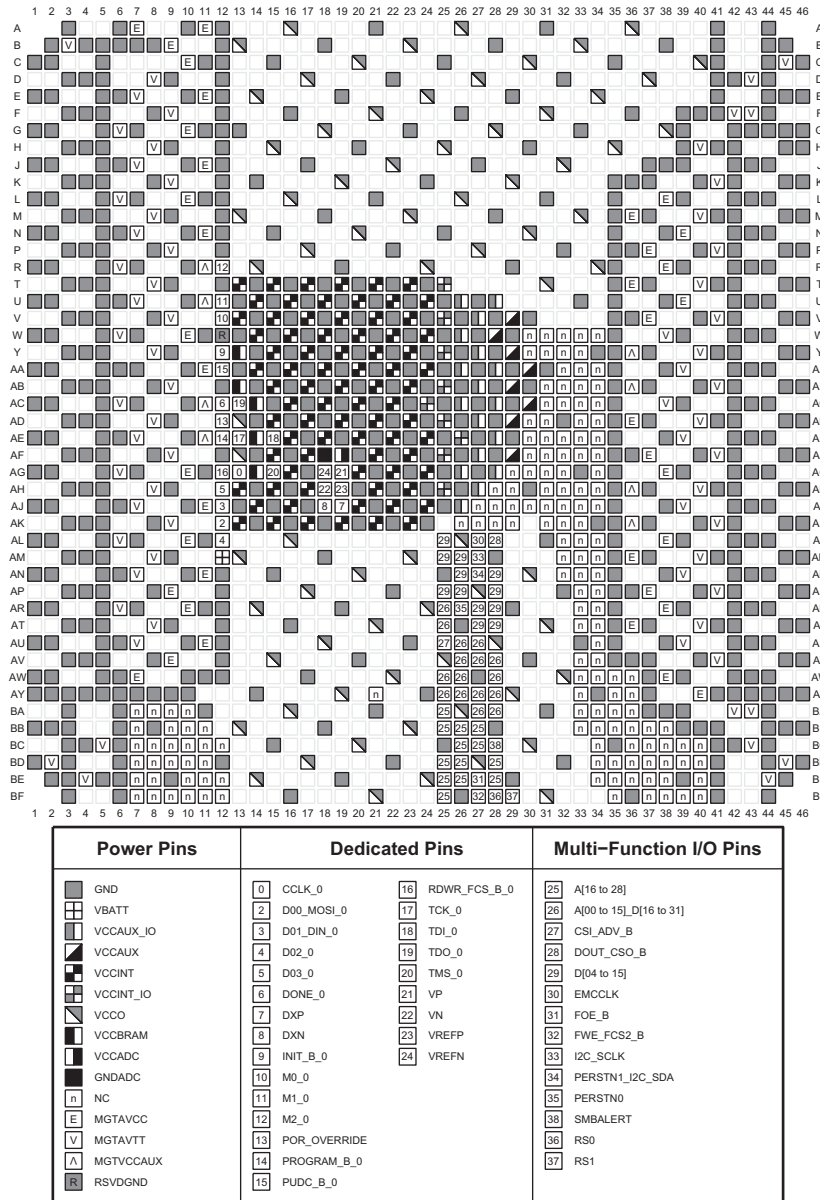

ug575\_c3\_100\_030817

Figure 3-134: FLGB2104 Package—XCVU11P Configuration/Power Diagram

# FHGB2104 (XCVU13P)


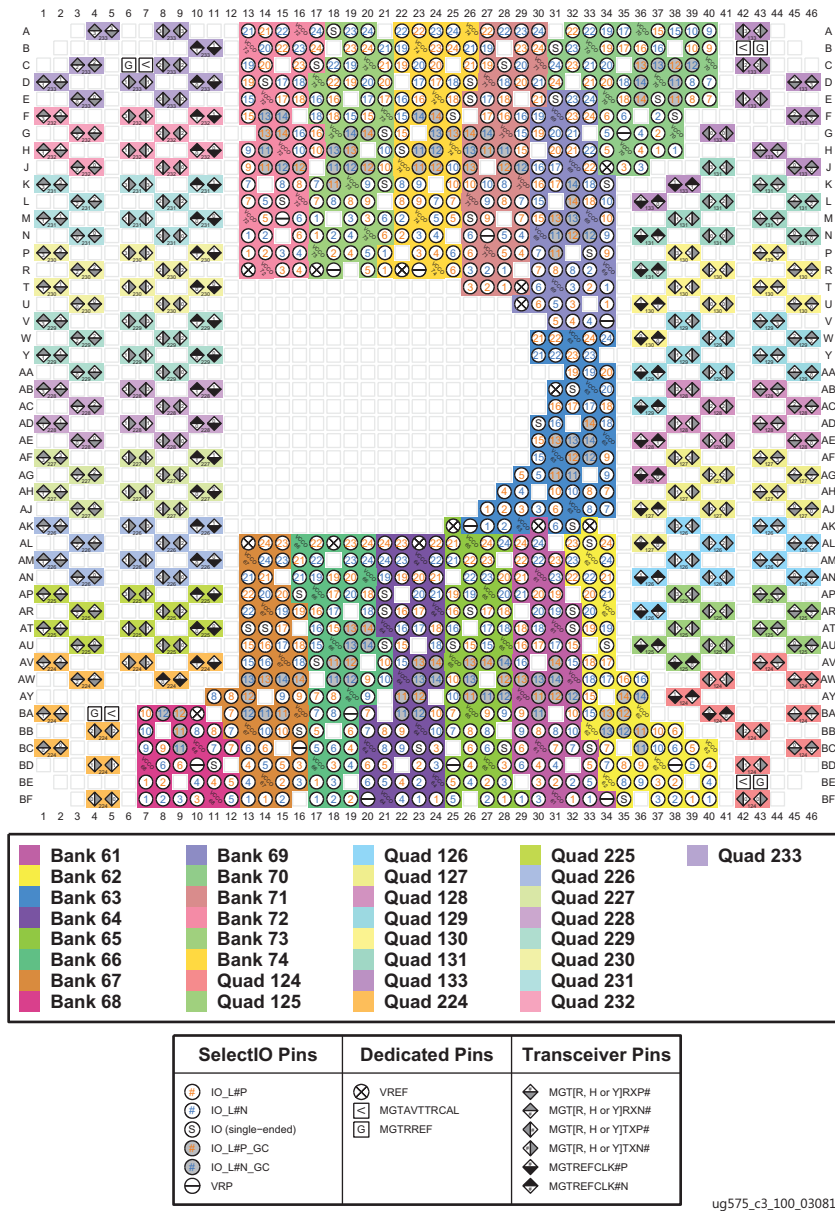


Figure 3-135: FHGB2104 Package—XCVU13P I/O Bank Diagram

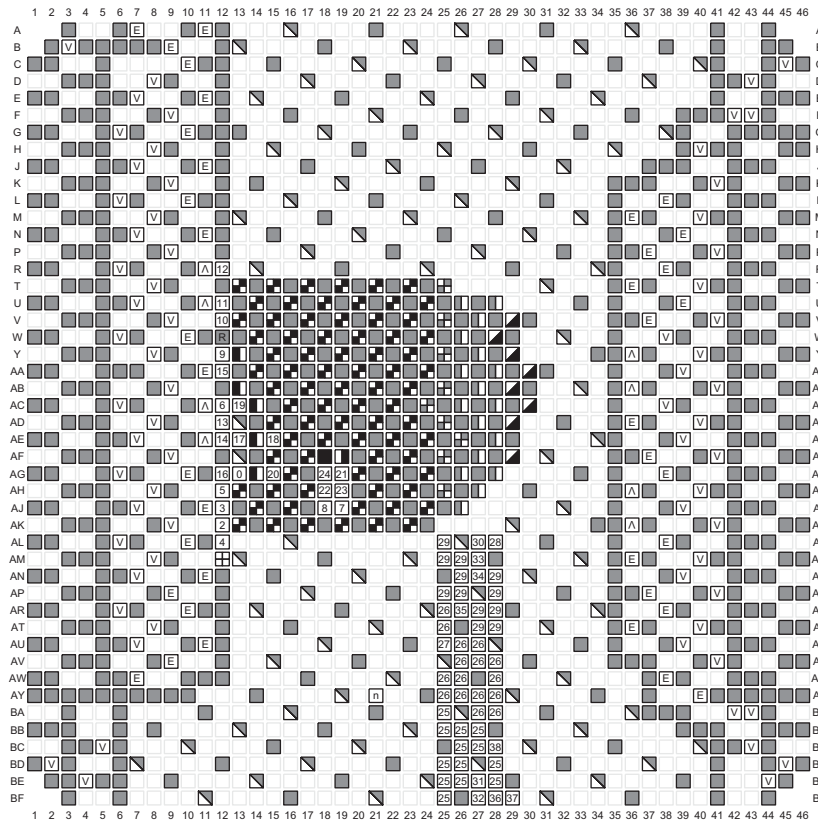

Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBAT	2 D00_MOSI_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	3 D01_DIN_0	27 CSI_ADV_B
VCCAUX	4 D02_0	28 DOUT_CSO_B
VCCINT	5 D03_0	29 D[04 to 15]
VCCINT_IO	6 DONE_0	30 EMCCLK
VCCO	7 DXP	31 FOE_B
VCCBRAM	8 DXN	32 FWE_FCS2_B
VCCADC	9 INIT_B_0	33 I2C_SCLK
GNDADC	10 M0_0	34 PERSTN1_I2C_SDA
n NC	11 M1_0	35 PERSTN0
E MGTAVCC	12 M2_0	38 SMBALERT
V MGTAVTT	13 POR_OVERRIDE	36 RSO
A MGTVCCAUX	14 PROGRAM_B_0	37 RS1
R RSVDGND	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_100\_030817

Figure 3-136: FHGB2104 Package—XCVU13P Configuration/Power Diagram

# FLVC2104 (XCVU5P and XCVU7P)


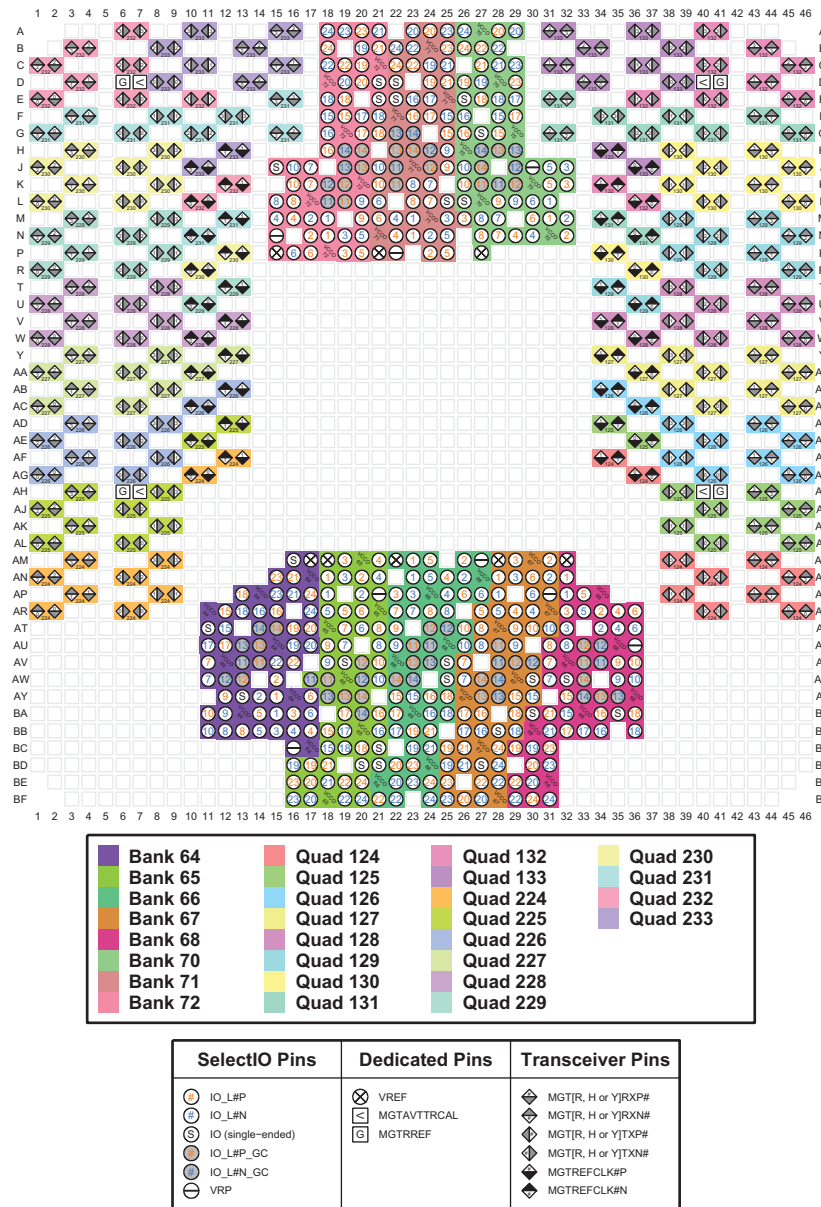


Figure 3-137: FLVC2104 Package—XCVU5P and XCVU7P I/O Bank Diagram

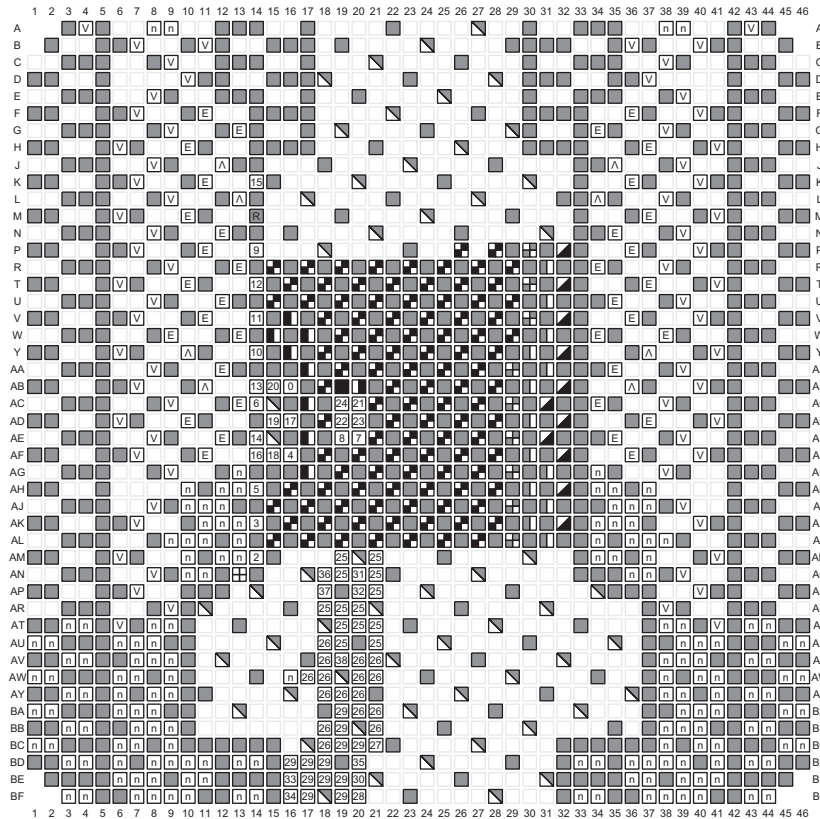

Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	2 D00_MOSI_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	3 D01_DIN_0	27 CSI_ADV_B
VCCAUX	4 D02_0	28 DOUT_CSO_B
VCCINT	5 D03_0	29 D[04 to 15]
VCCINT_IO	6 DONE_0	30 EMCCLK
VCCO	7 DXP	31 FOE_B
VCCBRAM	8 DXN	32 FWE_FCS2_B
VCCADC	9 INIT_B_0	33 I2C_SCLK
GNDADC	10 M0_0	34 PERSTN1_I2C_SDA
NC	11 M1_0	35 PERSTN0
MGTAVCC	12 M2_0	36 SMBALERT
MGTAVTT	13 POR_OVERRIDE	37 RSO
MGTVCCAUX	14 PROGRAM_B_0	38 RS1
RSVGDND	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_100\_030817

Figure 3-138: FLVC2104 Package—XCVU5P and XCVU7P Configuration/Power Diagram

# FLGC2104 (XCVU9P)


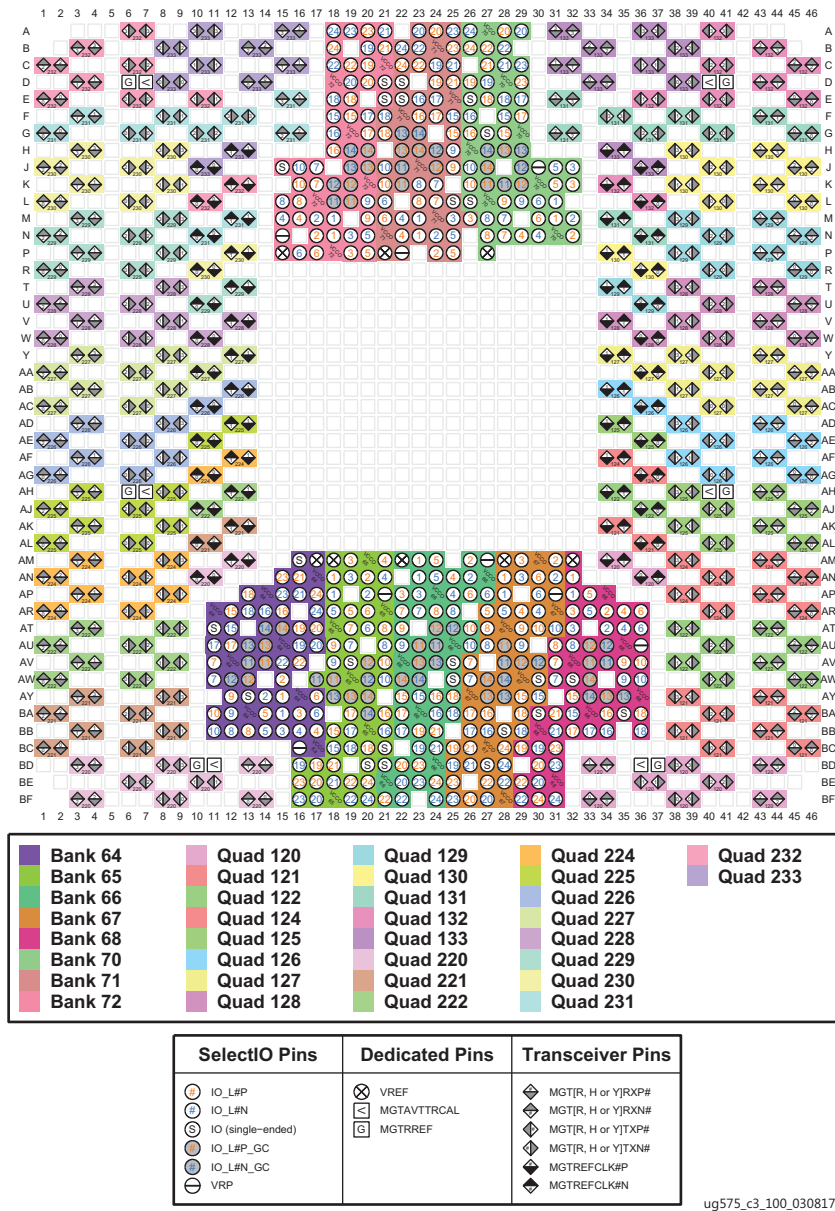


Figure 3-139: FLGC2104 Package—XCVU9P I/O Bank Diagram



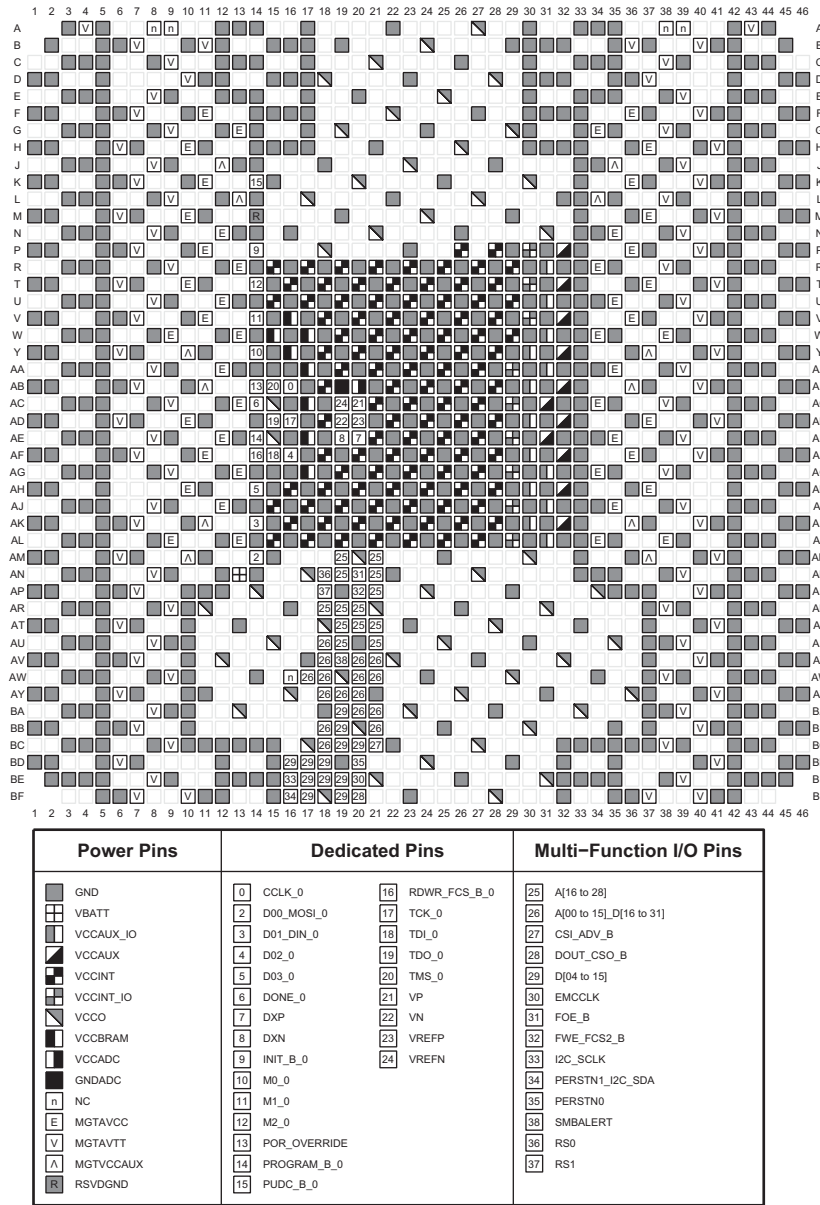

ug575\_c3\_100\_030817

Figure 3-140: FLGC2104 Package—XCVU9P Configuration/Power Diagram

# FLGC2104 (XCVU11P) and FLRC2104 (XQVU11P)


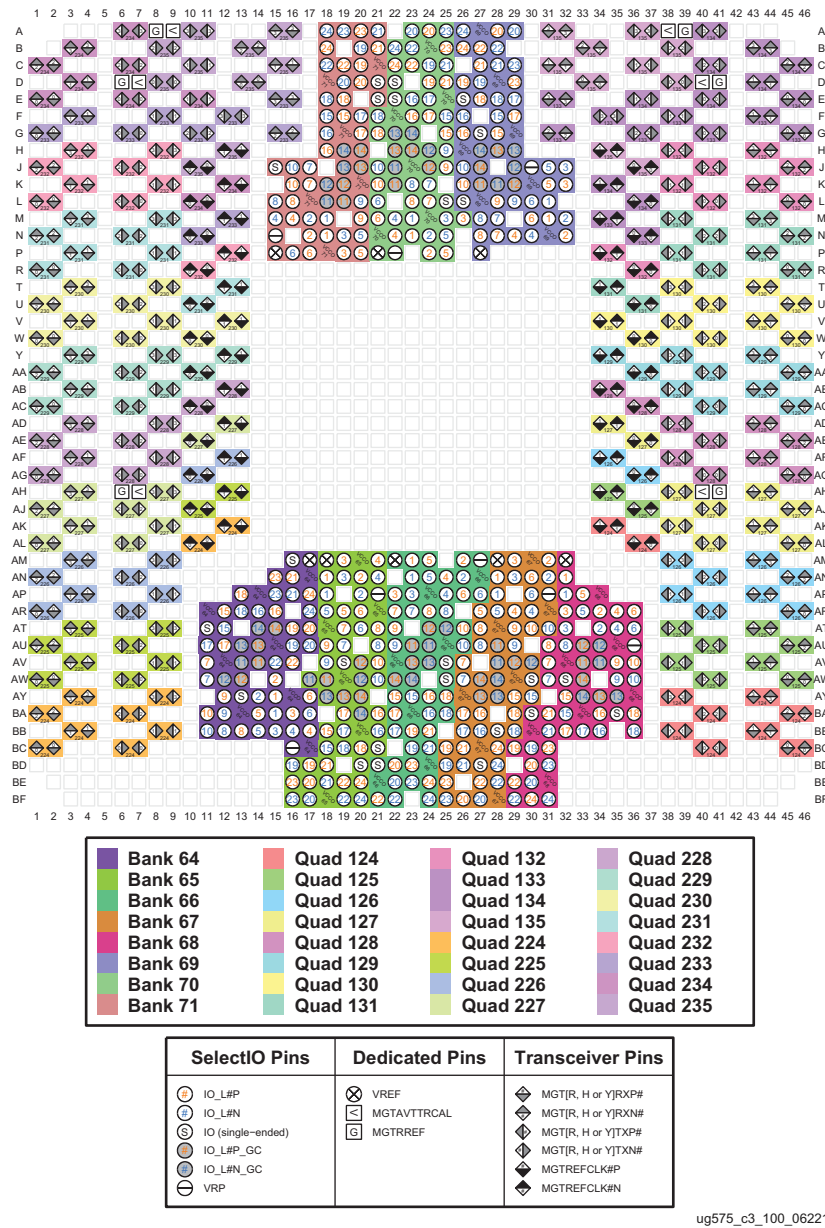



Figure 3-141: FLGC2104 Package—XCVU11P and FLRC2104 Package—XQVU11P I/O Bank Diagram

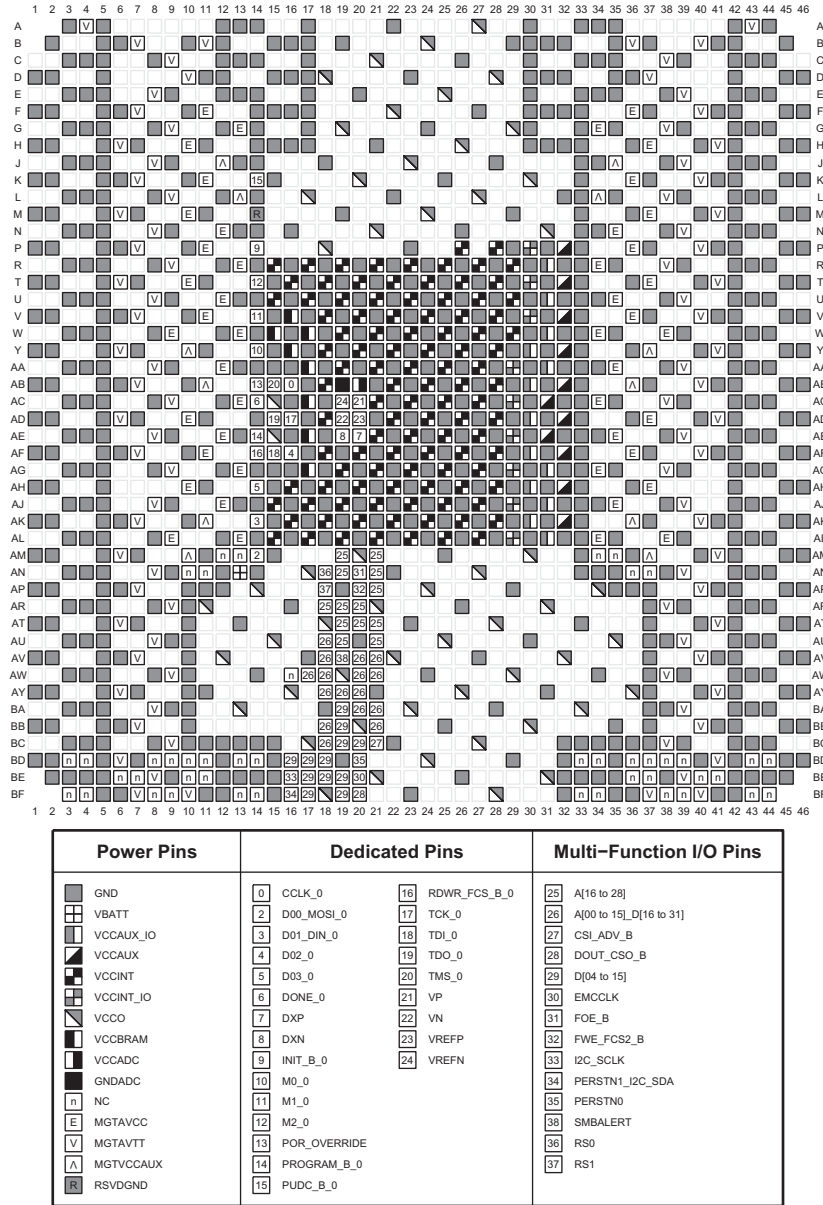

ug575\_c3\_100\_062217


Figure 3-142: FLGC2104 Package—XCVCU11P and FLRC2104 Package—XQVCU11P Configuration/Power Diagram

# FHGC2104 (XCVU13P)

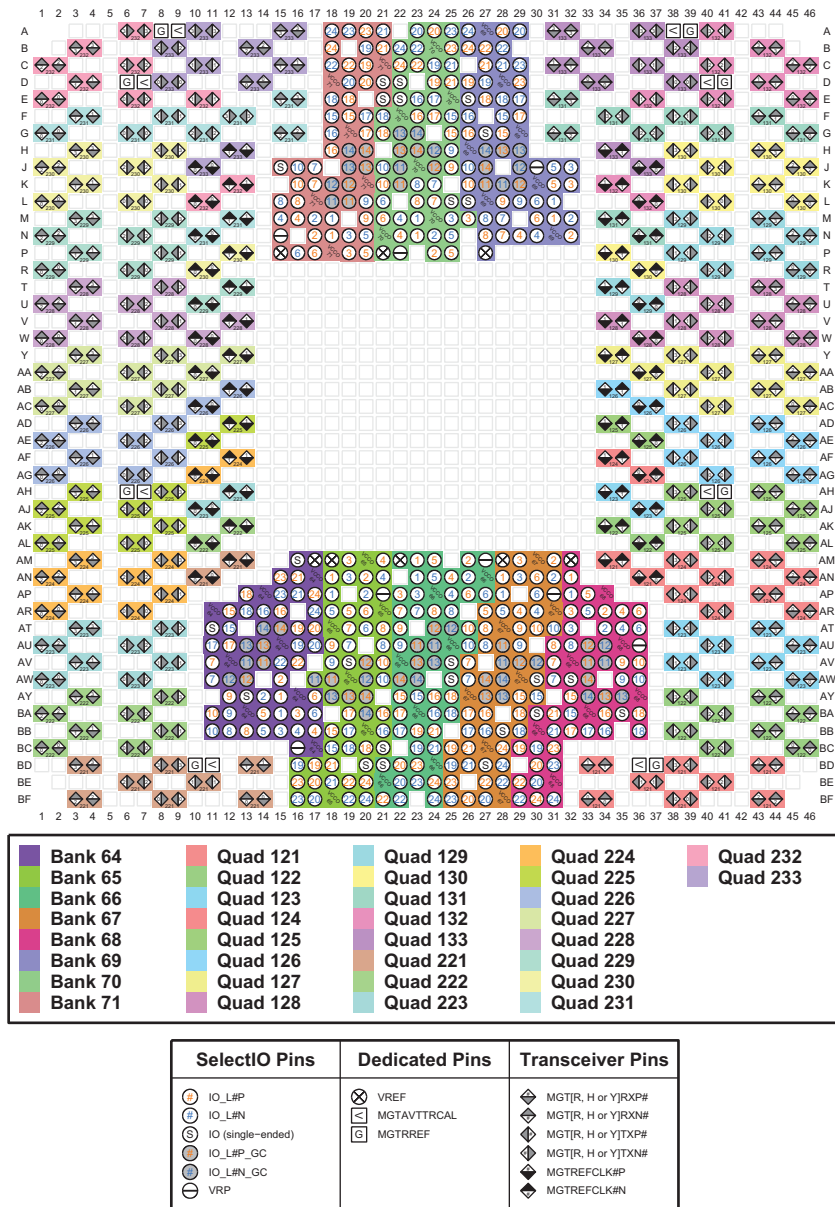

ug575\_c3\_100\_030817

Figure 3-143: FHGC2104 Package—XCVU13P I/O Bank Diagram

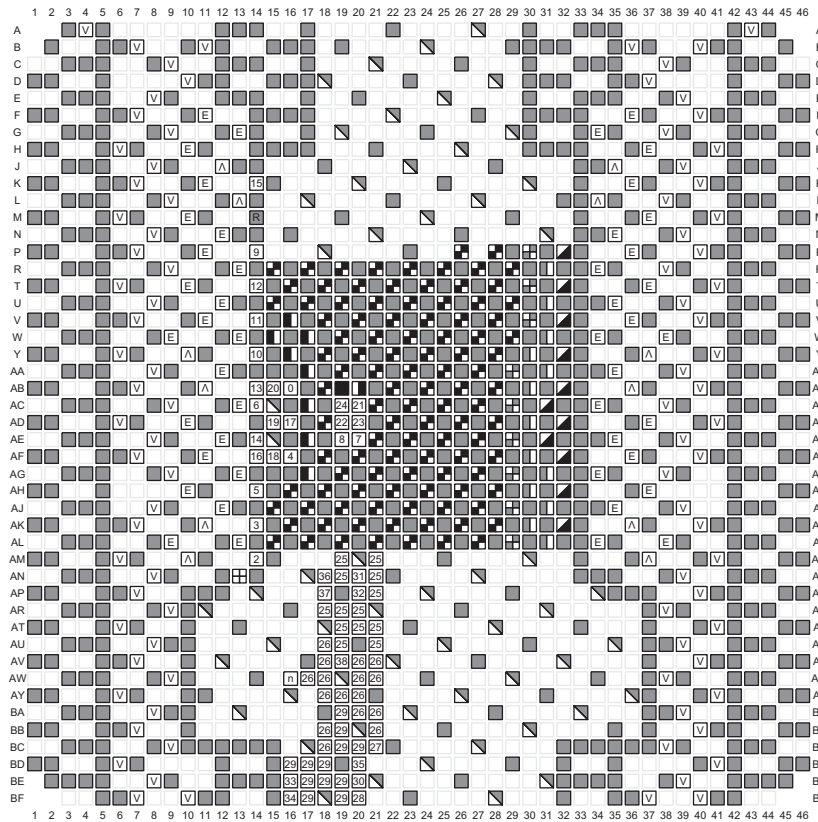

Power Pins	Dedicated Pins	Multi-Function I/O Pins
■ GND	0 CCLK_0	25 A[16 to 28]
⊕ VBAT	2 D00_MOSI_0	26 A[00 to 15], D[16 to 31]
▤ VCCAUX_IO	3 D01_DIN_0	27 CSI_ADV_B
▥ VCCAUX	4 D02_0	28 DOUT_CSO_B
▦ VCCINT	5 D03_0	29 D[04 to 15]
▧ VCCINT_IO	6 DONE_0	30 EMCCLK
▨ VCCO	7 DXP	31 FOE_B
▩ VCCBRAM	8 DXN	32 FWE_FCS2_B
▪ VCCADC	9 INIT_B_0	33 I2C_SCLK
▫ GNDADC	10 M0_0	34 PERSTN1_I2C_SDA
▬ NC	11 M1_0	35 PERSTN0
▭ MGTAVCC	12 M2_0	38 SMBALERT
▮ MGTAVTT	13 POR_OVERRIDE	36 RSO
▯ MGTVCCAUX	14 PROGRAM_B_0	37 RS1
▰ RSVGDND	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_100\_030817

Figure 3-144: FHGC2104 Package—XCVCU13P Configuration/Power Diagram

# FSGD2104 (XCVU9P)


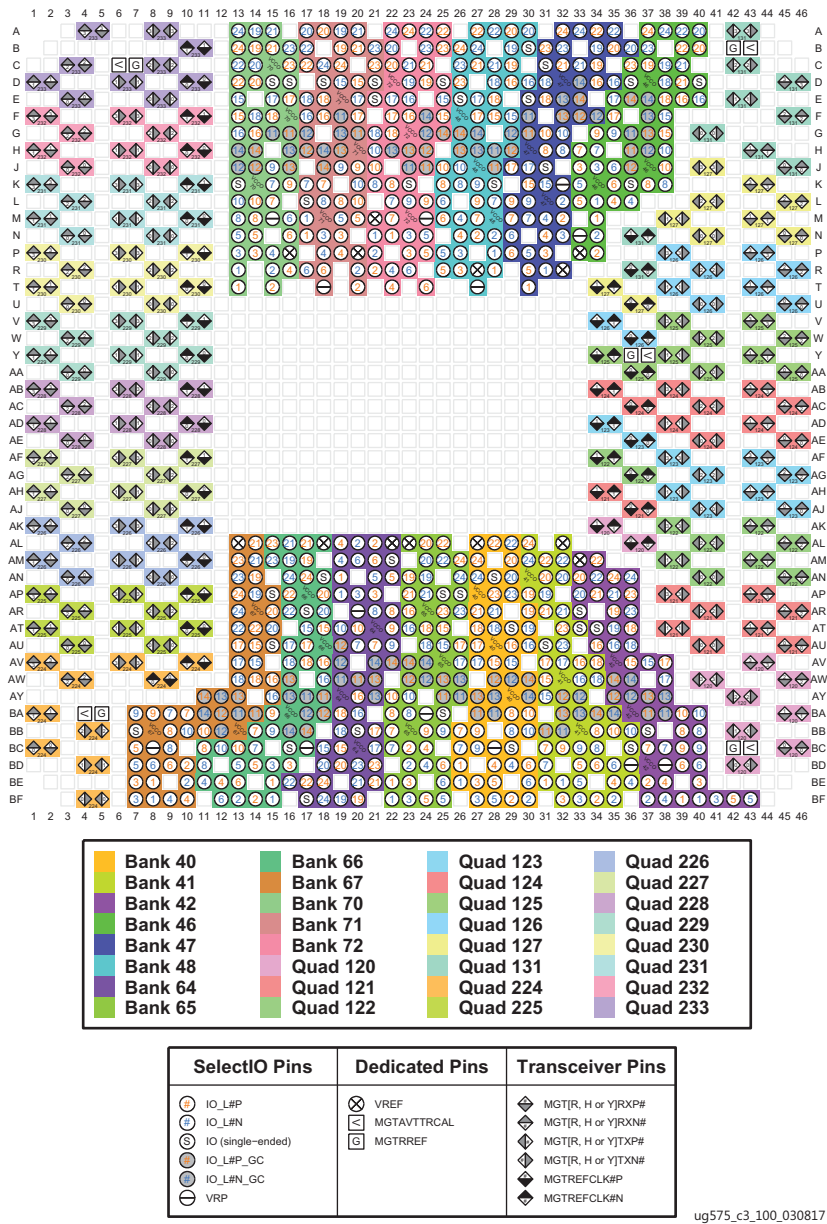


Figure 3-145: FSGD2104 Package—XCVU9P I/O Bank Diagram

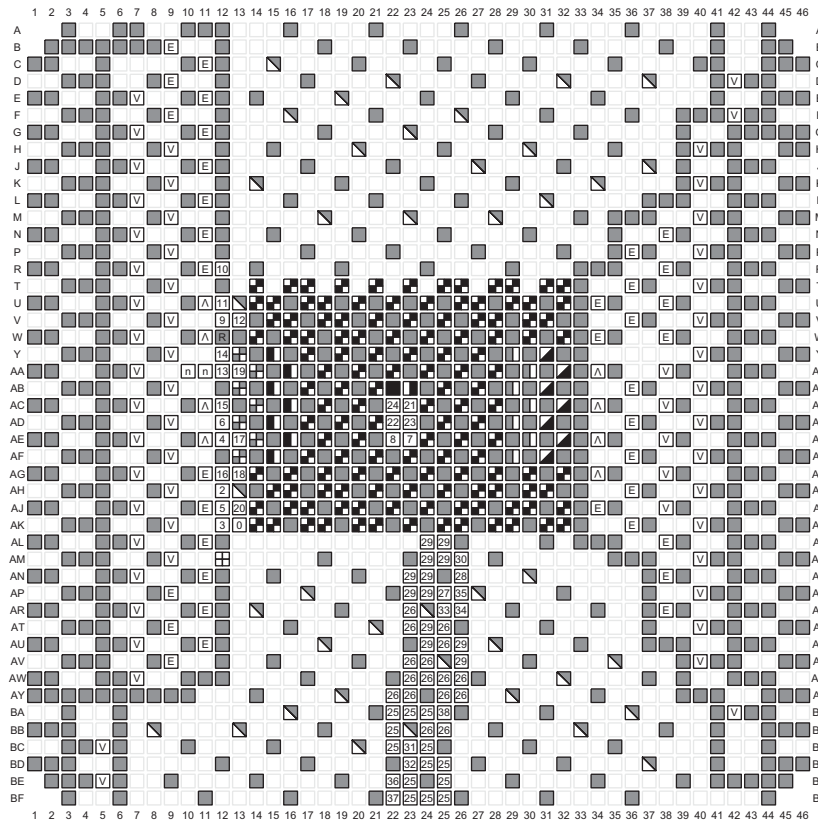

Power Pins	Dedicated Pins		Multi-Function I/O Pins
GND	0 CCLK_0	16 RDWR_FCS_B_0	25 A[16 to 28]
VBATT	2 D00_MOSI_0	17 TCK_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	3 D01_DIN_0	18 TDI_0	27 CSI_ADV_B
VCCAUX	4 D02_0	19 TDO_0	28 DOUT_CSO_B
VCCINT	5 D03_0	20 TMS_0	29 D[04 to 15]
VCCINT_IO	6 DONE_0	21 VP	30 EMCCLK
VCCO	7 DXP	22 VN	31 FOE_B
VCCBRAM	8 DXN	23 VREFP	32 FWE_FCS2_B
VCCADC	9 INIT_B_0	24 VREFN	33 I2C_SCLK
GNDADC	10 M0_0		34 PERSTN1_I2C_SDA
NC	11 M1_0		35 PERSTN0
MGTAVCC	12 M2_0		38 SMBALERT
MGTAVTT	13 POR_OVERRIDE		36 RS0
MGTVCCAUX	14 PROGRAM_B_0		37 RS1
RSVDGND	15 PUDC_B_0		

ug575\_c3\_100\_030817

Figure 3-146: FSGD2104 Package—XCVU9P Configuration/Power Diagram

# FSGD2104 (XCVU11P)


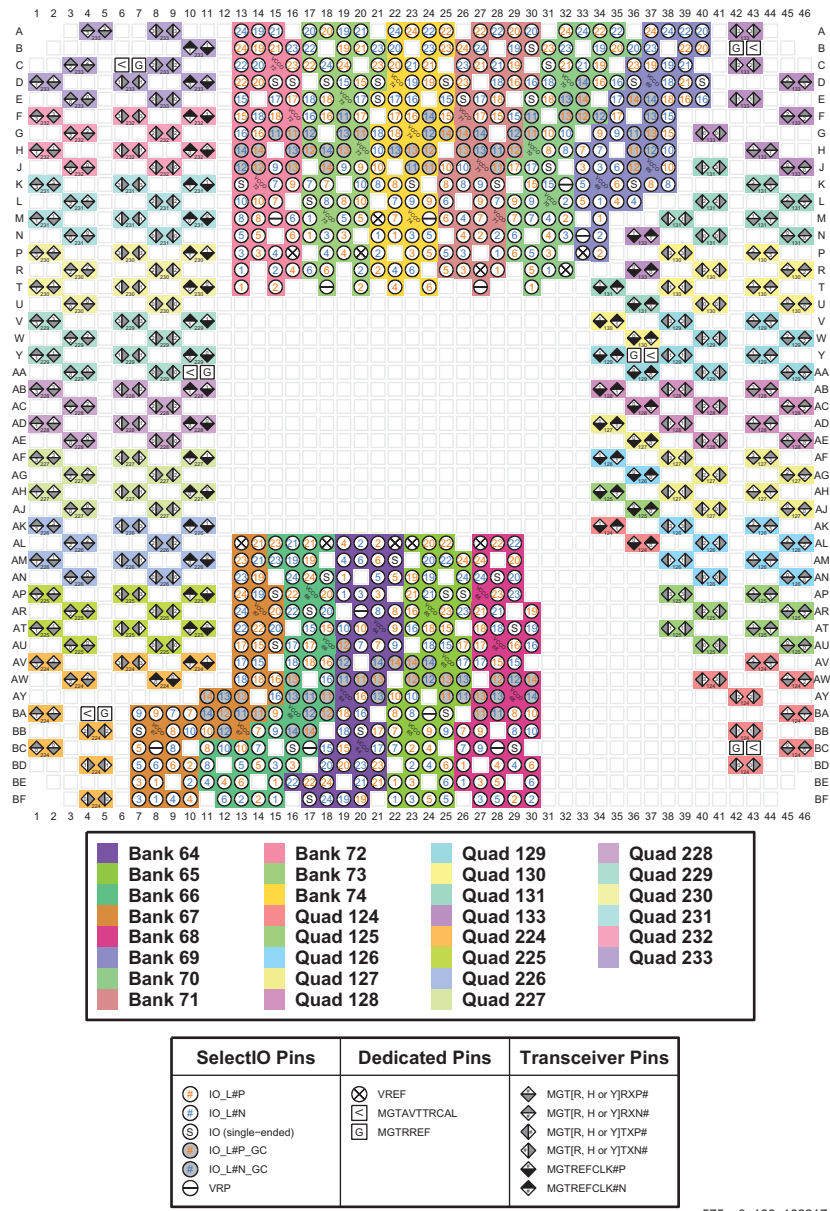


Figure 3-147: FSGD2104 Package—XCVU11P I/O Bank Diagram



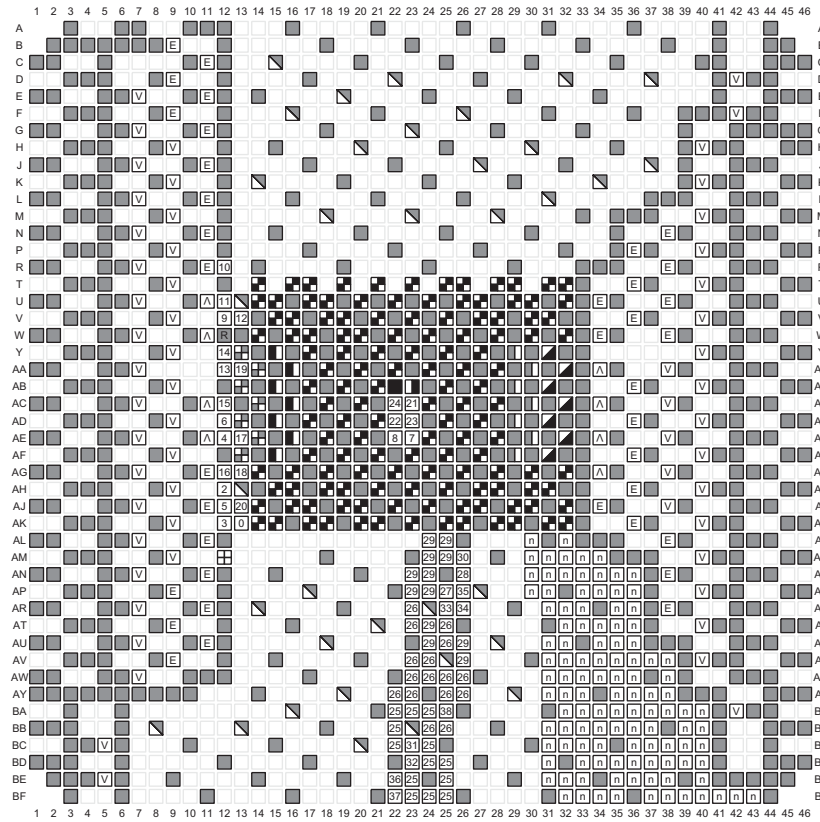

Power Pins	Dedicated Pins		Multi-Function I/O Pins
GND	0 CCLK_0	16 RDWR_FCS_B_0	25 A[16 to 28]
VBATT	2 D00_MOSI_0	17 TCK_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	3 D01_DIN_0	18 TDI_0	27 CSI_ADV_B
VCCAUX	4 D02_0	19 TDO_0	28 DOUT_CSO_B
VCCINT	5 D03_0	20 TMS_0	29 D[04 to 15]
VCCINT_IO	6 DONE_0	21 VP	30 EMCCLK
VCCO	7 DXP	22 VN	31 FOE_B
VCCBRAM	8 DXN	23 VREFP	32 FWE_FCS2_B
VCCADC	9 INIT_B_0	24 VREFN	33 I2C_SCLK
GNDADC	10 M0_0		34 PERSTN1_I2C_SDA
NC	11 M1_0		35 PERSTN0
MGTAVCC	12 M2_0		36 SMBALERT
MGTAVTT	13 POR_OVERRIDE		37 RS0
MGTVCCAUX	14 PROGRAM_B_0		
RSDVGGND	15 PUDC_B_0		

ug575\_c3\_100\_102217

Figure 3-148: FSGD2104 Package—XCVU11P Configuration/Power Diagram

# FIGD2104 (XCVU13P)


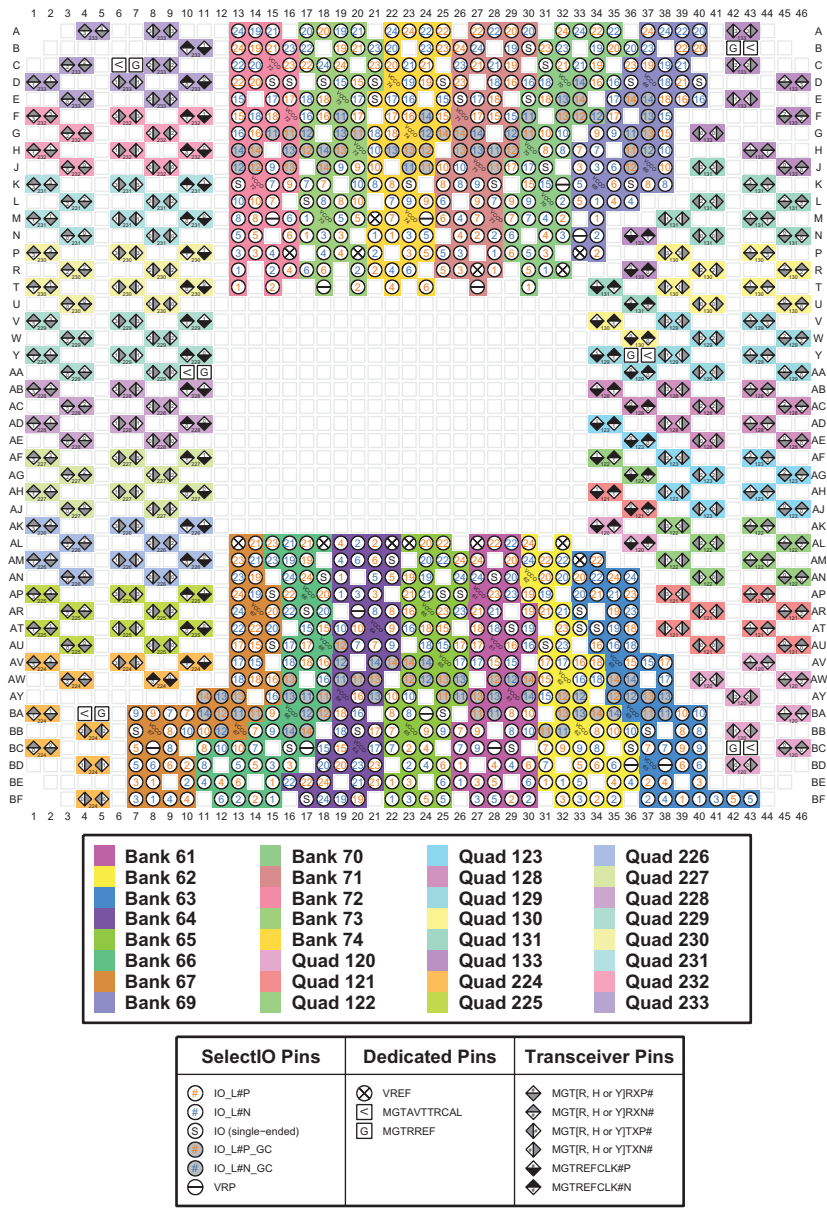


Figure 3-149: FIGD2104 Package—XCVU13P I/O Bank Diagram

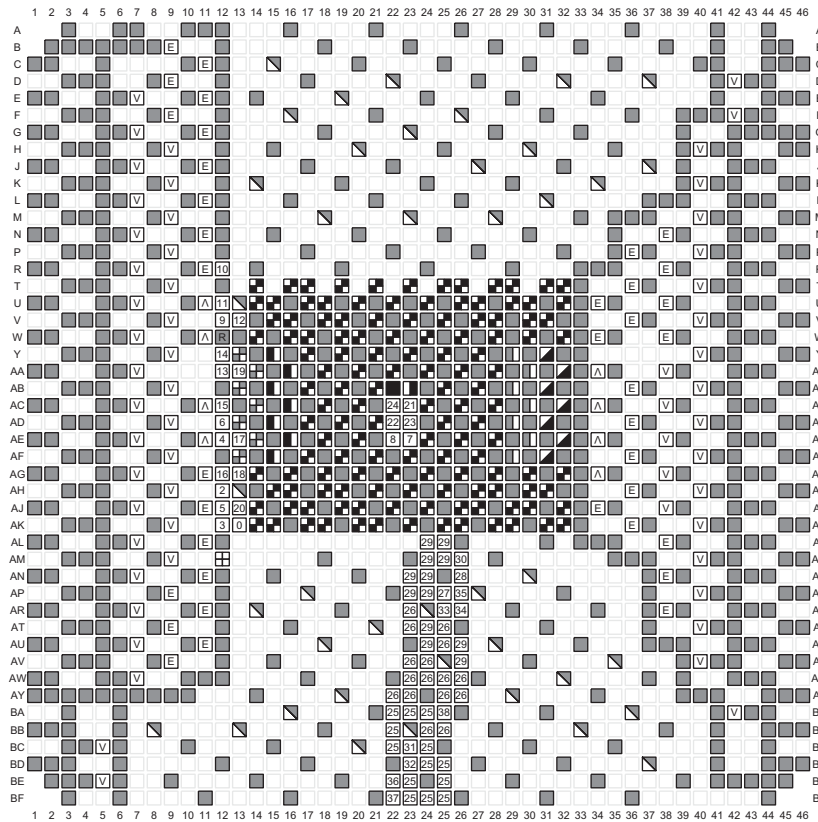


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	2 D00_MOSI_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	3 D01_DIN_0	27 CSI_ADV_B
VCCAUX	4 D02_0	28 DOUT_CSO_B
VCCINT	5 D03_0	29 D[04 to 15]
VCCINT_IO	6 DONE_0	30 EMCCLK
VCCO	7 DXP	31 FOE_B
VCCBRAM	8 DXN	32 FWE_FCS2_B
VCCADC	9 INIT_B_0	33 I2C_SCLK
GNDADC	10 M0_0	34 PERSTN1_I2C_SDA
NC	11 M1_0	35 PERSTN0
MGTAVCC	12 M2_0	36 SMBALERT
MGTAVTT	13 POR_OVERRIDE	37 RSO
MGTVCCAUX	14 PROGRAM_B_0	38 RS1
RSVDGND	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_100\_062217


Figure 3-150: FIGD2104 Package—XCVU13P Configuration/Power Diagram

# FIGD2104 (XCVU27P)

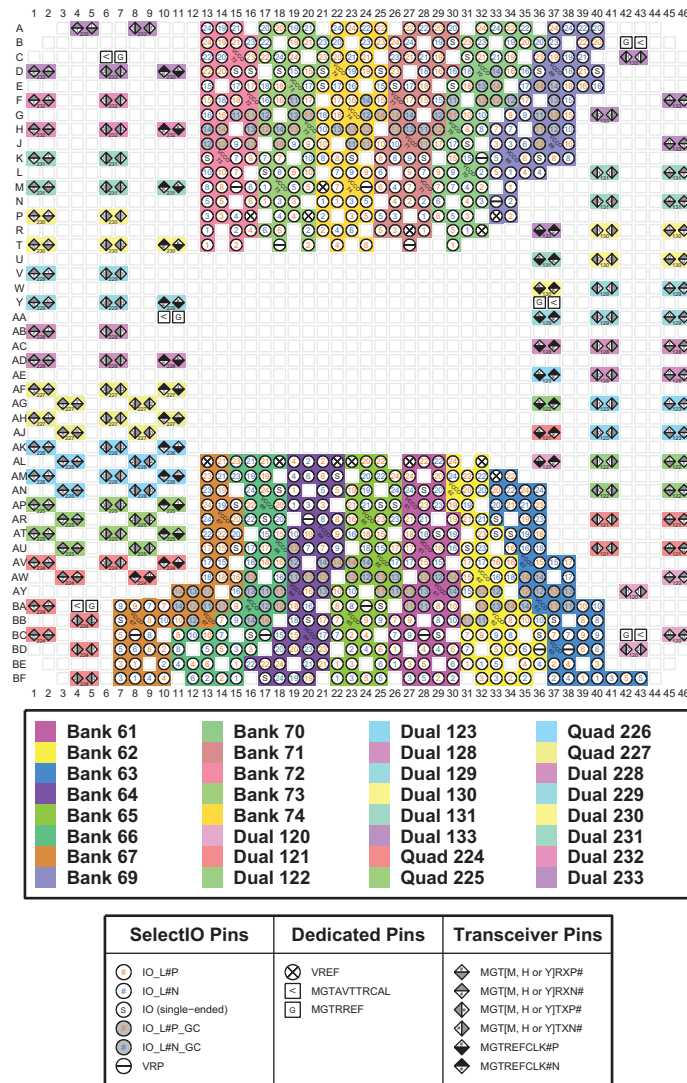

ug575\_c3\_xcvu27pfigd2104\_010819

Figure 3-151: FIGD2104 Package—XCVU27P I/O Bank Diagram

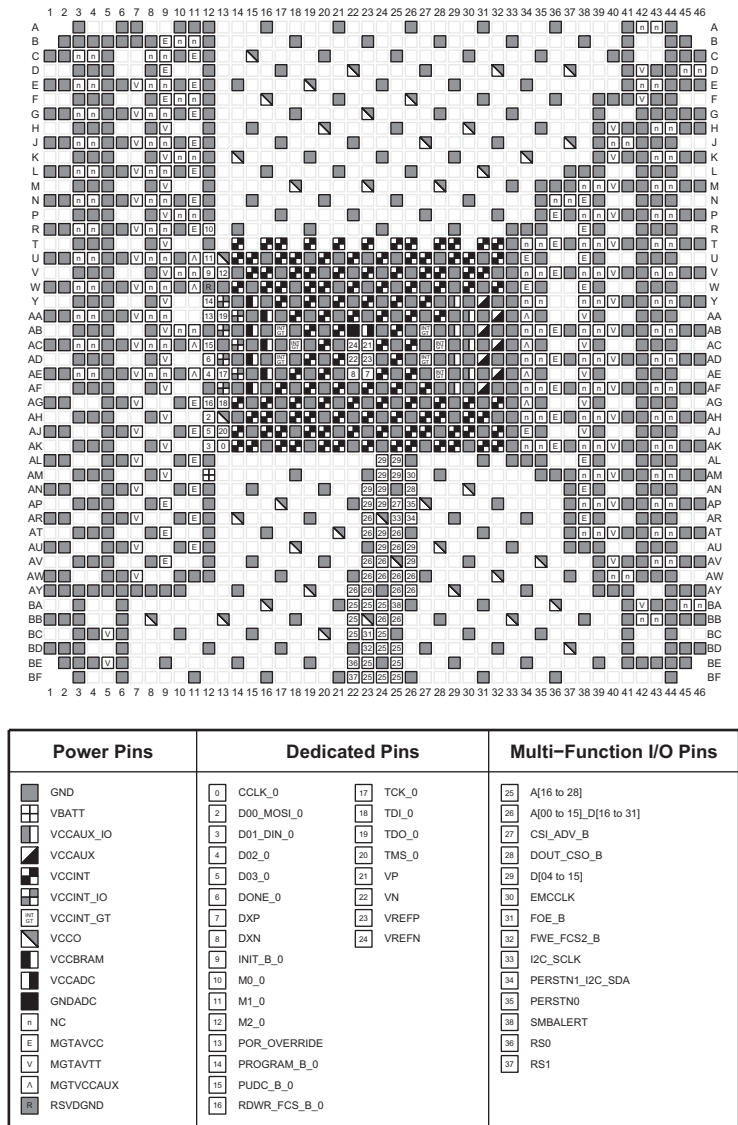

ug575\_c3\_xcvu27pfigd2104\_010819

Figure 3-152: FIGD2104 Package—XCvu27P Configuration/Power Diagram

# FIGD2104 (XCVU29P)

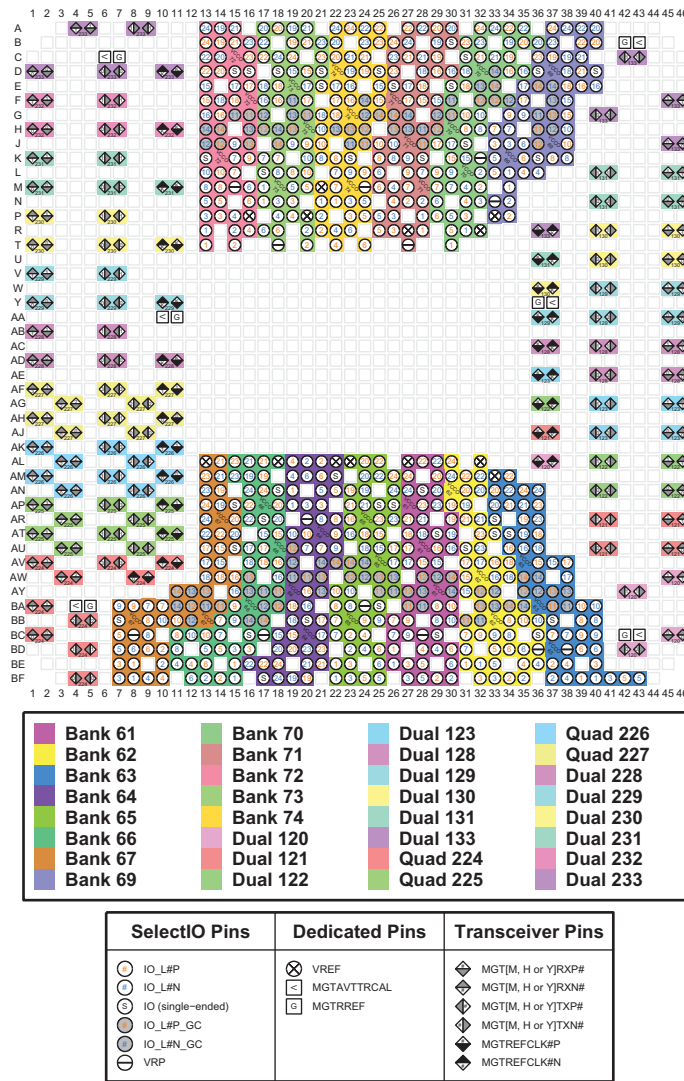


Figure 3-153: FIGD2104 Package—XCVU29P I/O Bank Diagram


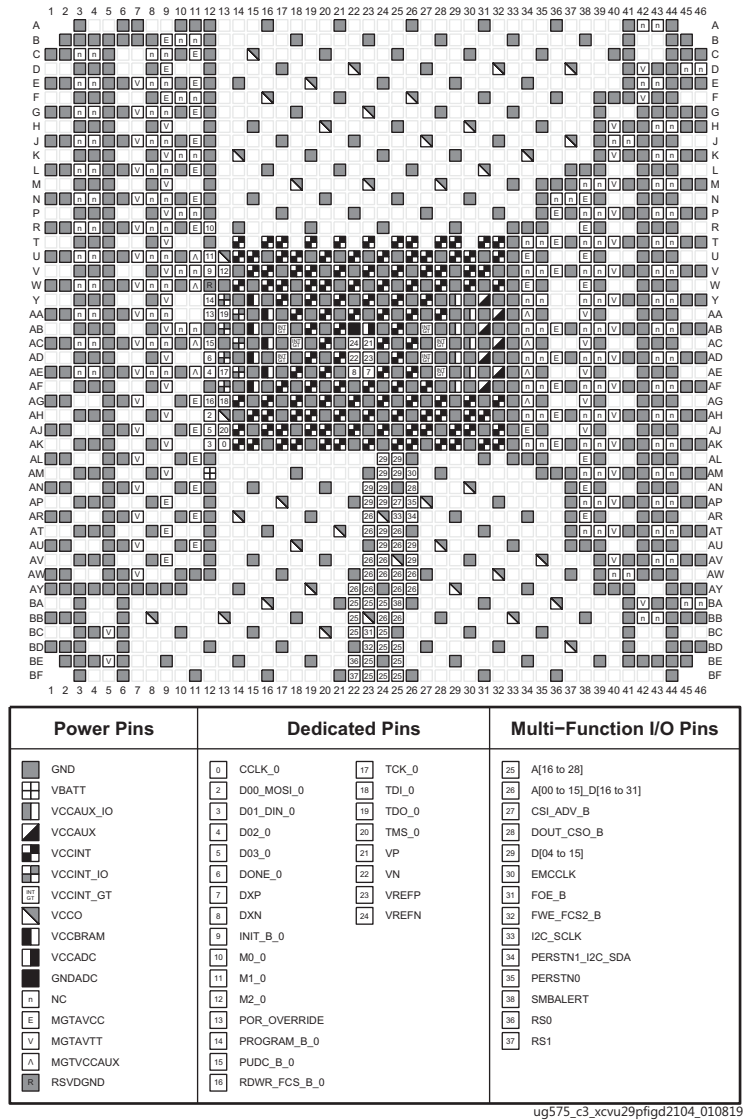


Figure 3-154: FIGD2104 Package—XCVU29P Configuration/Power Diagram


# FSVH2104 (XCVU33P)

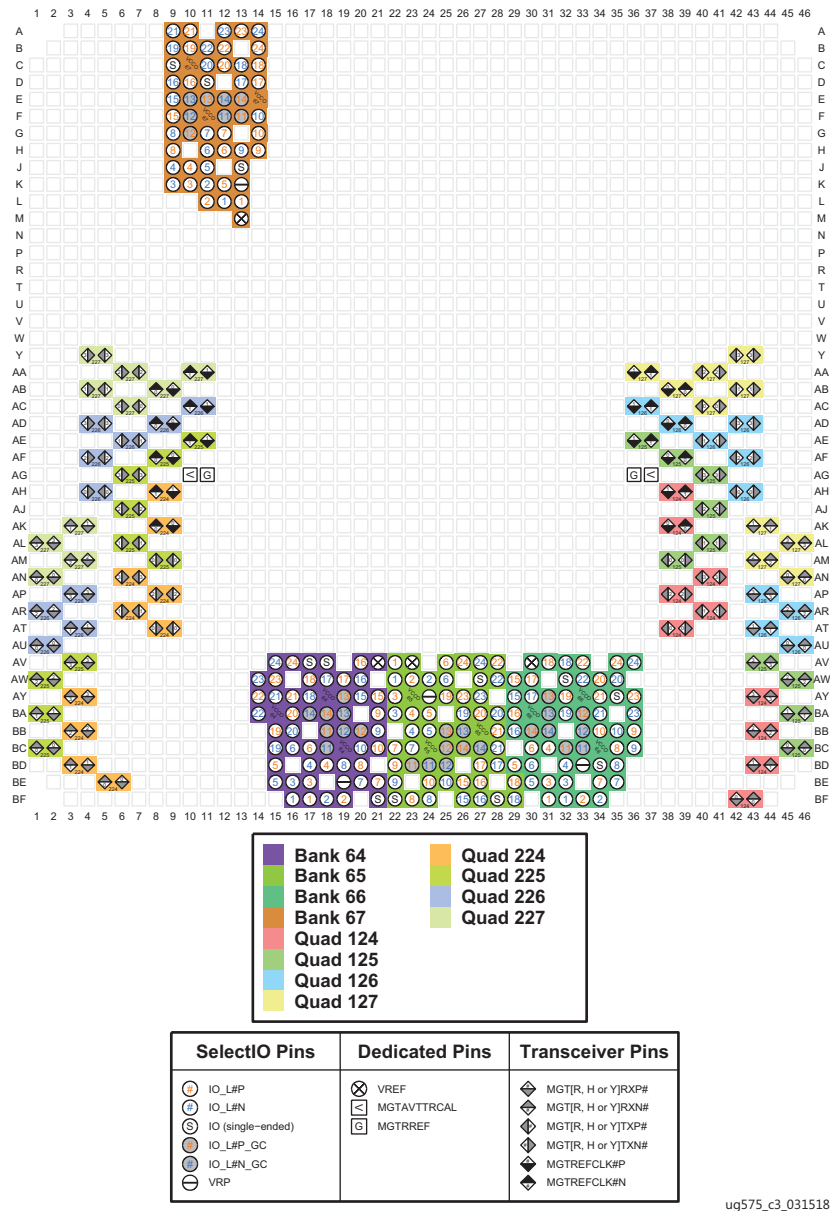

ug575\_c3\_031518

Figure 3-155: FSVH2104 Package—XCVU33P I/O Bank Diagram



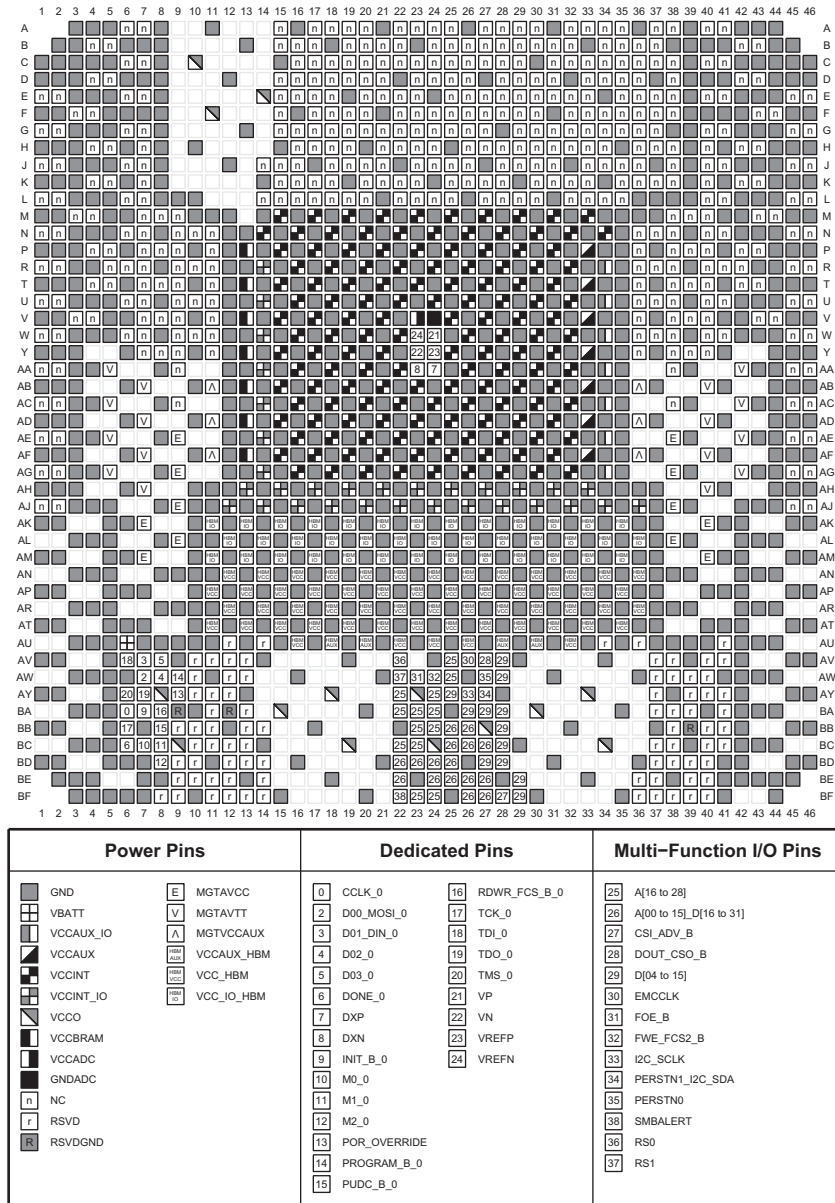

ug575\_c3\_031518

Figure 3-156: FSVH2104 Package—XCVU33P Configuration/Power Diagram

# FSVH2104 (XCVU35P and XCVU45P)


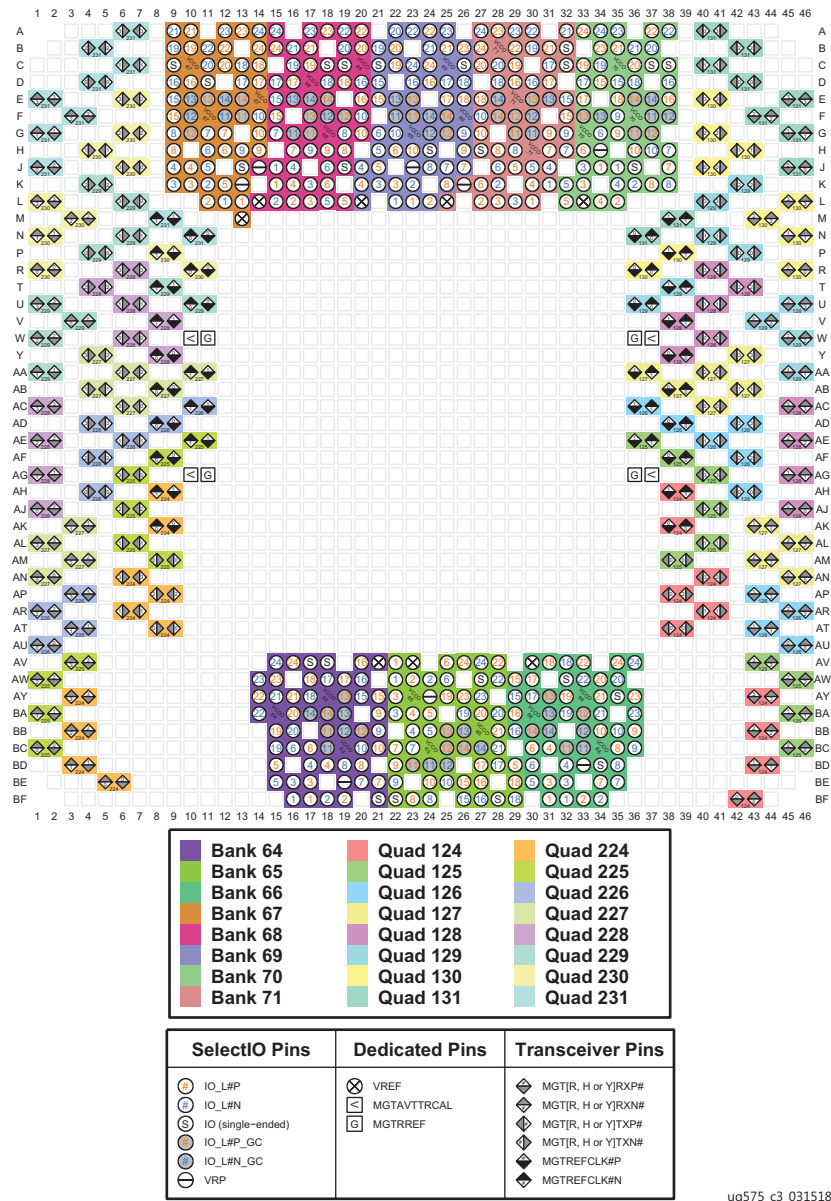


Figure 3-157: FSVH2104 Package—XCVU35P and XCVU45P I/O Bank Diagram

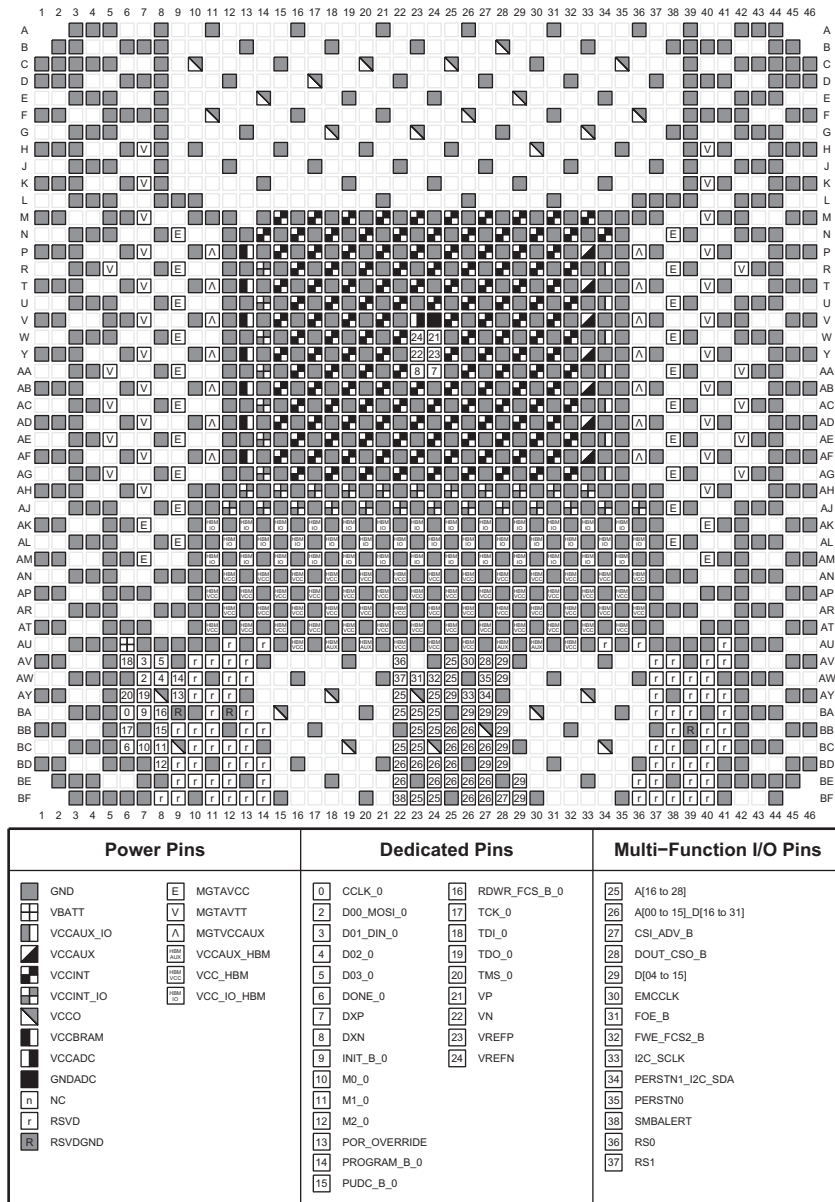

ug575\_c3\_031518

Figure 3-158: FSVH2104 Package—XCVU35P and XCVU45P Configuration/Power Diagram

# FLGA2577 (XCVU9P)


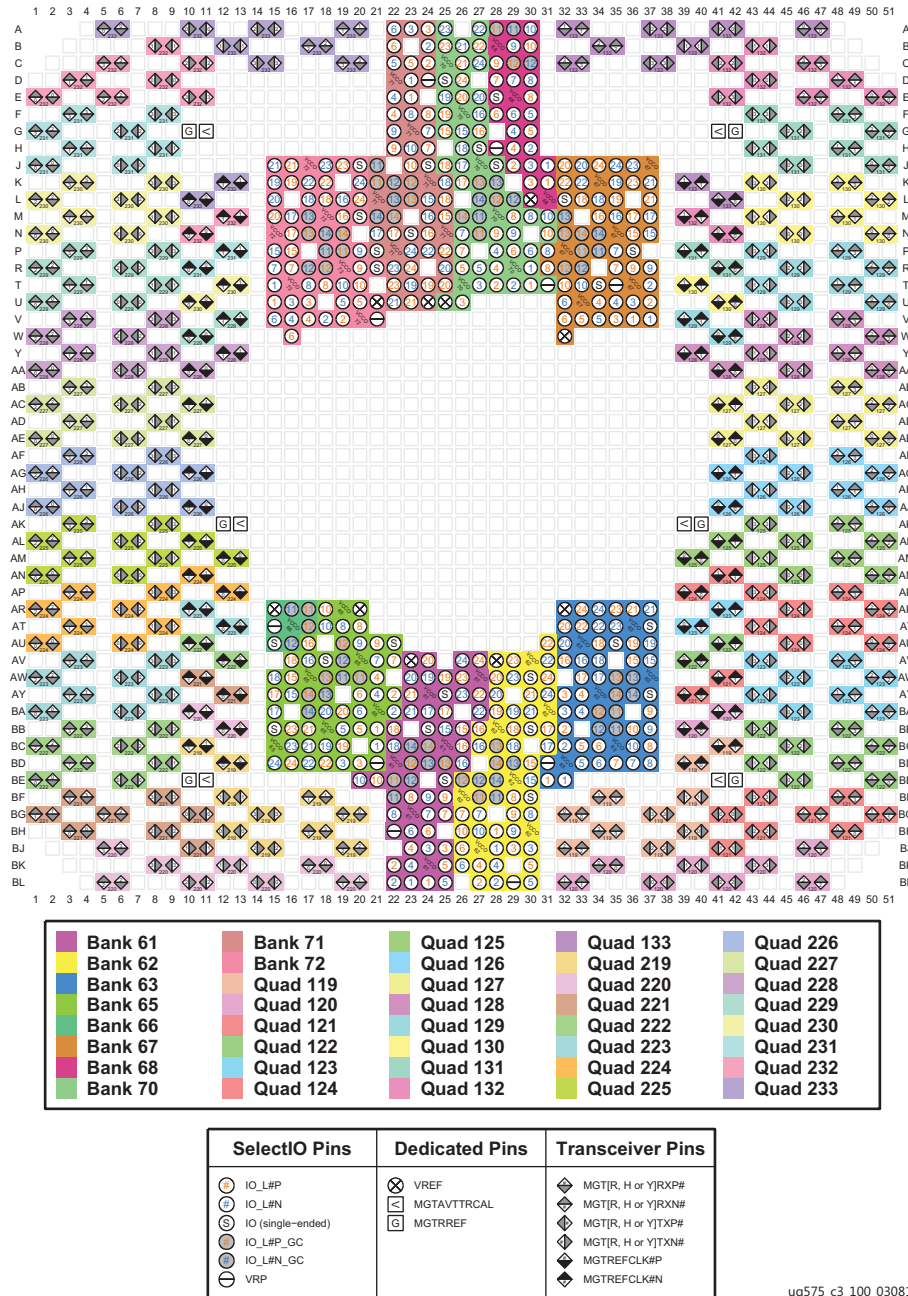


Figure 3-159: FLGA2577 Package—XCVU9P I/O Bank Diagram

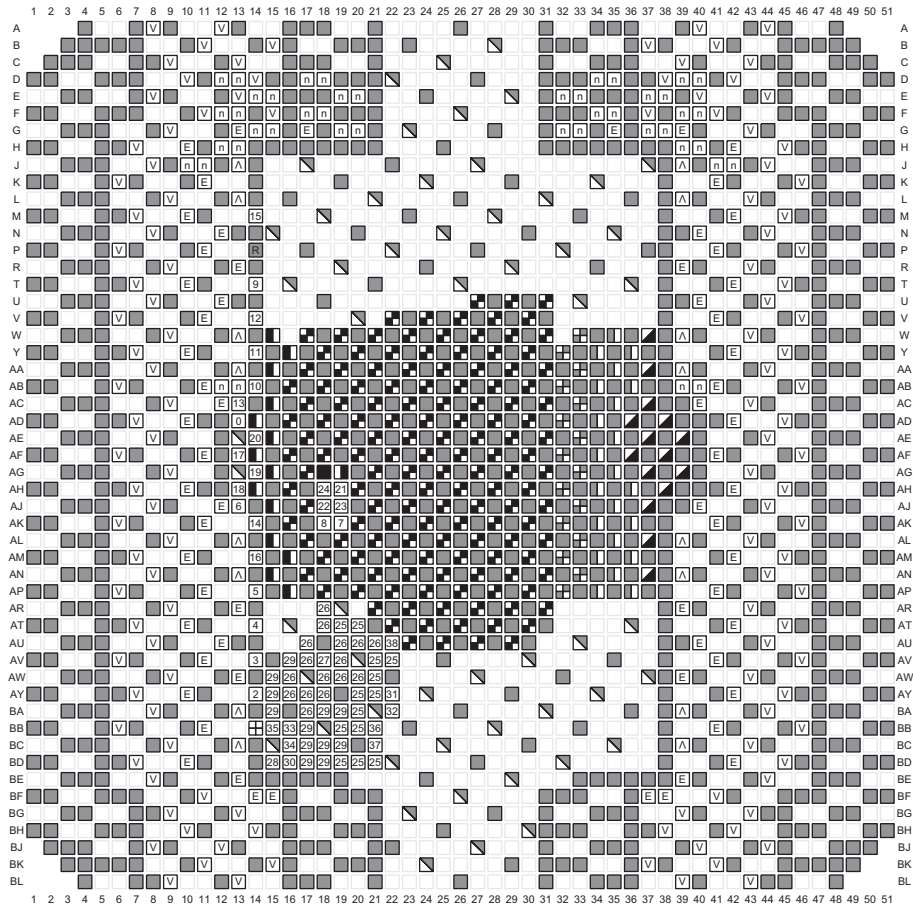

Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	2 D00_MOSI_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	3 D01_DIN_0	27 CSI_ADV_B
VCCAUX	4 D02_0	28 DOUT_CSO_B
VCCINT	5 D03_0	29 D[04 to 15]
VCCINT_IO	6 DONE_0	30 EMCCLK
VCCO	7 DXP	31 FOE_B
VCCBRAM	8 DXN	32 FWE_FCS2_B
VCCADC	9 INIT_B_0	33 I2C_SCLK
GNDADC	10 M0_0	34 PERSTN1_I2C_SDA
NC	11 M1_0	35 PERSTN0
MGTAVCC	12 M2_0	38 SMBALERT
MGTAVTT	13 POR_OVERRIDE	36 RSO
MGTVCCAUX	14 PROGRAM_B_0	37 RS1
RSVDGND	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_100\_030817

Figure 3-160: FLGA2577 Package—XCVU9P Configuration/Power Diagram

# FLGA2577 (XCVU11P)


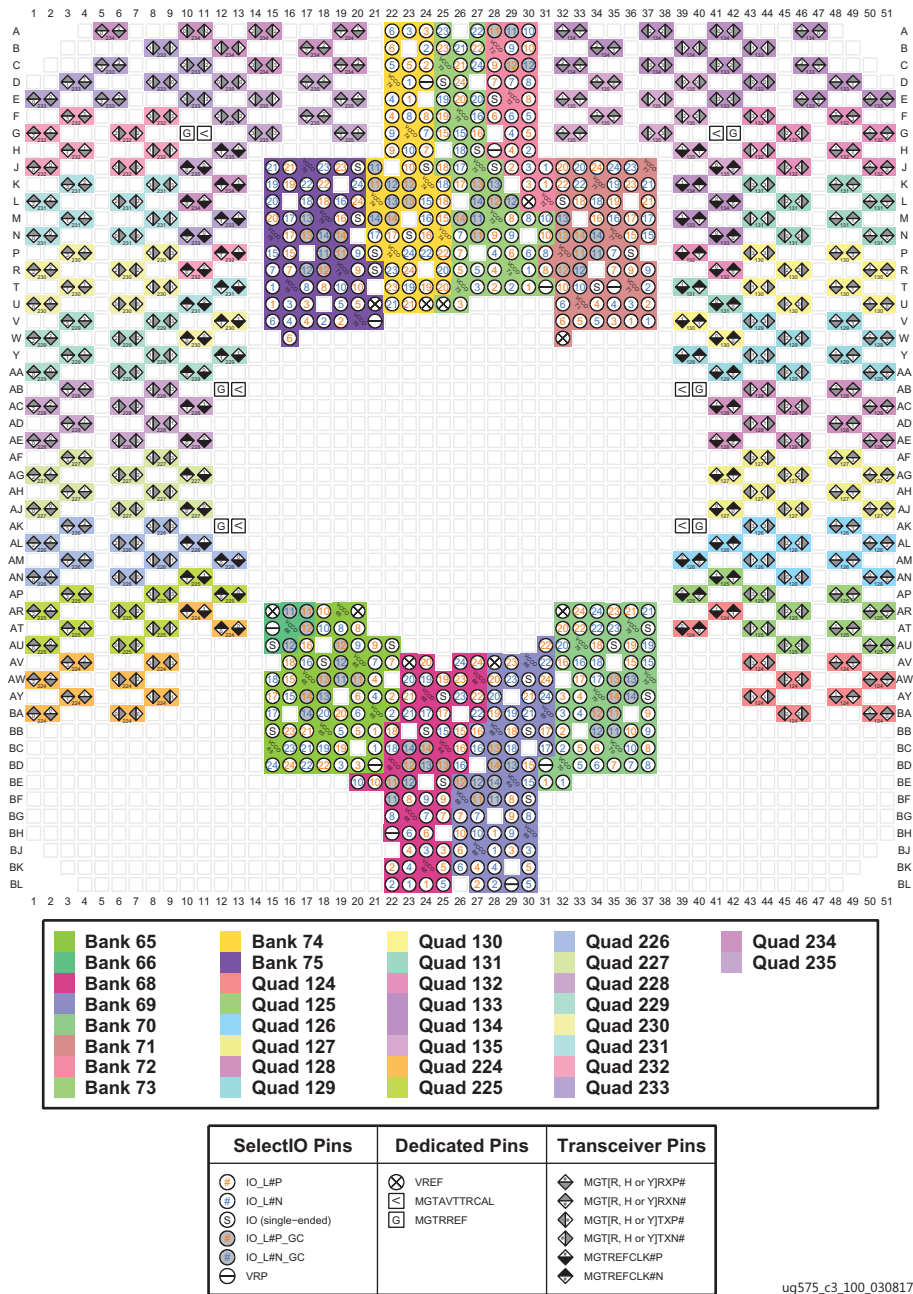


Figure 3-161: FLGA2577 Package—XCVU11P I/O Bank Diagram

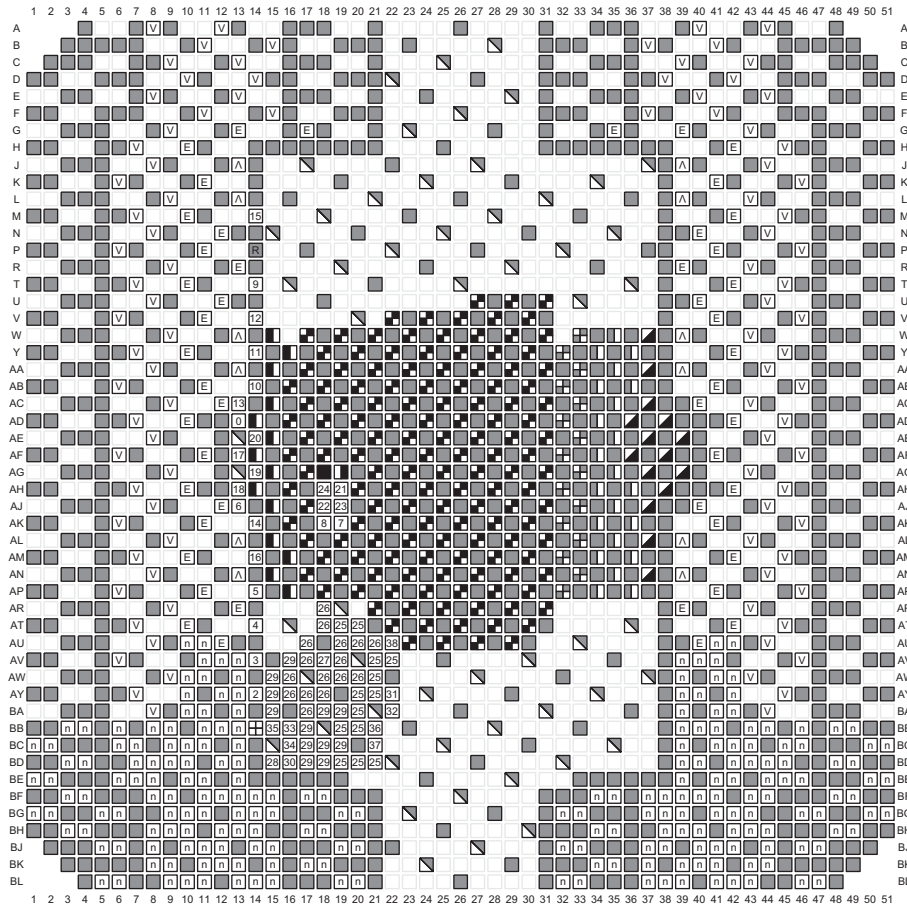


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	2 D00_MOSI_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	3 D01_DIN_0	27 CSI_ADV_B
VCCAUX	4 D02_0	28 DOUT_CSO_B
VCCINT	5 D03_0	29 D[04 to 15]
VCCINT_IO	6 DONE_0	30 EMCCLK
VCCO	7 DXP	31 FOE_B
VCCBRAM	8 DXN	32 FWE_FCS2_B
VCCADC	9 INIT_B_0	33 I2C_SCLK
GNDADC	10 M0_0	34 PERSTN1_I2C_SDA
NC	11 M1_0	35 PERSTN0
MGTAVCC	12 M2_0	38 SMBALERT
MGTAVTT	13 POR_OVERRIDE	36 RSO
MGTVCCAUX	14 PROGRAM_B_0	37 RS1
RSVDGND	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_100\_030817

Figure 3-162: FLGA2577 Package—XCVU11P Configuration/Power Diagram


# FLGA2577 and FSGA2577 (XCVU13P)

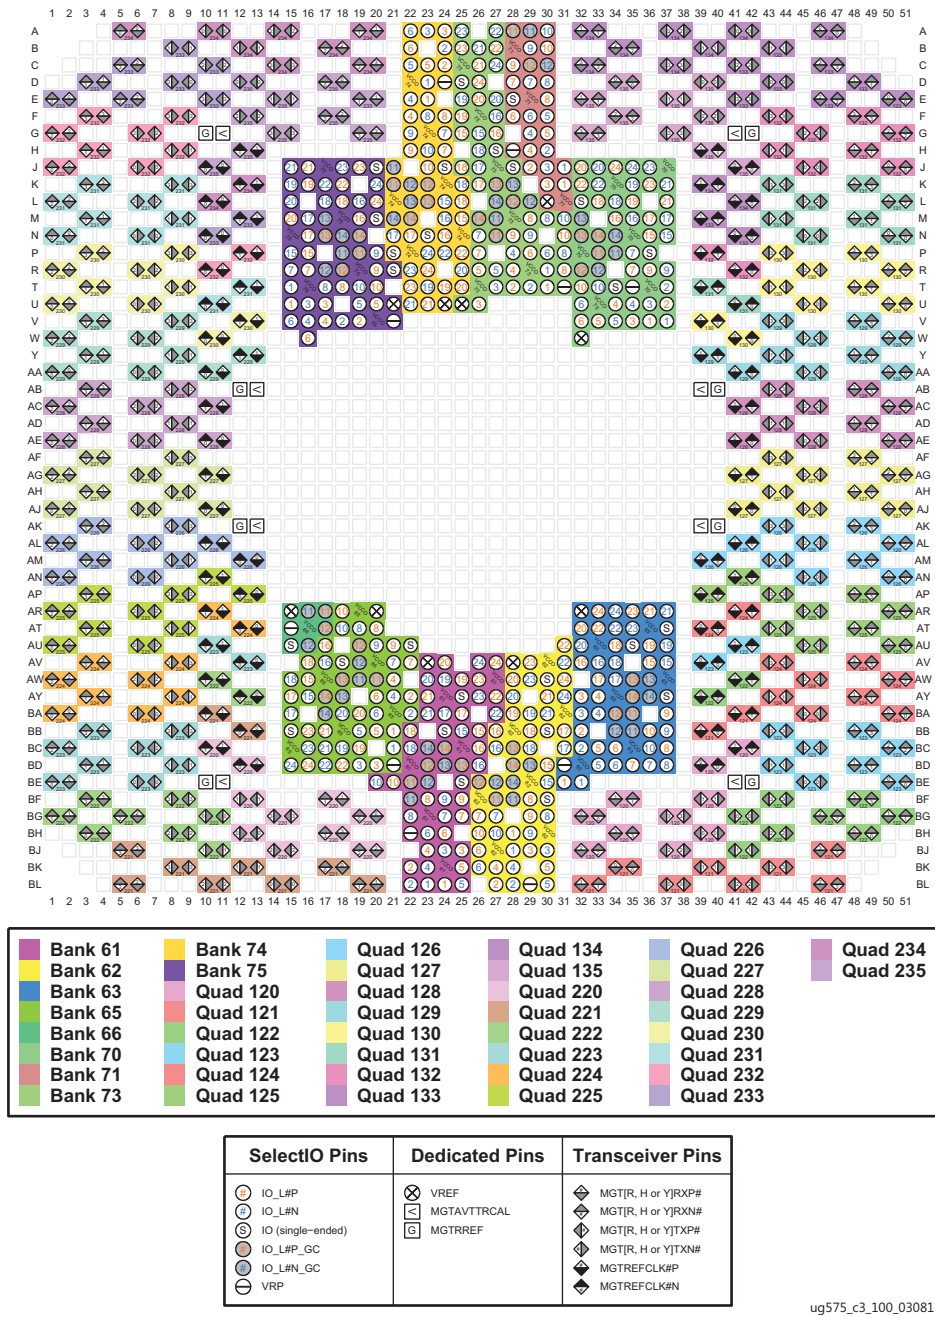

ug575\_c3\_100\_030817

Figure 3-163: FLGA2577 and FSGA2577 Packages—XCVU13P I/O Bank Diagram



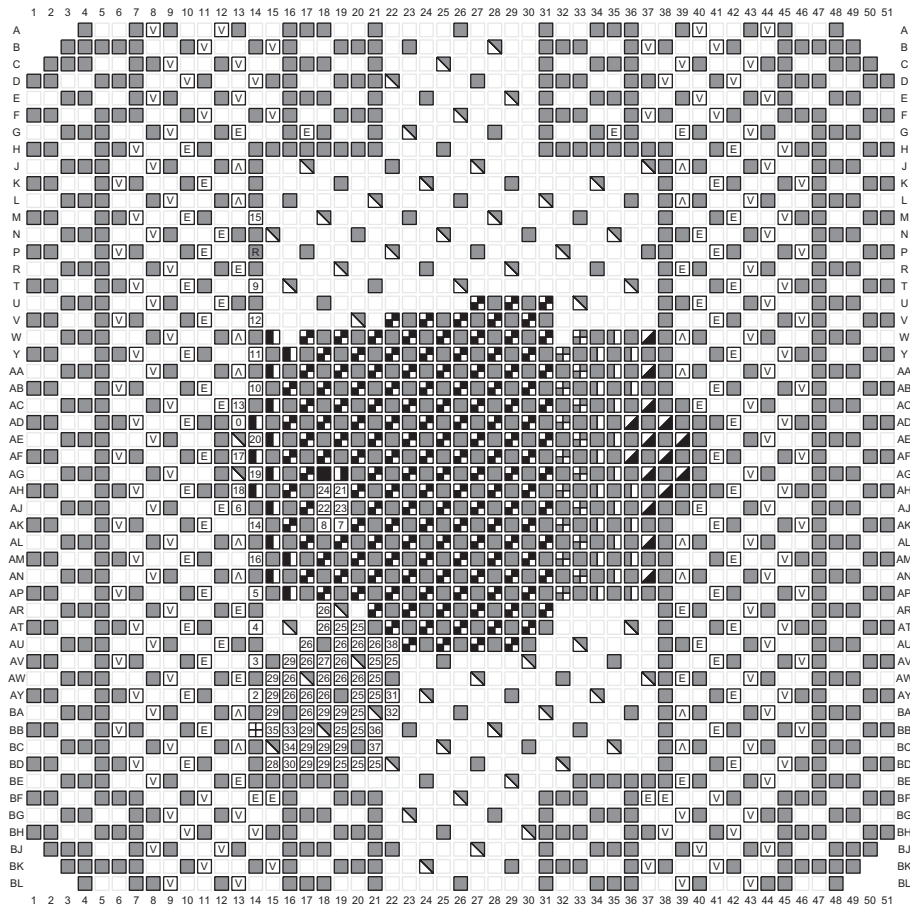


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	2 D00_MOSI_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	3 D01_DIN_0	27 CSI_ADV_B
VCCAUX	4 D02_0	28 DOUT_CSO_B
VCCINT	5 D03_0	29 D[04 to 15]
VCCINT_IO	6 DONE_0	30 EMCCLK
VCCO	7 DXP	31 FOE_B
VCCBRAM	8 DXN	32 FWE_FCS2_B
VCCADC	9 INIT_B_0	33 I2C_SCLCK
GNDADC	10 M0_0	34 PERSTN1_I2C_SDA
NC	11 M1_0	35 PERSTN0
MGTAVCC	12 M2_0	36 SMBALERT
MGTAVTT	13 POR_OVERRIDE	37 RSO
MGTVCCAUX	14 PROGRAM_B_0	38 RS1
RSVDGND	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_100\_030817


Figure 3-164: FLGA2577 and FSGA2577 Packages—XCVU13P Configuration/Power Diagram

# FSGA2577 (XCVU27P)

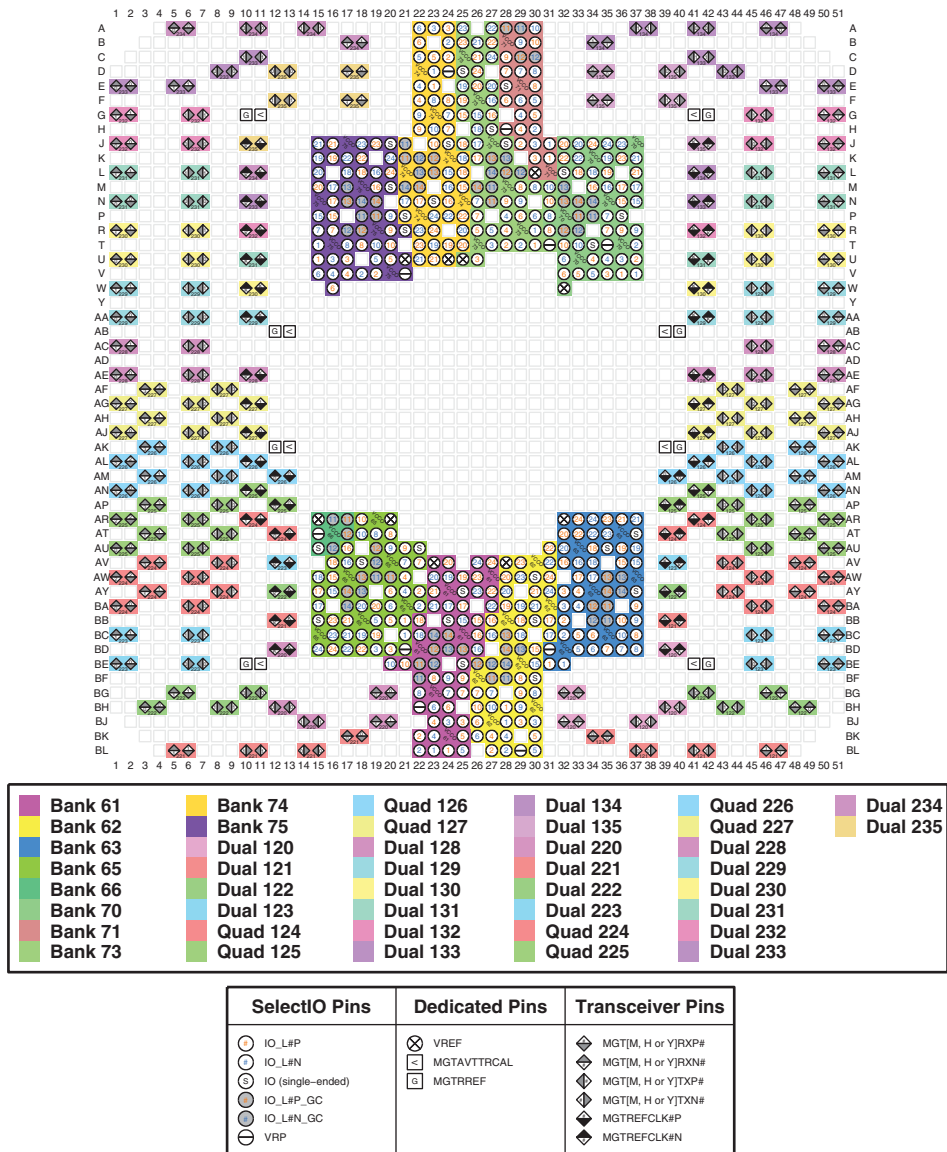

ug575\_c3\_xcvu27fsga2577\_082119

Figure 3-165: FSGA2577 Package—XCVU27P I/O Bank Diagram

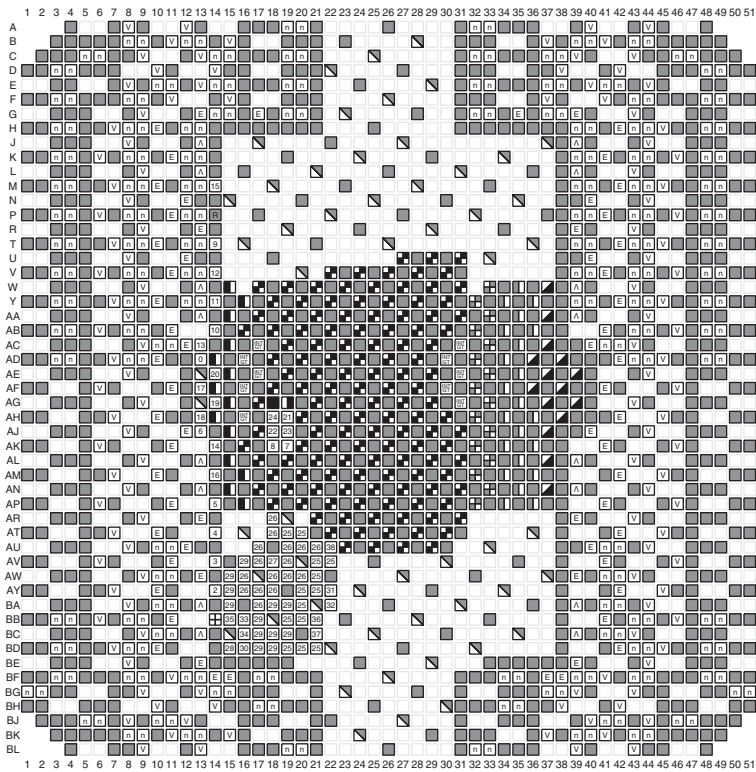


Power Pins	Dedicated Pins		Multi-Function I/O Pins
GND	0 CCLK_0	17 TCK_0	25 A[16 to 28]
VBATT	2 D00_MOSI_0	18 TDL_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	3 D01_DIN_0	19 TDO_0	27 CSI_ADV_B
VCCAUX	4 D02_0	20 TMS_0	28 DOUT_CSO_B
VCCINT	5 D03_0	21 VP	29 D[04 to 15]
VCCINT_IO	6 DONE_0	22 VN	30 EMCCLK
VCCINT_GT	7 DXP	23 VREFP	31 FOE_B
VCCO	8 DXN	24 VREFN	32 FWE_FCS2_B
VCCBRAM	9 INIT_B_0		33 I2C_SCLK
VCCADC	10 M0_0		34 PERSTN1_I2C_SDA
GNDADC	11 M1_0		35 PERSTN0
NC	12 M2_0		38 SMBALERT
MGTAVCC	13 POR_OVERRIDE		36 RSO
MGTAVTT	14 PROGRAM_B_0		37 RS1
MGTVCCAUX	15 PUDC_B_0		
RSVDGND	16 RDWR_FCS_B_0		

ug575\_c3\_xcvu27fsga2577\_082119


Figure 3-166: FSGA2577 Package—XCVU27P Configuration/Power Diagram

# FSGA2577 (XCVU29P)

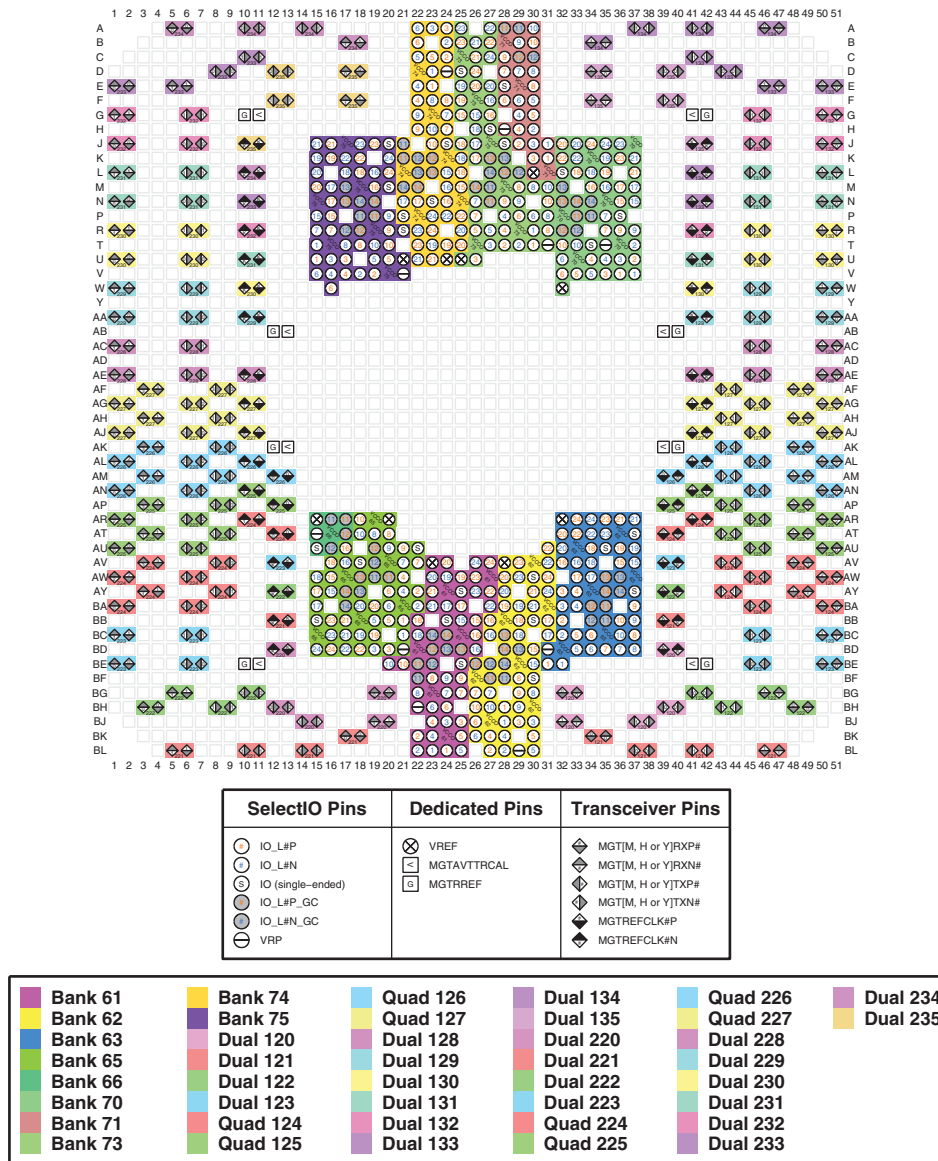

ug575\_c3\_xcvu29fsga2577\_082119

Figure 3-167: FSGA2577 Package—XCVU29P I/O Bank Diagram

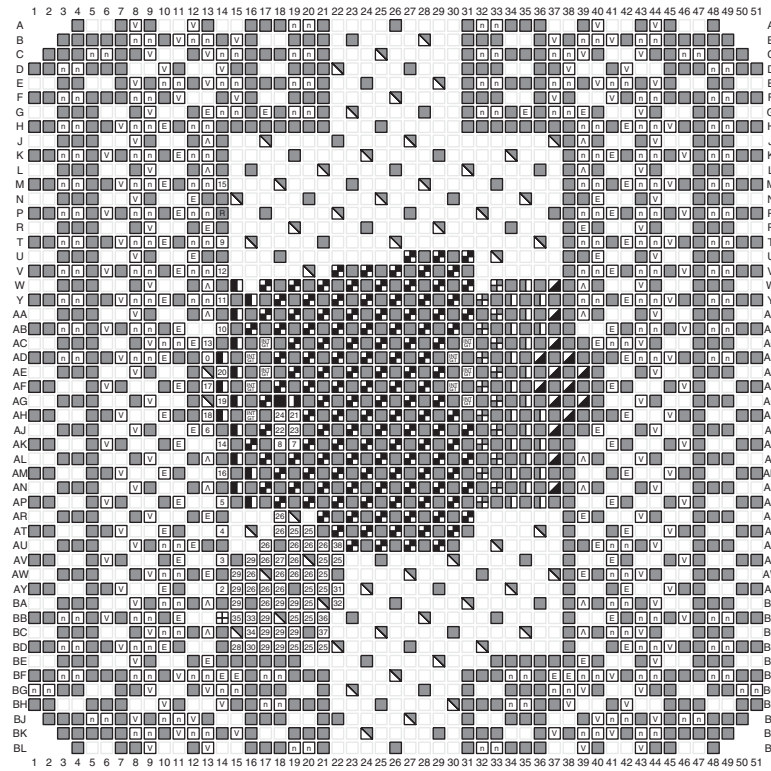


Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	2 D00_MOSI_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	3 D01_DIN_0	27 CSI_ADV_B
VCCAUX	4 D02_0	28 DOUT_CSO_B
VCCINT	5 D03_0	29 D[04 to 15]
VCCINT_IO	6 DONE_0	30 EMCCLK
VCCINT_GT	7 DXP	31 FOE_B
VCCO	8 DXN	32 FWE_FCS2_B
VCCBRAM	9 INIT_B_0	33 I2C_SCLK
VCCADC	10 M0_0	34 PERSTN1_I2C_SDA
GNDADC	11 M1_0	35 PERSTN0
NC	12 M2_0	38 SMBALERT
MGTAVCC	13 POR_OVERRIDE	36 RSO
MGTAVTT	14 PROGRAM_B_0	37 RS1
MGTVCCAUX	15 PUDC_B_0	
RSVDGND	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_xcvu29fsga2577\_082119


Figure 3-168: FSGA2577 Package—XCVU29P Configuration/Power Diagram

# FSVH2892 (XCVU35P and XCVU45P)

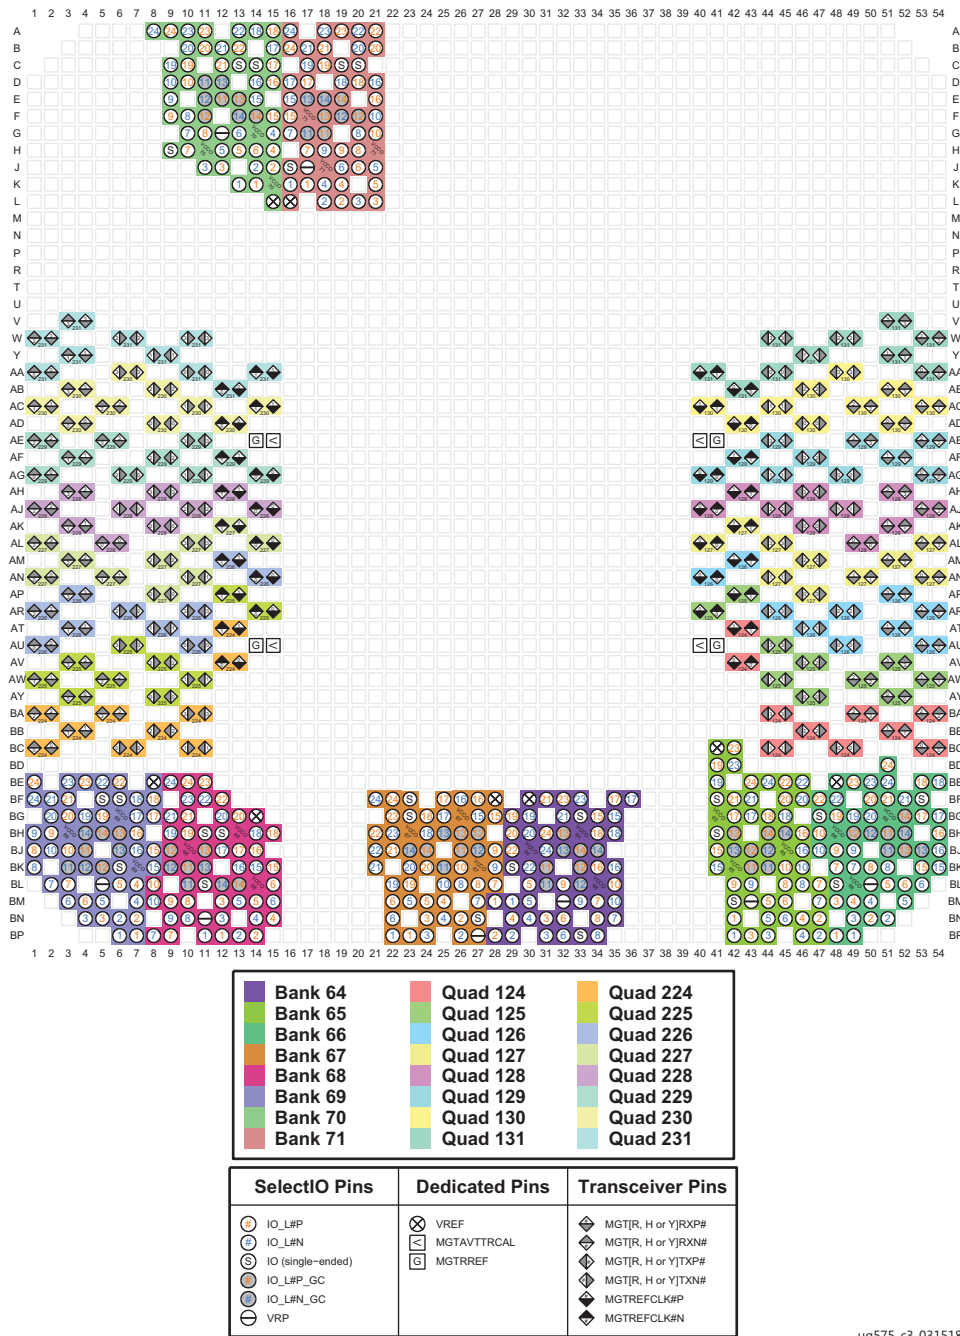

ug575\_c3\_031518


Figure 3-169: FSVH2892 Package—XCVU35P and XCVU45P I/O Bank Diagram

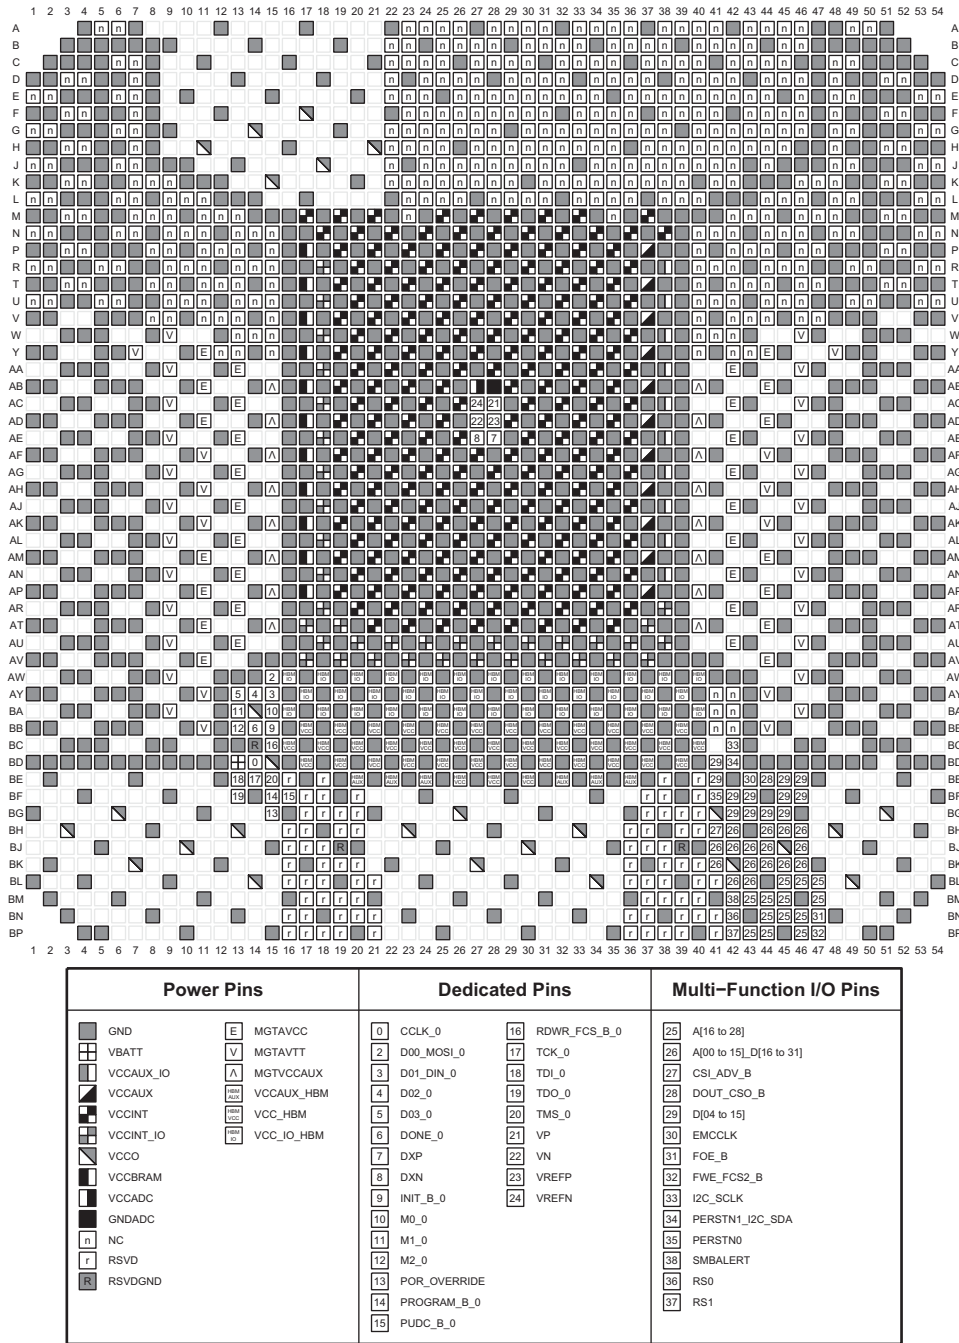

ug575\_c3\_031518

Figure 3-170: FSVH2892 Package—XCVU35P and XCVU45P Configuration/Power Diagram

# FSVH2892 (XCVU37P and XCVU47P)

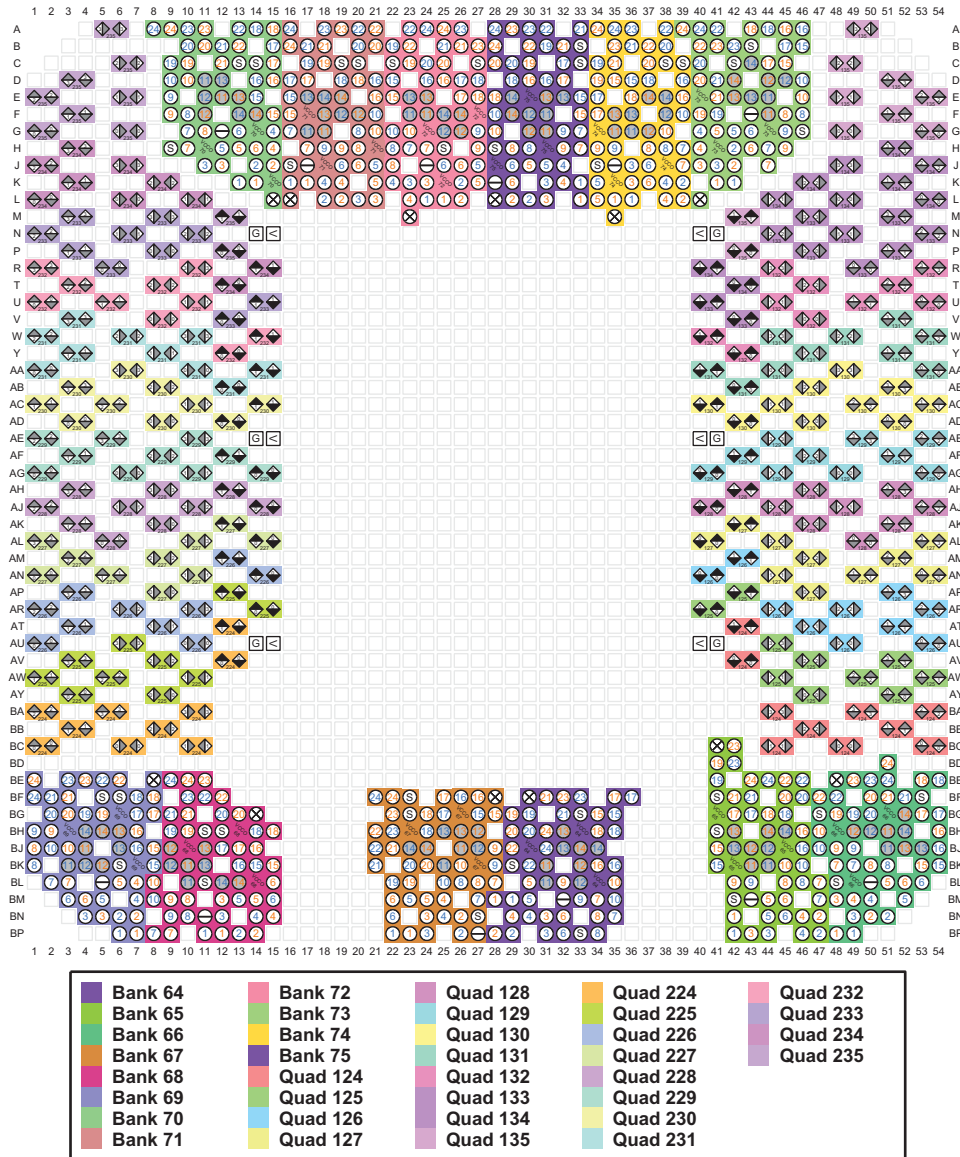

ug575\_c3\_110317

Figure 3-171: FSVH2892 Package—XCVU37P and XCVU47P I/O Bank Diagram




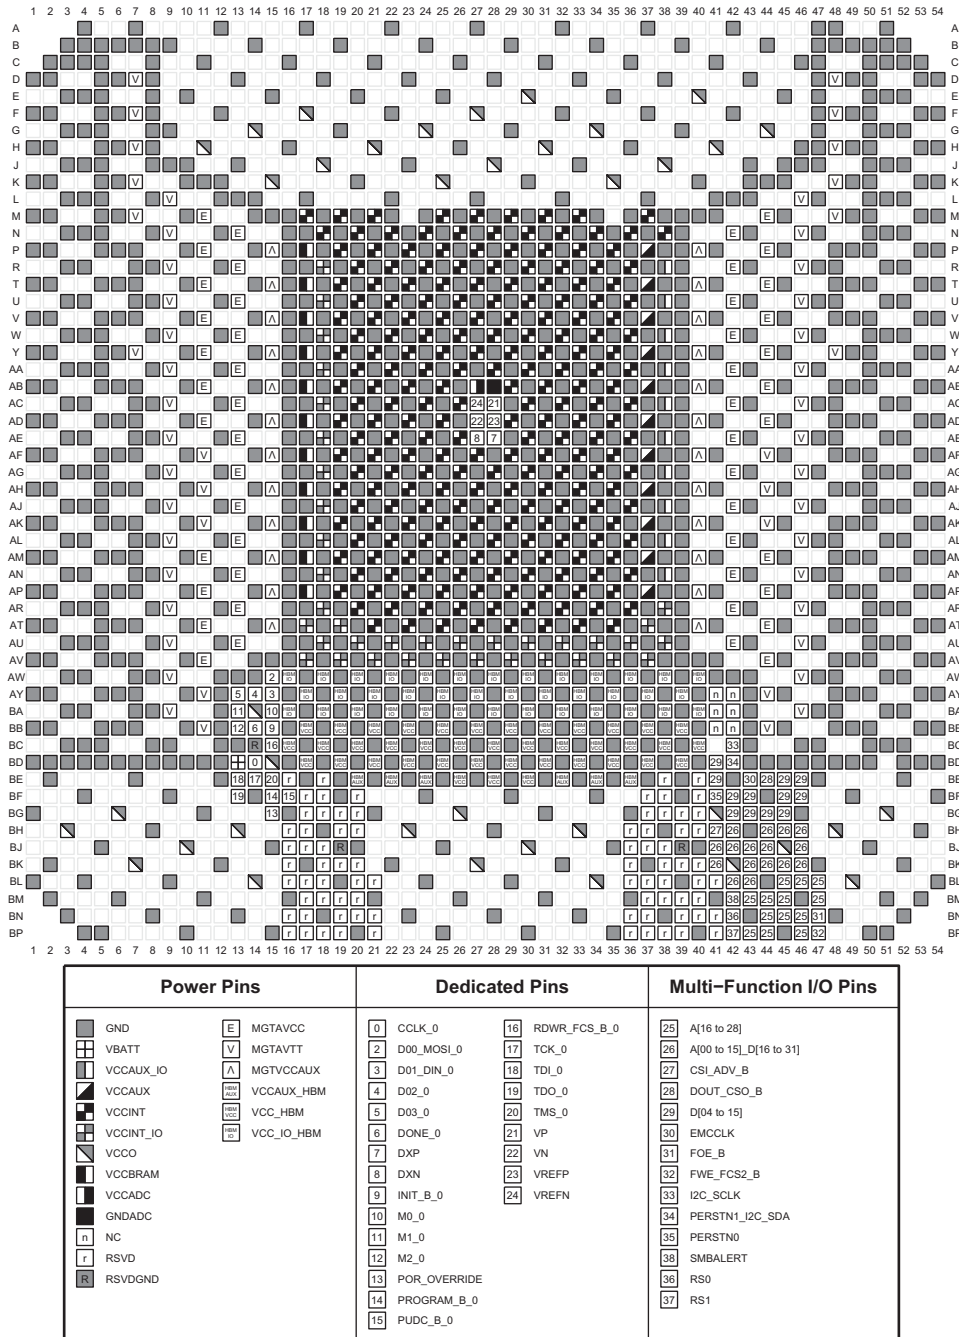



Figure 3-172: FSVH2892 Package—XCVU37P and XCVU47P Configuration/Power Diagram

# FSVK2892 (XCVU57P)

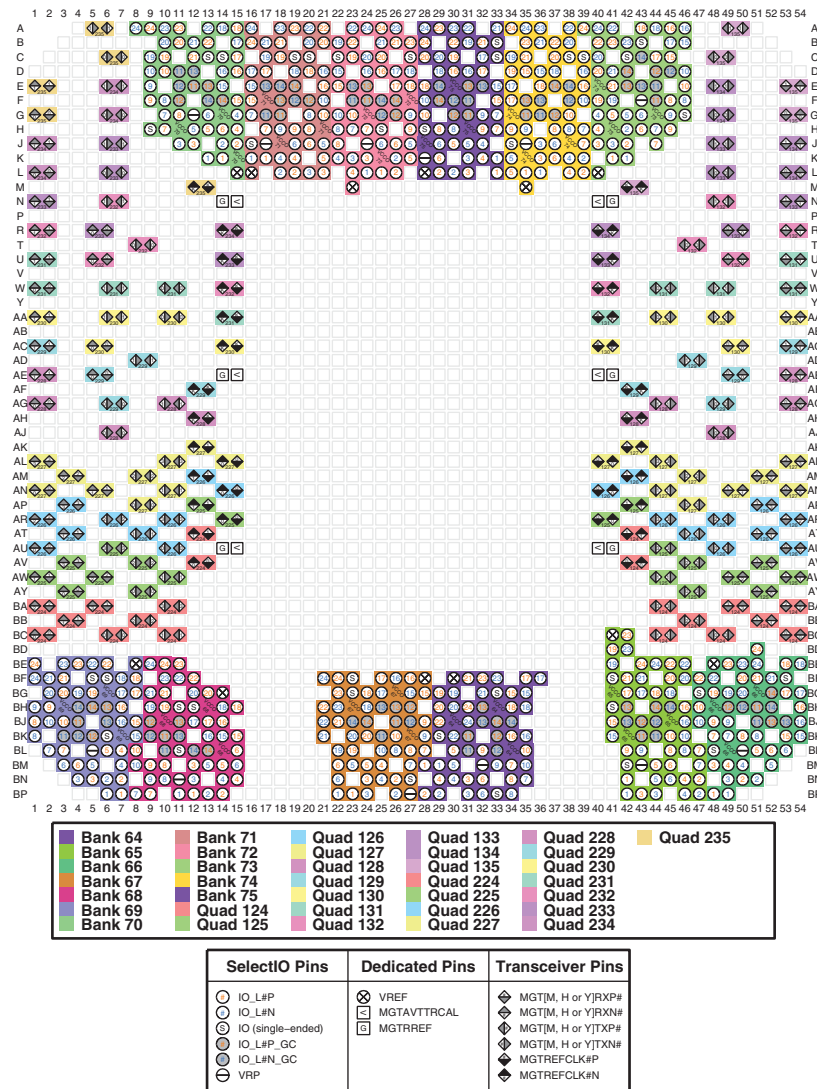

ug575\_c3\_xcvu57pfsvk2892\_083020


Figure 3-173: FSVK2892 Package—XCVU57P I/O Bank Diagram

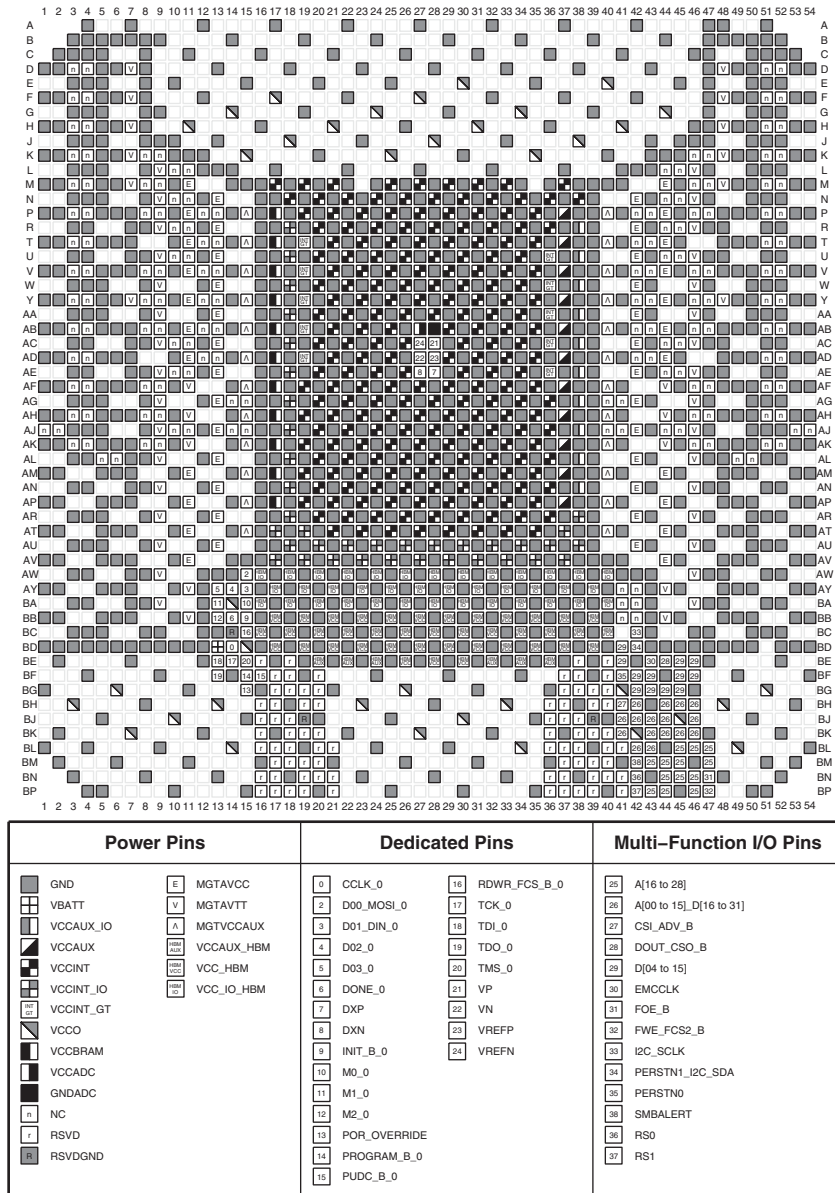

ug575\_c3\_xcvu57pfsvk2892\_083020


Figure 3-174: FSVK2892 Package—XCVU57P Configuration/Power Diagram

# FSVA3824 (XCVU19P)

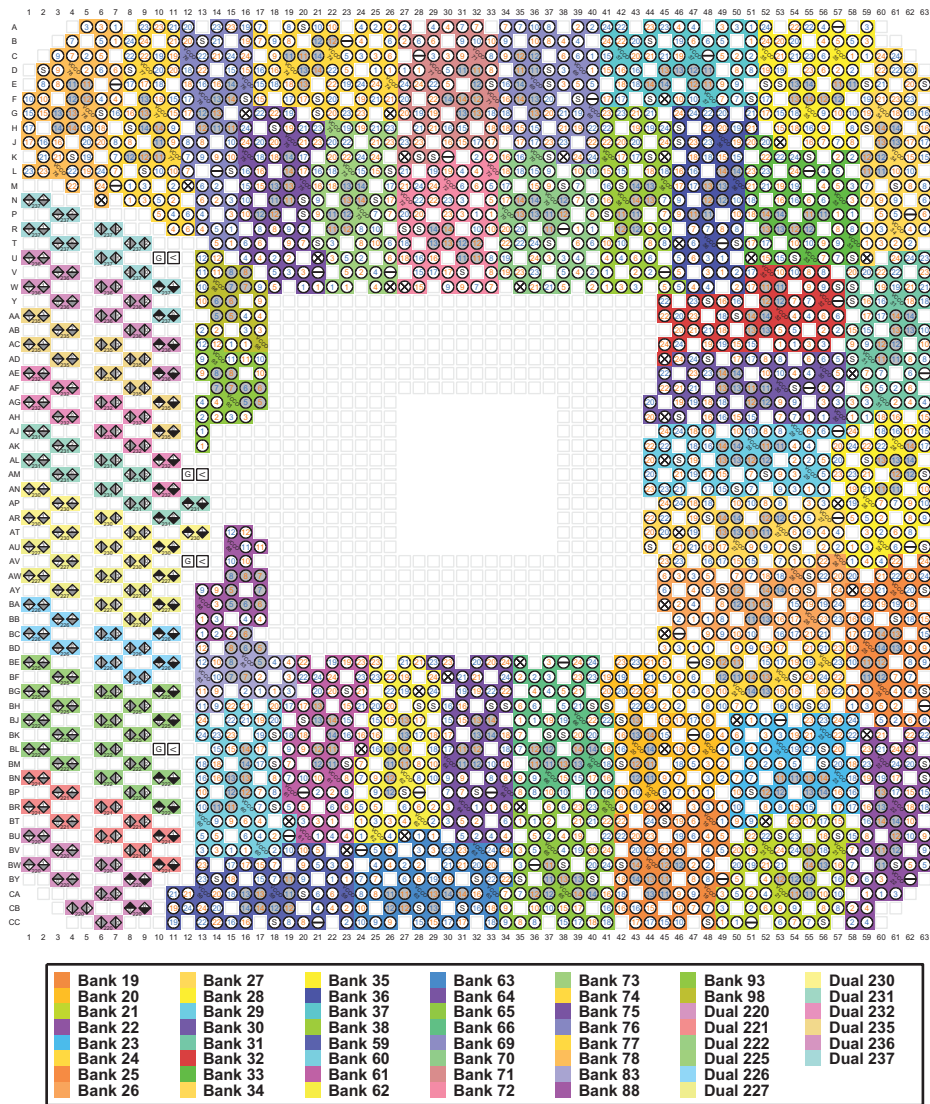

xcvu19pfsva3824\_041719

Figure 3-176: FSVA3824 Package—XCVU19P I/O Bank Diagram

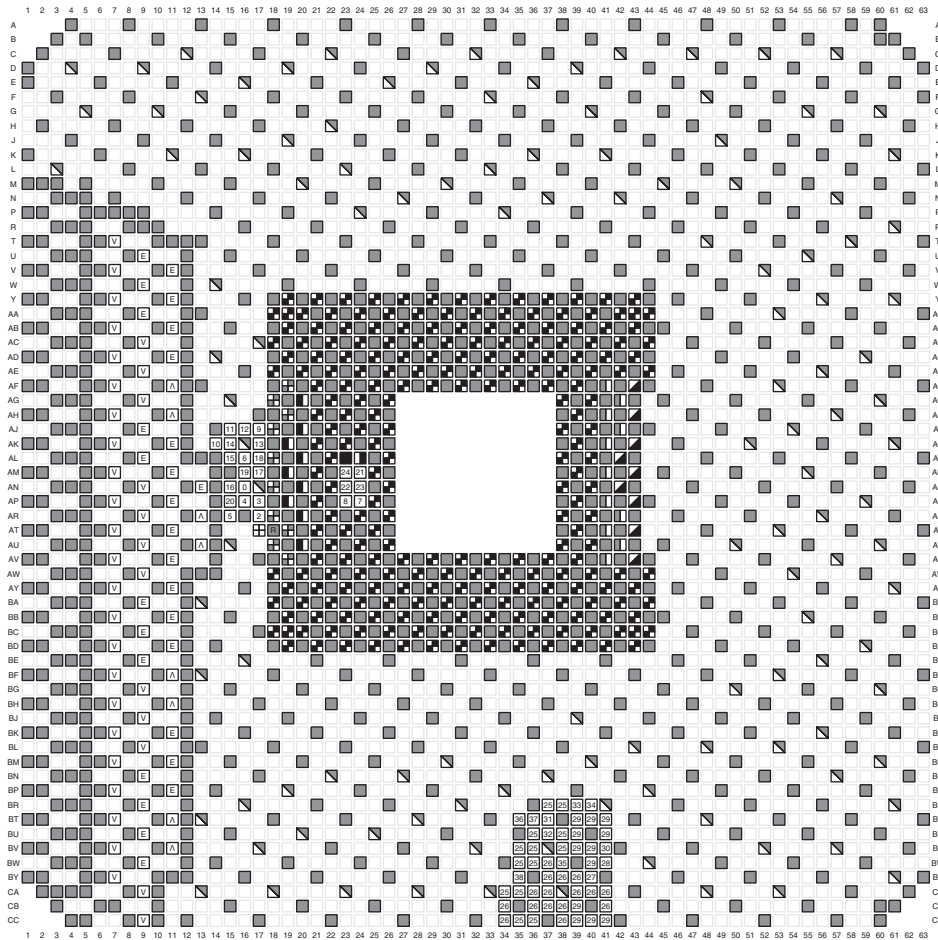


Power Pins	Dedicated Pins		Multi-Function I/O Pins
GND	0 CCLK_0	18 RDWR_FCS_B_0	25 A[16 to 28]
VBATT	2 D00_MOSI_0	17 TCK_0	26 A[00 to 15]_D[16 to 31]
VCCAUX_IO	3 D01_DIN_0	18 TDI_0	27 CSI_ADV_B
VCCAUX	4 D02_0	19 TDO_0	28 DOUT_CSO_B
VCCINT	5 D03_0	20 TMS_0	29 D[04 to 15]
VCCINT_IO	6 DONE_0	21 VP	30 EMCLK
VCCO	7 DXP	22 VN	31 FOE_B
VCCBRAM	8 DXN	23 VREFP	32 FW_E_FCS2_B
VCCADC	9 INIT_B_0	24 VREFN	33 I2C_SCLK
GNDADC	10 M0_0		34 PERSTN1_I2C_SDA
NC	11 M1_0		35 PERSTN0
MGTAVCC	12 M2_0		38 SMBALERT
MGTAVTT	13 POR_OVERRIDE		36 RSO
MGTVCCAUX	14 PROGRAM_B_0		37 RS1
RSVDGND	15 PUDC_B_0		

xcvu19pfsva3824\_072921


Figure 3-177: FSVA3824 Package—XCVU19P Configuration/Power Diagram

# FSVB3824 (XCVU19P)

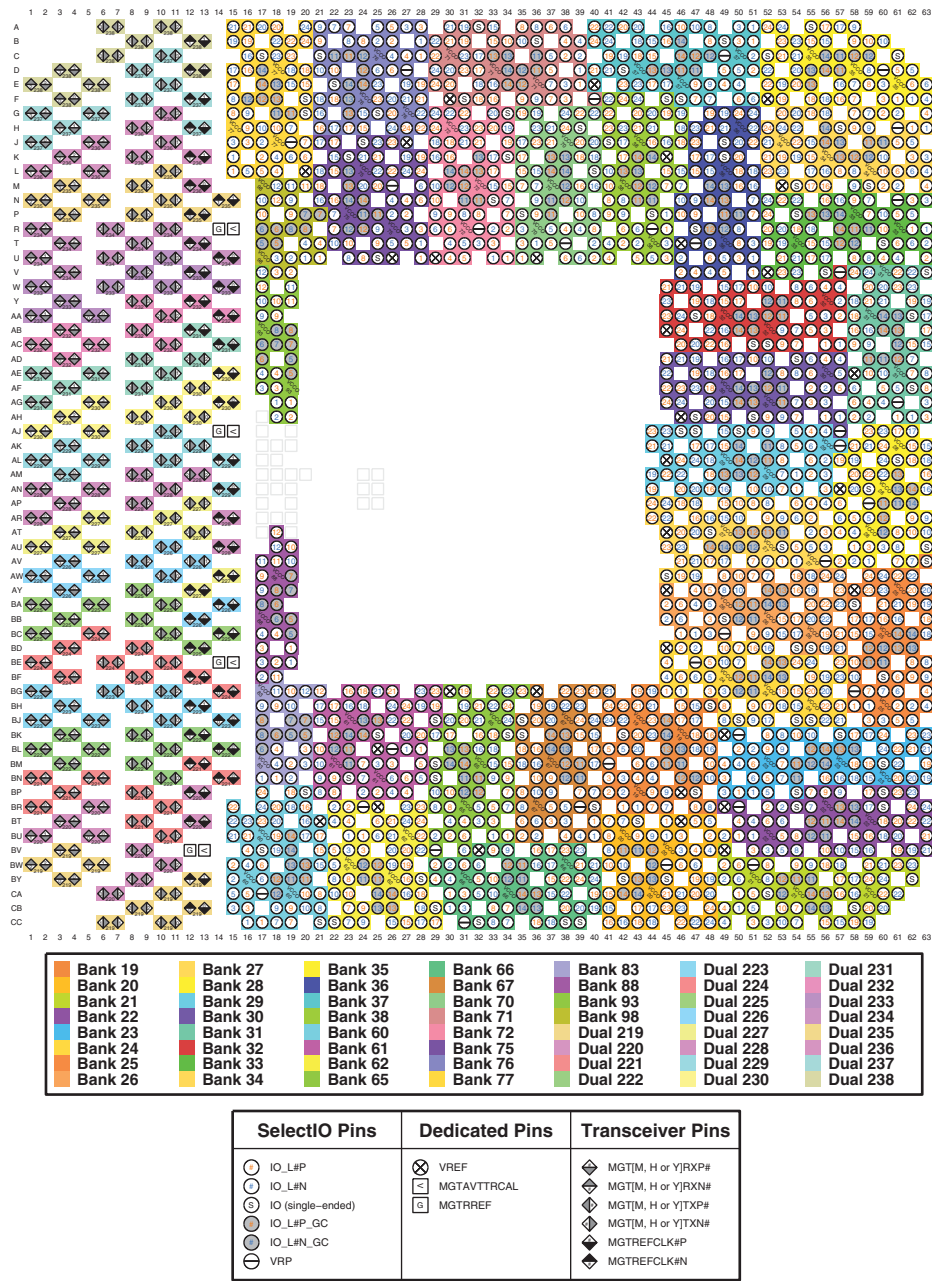

ug575\_c3\_xcvu19fsvb3824\_072819

Figure 3-178: FSVB3824 Package—XCVU19P I/O Bank Diagram

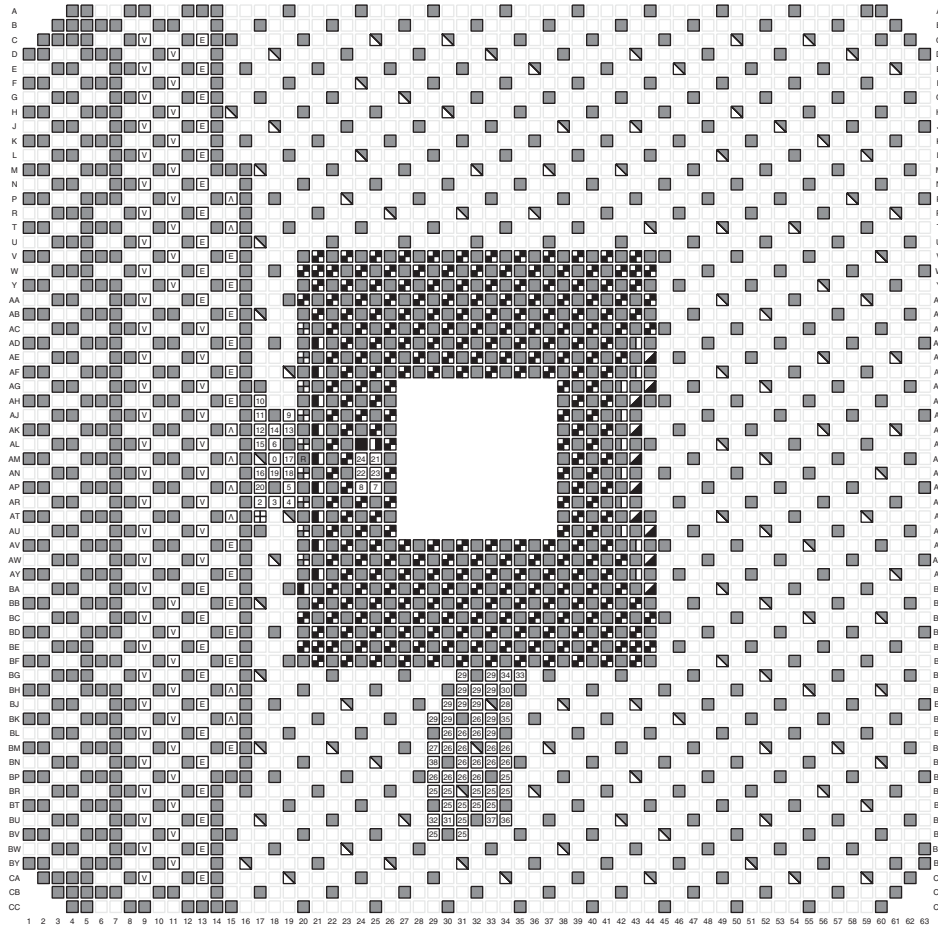

Power Pins	Dedicated Pins	Multi-Function I/O Pins
GND	0 CCLK_0	25 A[16 to 28]
VBATT	2 D00_MOSI_0	28 A[00 to 15]_D[16 to 31]
VCCAUX_IO	3 D01_DIN_0	27 CSI_ADV_B
VCCAUX	4 D02_0	26 DOUT_CSO_B
VCCINT	5 D03_0	29 D[04 to 15]
VCCINT_IO	6 DONE_0	30 EMCCLK
VCCO	7 DXP	31 FOE_B
VCCBRAM	8 DXN	32 FWE_FCS2_B
VCCADC	9 INIT_B_0	33 I2C_SCLK
GNDADC	10 M0_0	34 PERSTN1_I2C_SDA
NC	11 M1_0	35 PERSTN0
MGTA VCC	12 M2_0	38 SMBALERT
MGTA VTT	13 POR_OVERRIDE	36 RS0
MGTVCCAUX	14 PROGRAM_B_0	37 RS1
RSVDGND	15 PUDC_B_0	
	16 RDWR_FCS_B_0	
	17 TCK_0	
	18 TDI_0	
	19 TDO_0	
	20 TMS_0	
	21 VP	
	22 VN	
	23 VREFP	
	24 VREFN	

ug575\_c3\_xcvu19fsvb3824\_072921

Figure 3-179: FSVB3824 Package—XCVU19P Configuration/Power Diagram

# VSVA1365 (XCVU23P)

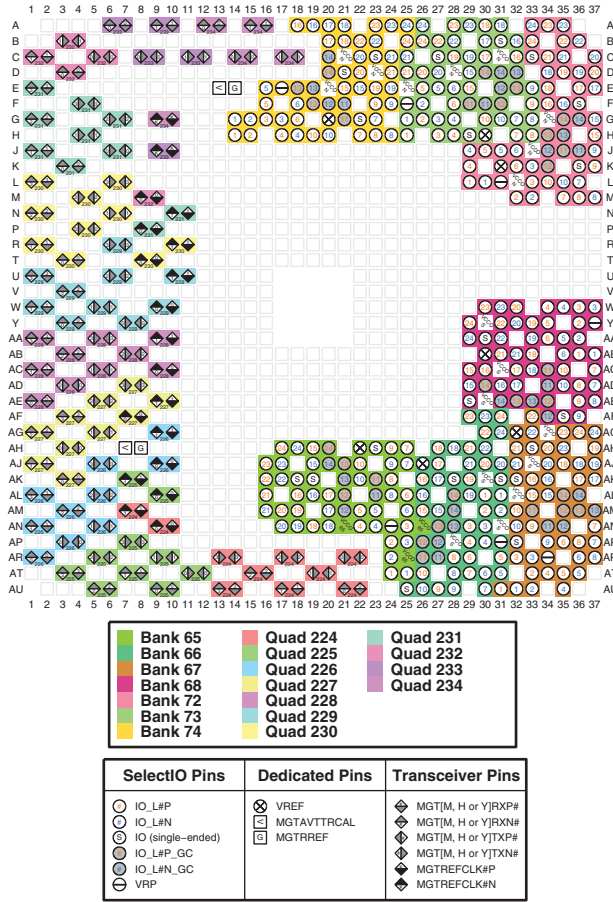


Figure 3-180: VSVA1365 Package—XCVU23P I/O Bank Diagram



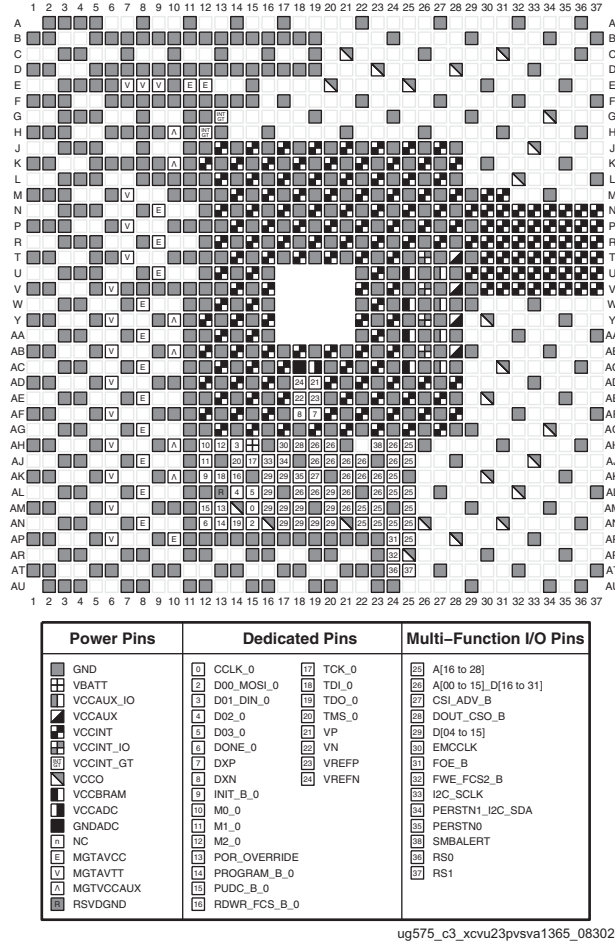


Figure 3-181: VSVA1365 Package—XCVU23P Configuration/Power Diagram

# Mechanical Drawings

## Summary

This chapter provides mechanical drawings (package specifications) of the UltraScale™ and UltraScale+™ device packages. [Table 4-1](#) is a cross-reference to the mechanical drawings by device and package combination.

All Kintex® and Virtex® UltraScale+ devices are available in packages with eutectic BGA balls. To order these packages, the device type starts with an XQ vs. XC and the third digit in the package name replaces the V or G with a Q to delineate the use of eutectic balls on an otherwise XC package. For information on ordering the XQ non-ruggedized eutectic Sn/Pb ball packages, see the XQ UltraScale+ FPGA Ordering Information in the *XQ UltraScale Architecture Data Sheet Overview (DS895)* [[Ref 2](#)]. For the XQ non-ruggedized eutectic Sn/Pb ball packages mechanicals, refer to the XC packages in [Table 4-1](#) because they are built with an XC style package and lid using Pb-free solder inside.



**TIP:** For information on materials composition and weight of a device, refer to the material declaration data sheet (MDDS) [[Ref 20](#)].

In [Table 4-1](#), the full Defense-grade XQ ruggedized packages are delineated by an R in the third digit of the package code.

**Table 4-1: Cross-Reference to Mechanical Drawings by Package**

Package	Figure	Device				Package Status
FBVA676	<a href="#">Figure 4-1</a> <a href="#">Figure 4-2</a>	XCKU035	XCKU040			<a href="#">Production</a>
FFVA676 FFQA676	<a href="#">Figure 4-3</a>	XCKU3P	XCKU5P			<a href="#">Production</a>
FFVB676 FFQB676	<a href="#">Figure 4-3</a>	XCAU20P	XCAU25P	XCKU3P	XCKU5P	<a href="#">Production</a>
FFRB676	<a href="#">Figure 4-4</a>	XQKU5P				<a href="#">Production</a>
RBA676	<a href="#">Figure 4-5</a>	XQKU040				<a href="#">Production</a>
SFVA784	<a href="#">Figure 4-6</a>	XCKU035	XCKU040			<a href="#">Production</a>

Table 4-1: Cross-Reference to Mechanical Drawings by Package (Cont'd)

Package	Figure	Device				Package Status
SFVB784 SFQB784	<a href="#">Figure 4-7</a>	XCAU20P	XCAU25P	XCKU3P	XCKU5P	Production
SFRB784	<a href="#">Figure 4-8</a>	XQKU5P				Production
FBVA900	<a href="#">Figure 4-9</a> <a href="#">Figure 4-10</a>	XCKU035	XCKU040			Production
FFVD900 FFQD900	<a href="#">Figure 4-11</a>	XCKU3P	XCKU5P	XCKU11P		Production
FFVE900 FFQE900	<a href="#">Figure 4-11</a>	XCKU9P	XCKU13P			Production
FFVA1156 FFQA1156 <sup>(1)</sup>	<a href="#">Figure 4-12</a>	XCKU025	XCKU035	XCKU040		Production
	<a href="#">Figure 4-13</a>	XCKU060	XCKU095	XCKU11P		Production
	<a href="#">Figure 4-14</a>	XCKU15P				Production
FFRA1156	<a href="#">Figure 4-15</a>	XQKU15P				Production
RFA1156	<a href="#">Figure 4-16</a>	XQKU040				Production
	<a href="#">Figure 4-17</a>	XQKU060	XQKU095			Production
VSVA1365	<a href="#">Figure 4-18</a>	XCVU23P				Engineering Sample
FFVA1517	<a href="#">Figure 4-19</a>	XCKU060				Production
FLVA1517	<a href="#">Figure 4-22</a>	XCKU085	XCKU115			Production
FFVC1517 FFQC1517 <sup>(1)</sup>	<a href="#">Figure 4-19</a>	XCKU095	XCVU065	XCVU080	XCVU095	Production
	<a href="#">Figure 4-20</a>	XCVU3P				Production
FFRC1517	<a href="#">Figure 4-21</a>	XQVU3P				Production
FFVD1517	<a href="#">Figure 4-19</a>	XCVU080	XCVU095			Production
FLVD1517	<a href="#">Figure 4-22</a>	XCKU115	XCVU125			Production
FFVE1517 FFQE1517	<a href="#">Figure 4-20</a>	XCKU11P	XCKU15P			Production
FFRE1517	<a href="#">Figure 4-21</a>	XQKU15P				Production
RLD1517	<a href="#">Figure 4-23</a>	XQKU115				Production
FFVA1760 FFQA1760	<a href="#">Figure 4-24</a>	XCKU15P				Production
FFVB1760	<a href="#">Figure 4-25</a>	XCKU095	XCVU080	XCVU095		Production
FLVB1760	<a href="#">Figure 4-26</a>	XCKU085	XCKU115	XCVU125		Production
FFVE1760 FFQE1760	<a href="#">Figure 4-27</a>	XCKU15P				Production
FFVJ1760	<a href="#">Figure 4-28</a>	XCKU19P				Evaluation Only
FSVJ1760	<a href="#">Figure 4-29</a>	XCVU23P				Evaluation Only

Table 4-1: Cross-Reference to Mechanical Drawings by Package (Cont'd)

Package	Figure	Device			Package Status
FLVD1924	Figure 4-30	XCKU115			Production
FLVF1924	Figure 4-30	XCKU085	XCKU115		Production
FLGF1924 FLQF1924	Figure 4-31	XCVU11P			Production
RLF1924	Figure 4-32	XQKU115			Production
FSVH1924 FSQH1924	Figure 4-33	XCVU31P			Production
FFVA2104	Figure 4-34	XCVU080	XCVU095		Production
FHGA2104 FHQA2104	Figure 4-36	XCVU13P			Production
FLVA2104	Figure 4-38	XCKU115	XCVU125		Production
FLQA2104 <sup>(1)</sup>	Figure 4-39	XCVU5P	XCVU7P		Production
FLRA2104	Figure 4-40	XQVU7P			Production
FLGA2104 FLQA2104	Figure 4-41	XCVU9P			Production
FFVB2104	Figure 4-34	XCKU095	XCVU080	XCVU095	Production
FFVB2104	Figure 4-35	XCKU19P			Evaluation Only
FHGB2104 FHQB2104	Figure 4-37	XCVU13P			Production
FLVB2104	Figure 4-38	XCKU115	XCVU125		Production
FLQB2104 <sup>(1)</sup>	Figure 4-39	XCVU5P	XCVU7P		Production
FLRB2104	Figure 4-40	XQVU7P			Production
FLGB2104	Figure 4-42	XCVU160	XCVU190		Production
FLQB2104 <sup>(1)</sup>	Figure 4-43	XCVU9P	XCVU11P		Production
FFVC2104	Figure 4-45	XCVU095			Production
FHGC2104 FHQC2104	Figure 4-37	XCVU13P			Production
FLGC2104 FLQC2104 <sup>(1)</sup>	Figure 4-42	XCVU160	XCVU190		Production
	Figure 4-46	XCVU9P			Production
	Figure 4-43	XCVU11P			Production
FLRC2104	Figure 4-44	XQVU11P			Production
FLVC2104	Figure 4-47	XCVU125			Production
FLQC2104 <sup>(1)</sup>	Figure 4-48	XCVU5P	XCVU7P		Production
FIGD2104	Figure 4-49	XCVU13P			Production
FIQD2104 <sup>(1)</sup>	Figure 4-49	XCVU27P	XCVU29P		Production

Table 4-1: Cross-Reference to Mechanical Drawings by Package (Cont'd)

Package	Figure	Device		Package Status
FSGD2104 FSQD2104	<a href="#">Figure 4-50</a>	XCVU9P		Production
	<a href="#">Figure 4-51</a>	XCVU11P		Production
FSVH2104 FSQH2104	<a href="#">Figure 4-52</a>	XCVU33P		Production
	<a href="#">Figure 4-53</a>	XCVU35P	XCVU45P	Production
FLGB2377	<a href="#">Figure 4-54</a>	XCVU440		Production
FLGA2577 FLQA2577 <sup>(1)</sup>	<a href="#">Figure 4-55</a>	XCVU190		Production
	<a href="#">Figure 4-56</a>	XCVU9P	XCVU13P	Production
	<a href="#">Figure 4-57</a>	XCVU11P		Production
FSGA2577 FSQA2577	<a href="#">Figure 4-58</a>	XCVU13P		Production
	<a href="#">Figure 4-58</a>	XCVU27P	XCVU29P	Production
FLGA2892	<a href="#">Figure 4-59</a>	XCVU440		Production
FSVH2892 FSQH2892	<a href="#">Figure 4-60</a>	XCVU35P	XCVU45P	Production
	<a href="#">Figure 4-61</a>	XCVU37P		Production
FSVK2892	<a href="#">Figure 4-62</a>	XCVU57P		Engineering Sample
FSVA3824	<a href="#">Figure 4-63</a>	XCVU19P		Production
FSVB3824	<a href="#">Figure 4-63</a>	XCVU19P		Production


**Notes:**

1. The XQ devices with non-ruggedized eutectic Sn/Pb ball packages are only available in Kintex and Virtex UltraScale+ devices.

Table 4-2: Mechanical Drawing Dimension Definitions

Dimension	Definition
$\ominus$	Bilateral tolerance of package sides with respect to datums A and B
$\square$	Flatness tolerance of silicon die or package lid top surface
//	Bilateral tolerance for parallelism of silicon die or package lid top surface with respect to the seating plane datum C
A	Thickness of package with respect to the seating plane datum C
A <sub>1</sub>	Thickness of BGA balls with respect to the seating plane datum C
A <sub>2</sub>	Thickness of package body, including stiffener ring or lid and excluding BGA balls, with respect to the seating plane datum C
A <sub>3</sub>	Distance from top of silicon die to top of stiffener ring or lid with respect to the seating plane datum C
D/E	Length/width of package with respect to datums A and B
D <sub>1</sub> /E <sub>1</sub>	Length/width of BGA matrix with respect to datums A and B
e	BGA ball pitch measured at the center of each ball
∅b	BGA ball diameter
$\ominus$ aaa	Unidirectional upward tolerance with respect to the seating plane datum C
// bbb	Bilateral tolerance for parallelism of package surface with respect to the seating plane datum C
∅ddd	BGA ball position tolerance of diameter ddd with respect to datums A and B perpendicular to the seating plane datum C in which the center of each ball must lie
∅eee	BGA ball position tolerance of diameter eee measured with respect to other balls within the BGA matrix in which the center of each ball must lie
M	BGA ball matrix size

# FBVA676 Bare-die Flip-Chip, Fine-Pitch BGA (XCKU035 and XCKU040)

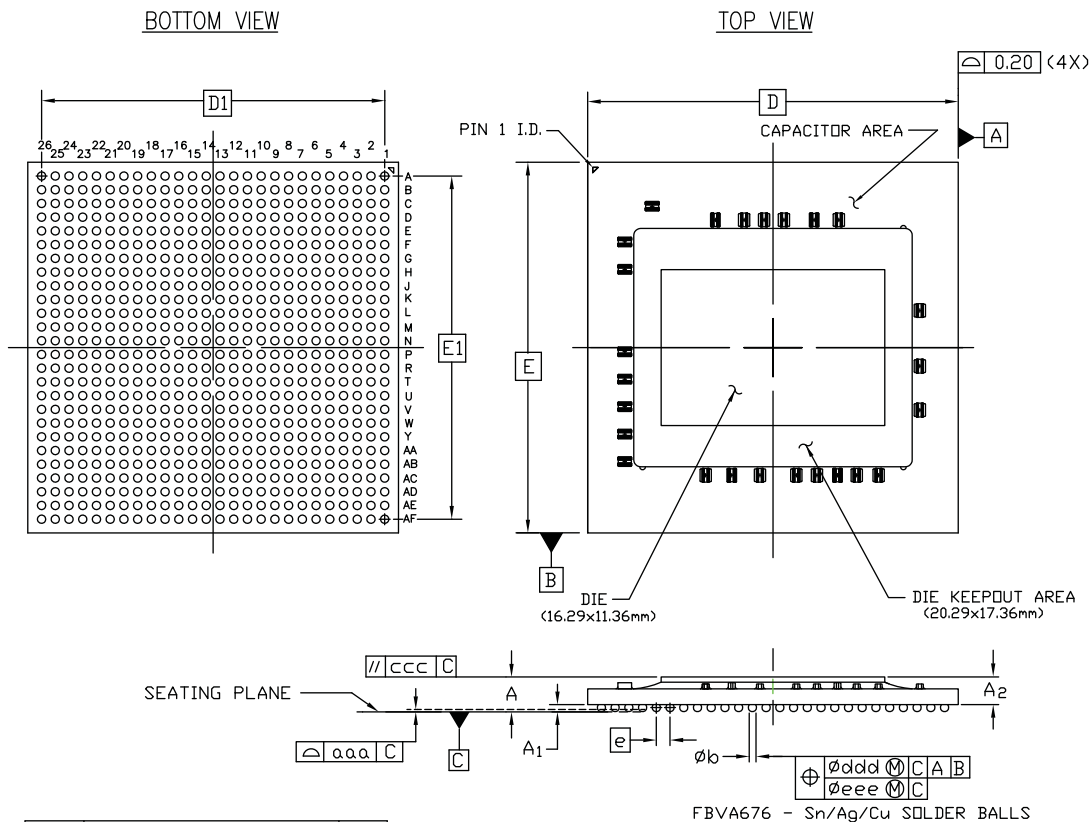

FBVA676 - Sn/Ag/Cu SOLDER BALLS

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	2.31	2.51	2.71	2
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	1.81	2.01	2.21	
D/E	27.00 BASIC			
D <sub>1</sub> /E <sub>1</sub>	25.00 BASIC			
e	1.00 BASIC			
φ <sub>b</sub>	0.50	0.60	0.70	
aaa	<i>∅</i>	<i>∅</i>	0.20	
ccc	<i>∅</i>	<i>∅</i>	0.25	
ddd	<i>∅</i>	<i>∅</i>	0.25	
eee	<i>∅</i>	<i>∅</i>	0.10	
M	26			

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE
3. CONFORMS TO JEDEC MS-034
4. SEE NEXT PAGE FOR CHIP CAPACITOR LOCATION DIMENSIONS

ug575\_c4\_01\_082014

Figure 4-1: Package Dimensions for FBVA676 (XCKU035 and XCKU040)

CHIP CAPACITOR LAYOUT

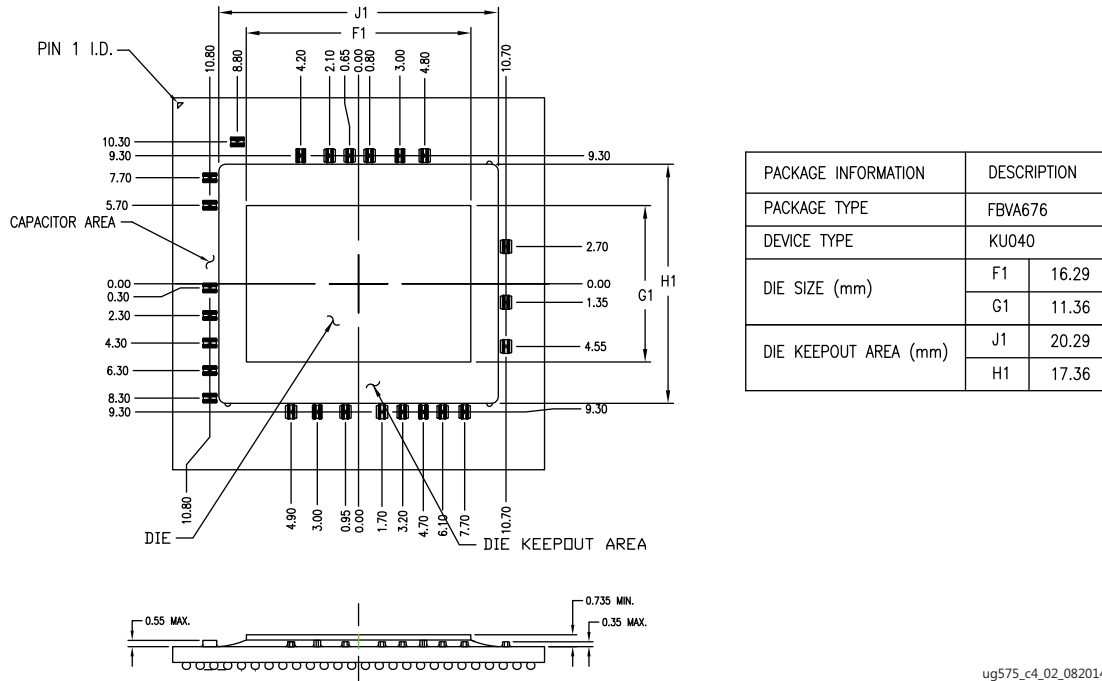


Figure 4-2: FBVA676 Package (XCKU035 and XCKU040) Die Dimensions with Capacitor Locations



# FFVA676 and FFVB676 Flip-Chip, Fine-Pitch BGA (XCAU20P, XCAU25P, XCKU3P, and XCKU5P)

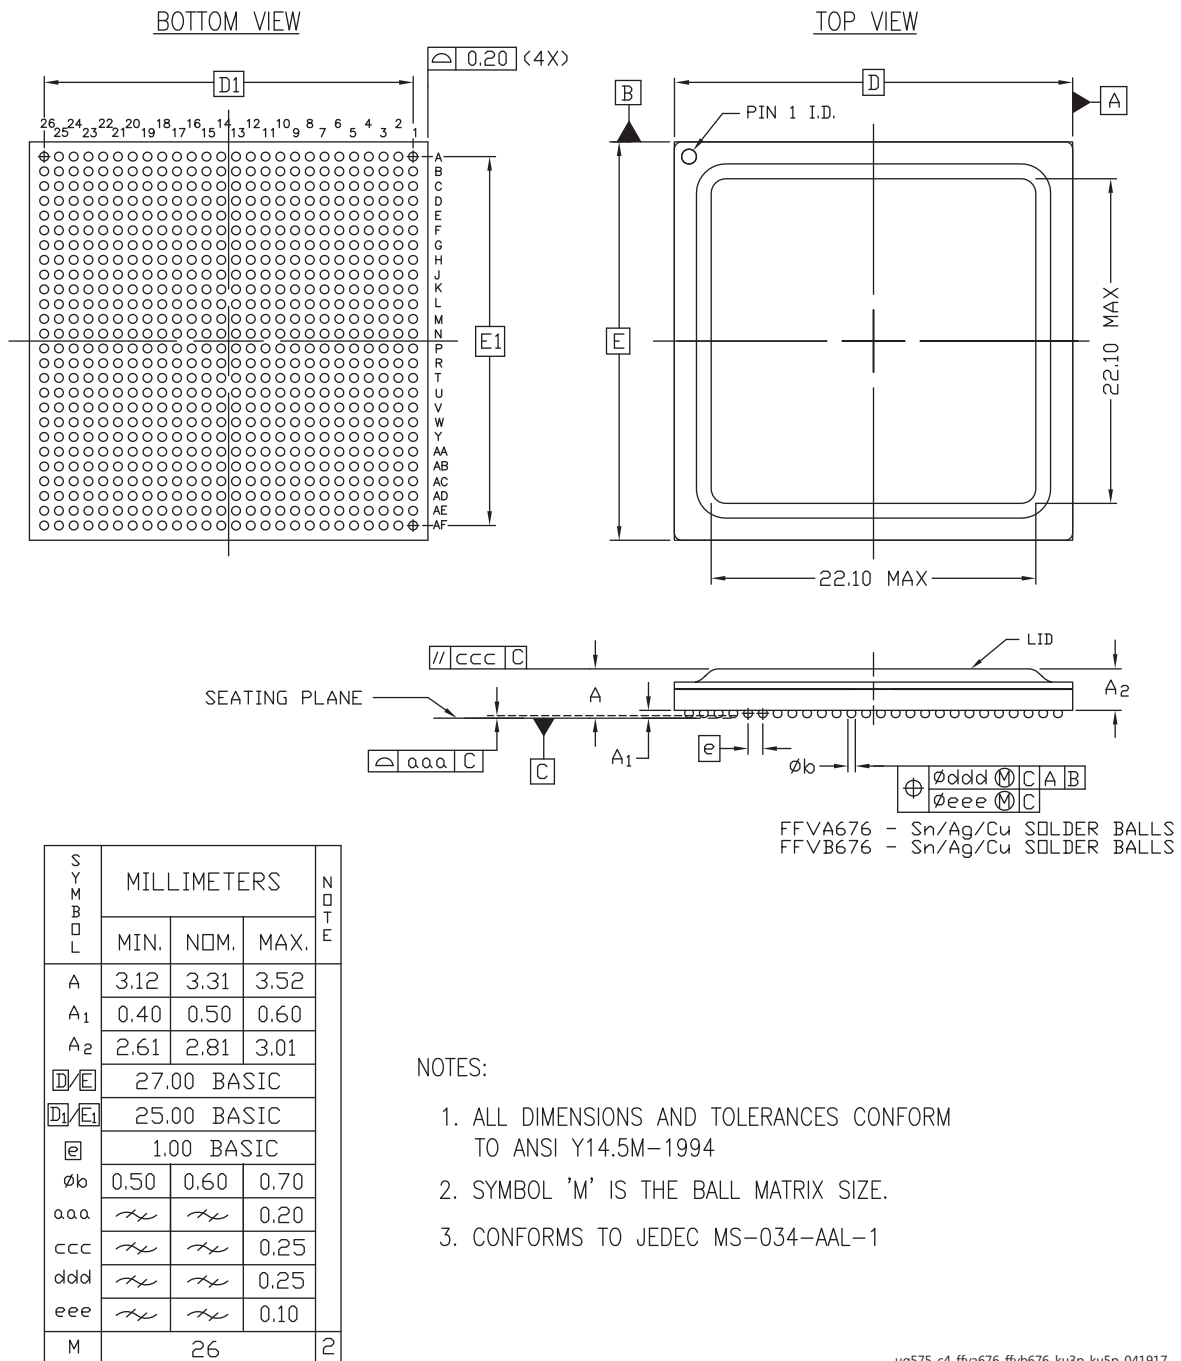


Figure 4-3: Package Dimensions for FFVA676 and FFVB676 (XCAU20P, XCAU25P, XCKU3P, and XCKU5P)

# FFRB676 Ruggedized Flip-Chip, Fine-Pitch BGA (XQKU5P)

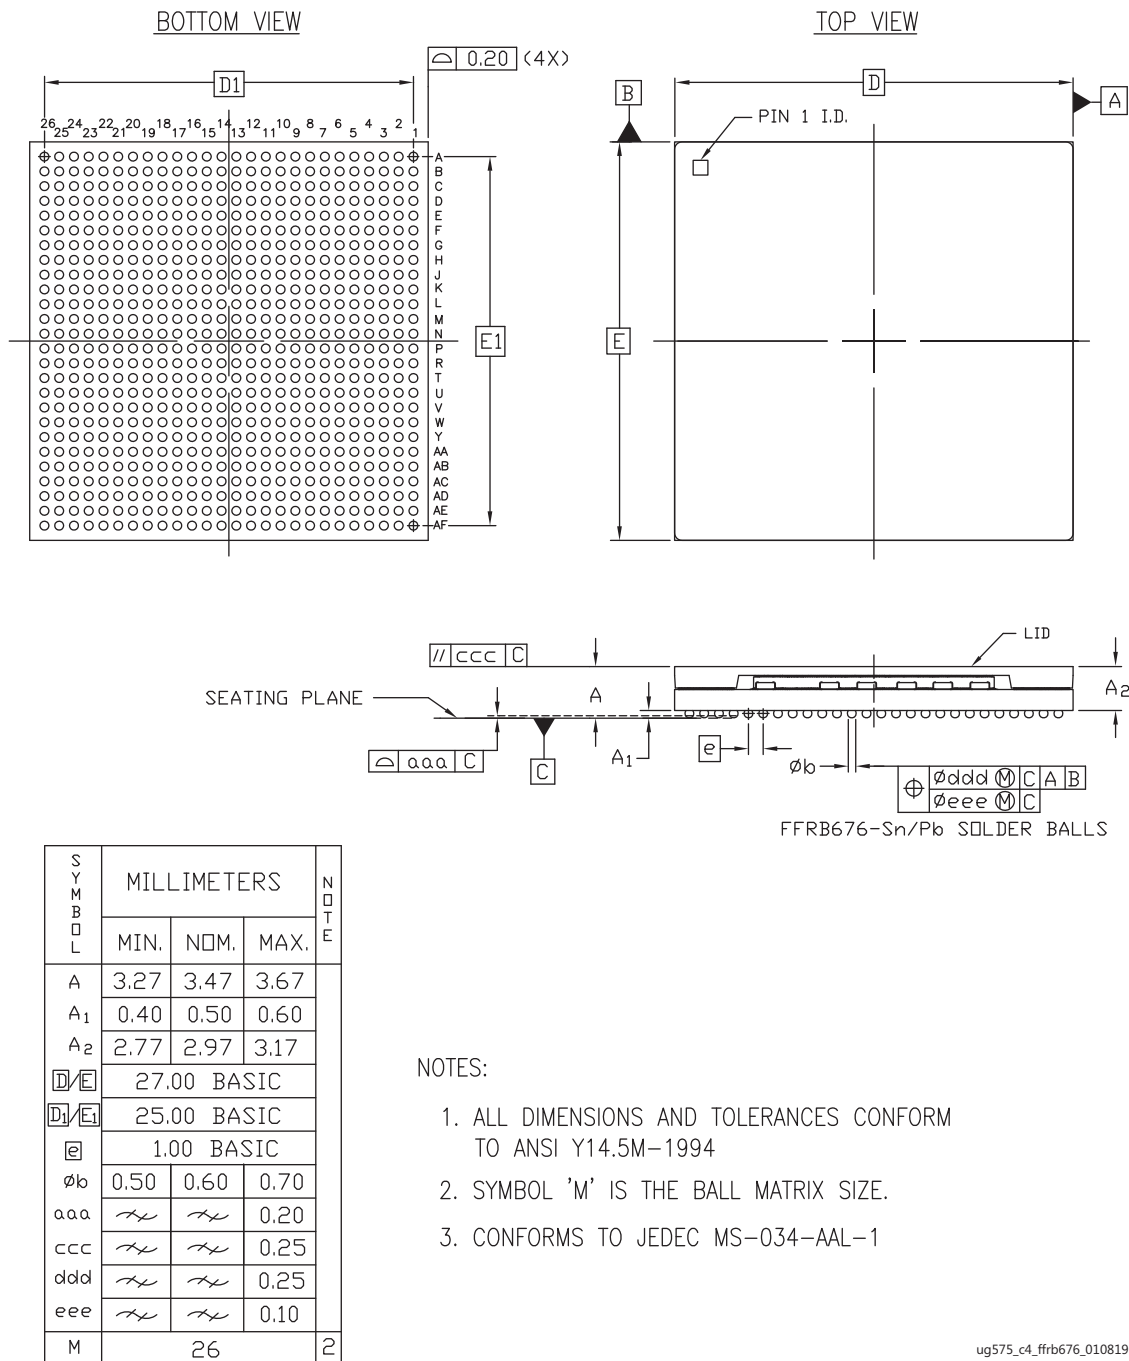


Figure 4-4: Package Dimensions for FFRB676 (XQKU5P)

# RBA676 Ruggedized Flip-Chip, Fine-Pitch BGA (XQKU040)

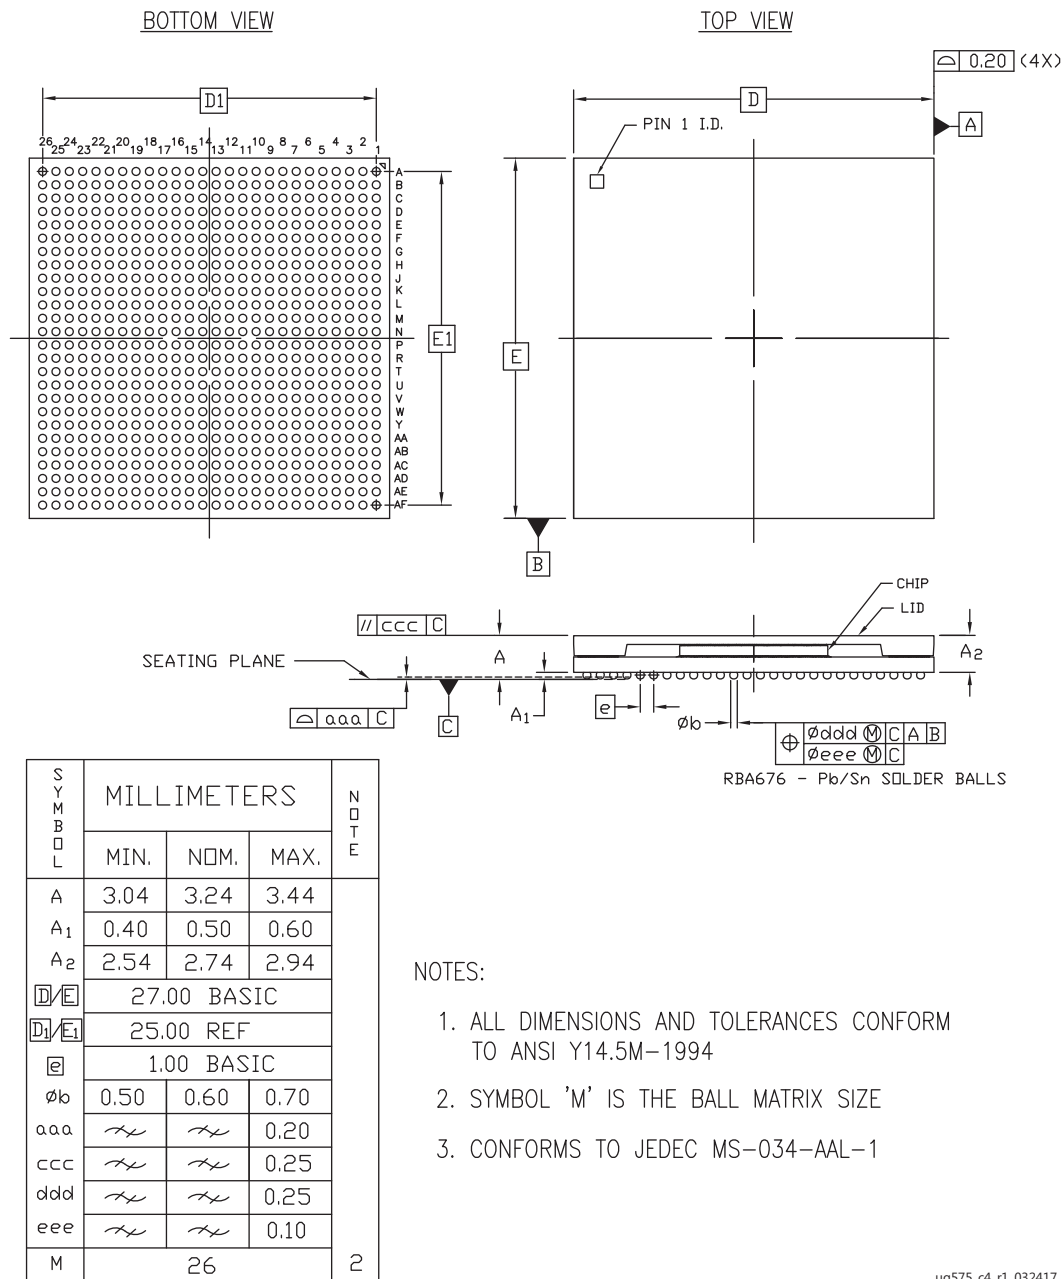


Figure 4-5: Package Dimensions for RBA676 (XQKU040)

# SFVA784 Flip-Chip, Chip-Scale (0.8 mm) BGA (XCKU035 and XCKU040)

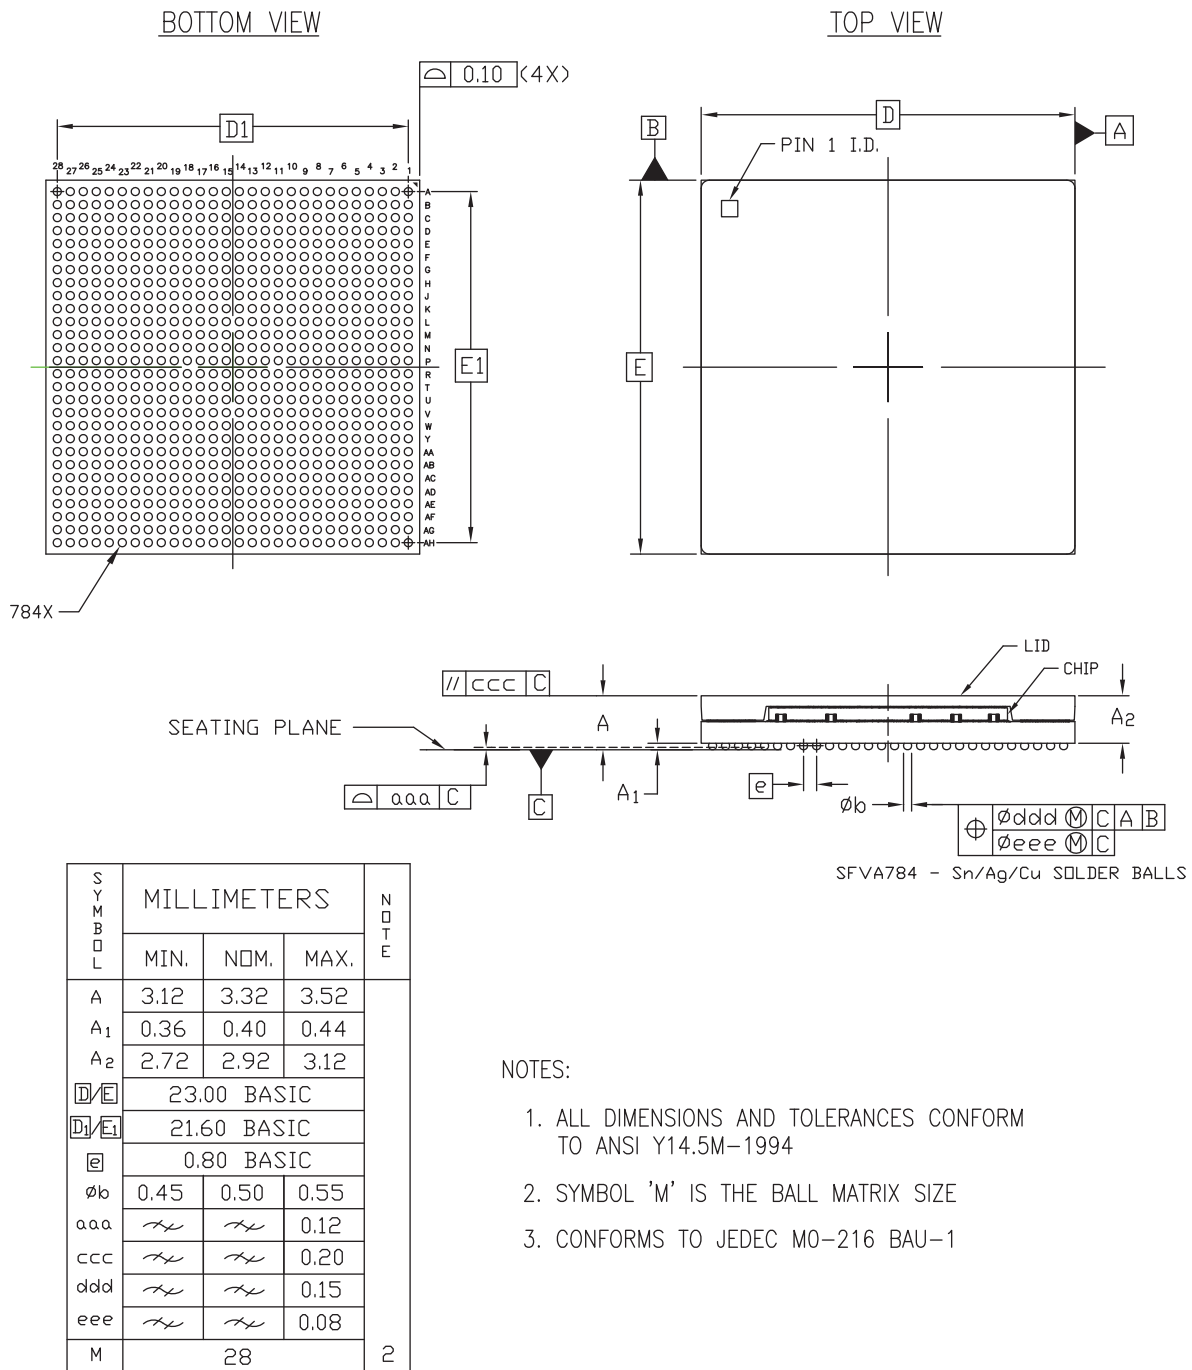


Figure 4-6: Package Dimensions for SFVA784 (XCKU035 and XCKU040)

# SFVB784 Flip-Chip, Super-Fine Pitch (0.8 mm) BGA (XCAU20P, XCAU25P, XCKU3P, and XCKU5P)

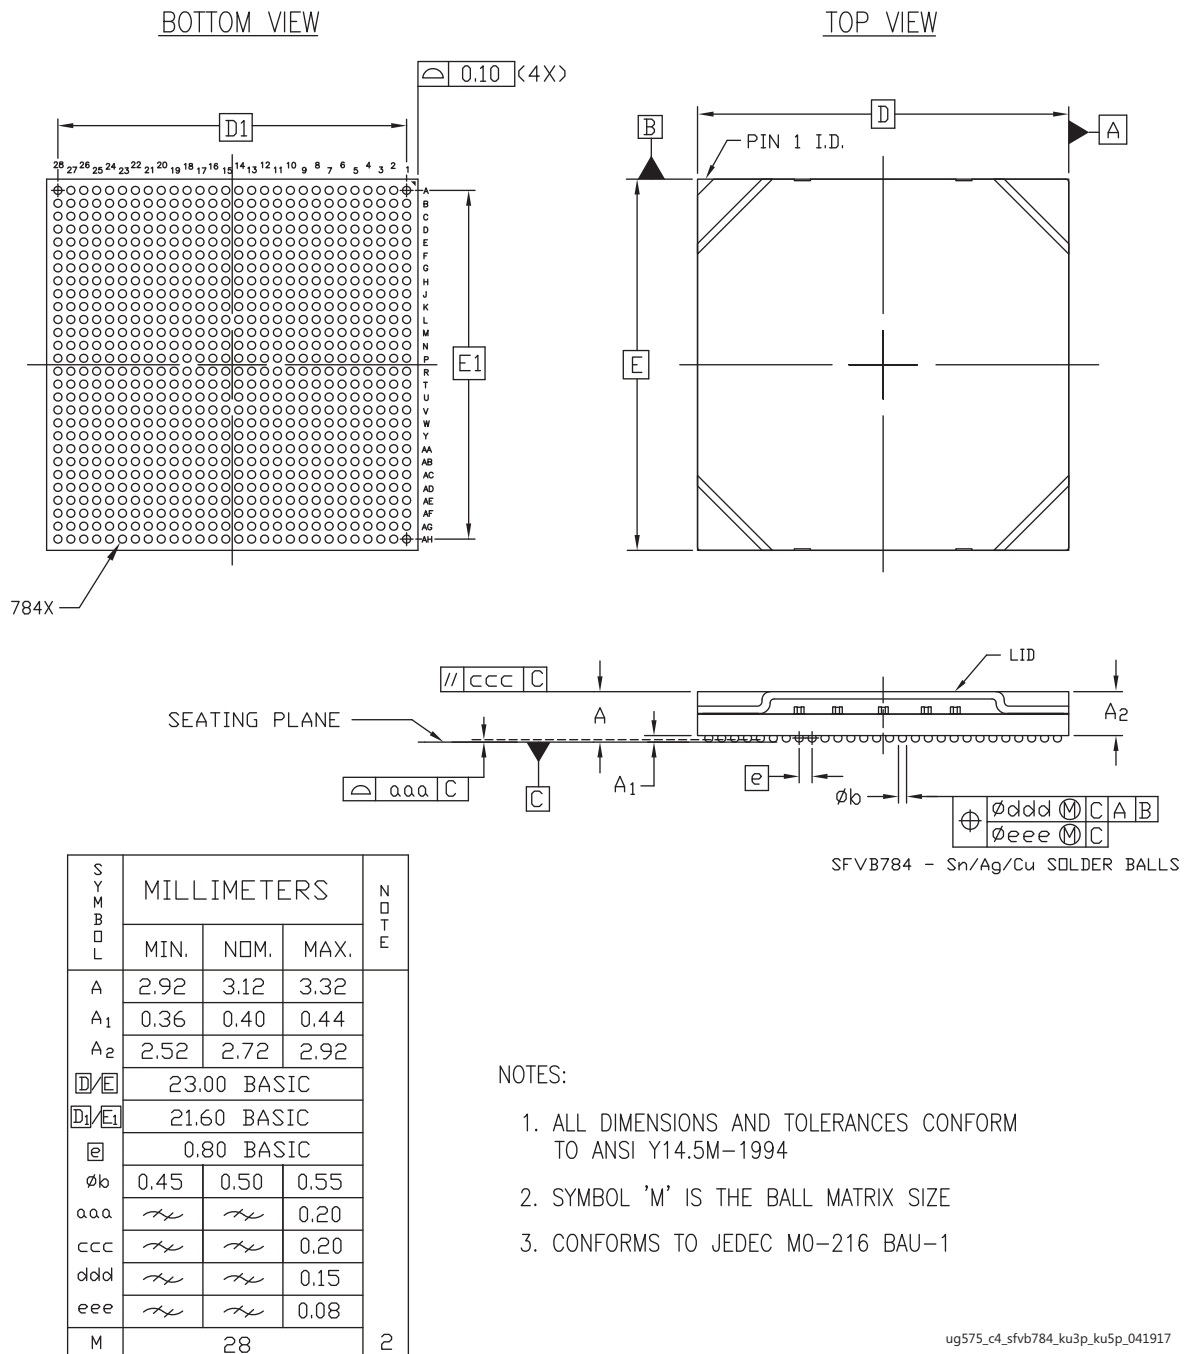


Figure 4-7: Package Dimensions for SFVB784 (XCAU20P, XCAU25P, XCKU3P, and XCKU5P)

# SFRB784 Ruggedized Flip-Chip, Super Fine-Pitch BGA (XQKU5P)


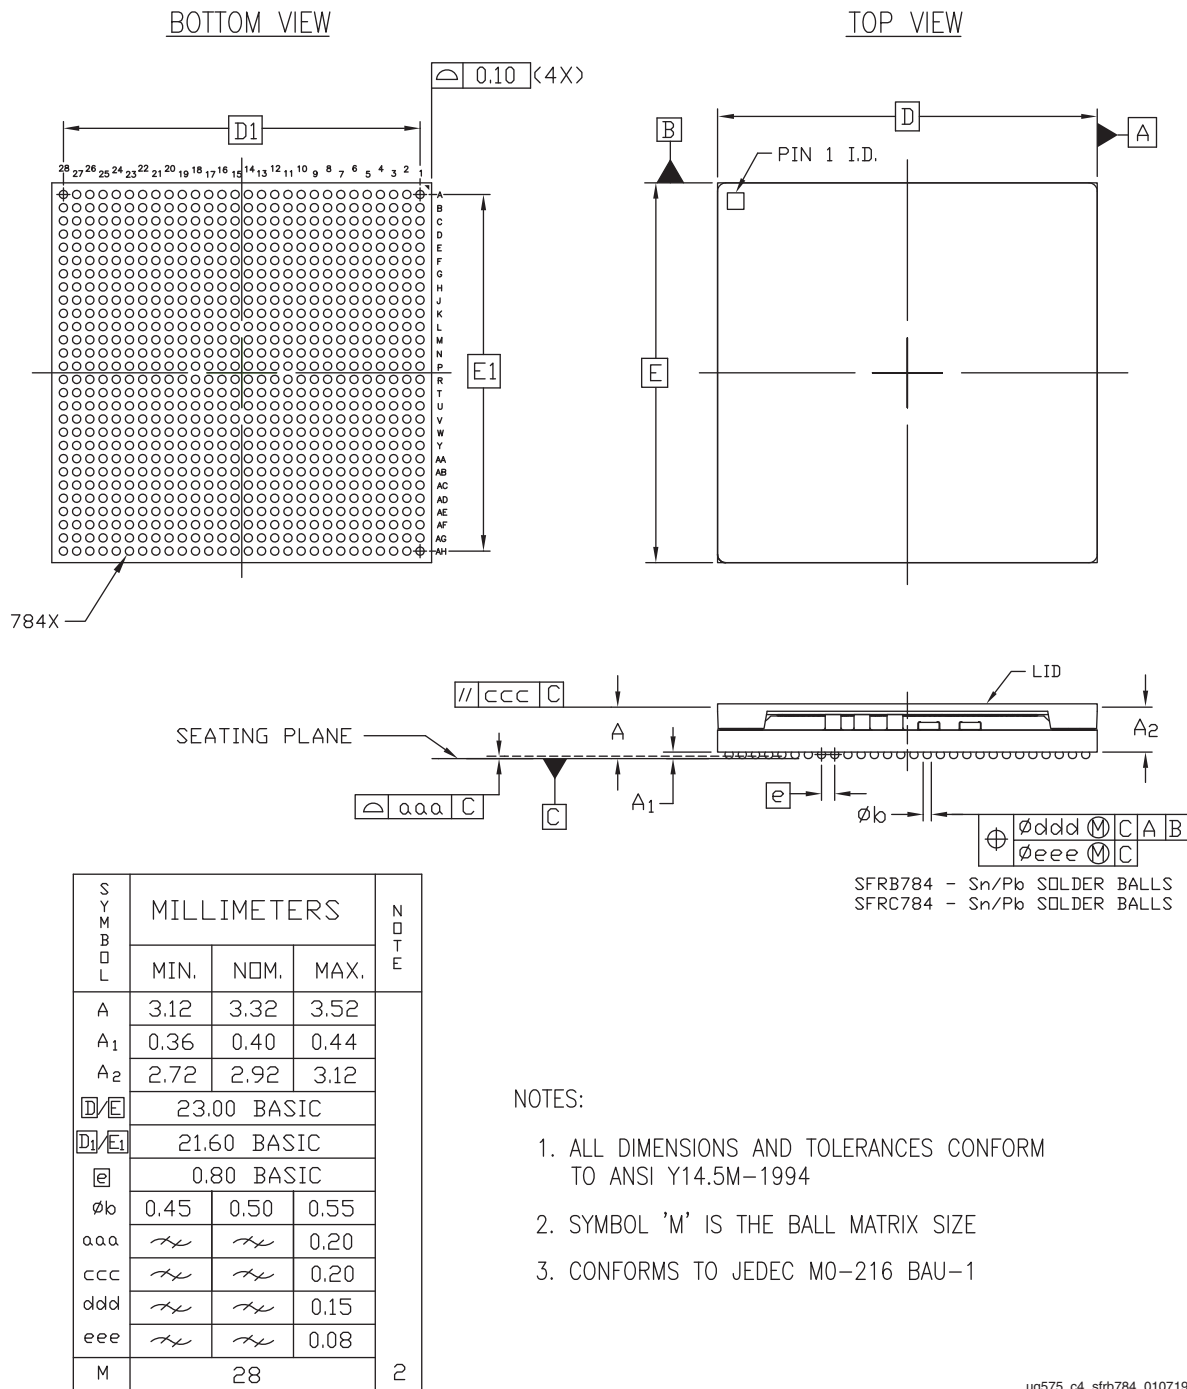


Figure 4-8: Package Dimensions for SFRB784 (XQKU5P)

# FBVA900 Bare-die Flip-Chip, Fine-Pitch BGA (XCKU035 and XCKU040)

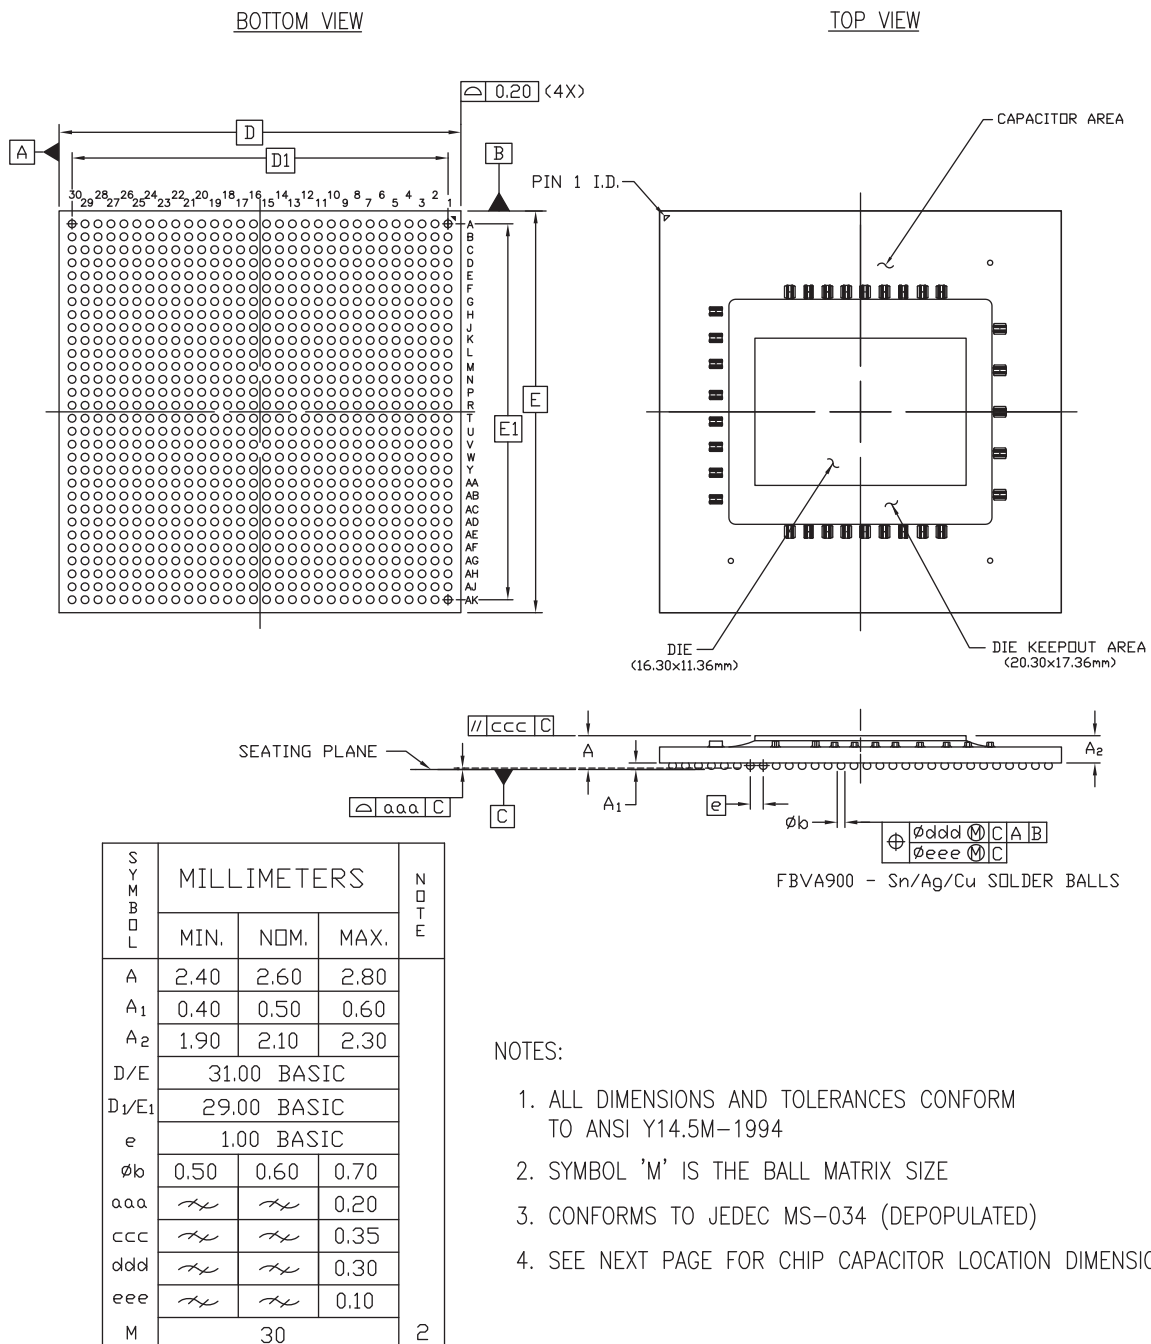

ug575\_c4\_24\_041615

Figure 4-9: Package Dimensions for FBVA900 (XCKU035 and XCKU040)

CHIP CAPACITOR LAYOUT

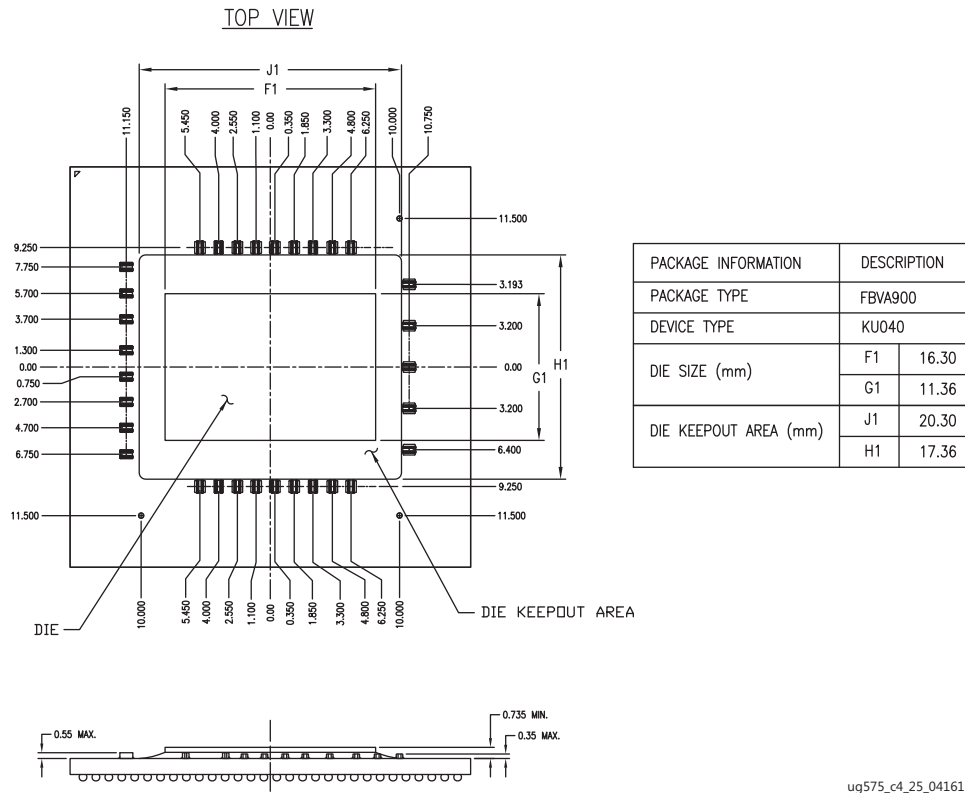


Figure 4-10: FBVA900 Package (XCKU035 and XCKU040) Die Dimensions with Capacitor Locations



# FFVD900 (XCKU3P, XCKU5P, and XCKU11P) and FFVE900 (XCKU9P and XCKU13P)

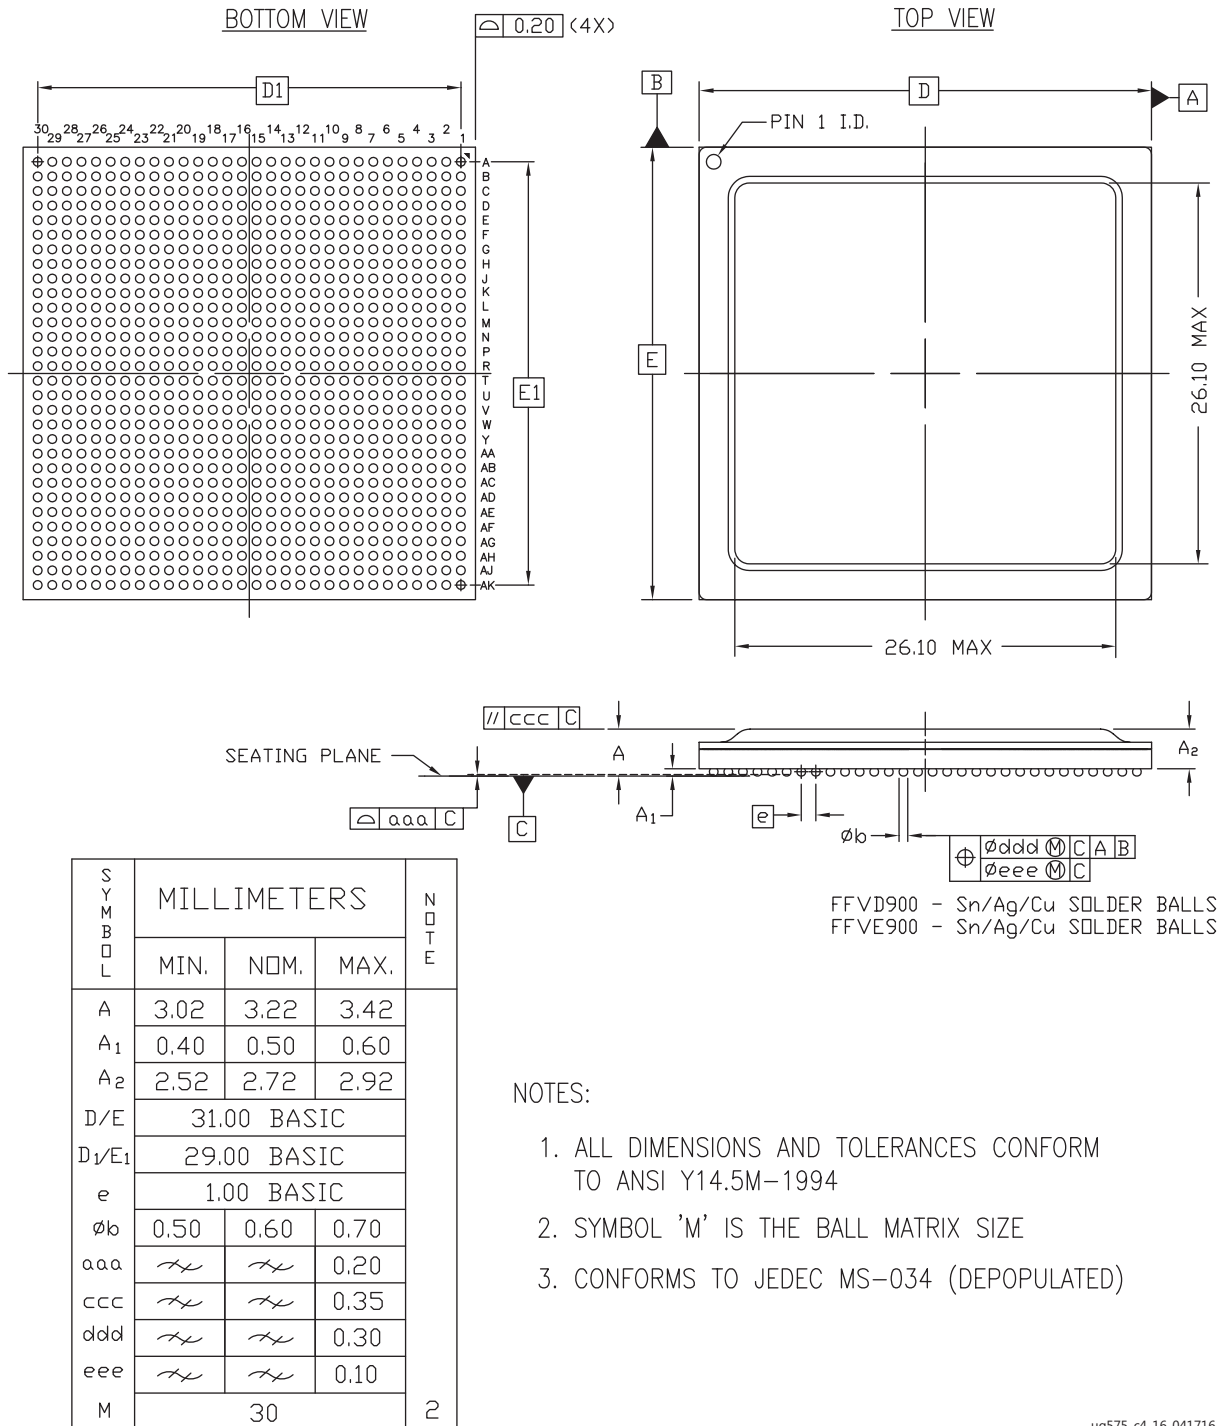


Figure 4-11: Package Dimensions for FFVD900 (XCKU3P, XCKU5P, and XCKU11P) and FFVE900 (XCKU9P and XCKU13P)

# FFVA1156 Flip-Chip, Fine-Pitch BGA (XCKU025, XCKU035, and XCKU040)


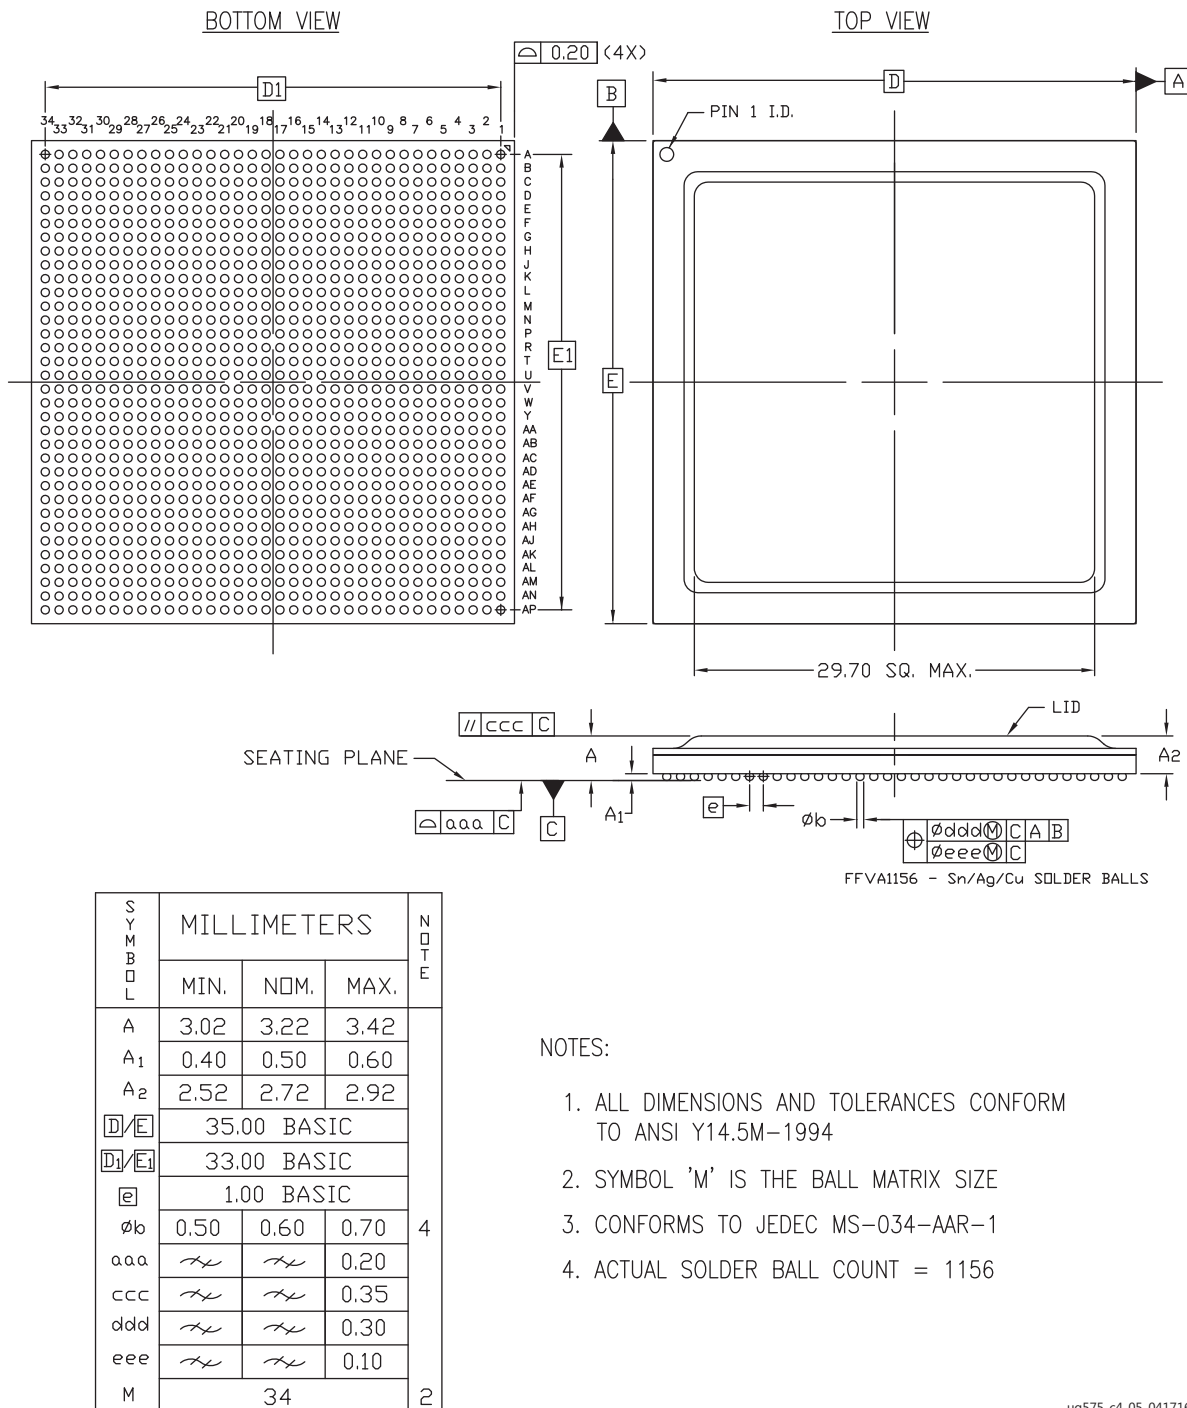


Figure 4-12: Package Dimensions for FFVA1156 (XCKU025, XCKU035, and XCKU040)

# FFVA1156 Flip-Chip, Fine-Pitch BGA (XCKU060, XCKU095, and XCKU11P)

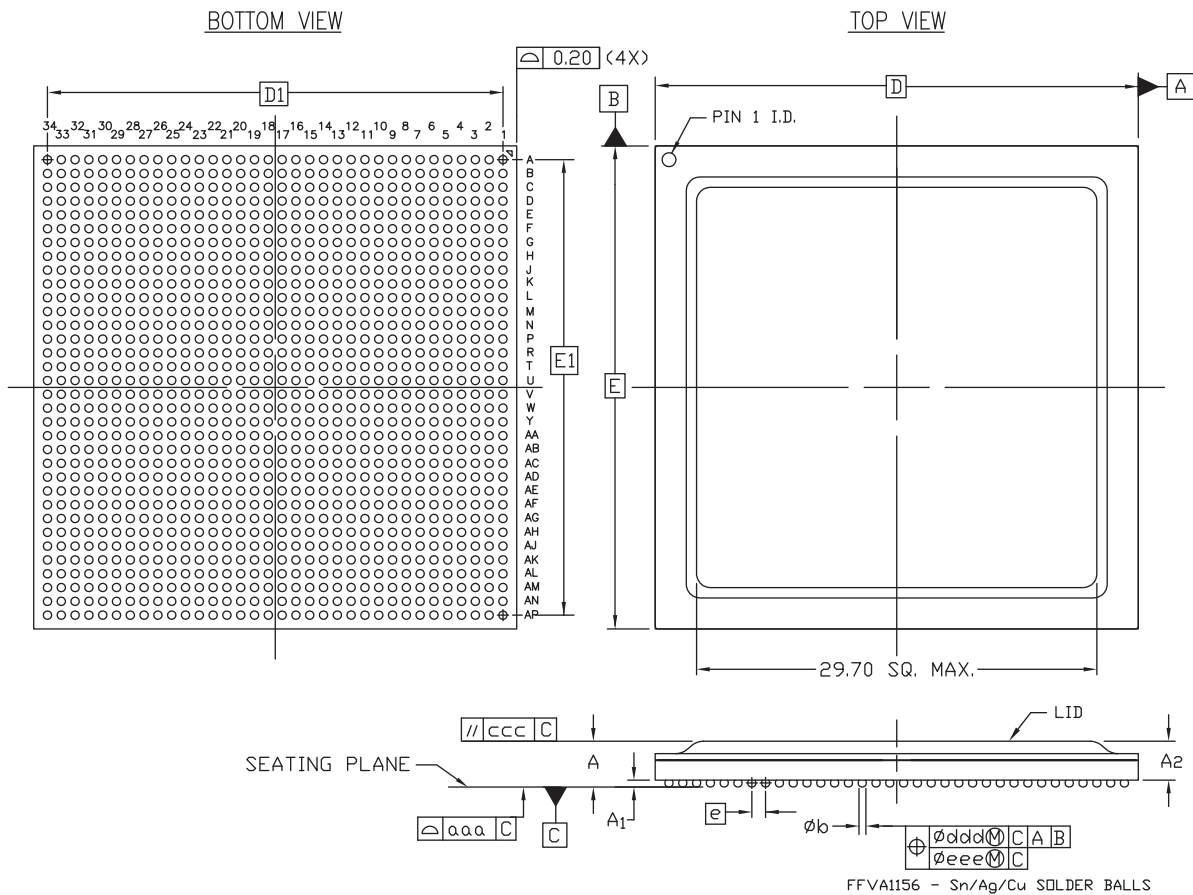

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	3.11	3.31	3.51	4
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	2.61	2.81	3.01	
$\frac{D}{E}$	35.00 BASIC			
$\frac{D_1}{E_1}$	33.00 BASIC			
$\square$	1.00 BASIC			
$\phi b$	0.50	0.60	0.70	
aaa	$\sqrt{\phantom{x}}$	$\sqrt{\phantom{x}}$	0.20	
ccc	$\sqrt{\phantom{x}}$	$\sqrt{\phantom{x}}$	0.35	
ddd	$\sqrt{\phantom{x}}$	$\sqrt{\phantom{x}}$	0.30	
eee	$\sqrt{\phantom{x}}$	$\sqrt{\phantom{x}}$	0.10	
M	34			2


NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE
3. CONFORMS TO JEDEC MS-034-AAR-1
4. ACTUAL SOLDER BALL COUNT = 1156

ug575\_c4\_06\_041716

Figure 4-13: Package Dimensions for FFVA1156 (XCKU060, XCKU095, and XCKU11P)

# FFVA1156 Flip-Chip, Fine-Pitch BGA (XCKU15P)

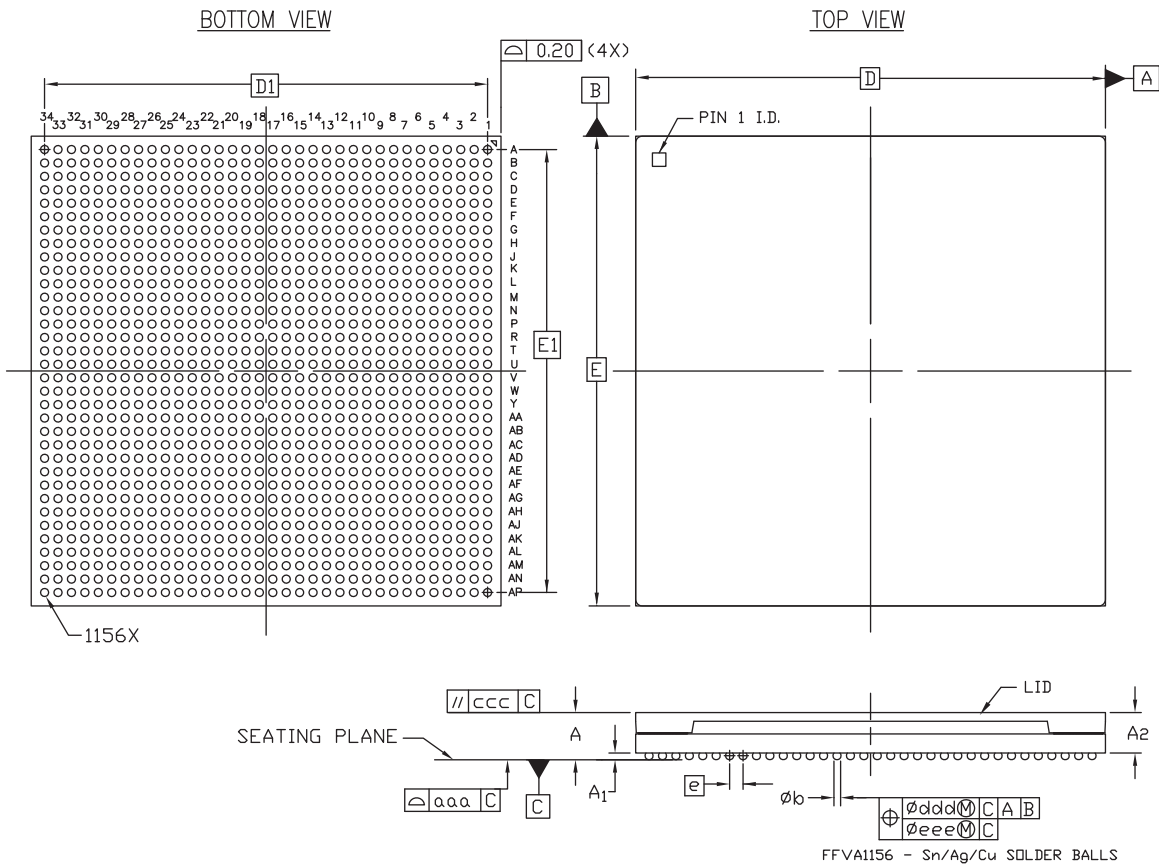

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	3.31	3.51	3.71	
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	2.81	3.01	3.21	
D/E	35.00 BASIC			
D <sub>1</sub> /E <sub>1</sub>	33.00 BASIC			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa	<i>HL</i>	<i>HL</i>	0.20	
ccc	<i>HL</i>	<i>HL</i>	0.35	
ddd	<i>HL</i>	<i>HL</i>	0.30	
eee	<i>HL</i>	<i>HL</i>	0.10	
M	34			2

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE
3. CONFORMS TO JEDEC MS-034-AAR-1

ug575\_c4\_ffva1156\_ku15p\_041917

Figure 4-14: Package Dimensions for FFVA1156 (XCKU15P)

# FFRA1156 Ruggedized Flip-Chip, Fine-Pitch BGA (XQKU15P)

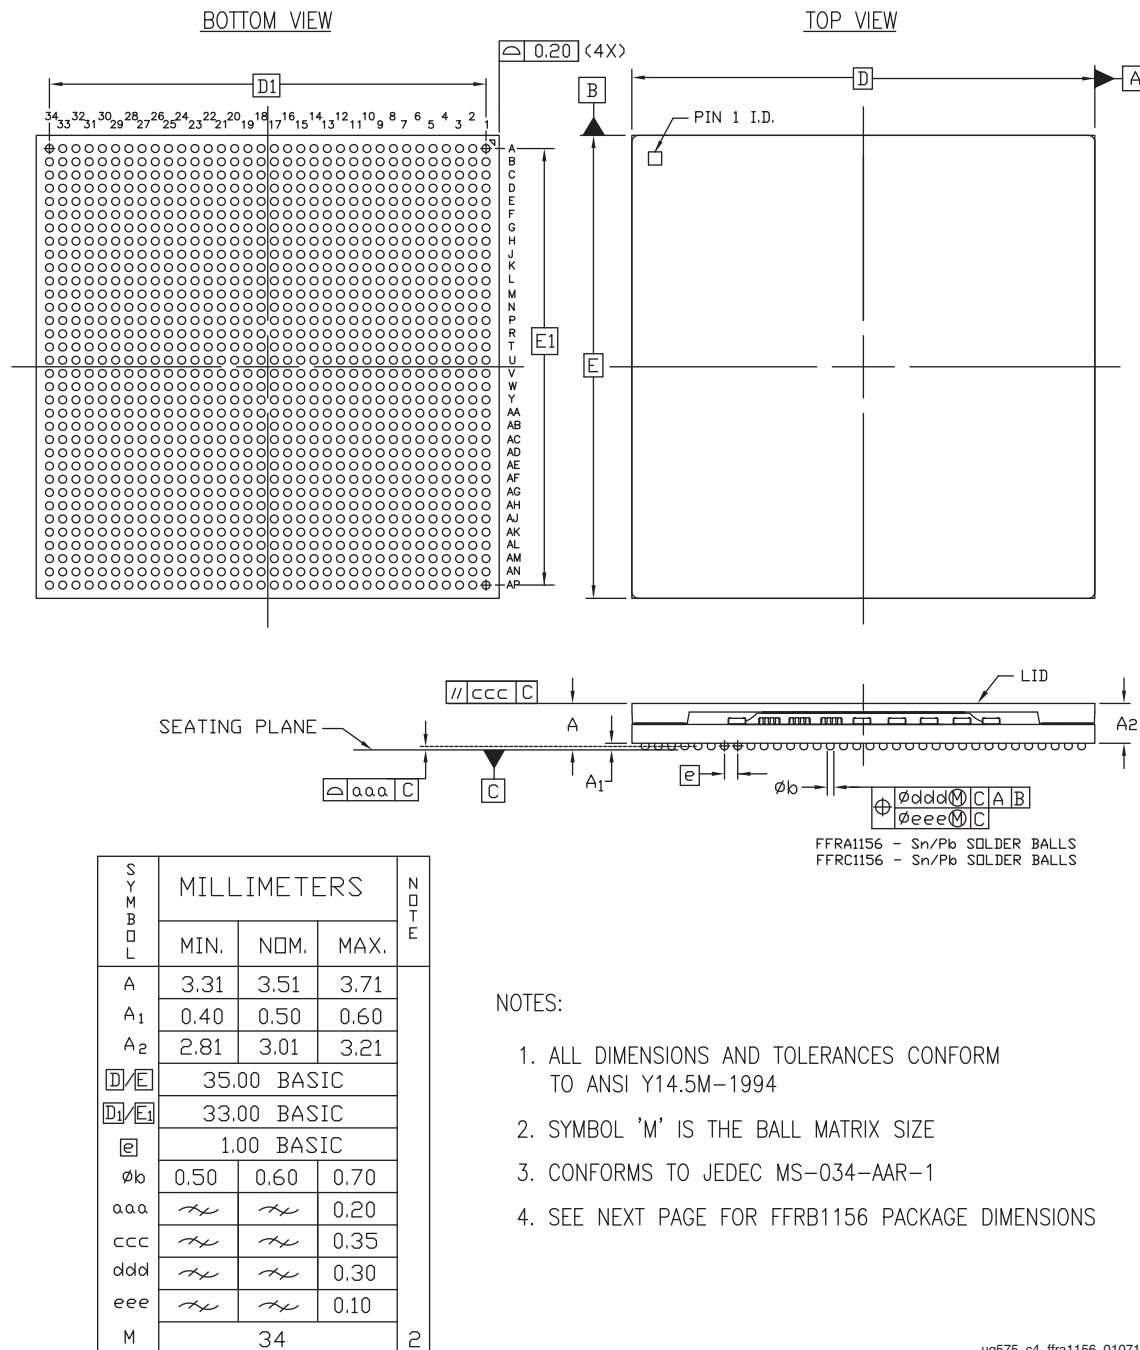


Figure 4-15: Package Dimensions for FFRA1156 (XQKU15P)

# RFA1156 Ruggedized Flip-Chip, Fine-Pitch BGA (XQKU040)

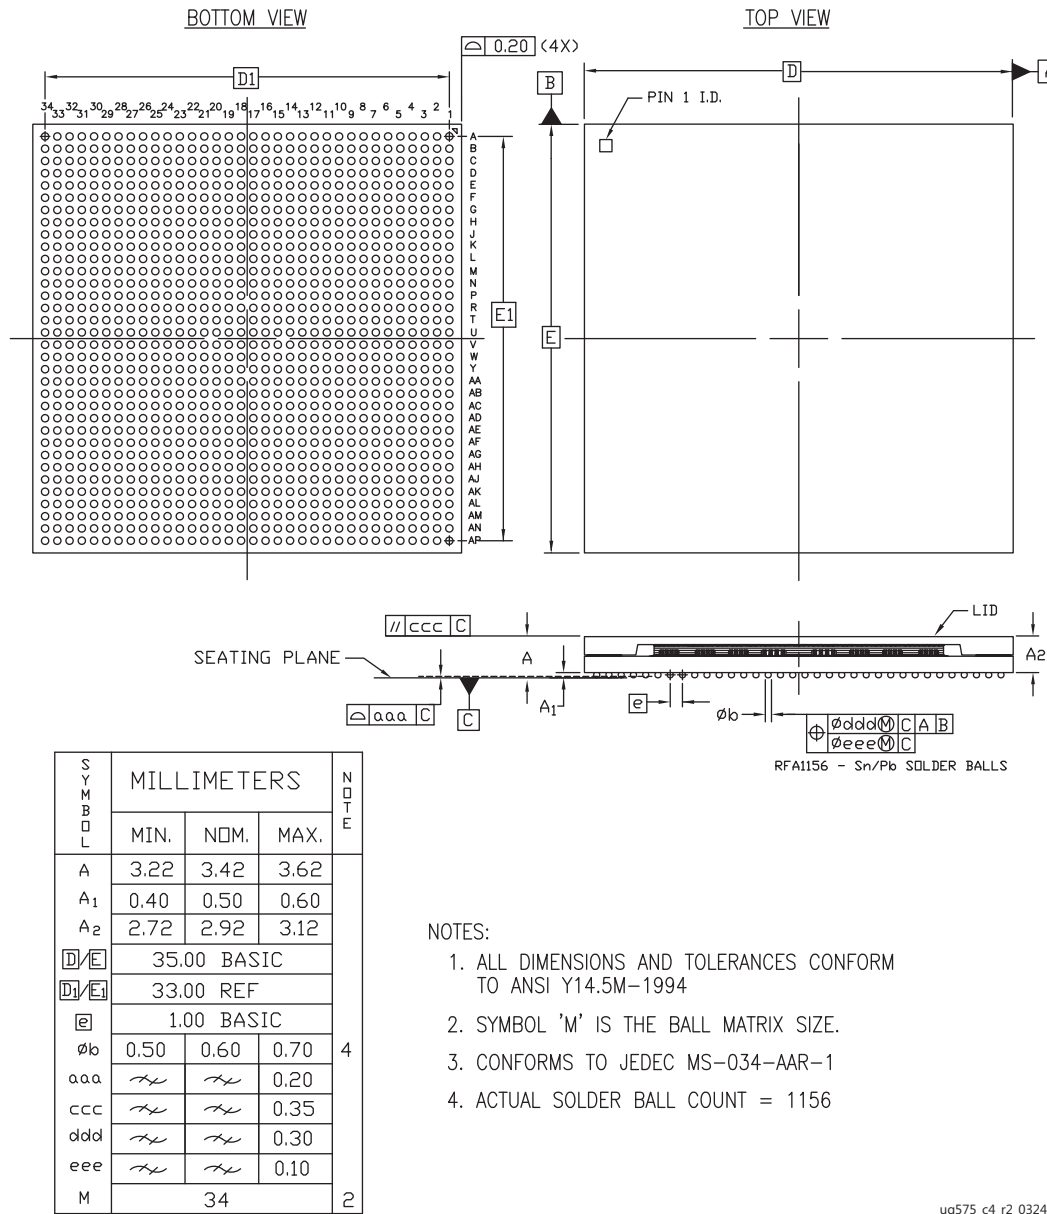


Figure 4-16: Package Dimensions for RFA1156 (XQKU040)

# RFA1156 Ruggedized Flip-Chip, Fine-Pitch BGA (XQKU060 and XQKU095)


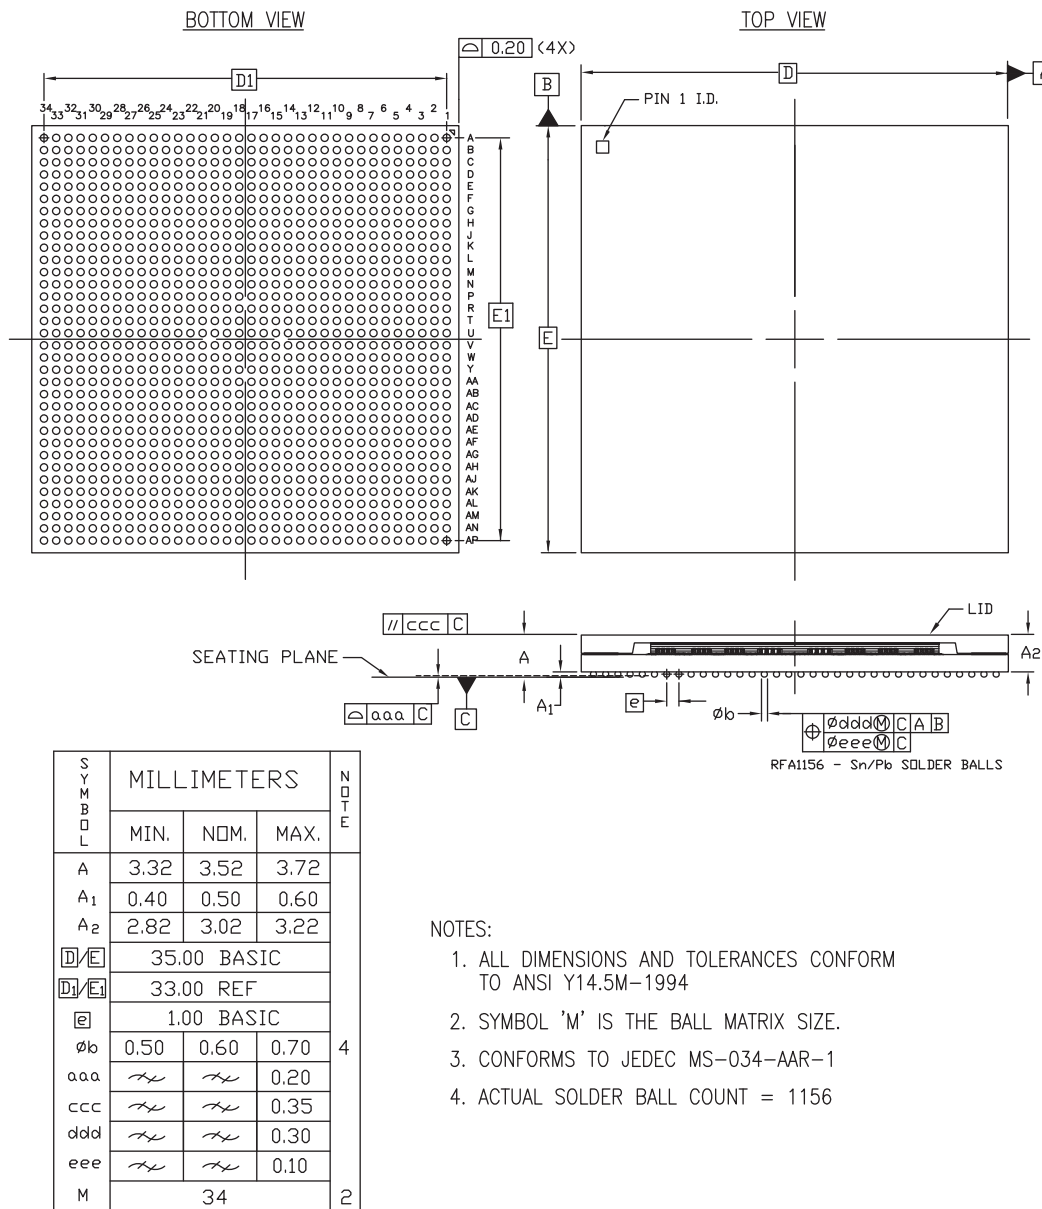


Figure 4-17: Package Dimensions for RFA1156 (XQKU060 and XQKU095)

# VSVA1365 Flip-Chip, Fine-Pitch BGA (XCVU23P)

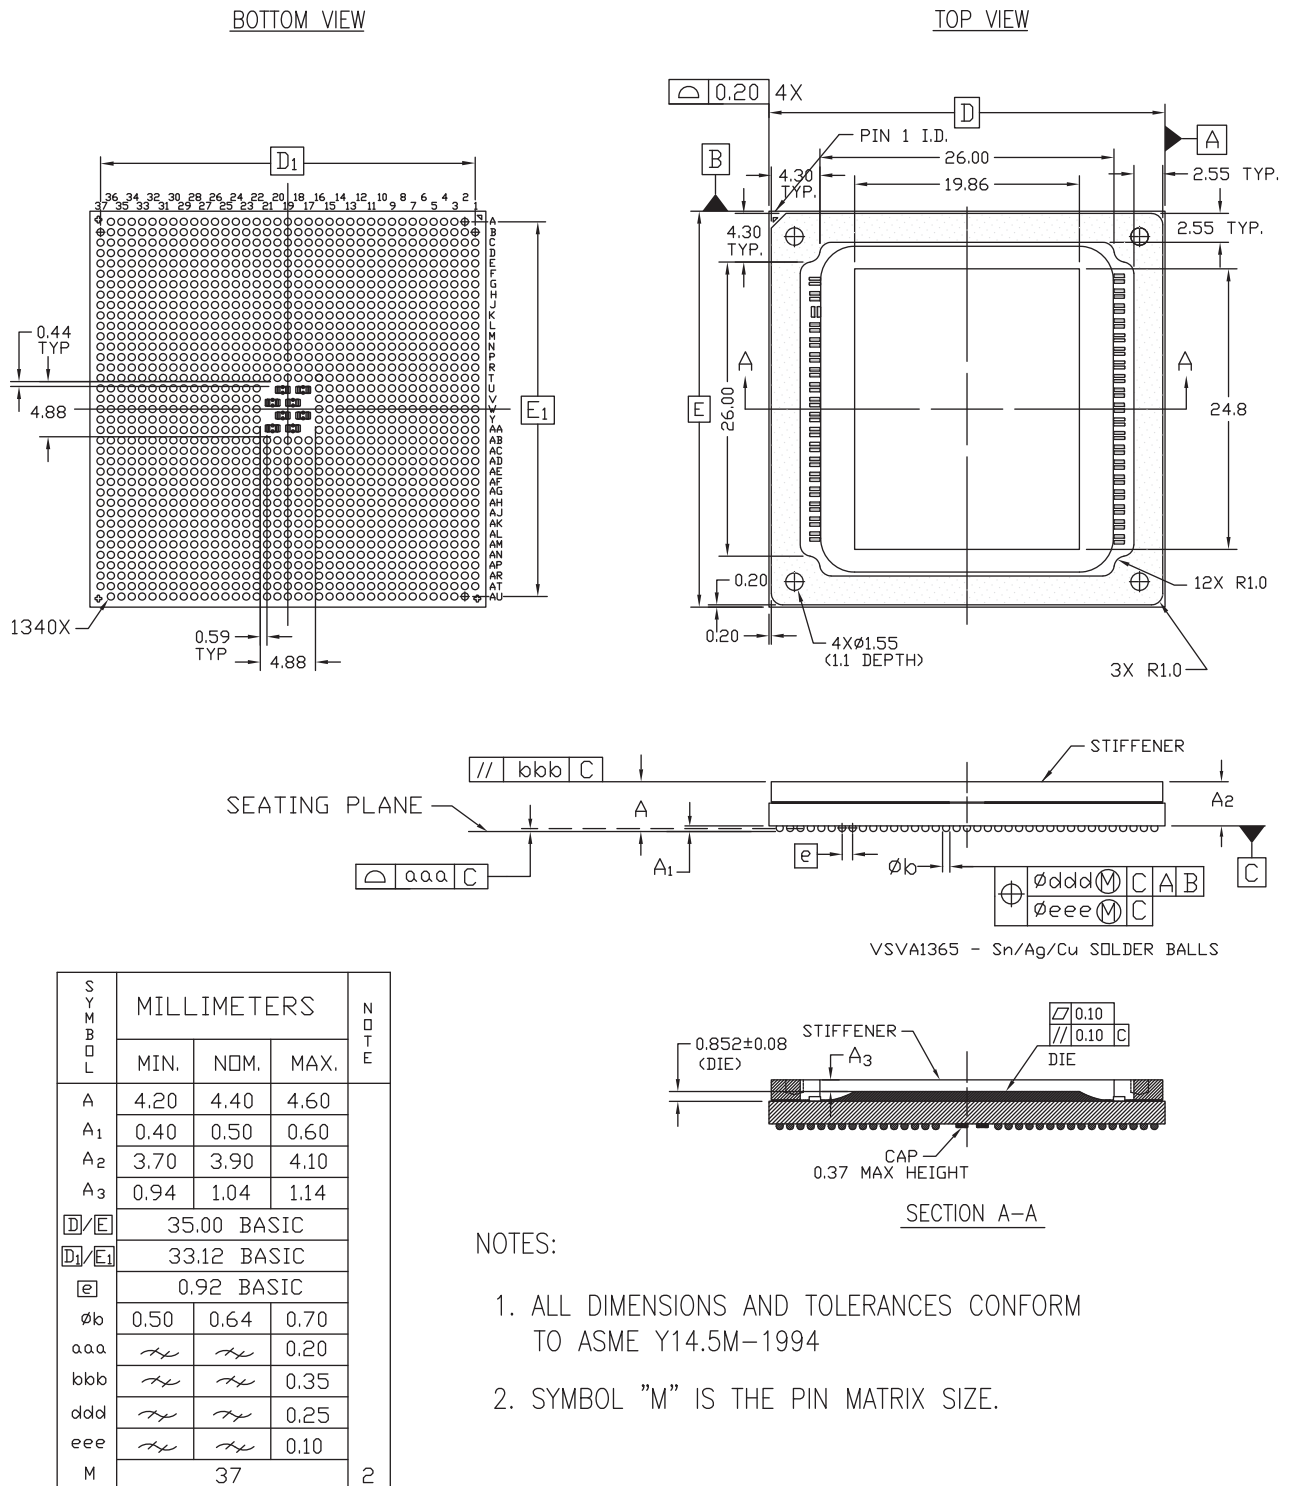

ug575\_vsva1365\_vu23p\_122120

Figure 4-18: Package Dimensions for VSVA1365 (XCVU23P)



# FFVA1517, FFVC1517, and FFVD1517 Flip-Chip, Fine-Pitch BGA (XCKU060, XCKU095, XCVU065, XCVU080, XCVU095)

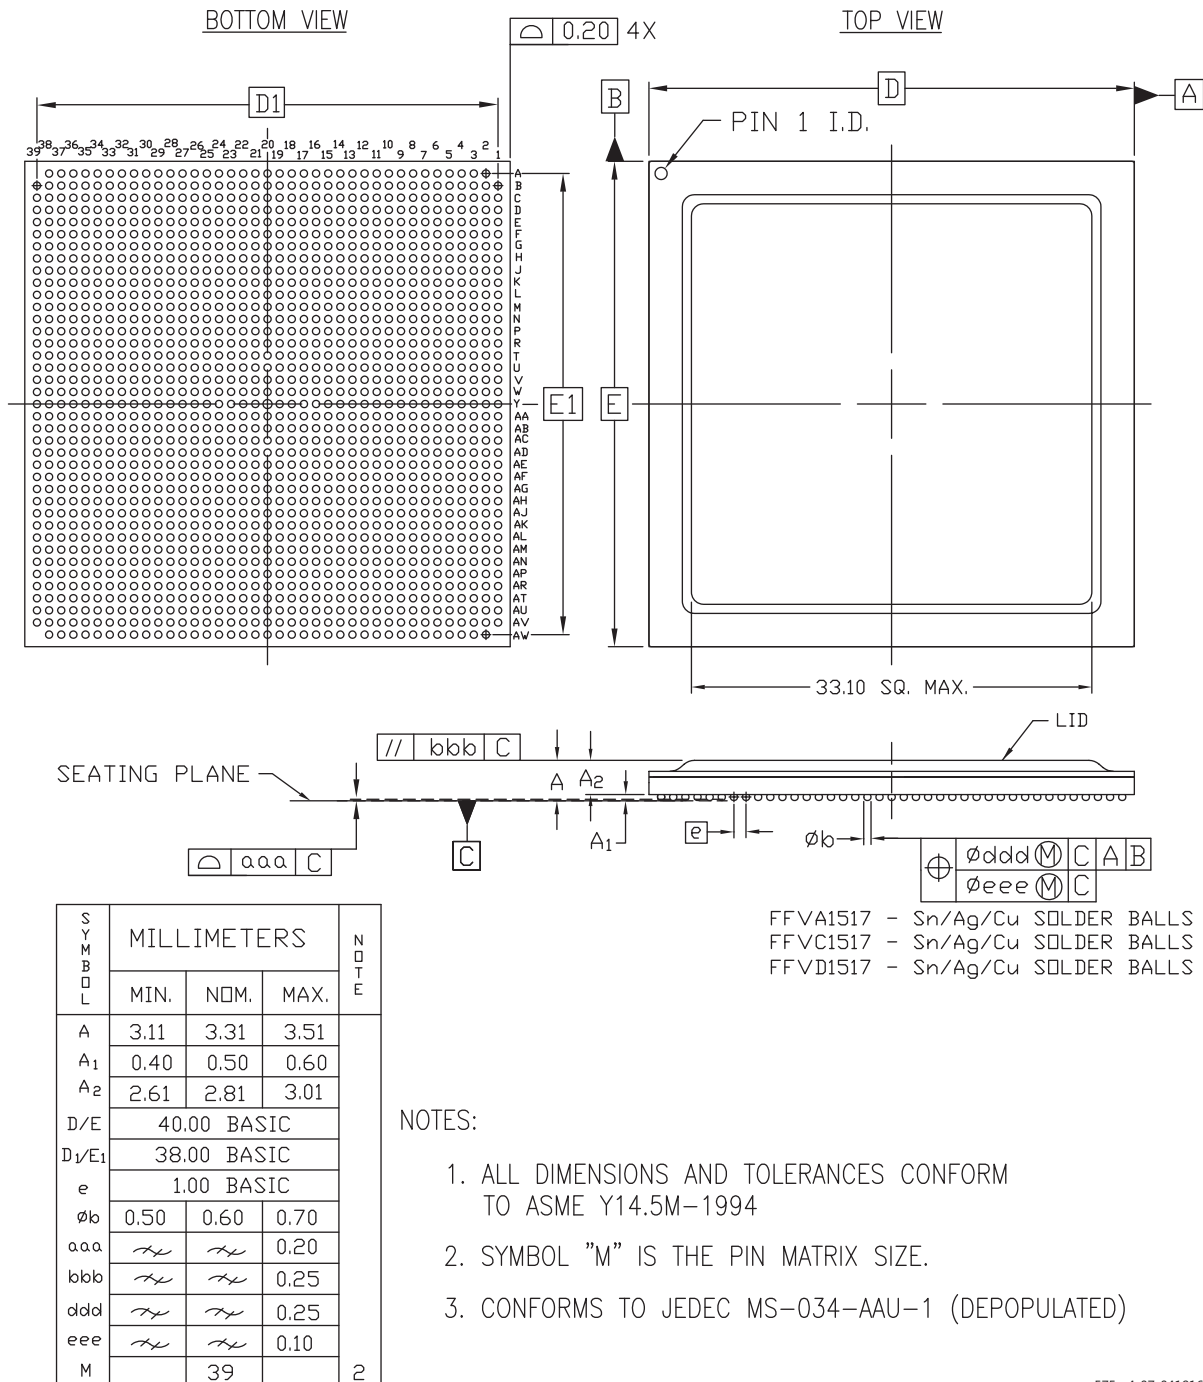


Figure 4-19: Package Dimensions for FFVA1517 (XCKU060), FFVC1517 (XCKU095, XCVU065, XCVU080, and XCVU095) and FFVD1517 (XCVU080 and XCVU095)

# FFVC1517 (XCVU3P) and FFVE1517 (XCKU11P and XCKU15P) Flip-Chip, Fine-Pitch BGA


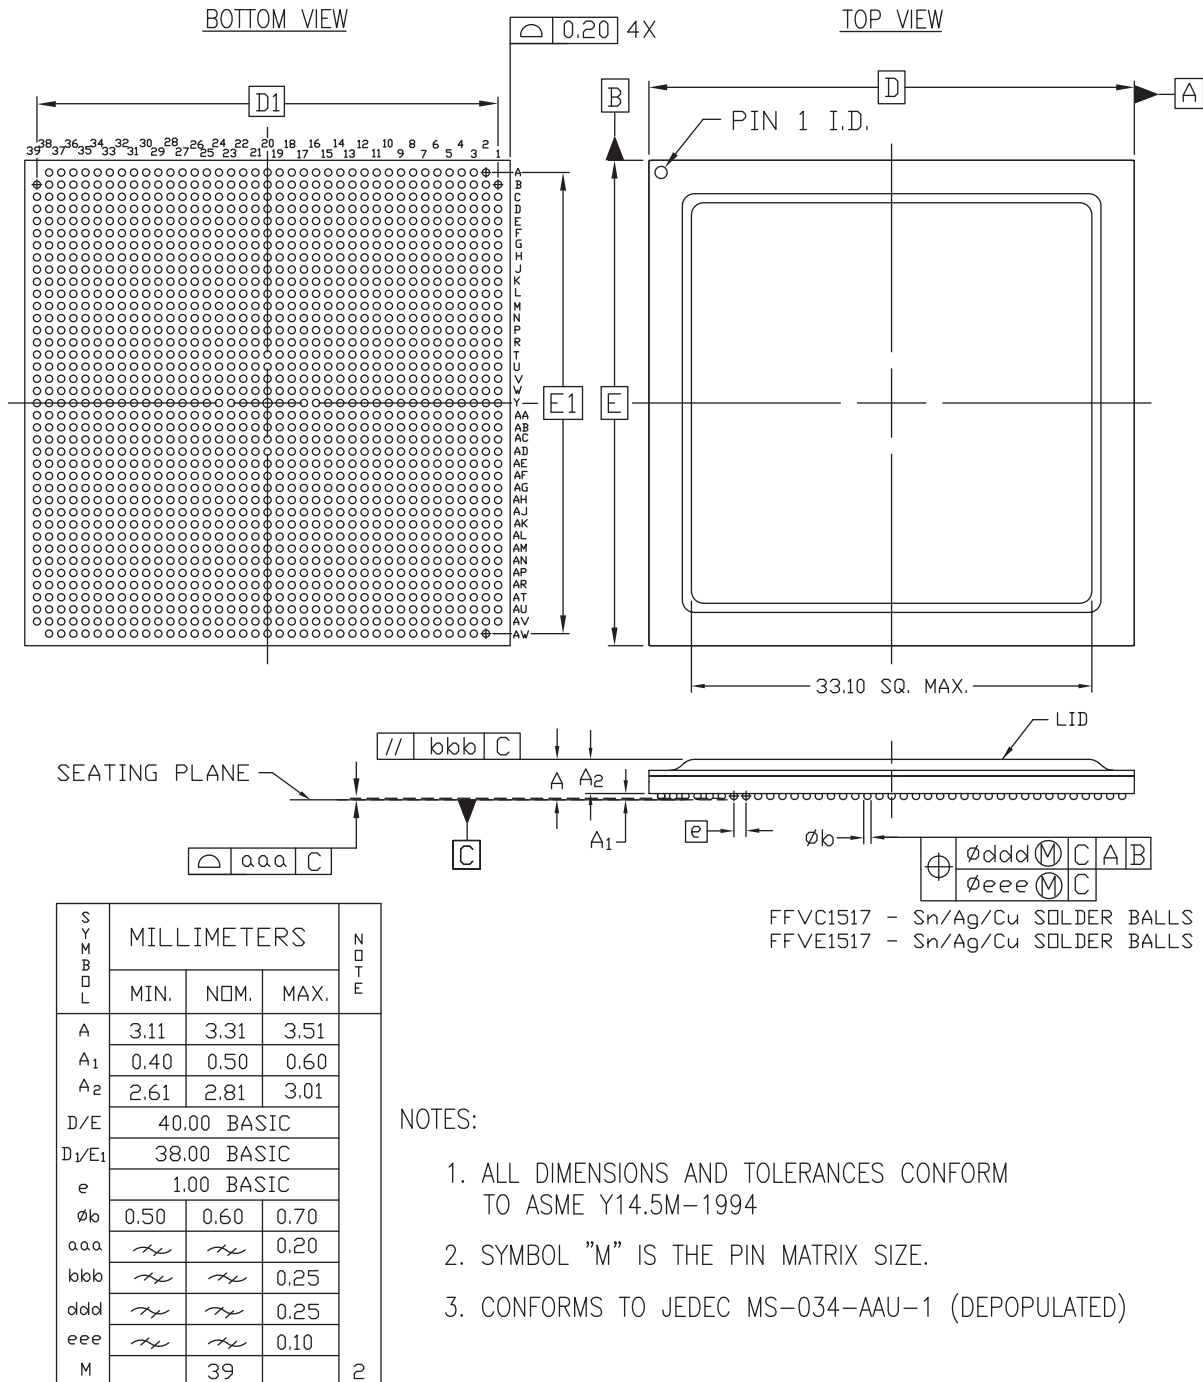


Figure 4-20: Package Dimensions for FFVC1517 (XCVU3P) and FFVE1517 (XCKU11P and XCKU15P)

# FFRC1517 (XQVU3P) and FFRE1517 (XQKU15P) Ruggedized Flip-Chip, Fine-Pitch BGA

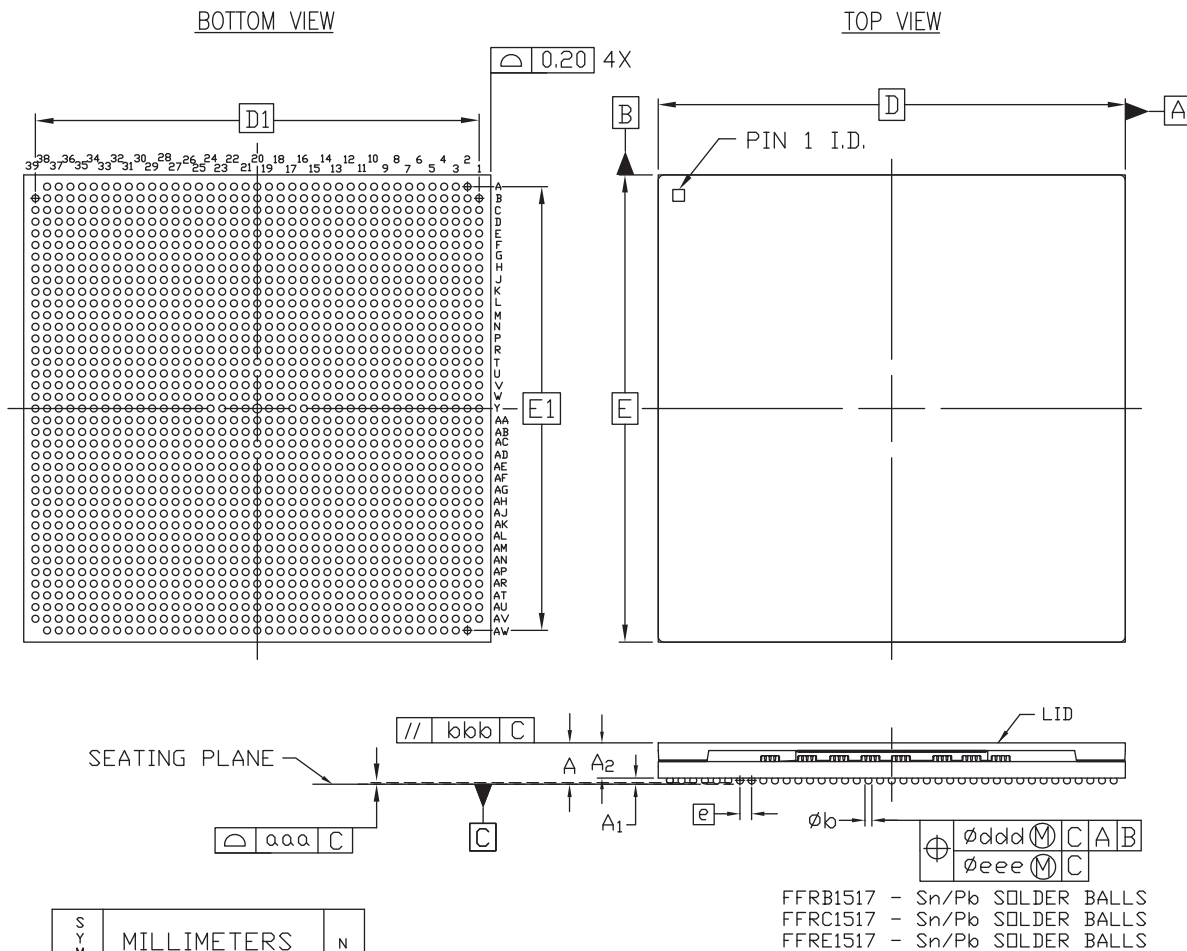


NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS-034-AAU-1 (DEPOPULATED)

ug575\_c4\_ffrc1517\_ffre1517\_010719

Figure 4-21: Package Dimensions for FFRC1517 (XQVU3P) and FFRE1517 (XQKU15P)

# FLVA1517 (XCKU085 and XCKU115) and FLVD1517 (XCKU115 and XCVU125) Flip-Chip, Fine-Pitch BGA

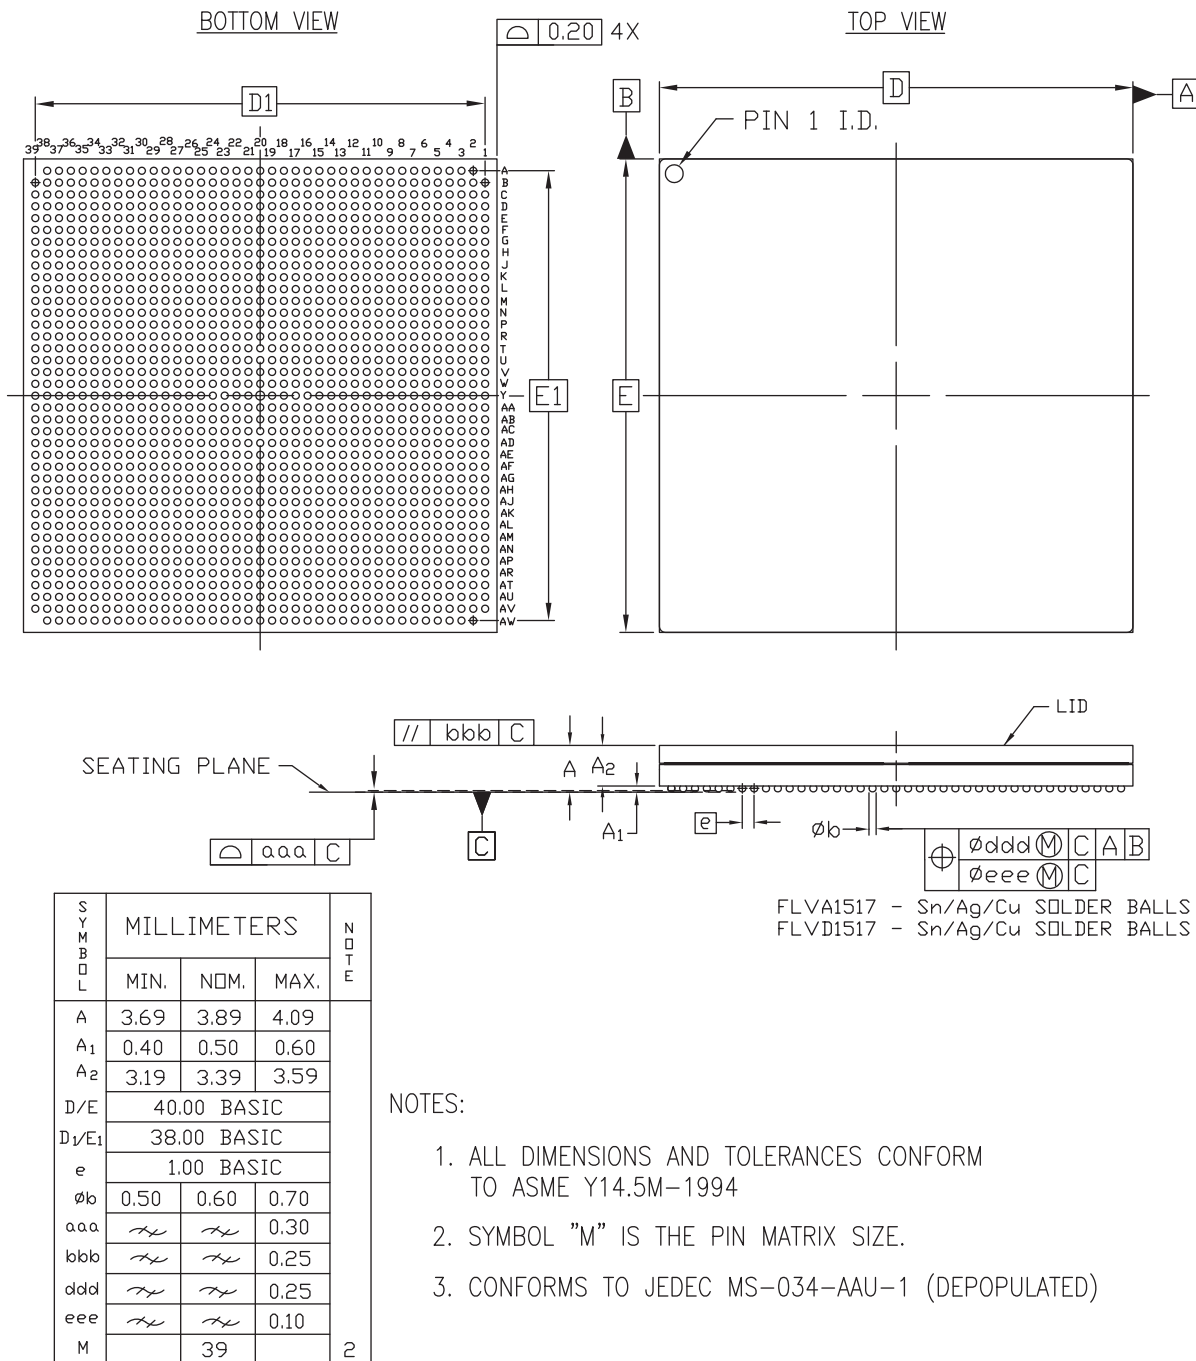

ug575\_c4\_08\_010715

Figure 4-22: Package Dimensions for FLVA1517 (XCKU085 and XCKU115) and FLVD1517 (XCKU115 and XCVU125)

# RLD1517 Ruggedized Flip-Chip, Fine-Pitch BGA (XQKU115)

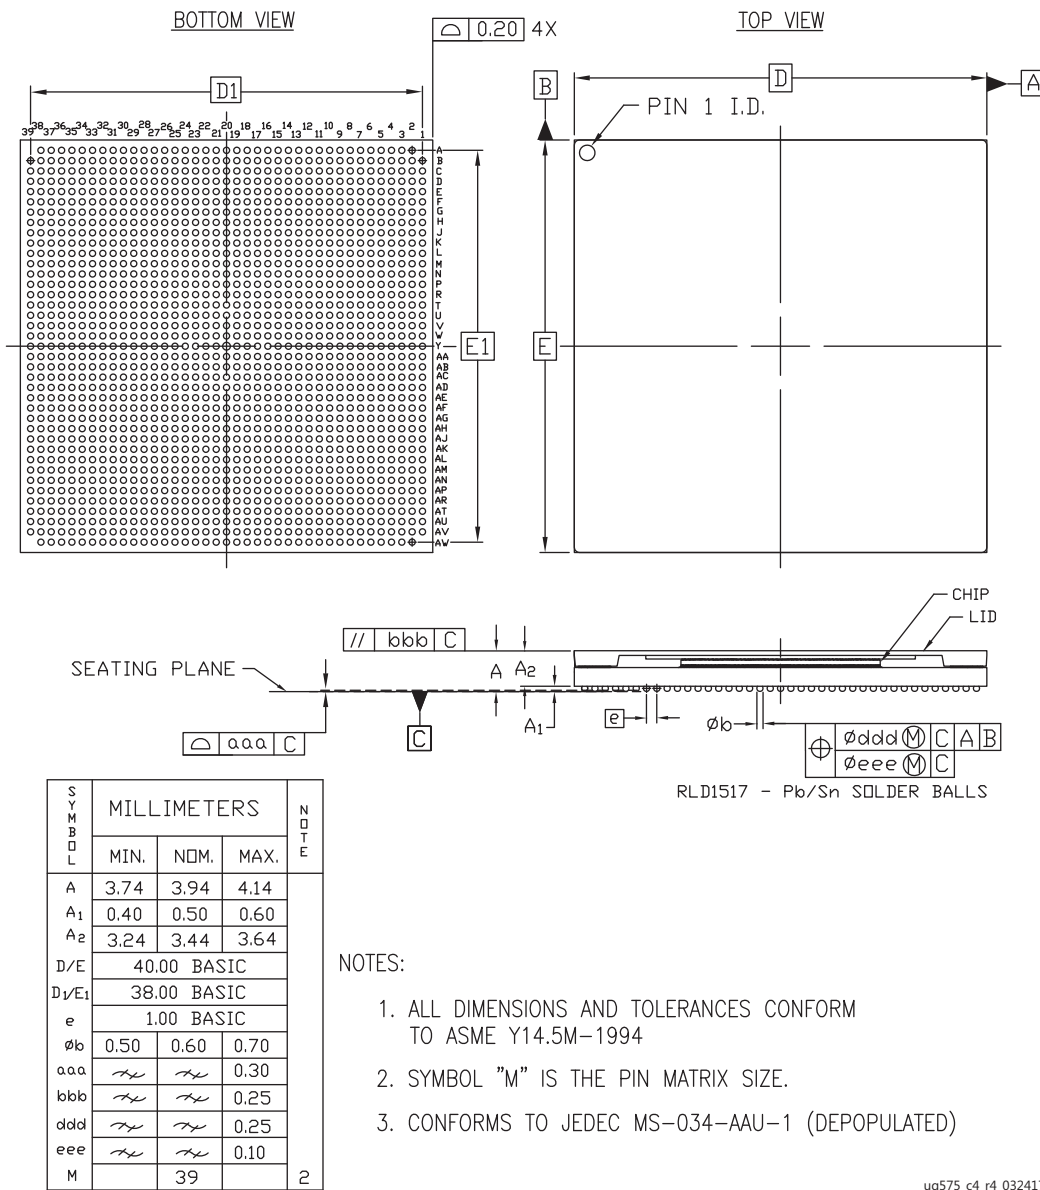


Figure 4-23: Package Dimensions for RLD1517 (XQKU115)

# FFVA1760 Flip-Chip, Fine-Pitch BGA (XCKU15P)


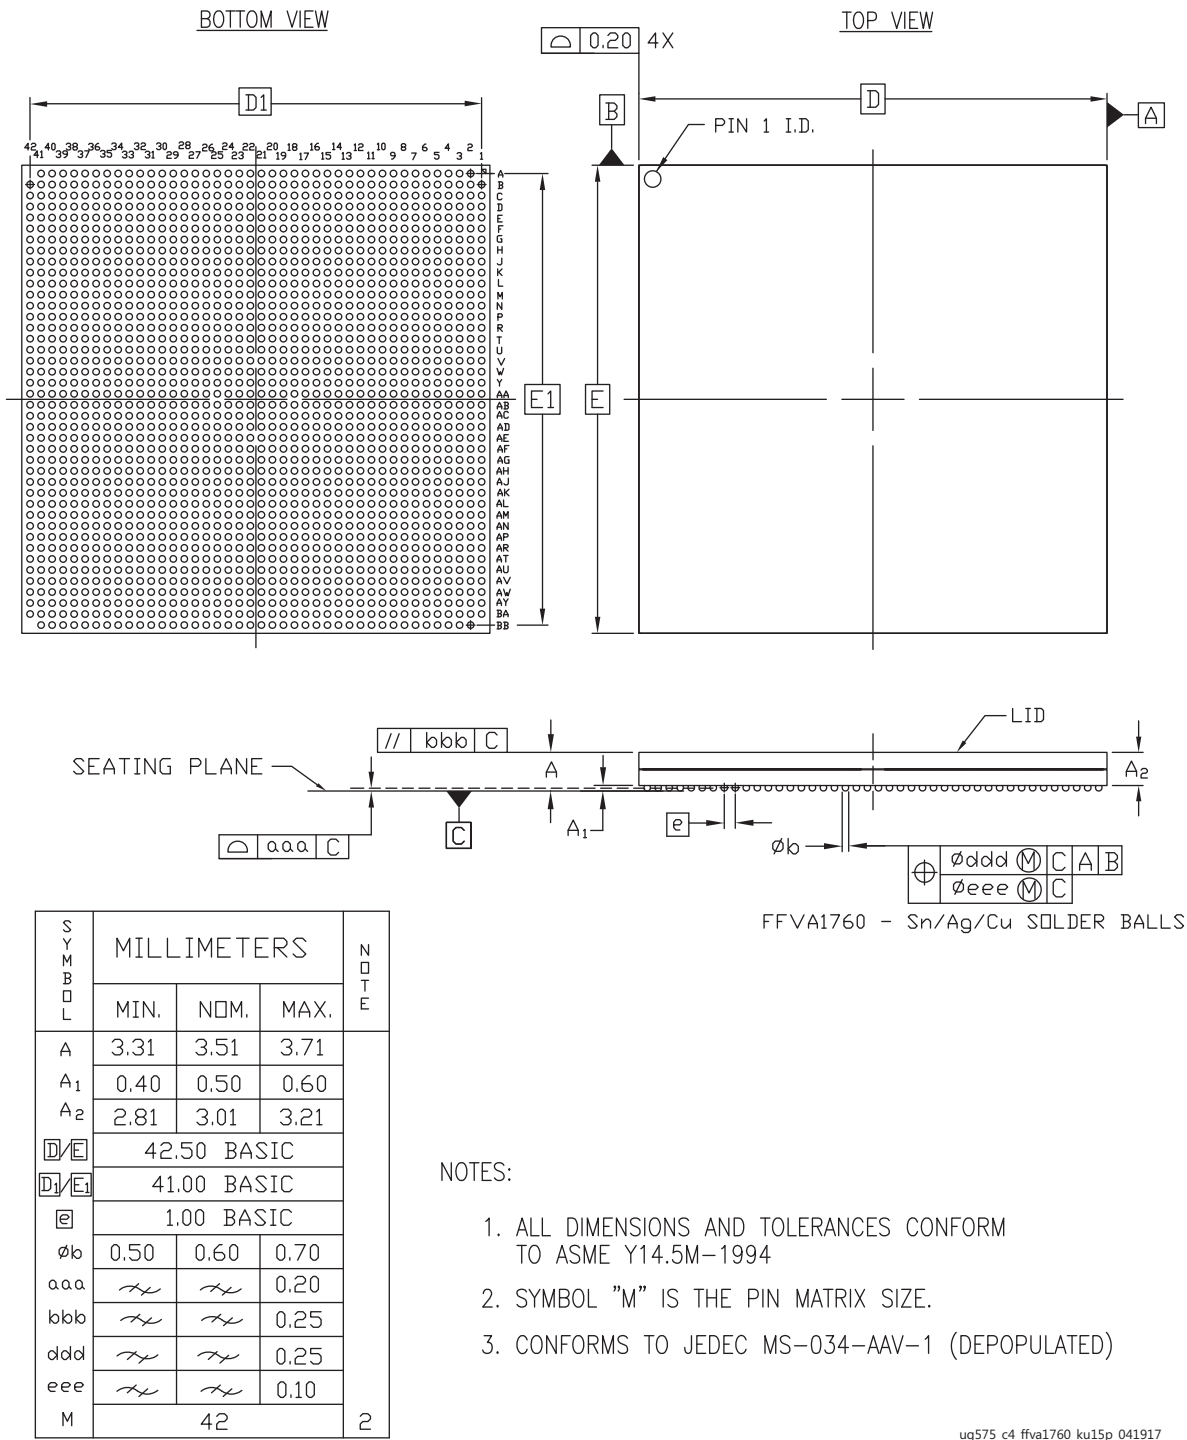


Figure 4-24: Package Dimensions for FFVA1760 (XCKU15P)


# FFVB1760 Flip-Chip, Fine-Pitch BGA (XCKU095, XCVU080, and XCVU095)

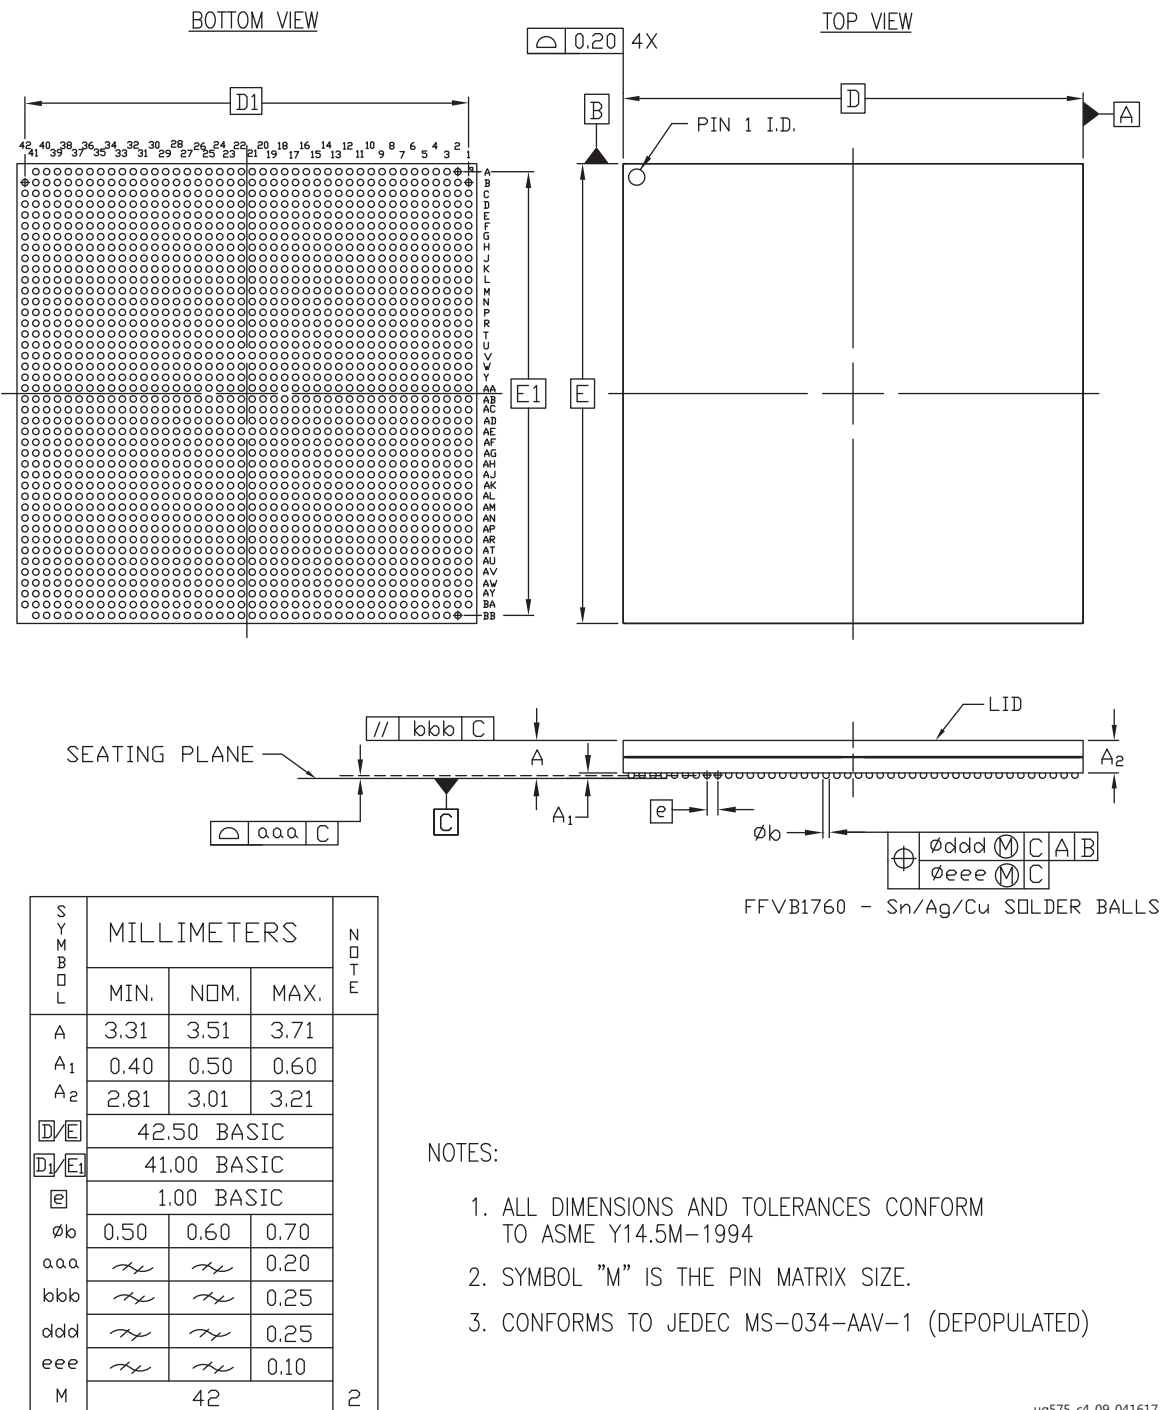

ug575\_c4\_09\_041617

Figure 4-25: Package Dimensions for FFVB1760 (XCKU095, XCVU080, and XCVU095)

# FLVB1760 Flip-Chip, Fine-Pitch BGA (XCKU085, XCKU115, and XCVU125)

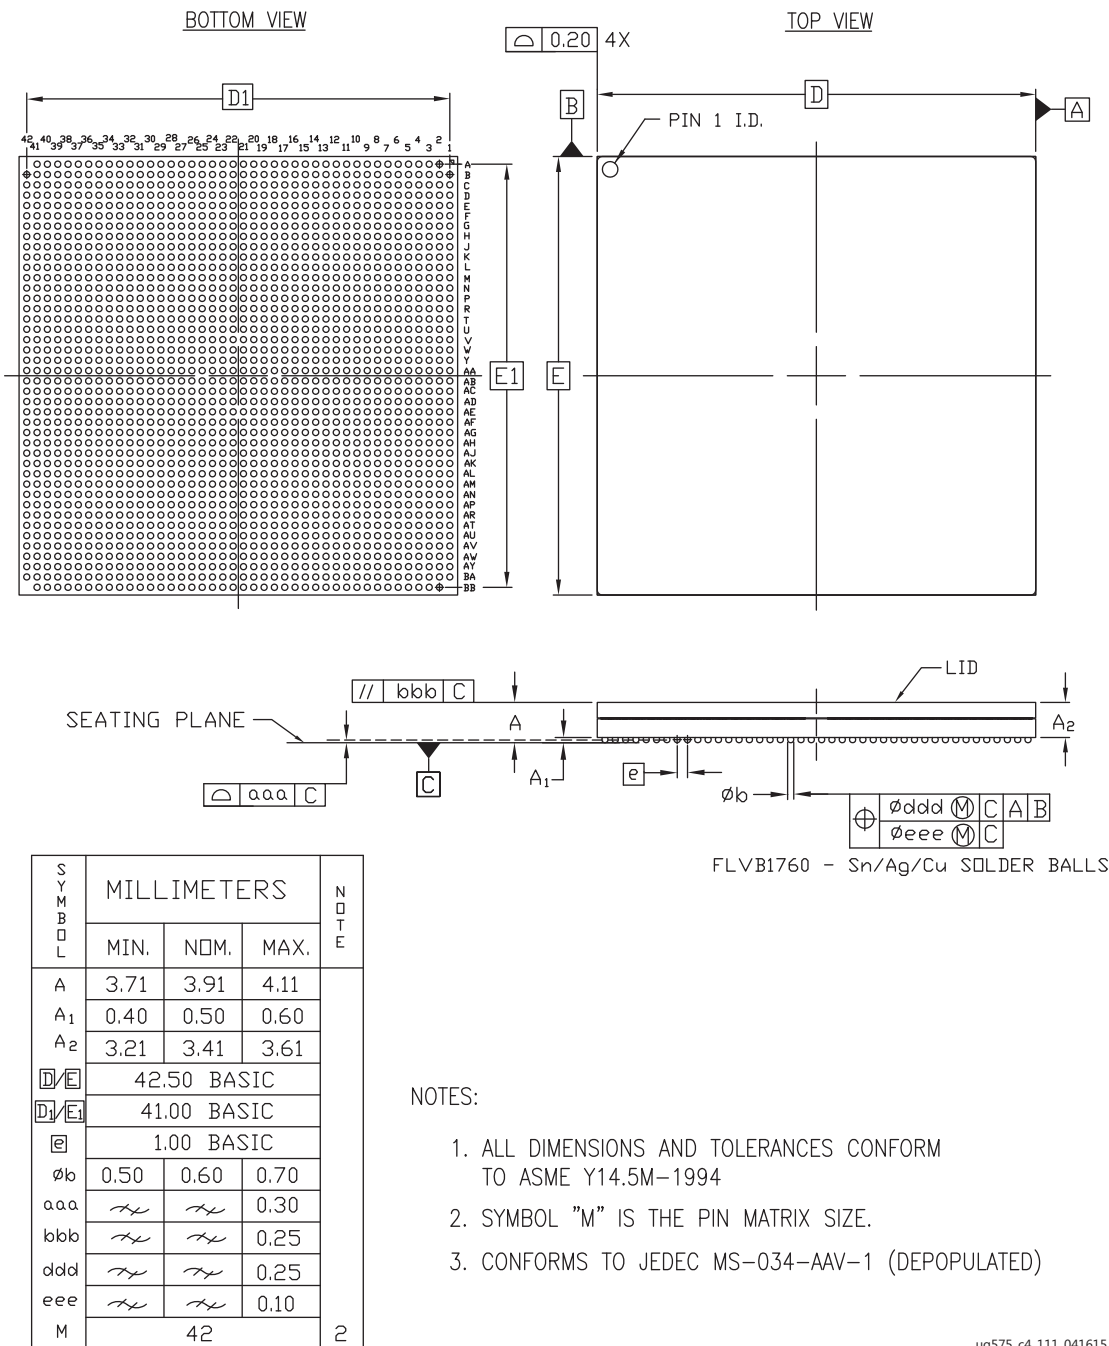

ug575\_c4\_111\_041615

Figure 4-26: Package Dimensions for FLVB1760 (XCKU085, XCKU115, and XCVU125)



# FFVE1760 Flip-Chip, Fine-Pitch BGA (XCKU15P)


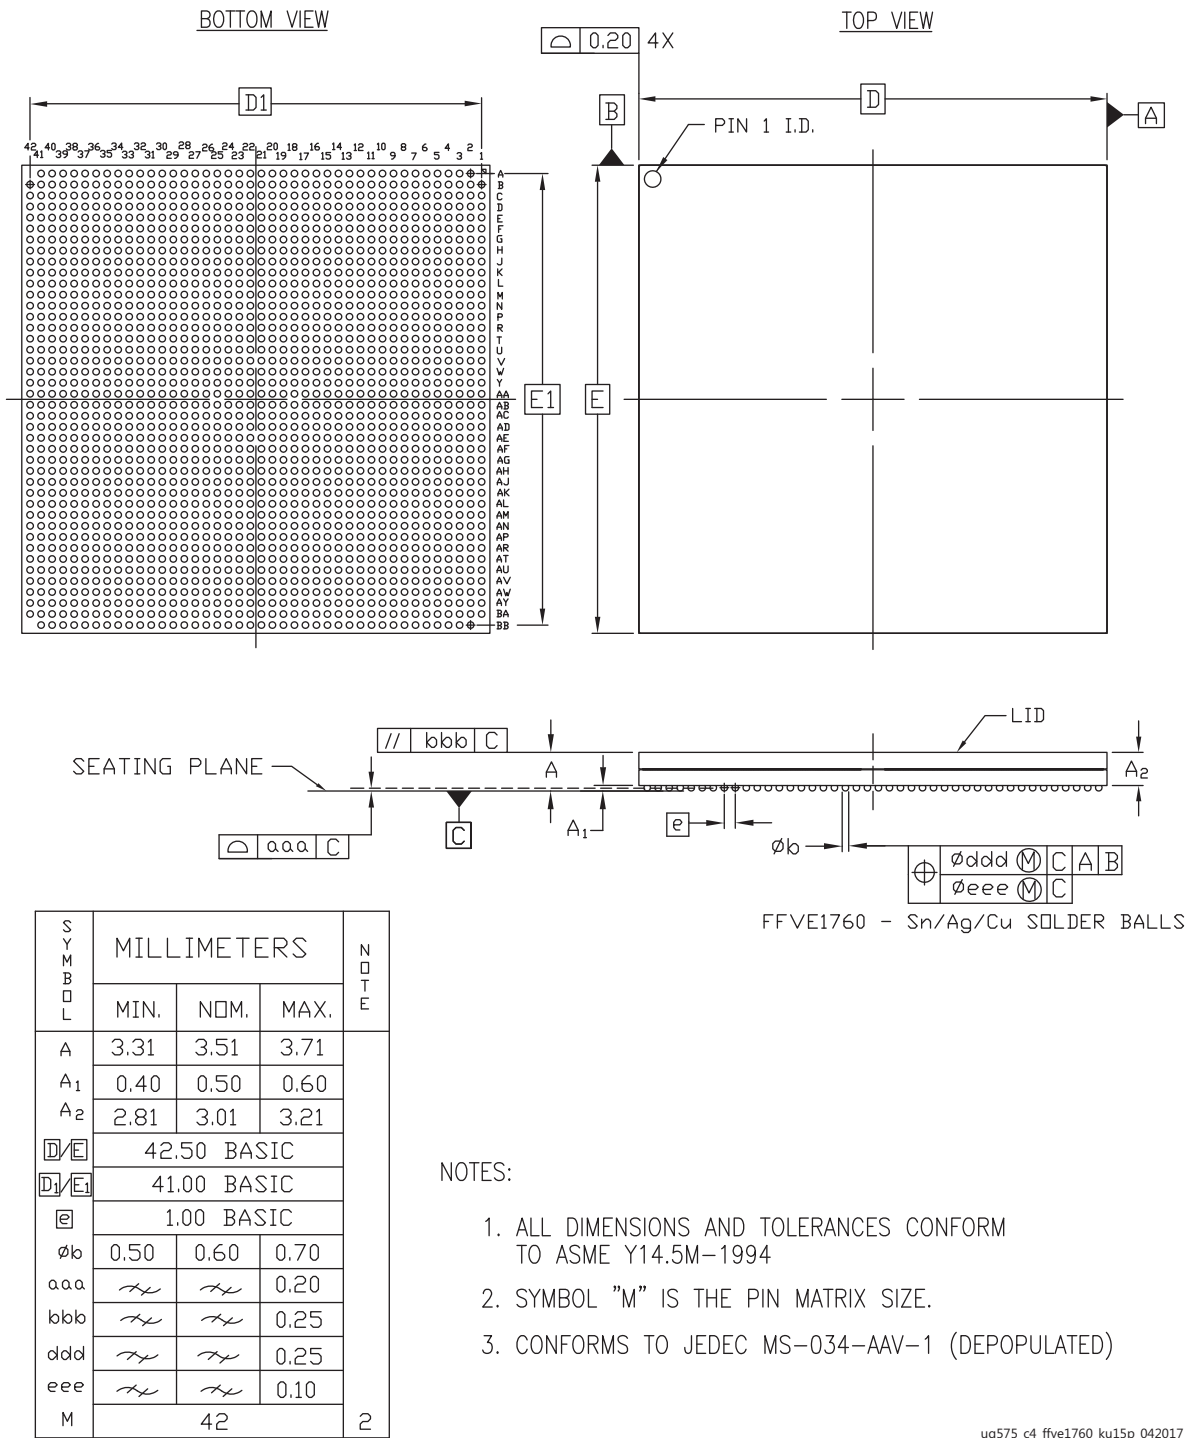


Figure 4-27: Package Dimensions for FFVE1760 (XCKU15P)

# FFVJ1760 Flip-Chip, Fine-Pitch BGA (XCKU19P)

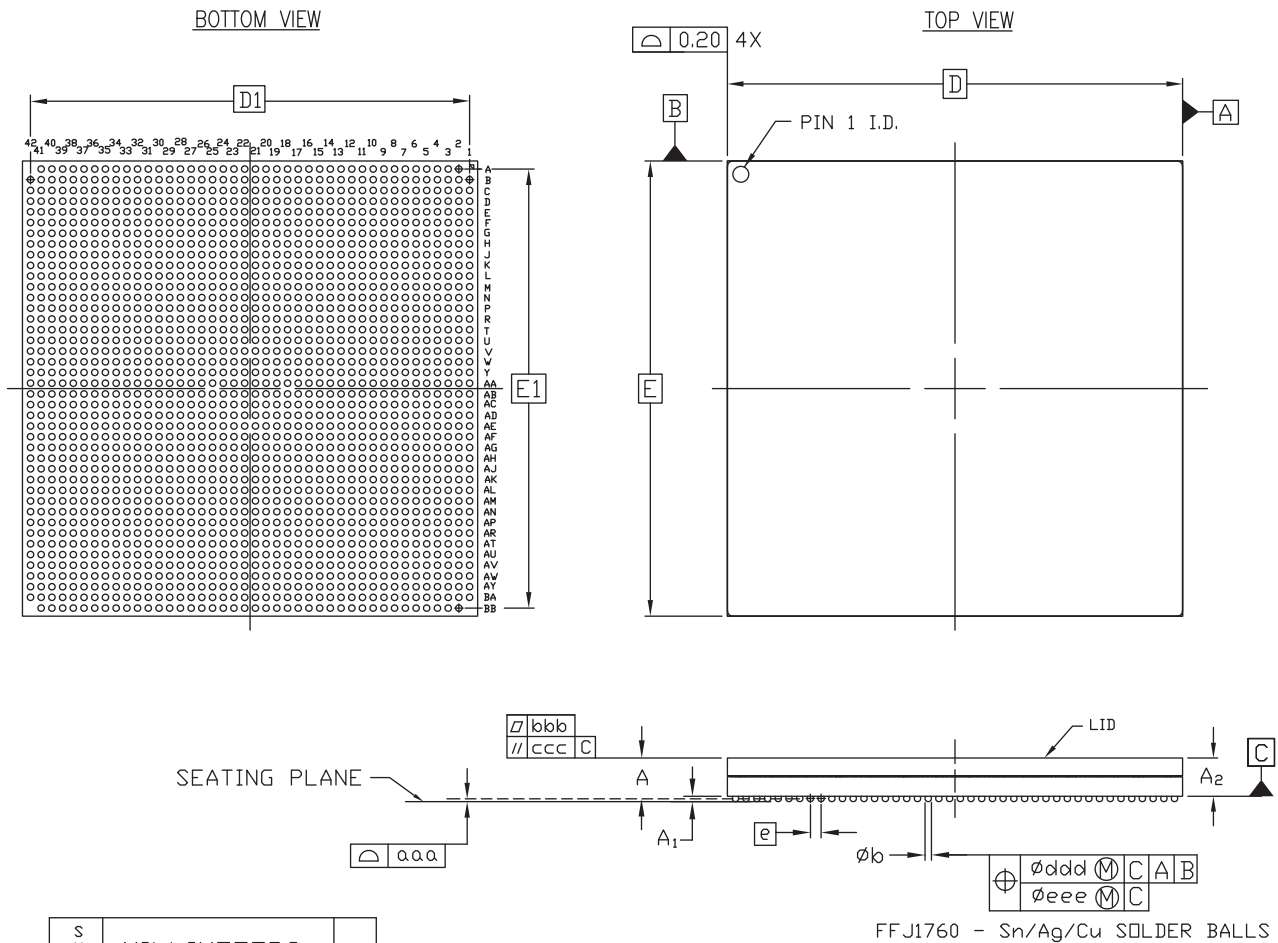

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	3.87	4.07	4.27	
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	3.37	3.57	3.77	
$\frac{D}{E}$	42.50 BASIC			
$\frac{D_1}{E_1}$	41.00 BASIC			
$\text{Ⓢ}$	1.00 BASIC			
$\varnothing b$	0.50	0.60	0.70	
aaa	$\sqrt{\text{R}}$	$\sqrt{\text{R}}$	0.20	
bbb	$\sqrt{\text{R}}$	$\sqrt{\text{R}}$	0.10	
ccc	$\sqrt{\text{R}}$	$\sqrt{\text{R}}$	0.10	
ddd	$\sqrt{\text{R}}$	$\sqrt{\text{R}}$	0.25	
eee	$\sqrt{\text{R}}$	$\sqrt{\text{R}}$	0.10	
M	42			2


NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MO-318-EF-1764 (DEPOPULATED)

ug575\_c4\_ffvj1760\_083020

Figure 4-28: Package Dimensions for FFVJ1760 (XCKU19P)

# FSVJ1760 Flip-Chip, Fine-Pitch BGA (XCVU23P)

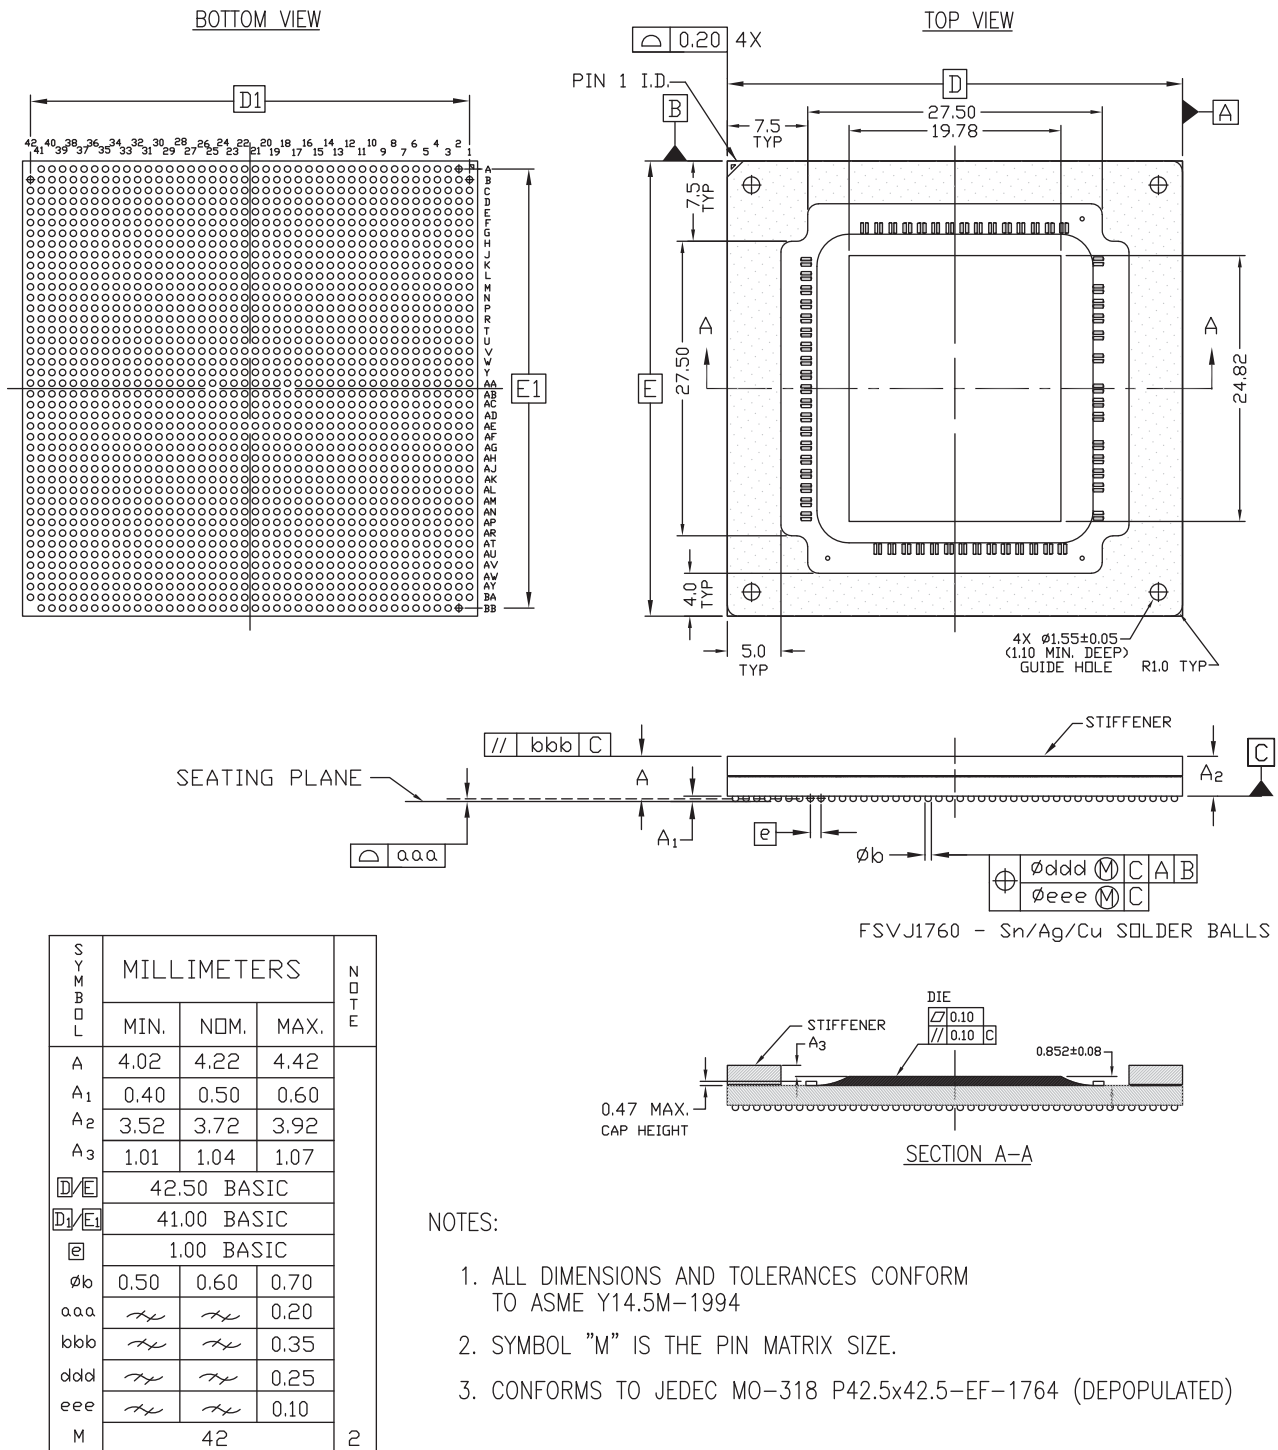

ug575\_fsvj1760\_vu23p\_122120

Figure 4-29: Package Dimensions for FSVJ1760 (XCVU23P)

# FLVD1924 (XCKU115) and FLVF1924 (XCKU085 and XCKU115) Flip-Chip, Fine-Pitch BGA


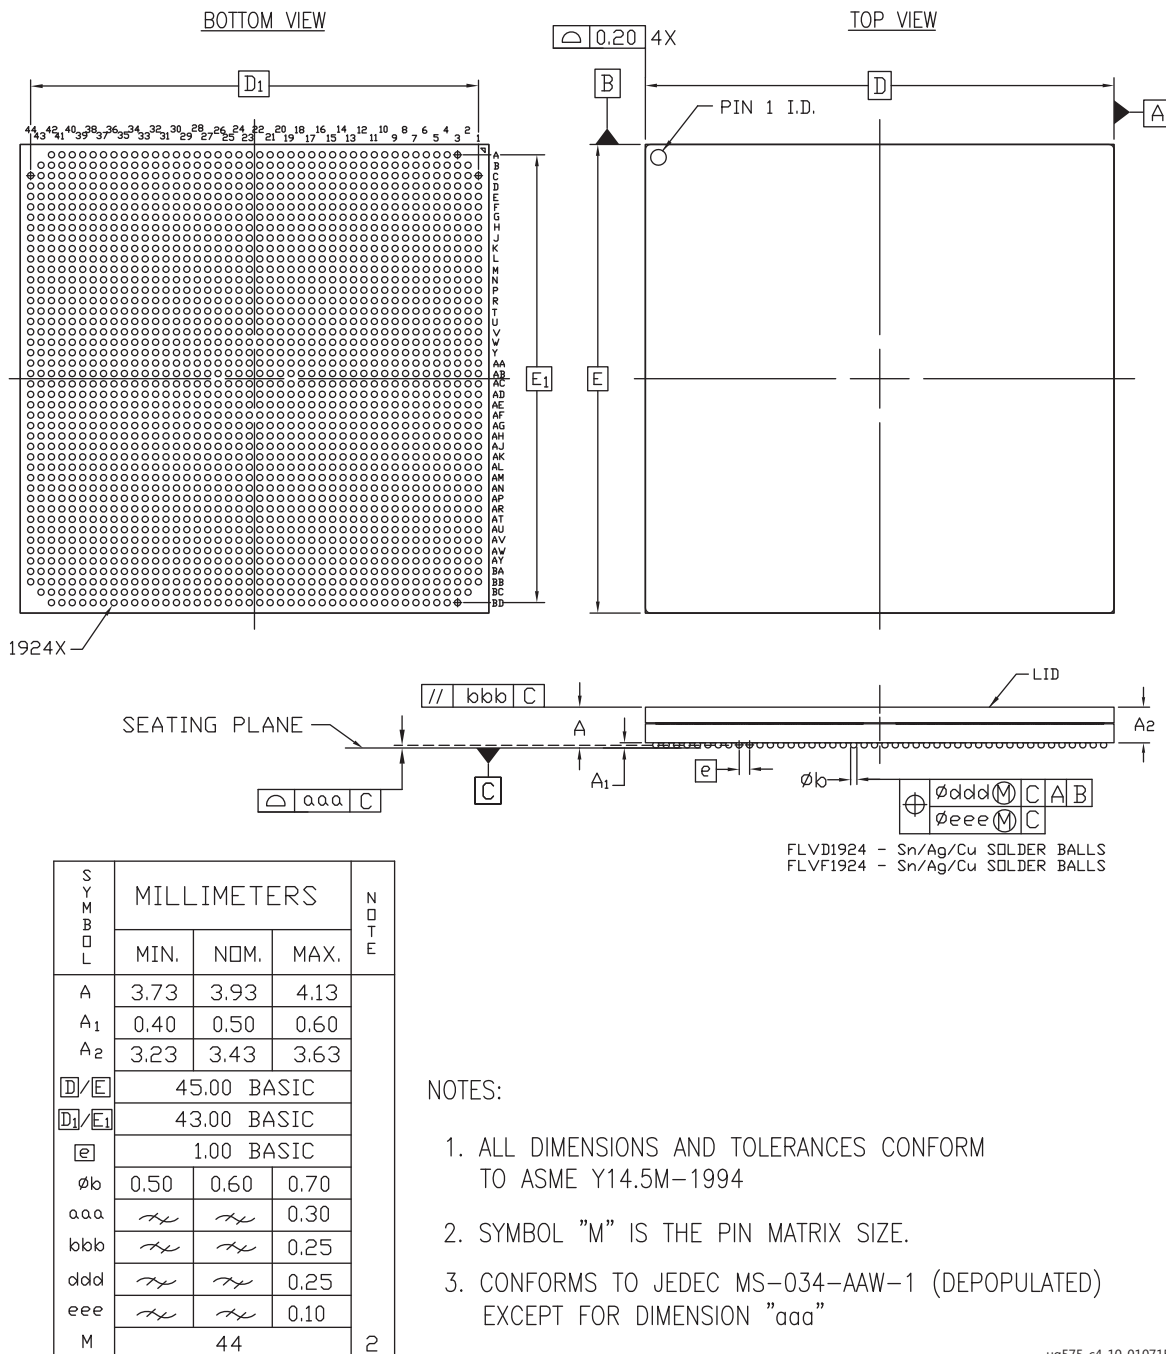


Figure 4-30: Package Dimensions for FLVD1924 (XCKU115) and FLVF1924 (XCKU085 and XCKU115)

# FLGF1924 (XCVU11P) Flip-Chip, Fine-Pitch BGA

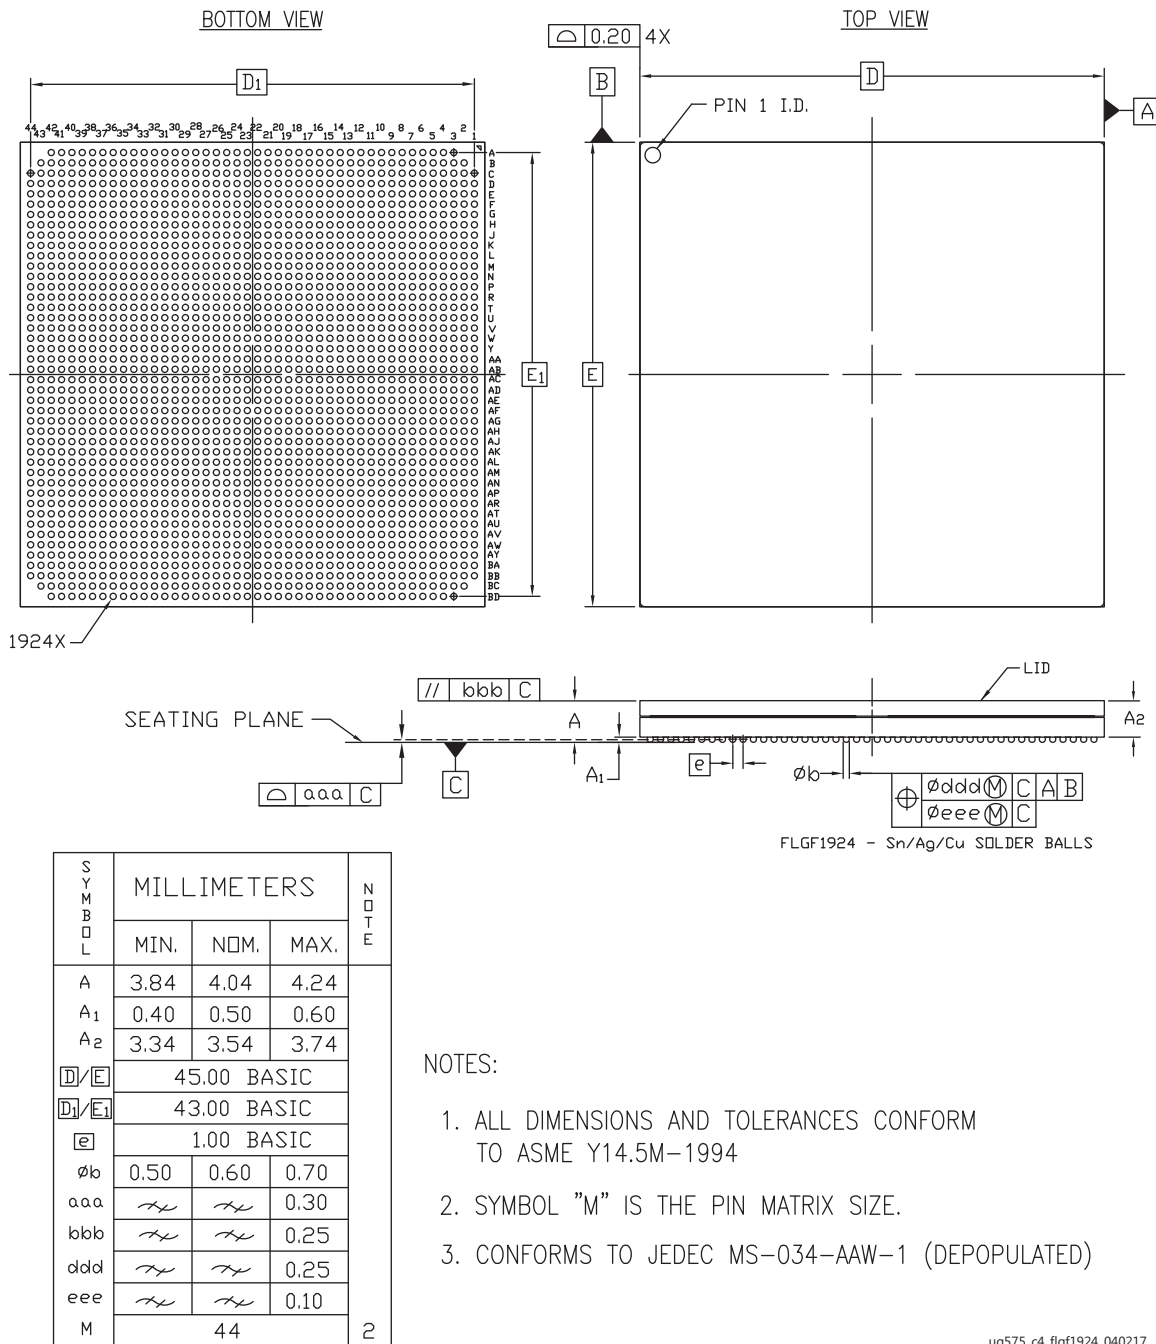

ug575\_c4\_flg1924\_040217

Figure 4-31: Package Dimensions for FLGF1924 (XCVU11P)

# RLF1924 (XQKU115) Ruggedized Flip-Chip, Fine-Pitch BGA

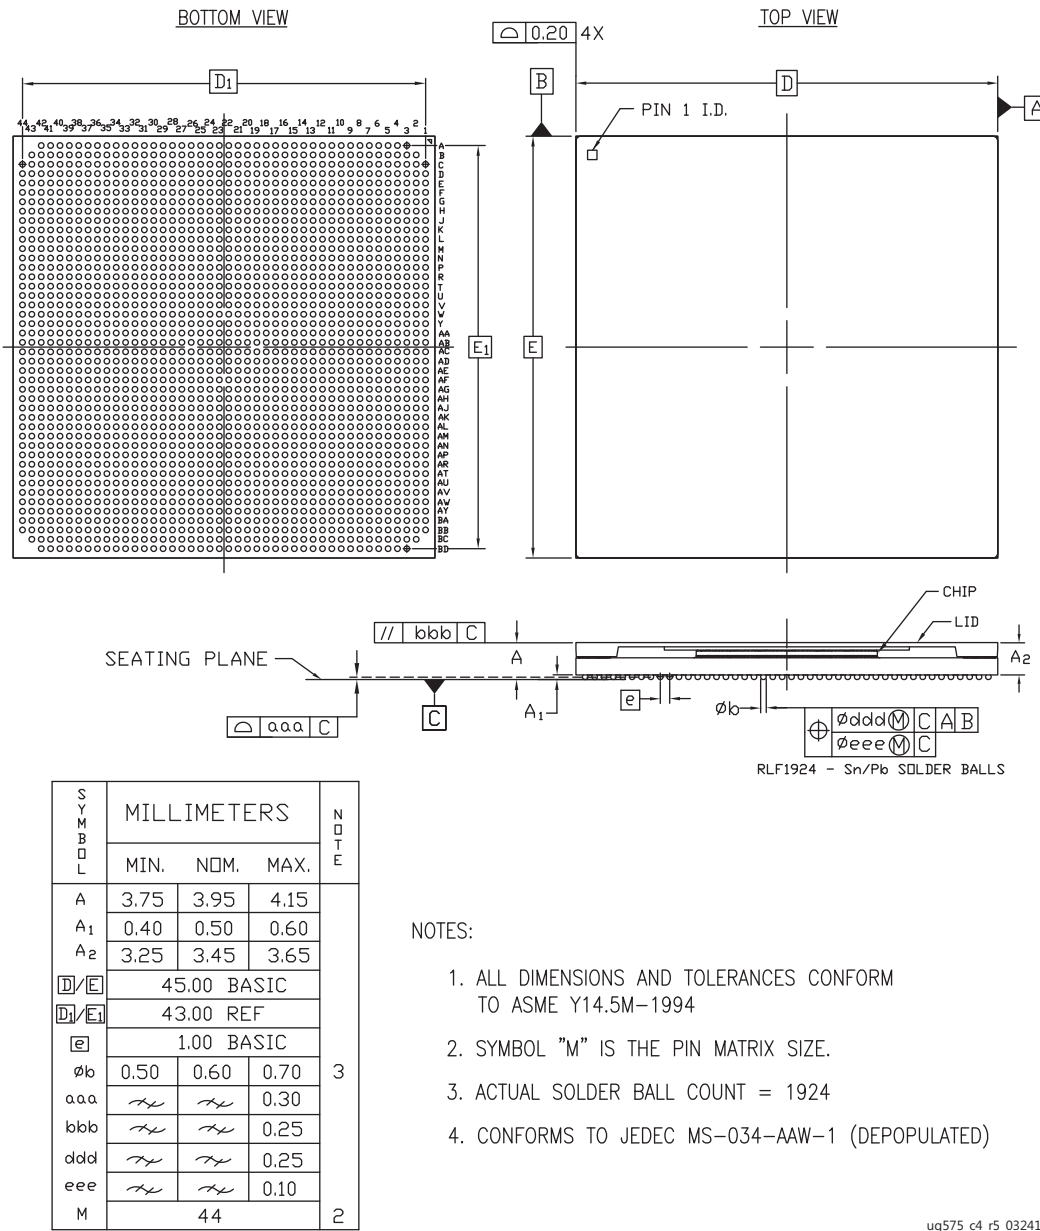


Figure 4-32: Package Dimensions for RLF1924 (XQKU115)

# FSVH1924 (XCVU31P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA



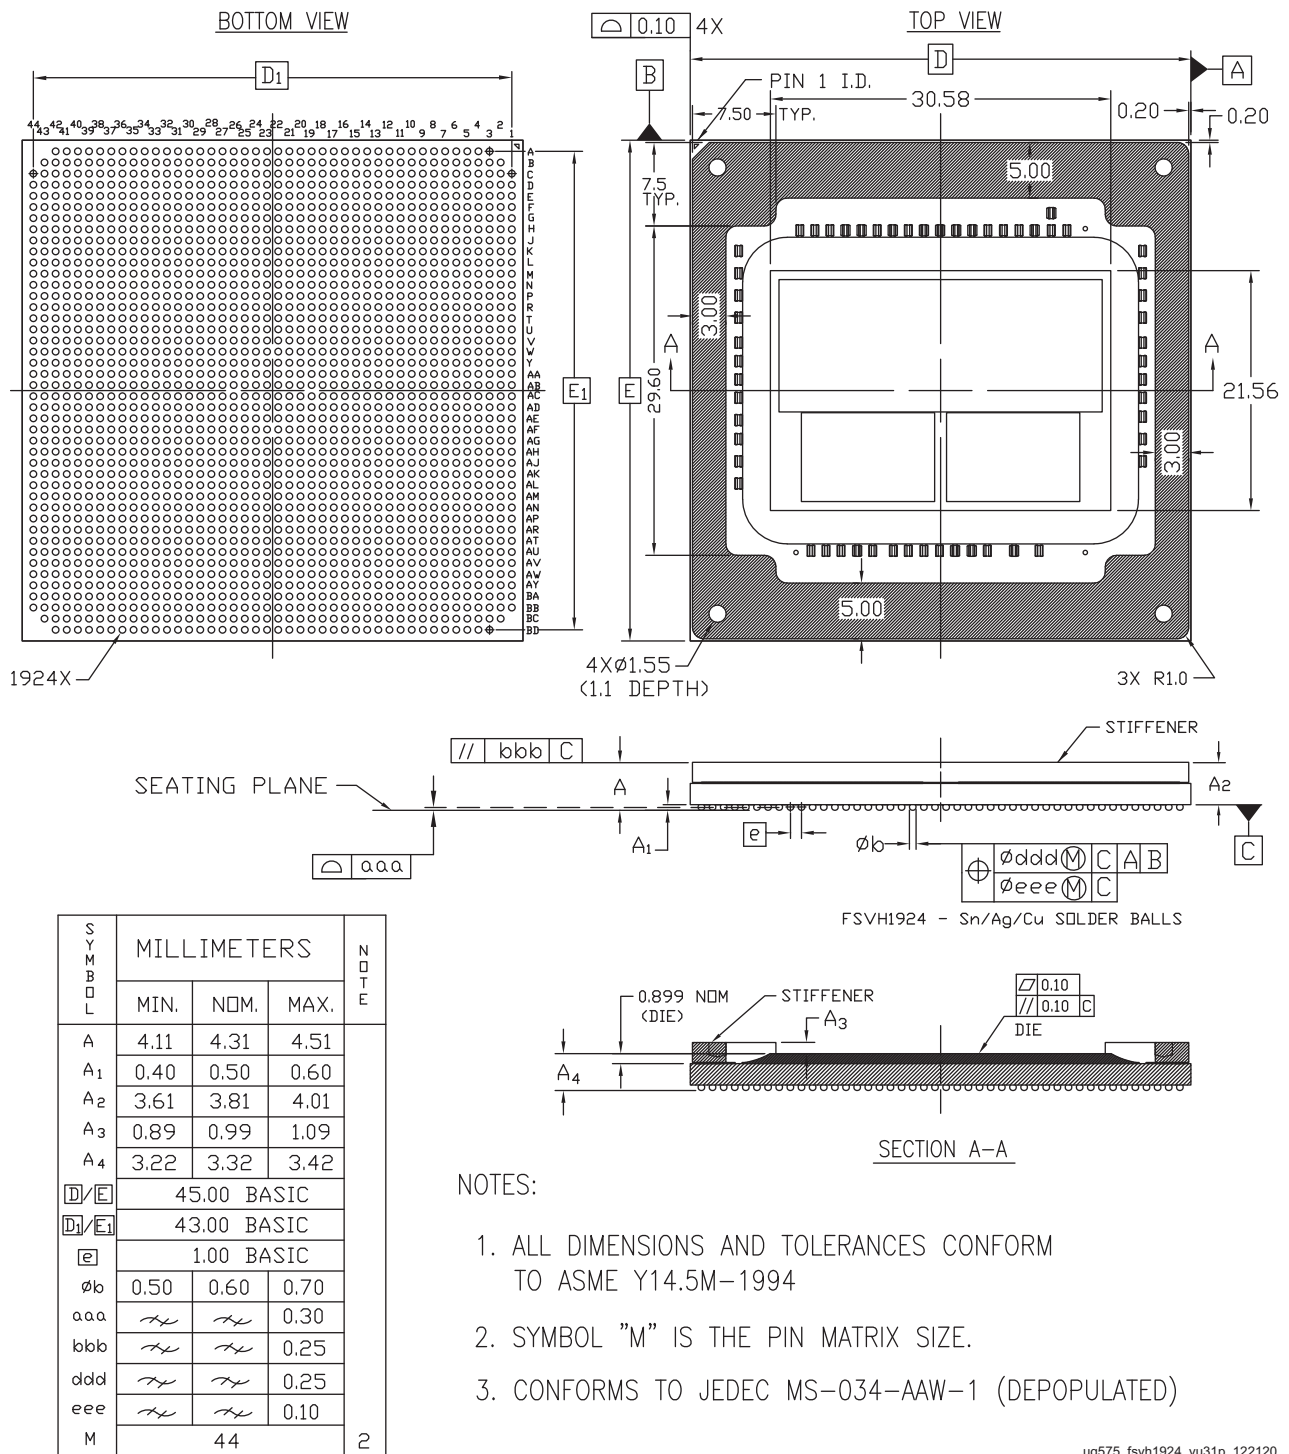


Figure 4-33: Package Dimensions for FSVH1924 (XCVU31P)

ug575\_fsvh1924\_vu31p\_122120

# FFVA2104 (XCVU080 and XCVU095) and FFVB2104 (XCKU095, XCVU080, and XCVU095) Flip-Chip, Fine-Pitch BGA

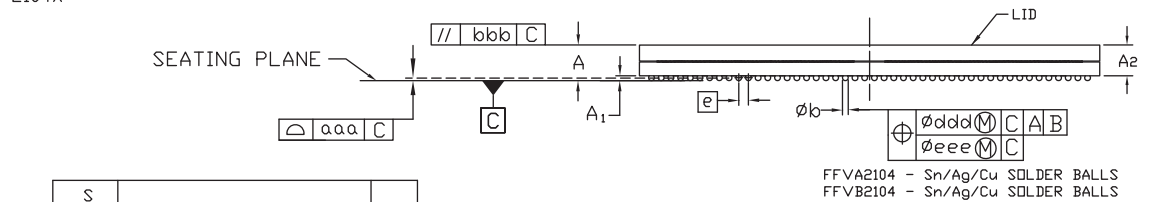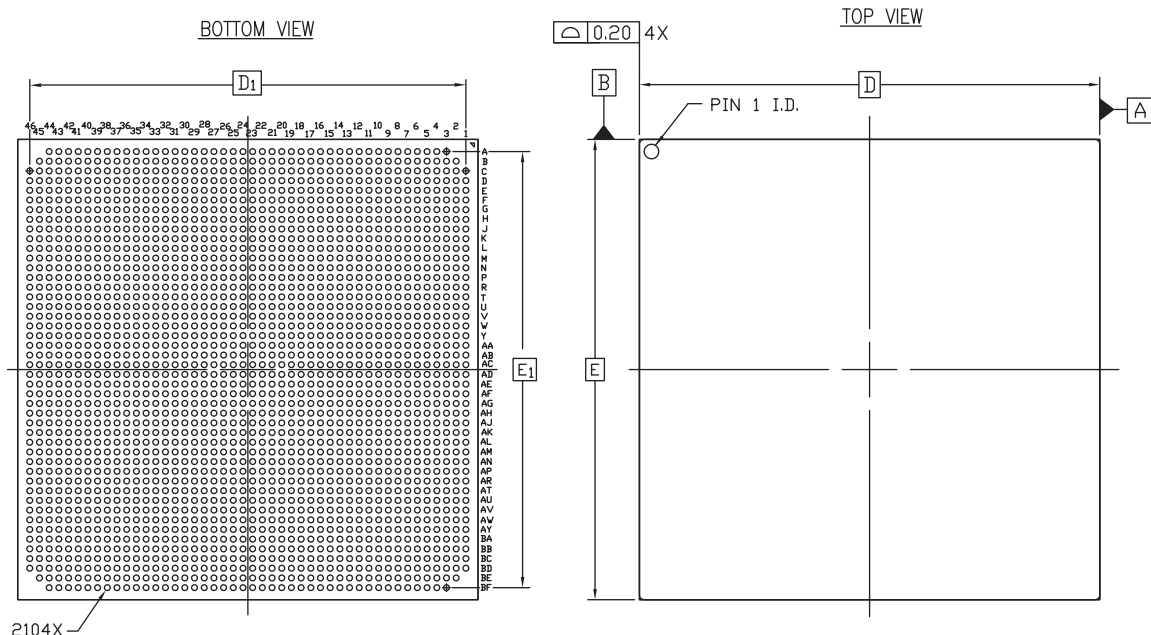

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	3.46	3.66	3.86	
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	2.96	3.16	3.36	
D/E	47.50 BASIC			
D <sub>1</sub> /E <sub>1</sub>	45.00 BASIC			
e	1.00 BASIC			
phi b	0.50	0.60	0.70	
aaa	$\sqrt{\text{---}}$	$\sqrt{\text{---}}$	0.20	
bbb	$\sqrt{\text{---}}$	$\sqrt{\text{---}}$	0.25	
ddd	$\sqrt{\text{---}}$	$\sqrt{\text{---}}$	0.25	
eee	$\sqrt{\text{---}}$	$\sqrt{\text{---}}$	0.10	
M	46			2

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS-034 AAY-2 (DEPOPULATED)

ug575\_c4\_11\_010715

Figure 4-34: Package Dimensions for FFVA2104 (XCVU080, and XCVU095) and FFVB2104 (XCKU095, XCVU080, and XCVU095)



# FFVB2104 (XCKU19P) Flip-Chip, Fine-Pitch BGA


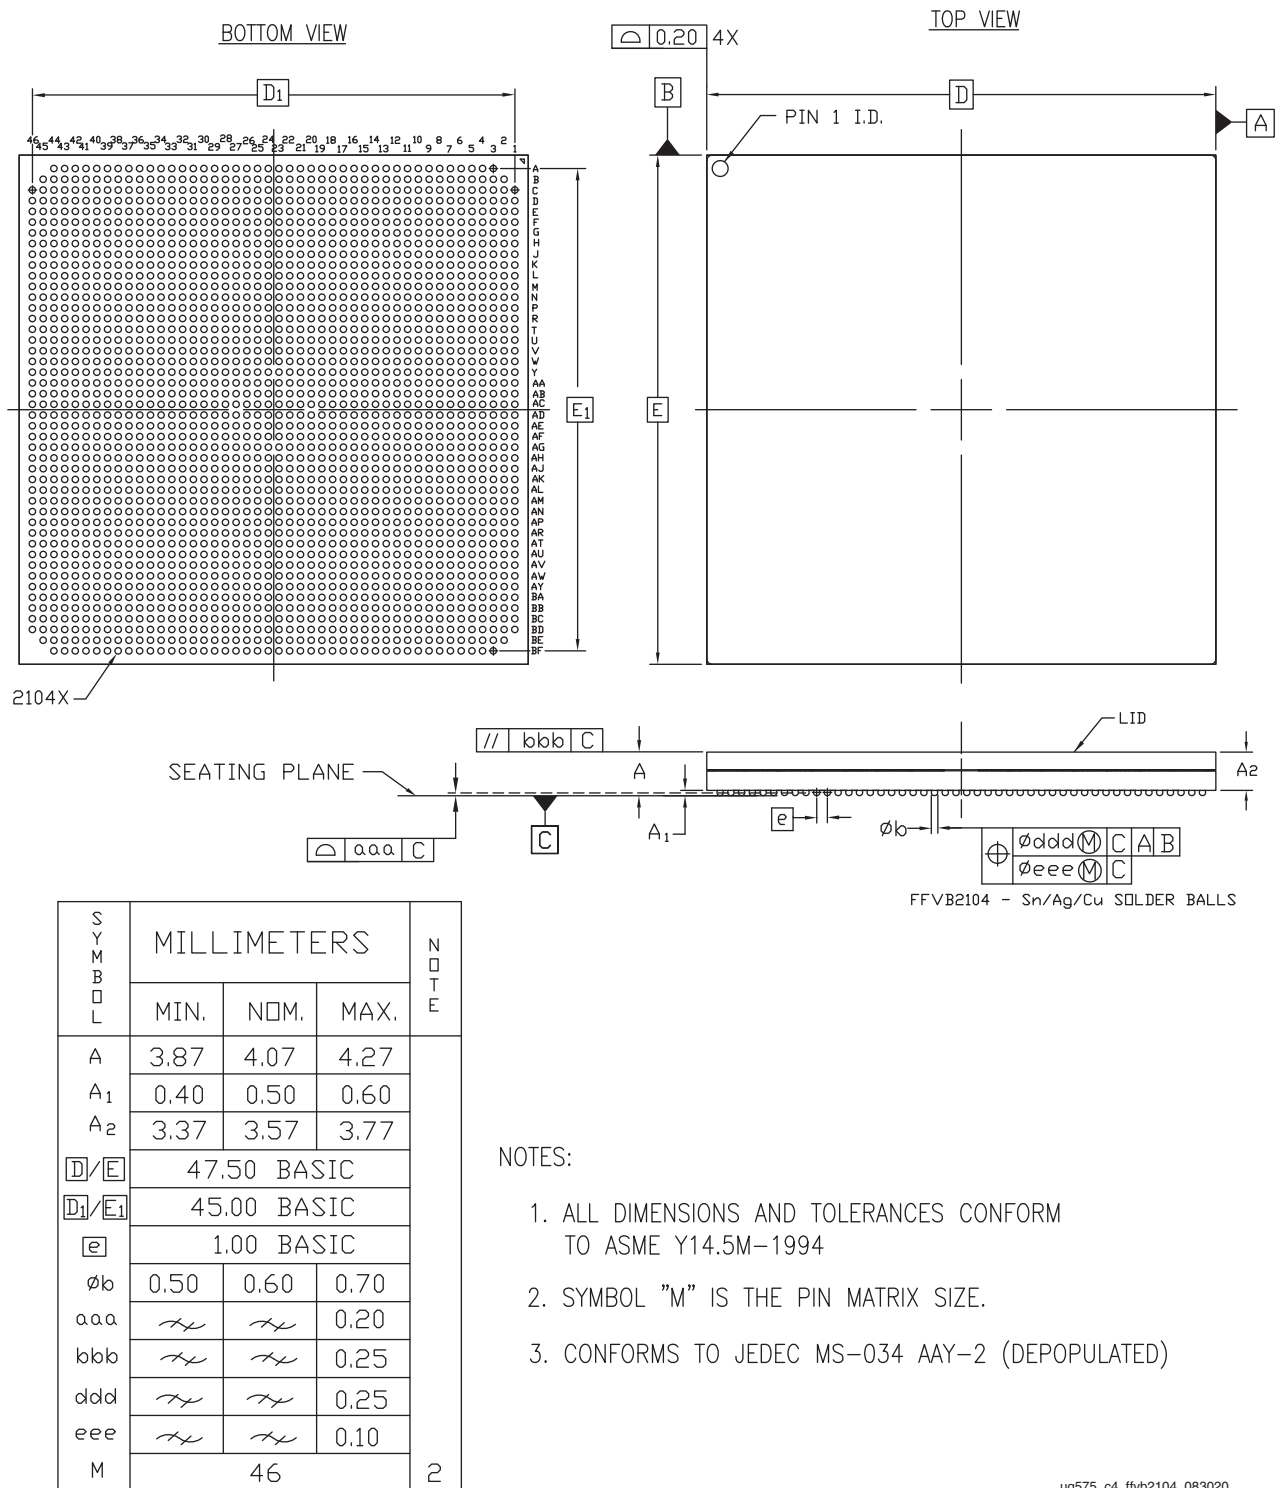


Figure 4-35: Package Dimensions for FFVB2104 (XCKU19P)

# FHGA2104 (XCVU13P) Flip-Chip, Fine-Pitch BGA

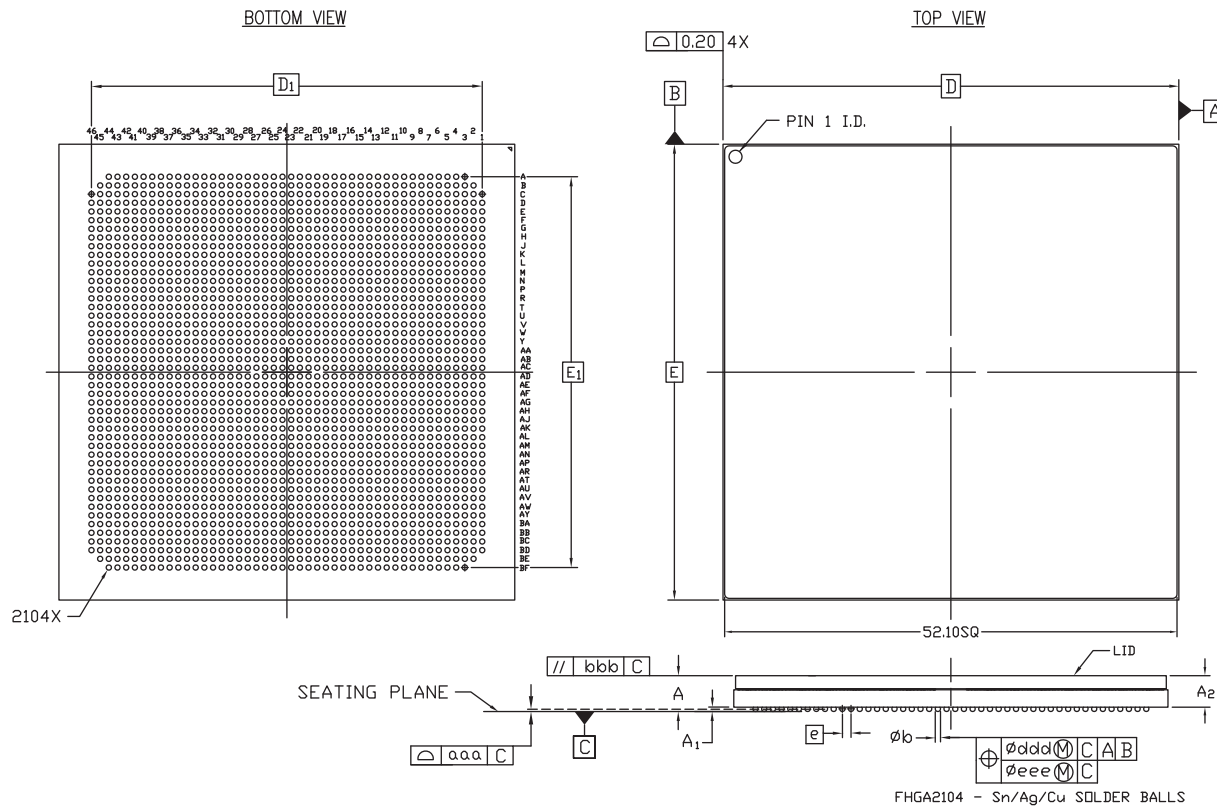

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	3.84	4.04	4.24	
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	3.34	3.54	3.74	
D/E	52.50 BASIC			
D <sub>1</sub> /E <sub>1</sub>	45.00 BASIC			
e	1.00 BASIC			
∅b	0.50	0.60	0.70	
aaa	<i>∕</i>	<i>∕</i>	0.30	
bbb	<i>∕</i>	<i>∕</i>	0.25	
ddd	<i>∕</i>	<i>∕</i>	0.25	
eee	<i>∕</i>	<i>∕</i>	0.10	
M	46			2


NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS-034-ABF-2 (DEPOPULATED) EXCEPT FOR DIMENSION "aaa"

ug575\_c4\_fhga2104\_vu13p\_041917

Figure 4-36: Package Dimensions for FHGA2104 (XCVU13P)

# FHGB2104 (XCVU13P) and FHGC2104 (XCVU13P) Flip-Chip, Fine-Pitch BGA

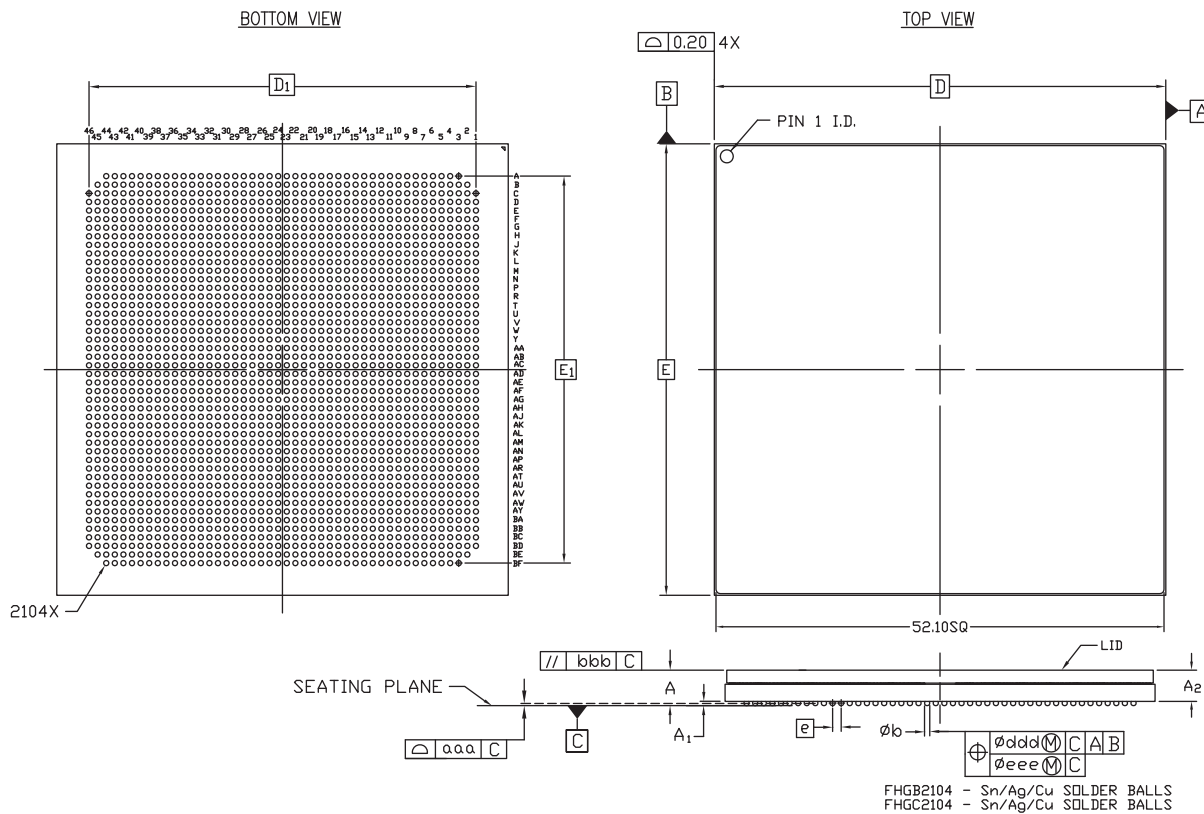

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	3.92	4.12	4.32	
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	3.42	3.62	3.82	
D/E	52.50 BASIC			
D <sub>1</sub> /E <sub>1</sub>	45.00 BASIC			
e	1.00 BASIC			
φb	0.50	0.60	0.70	
aaa	$\neq$	$\neq$	0.30	
bbb	$\neq$	$\neq$	0.25	
ddd	$\neq$	$\neq$	0.25	
eee	$\neq$	$\neq$	0.10	
M	46			2

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS-034-ABF-2 (DEPOPULATED) EXCEPT FOR DIMENSION "aaa"

ug575\_c4\_fhgb2104\_fhgc2104\_vu13p\_041917

Figure 4-37: Package Dimensions for FHGB2104 (XCVU13P) and FHGC2104 (XCVU13P)

# FLVA2104 (XCKU115 and XCVU125) and FLVB2104 (XCKU115 and XCVU125) Flip-Chip, Fine-Pitch BGA

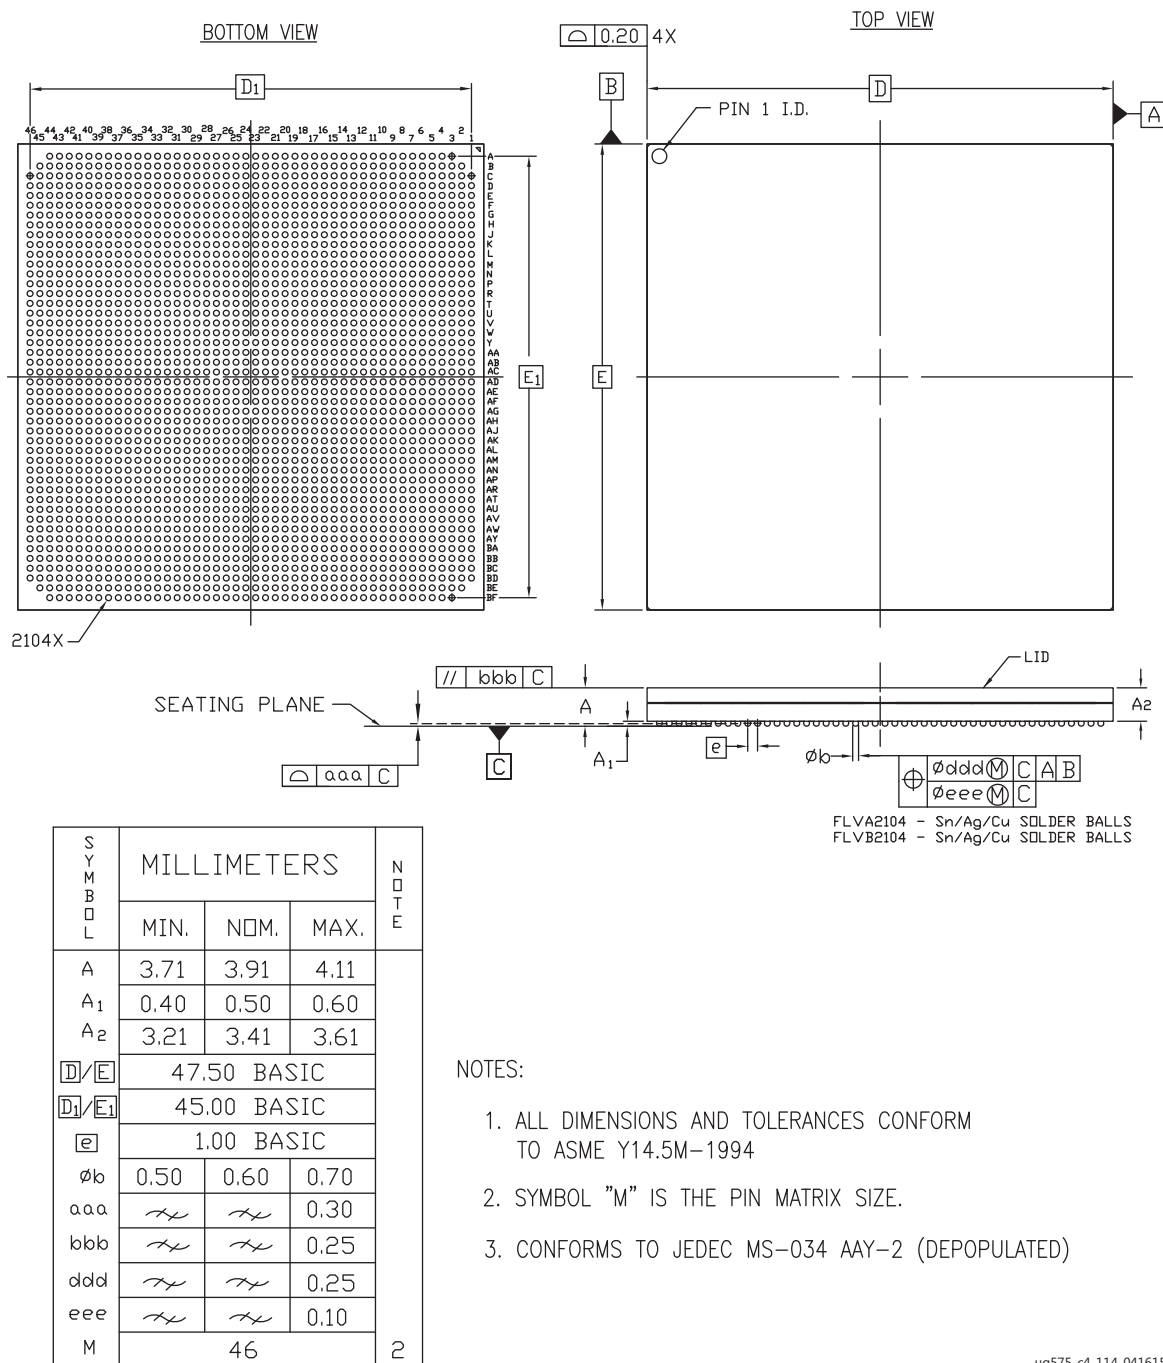


Figure 4-38: Package Dimensions for FLVA2104 (XCKU115 and XCVU125) and FLVB2104 (XCKU115 and XCVU125)

# FLVA2104 (XCVU5P and XCVU7P) and FLVB2104 (XCVU5P and XCVU7P) Flip-Chip, Fine-Pitch BGA

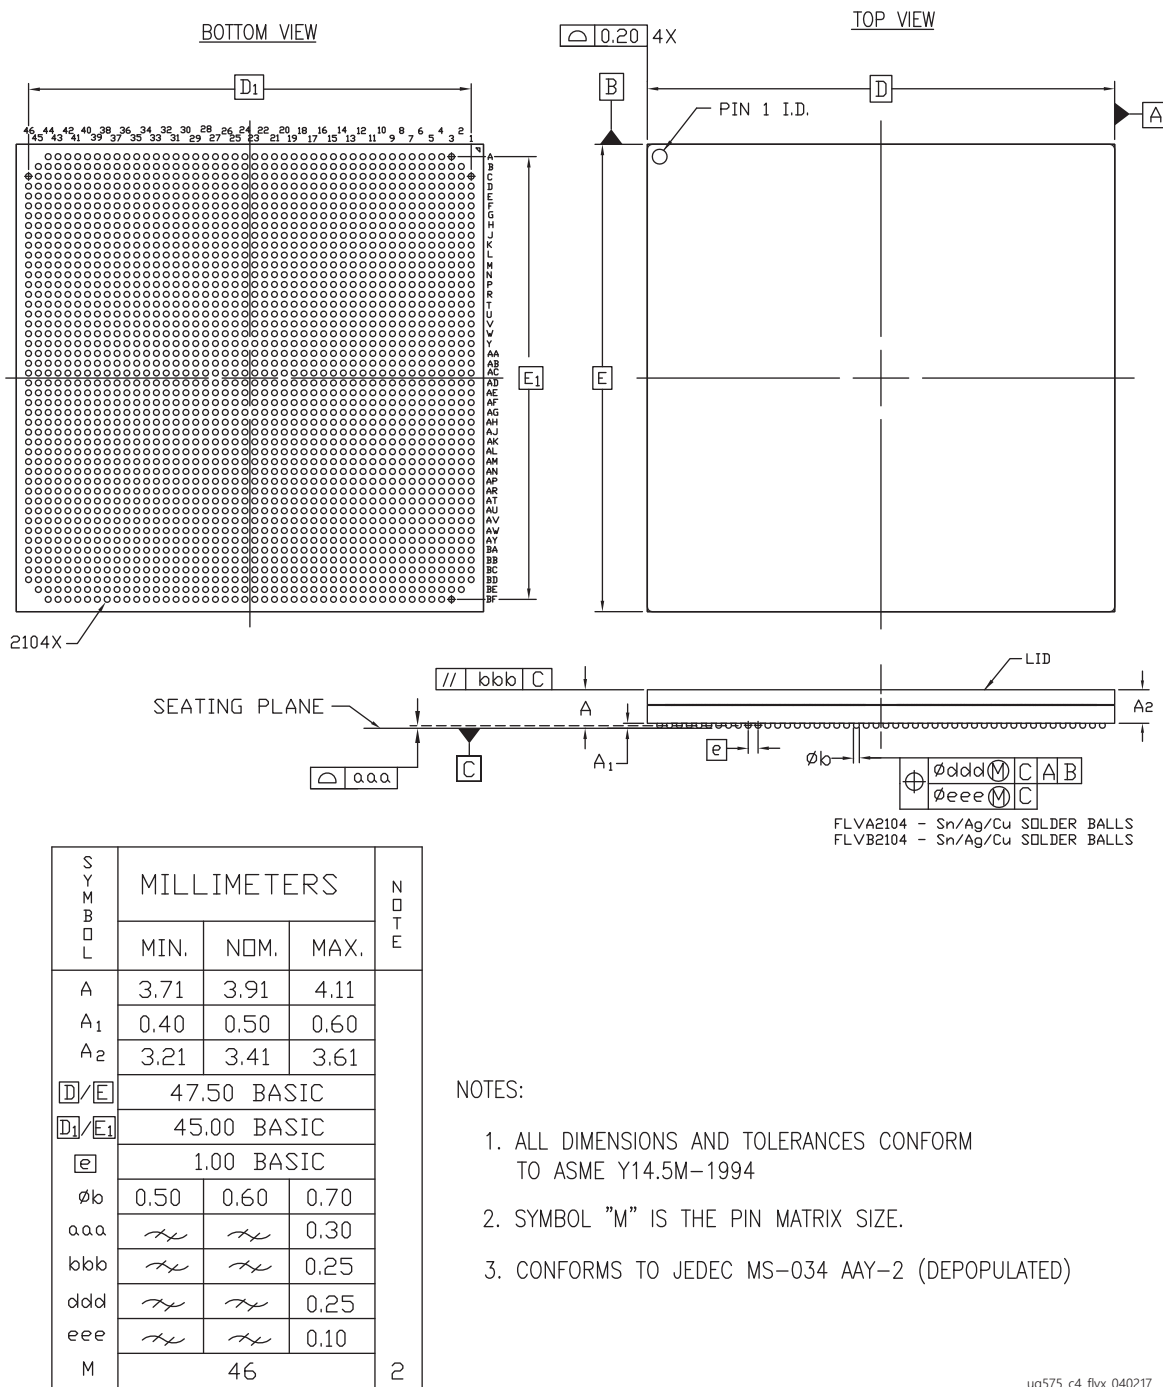


Figure 4-39: Package Dimensions for FLVA2104 (XCVU5P and XCVU7P) and FLVB2104 (XCVU5P and XCVU7P)

# FLRA2104 (XQVU7P) and FLRB2104 (XQVU7P) Ruggedized Flip-Chip, Fine-Pitch BGA


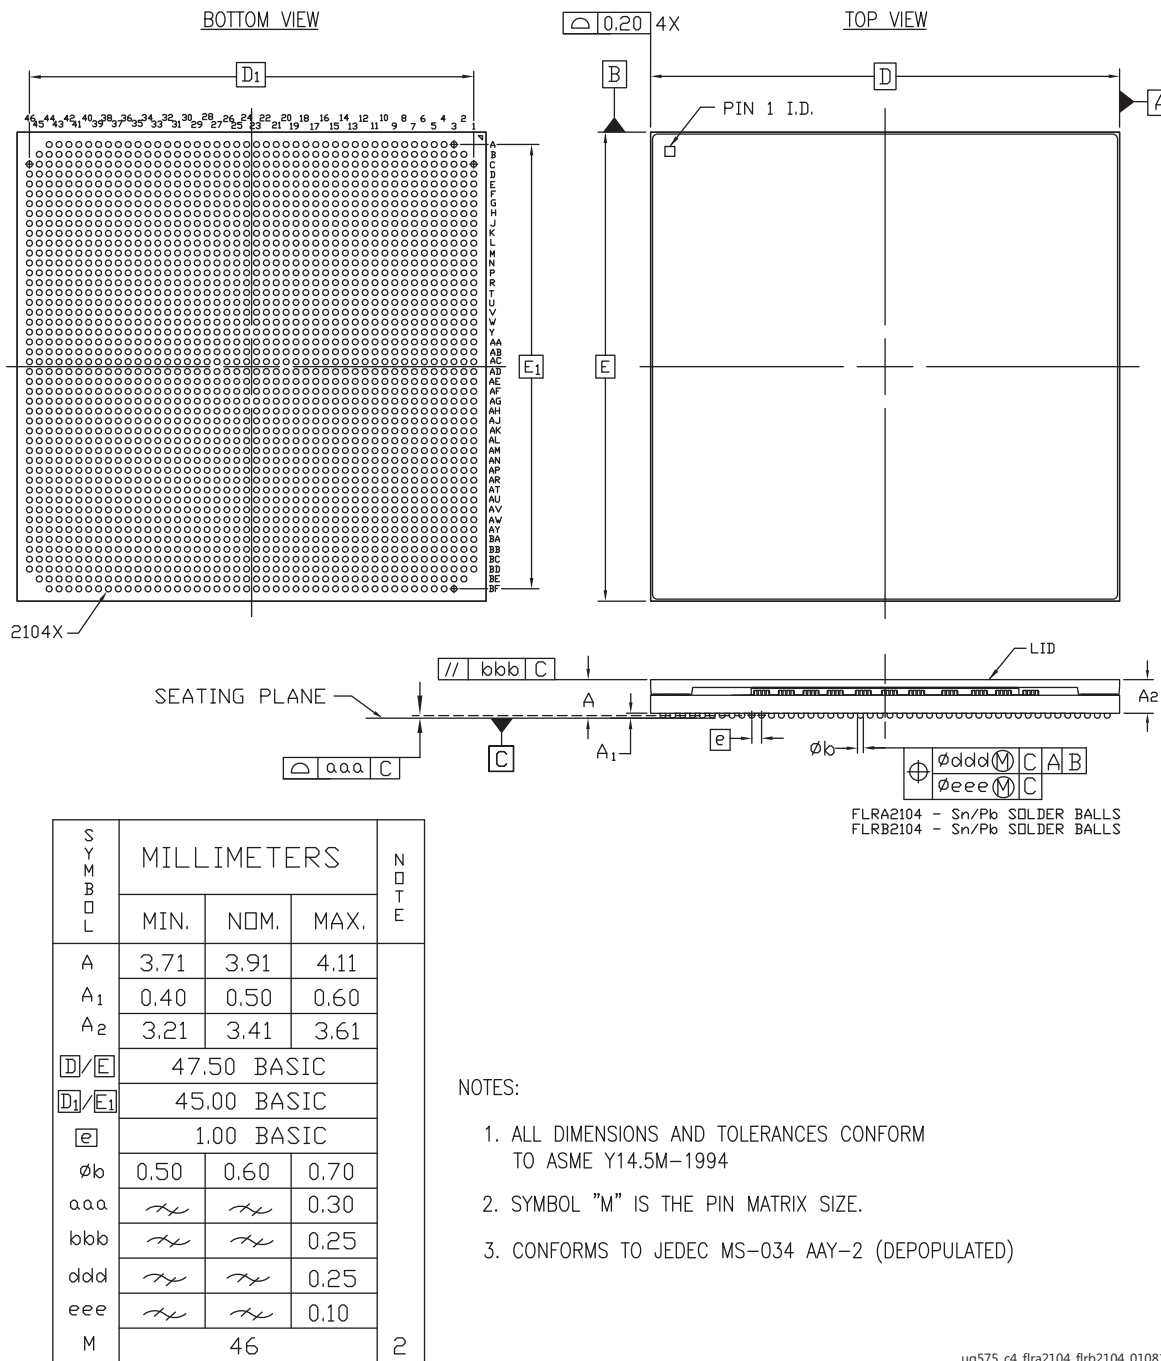


Figure 4-40: Package Dimensions for FLRA2104 (XQVU7P) and FLRB2104 (XQVU7P)

# FLGA2104 (XCVU9P) Flip-Chip, Fine-Pitch BGA

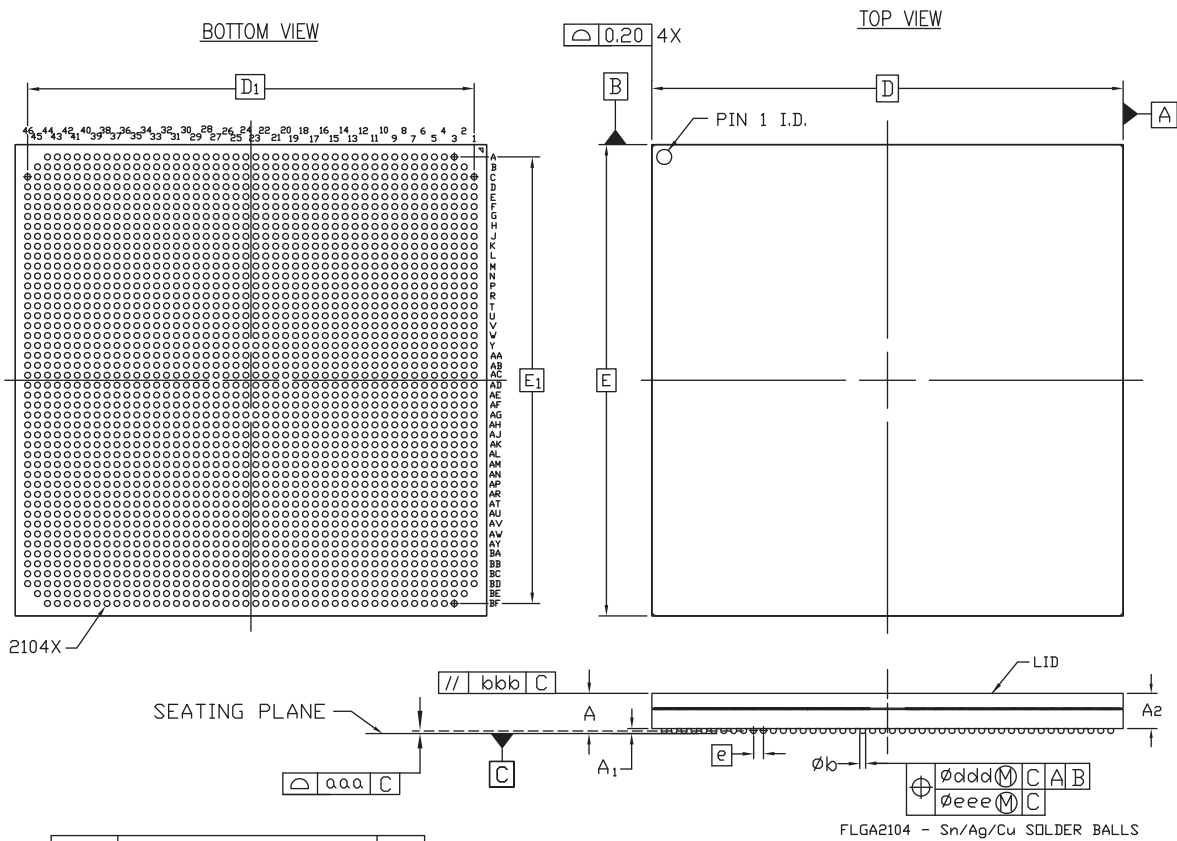

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	3.84	4.04	4.24	2
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	3.34	3.54	3.74	
D/E	47.50 BASIC			
D <sub>1</sub> /E <sub>1</sub>	45.00 BASIC			
e	1.00 BASIC			
φb	0.50	0.60	0.70	
aaa	$\sqrt{\text{---}}$	$\sqrt{\text{---}}$	0.30	
bbb	$\sqrt{\text{---}}$	$\sqrt{\text{---}}$	0.25	
ddd	$\sqrt{\text{---}}$	$\sqrt{\text{---}}$	0.25	
eee	$\sqrt{\text{---}}$	$\sqrt{\text{---}}$	0.10	
M	46			

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS-034 AAY-2 (DEPOPULATED)

ug575\_c4\_flg2104\_040217

Figure 4-41: Package Dimensions for FLGA2104 (XCVU9P)

# FLGB2104 (XCVU160 and XCVU190) and FLGC2104 (XCVU160 and XCVU190) Flip-Chip, Fine-Pitch BGA

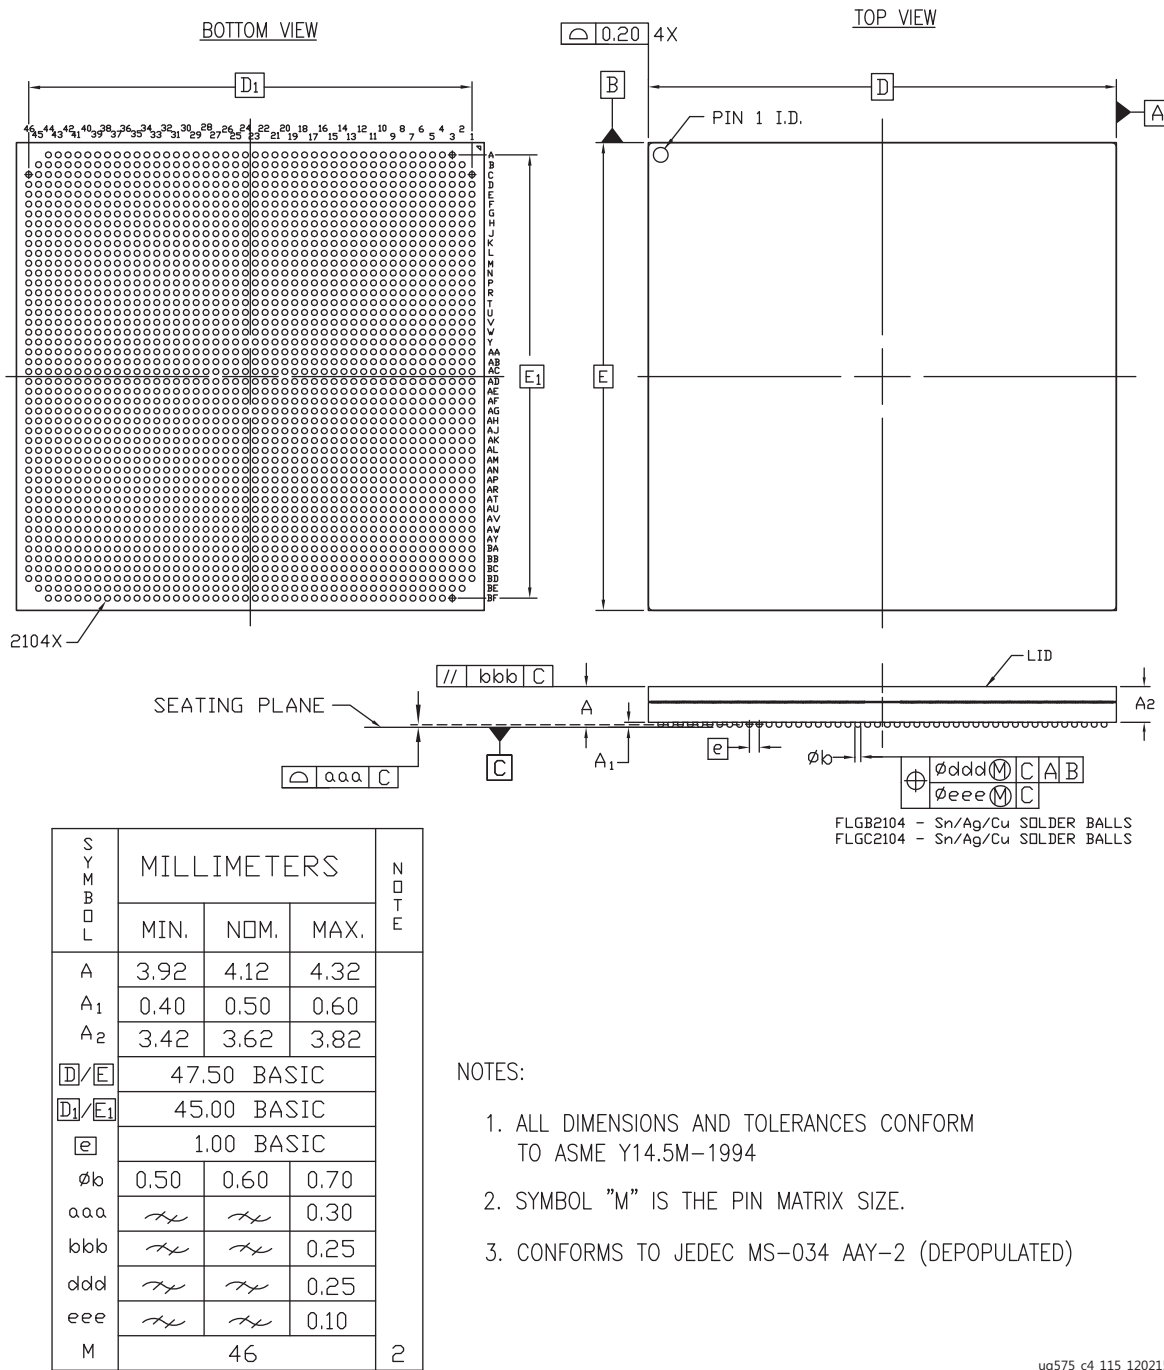


Figure 4-42: Package Dimensions for FLGB2104 (XCVU160 and XCVU190) and FLGC2104 (XCVU160 and XCVU190)



# FLGB2104 (XCVU9P and XCVU11P) and FLGC2104 (XCVU11P) Flip-Chip, Fine-Pitch BGA


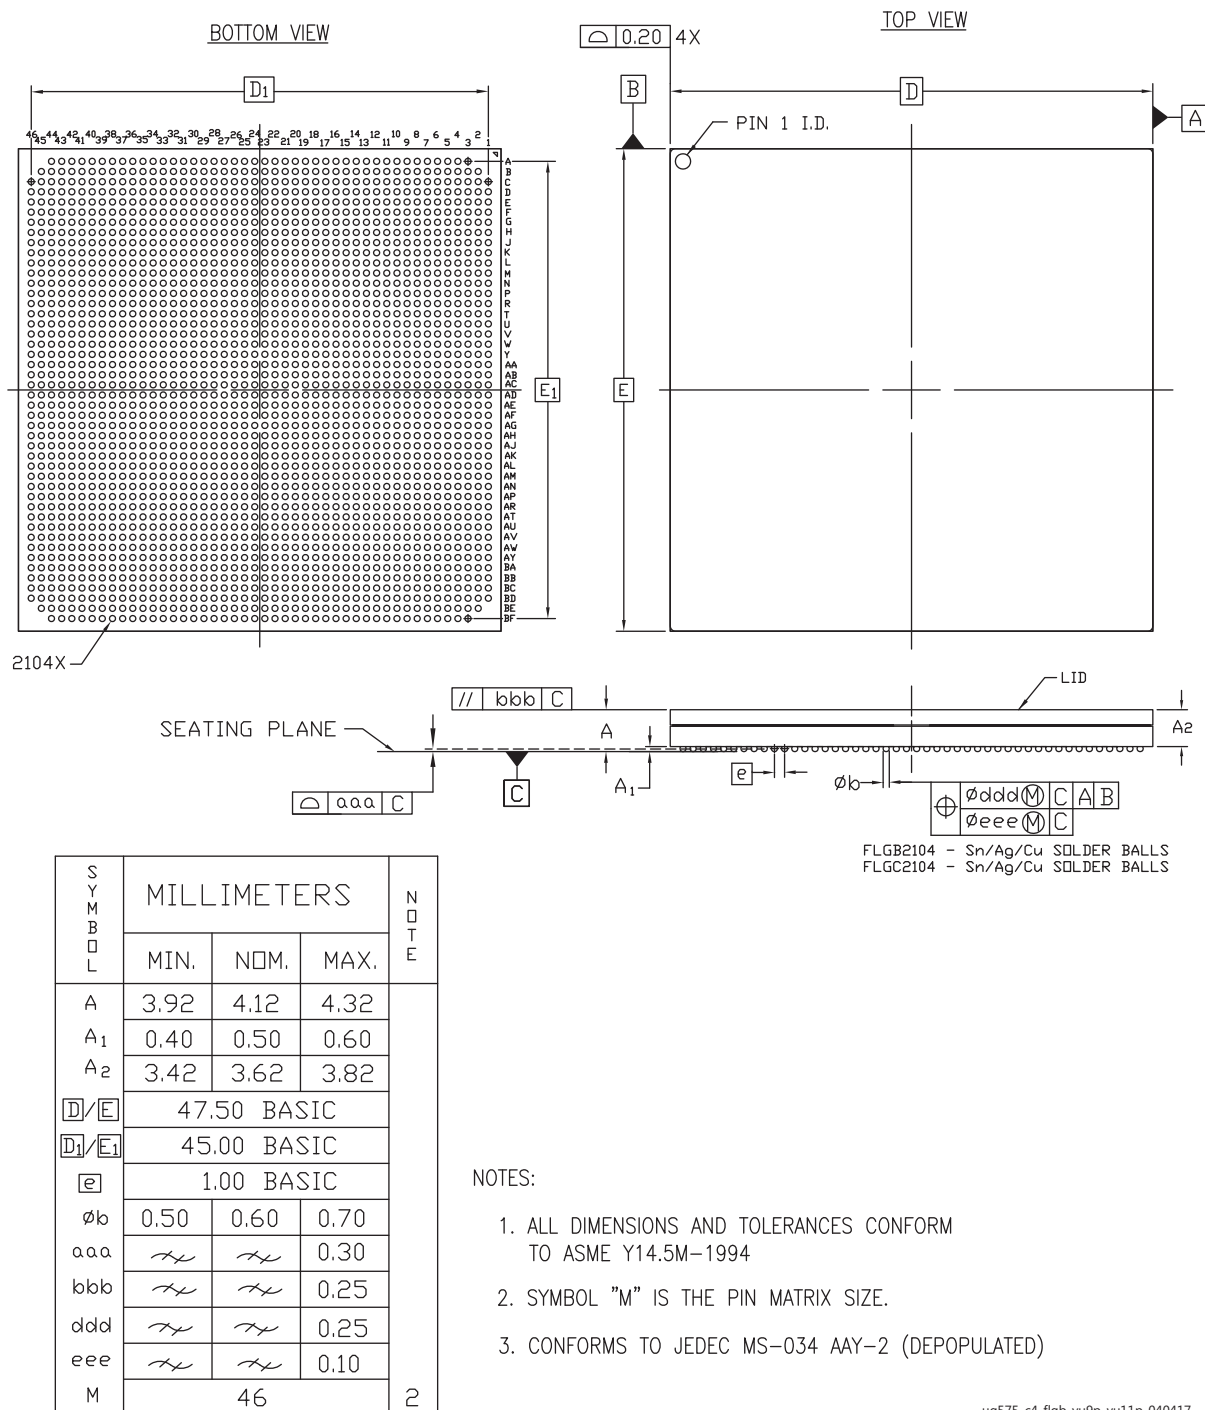


Figure 4-43: Package Dimensions for FLGB2104 (XCVU9P and XCVU11P) and FLGC2104 (XCVU11P)

# FLRC2104 (XQVU11P) Ruggedized Flip-Chip, Fine-Pitch BGA

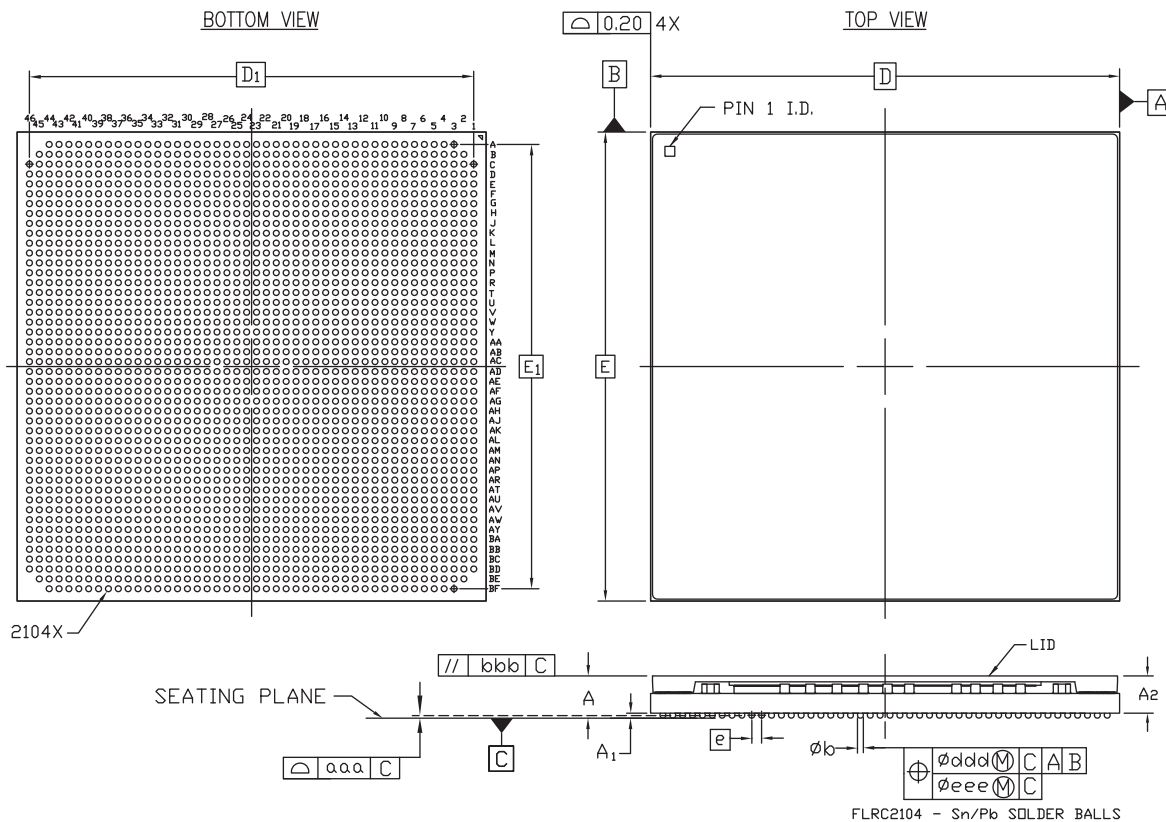

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	4.07	4.27	4.47	
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	3.57	3.77	3.97	
D/E	47.50 BASIC			
D <sub>1</sub> /E <sub>1</sub>	45.00 BASIC			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa	$\cancel{\text{---}}$	$\cancel{\text{---}}$	0.30	
bbb	$\cancel{\text{---}}$	$\cancel{\text{---}}$	0.25	
ddd	$\cancel{\text{---}}$	$\cancel{\text{---}}$	0.25	
eee	$\cancel{\text{---}}$	$\cancel{\text{---}}$	0.10	
M	46			2


NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS-034 AAY-2 (DEPOPULATED)

ug575\_c4\_firc2104\_010819

Figure 4-44: Package Dimensions for FLRC2104 (XQVU11P)

# FFVC2104 (XCVU095) Flip-Chip, Fine-Pitch BGA

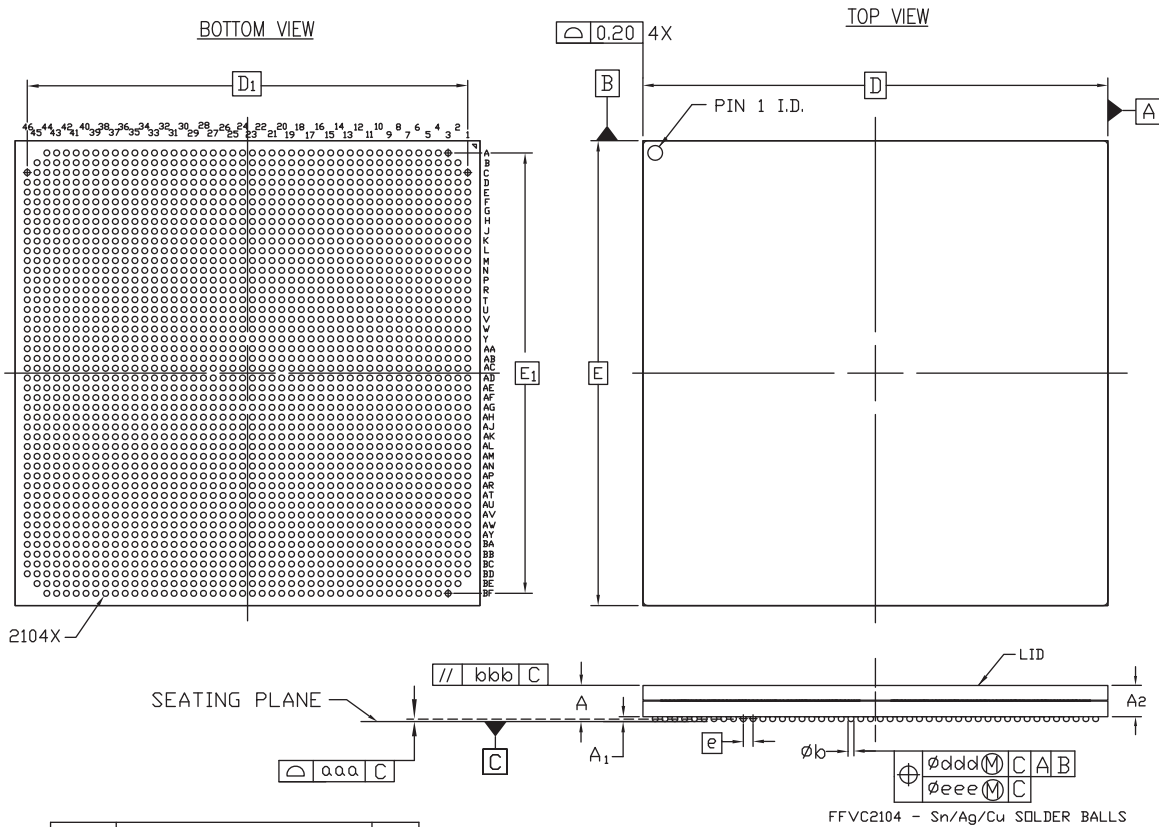

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	3.64	3.84	4.04	2
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	3.14	3.34	3.54	
D/E	47.50 BASIC			
D <sub>1</sub> /E <sub>1</sub>	45.00 BASIC			
e	1.00 BASIC			
φb	0.50	0.60	0.70	
aaa	<i>xx</i>	<i>xx</i>	0.20	
bbb	<i>xx</i>	<i>xx</i>	0.25	
ddd	<i>xx</i>	<i>xx</i>	0.25	
eee	<i>xx</i>	<i>xx</i>	0.10	
M	46			


NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS-034 AAY-2 (DEPOPULATED)

ug575\_c4\_18\_041716

Figure 4-45: Package Dimensions for FFVC2104 (XCVU095)

# FLGC2104 (XCVU9P) Flip-Chip, Fine-Pitch BGA

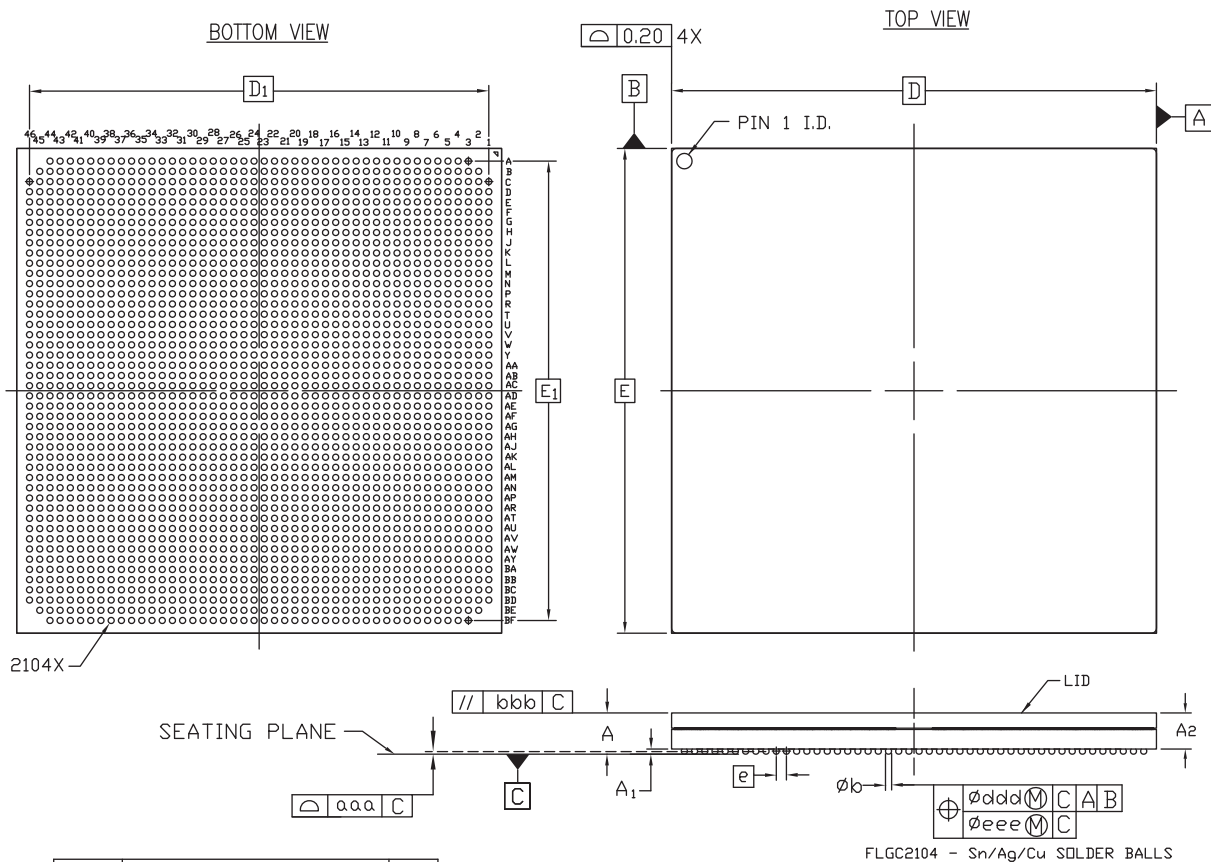

FLGC2104 - Sn/Ag/Cu SOLDER BALLS

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	3.84	4.04	4.24	
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	3.34	3.54	3.74	
D/E	47.50 BASIC			2
D <sub>1</sub> /E <sub>1</sub>	45.00 BASIC			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa	<i>∅</i>	<i>∅</i>	0.30	
bbb	<i>∅</i>	<i>∅</i>	0.25	
ddd	<i>∅</i>	<i>∅</i>	0.25	
eee	<i>∅</i>	<i>∅</i>	0.10	
M	46			

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS-034 AAY-2 (DEPOPULATED)

ug575\_c4\_flgcvu9p\_040417

Figure 4-46: Package Dimensions for FLGC2104 (XCVU9P)

# FLVC2104 (XCVU125) Flip-Chip, Fine-Pitch BGA

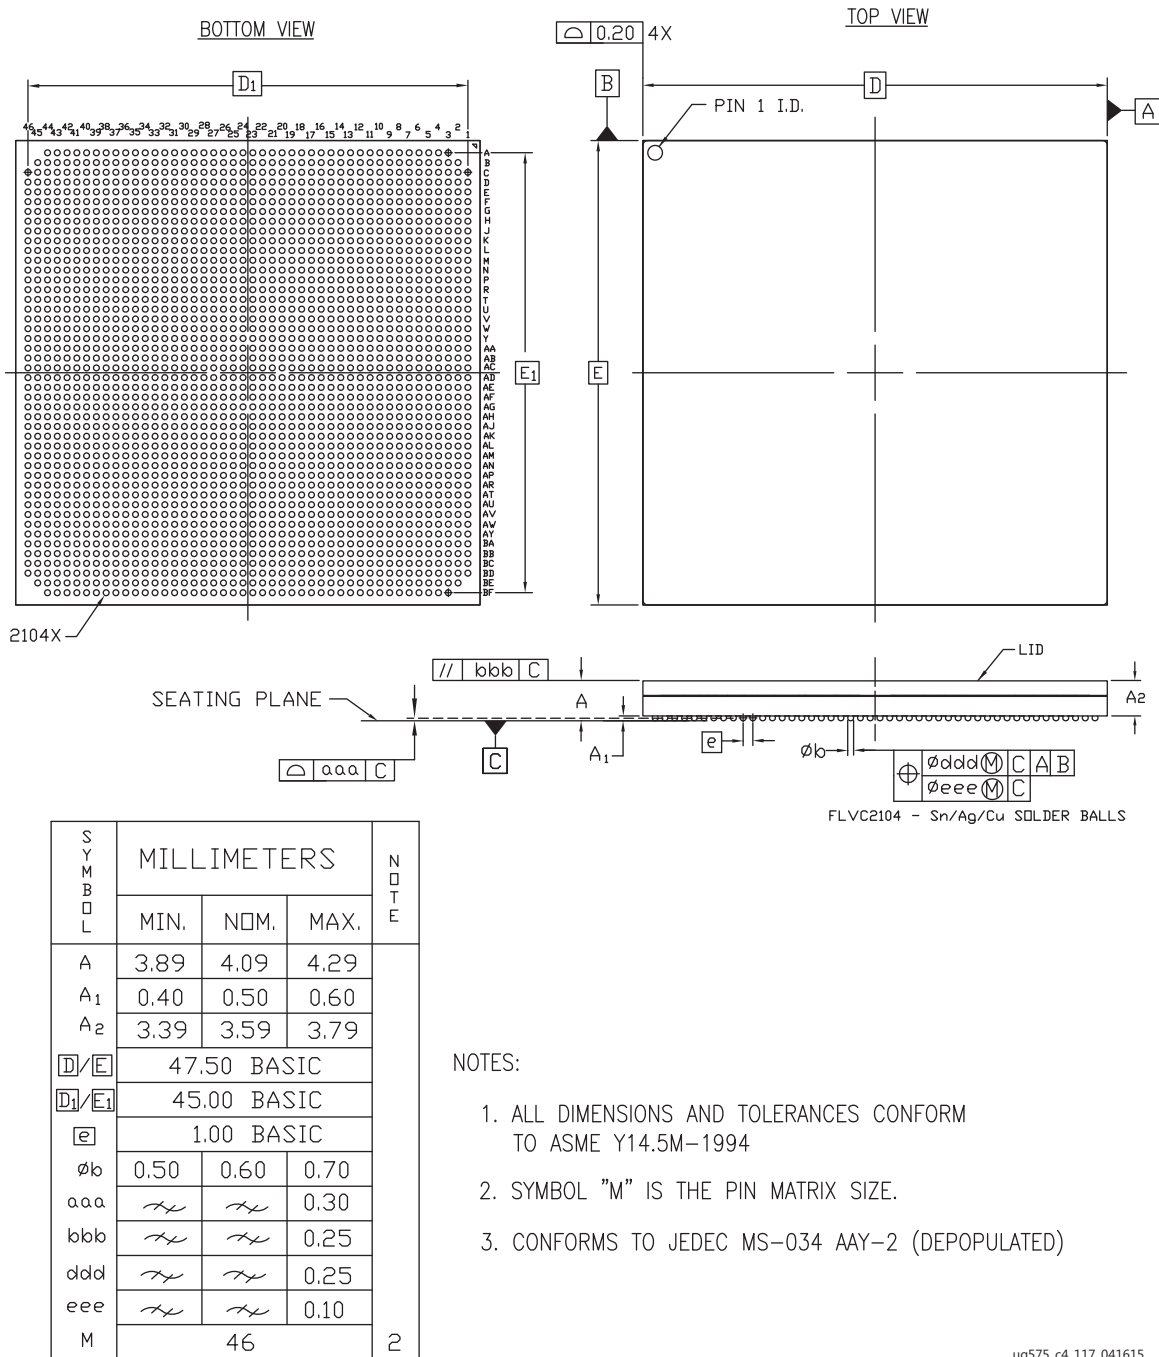


Figure 4-47: Package Dimensions for FLVC2104 (XCVU125)

ug575\_c4\_117\_041615

# FLVC2104 (XCVU5P and XCVU7P) Flip-Chip, Fine-Pitch BGA


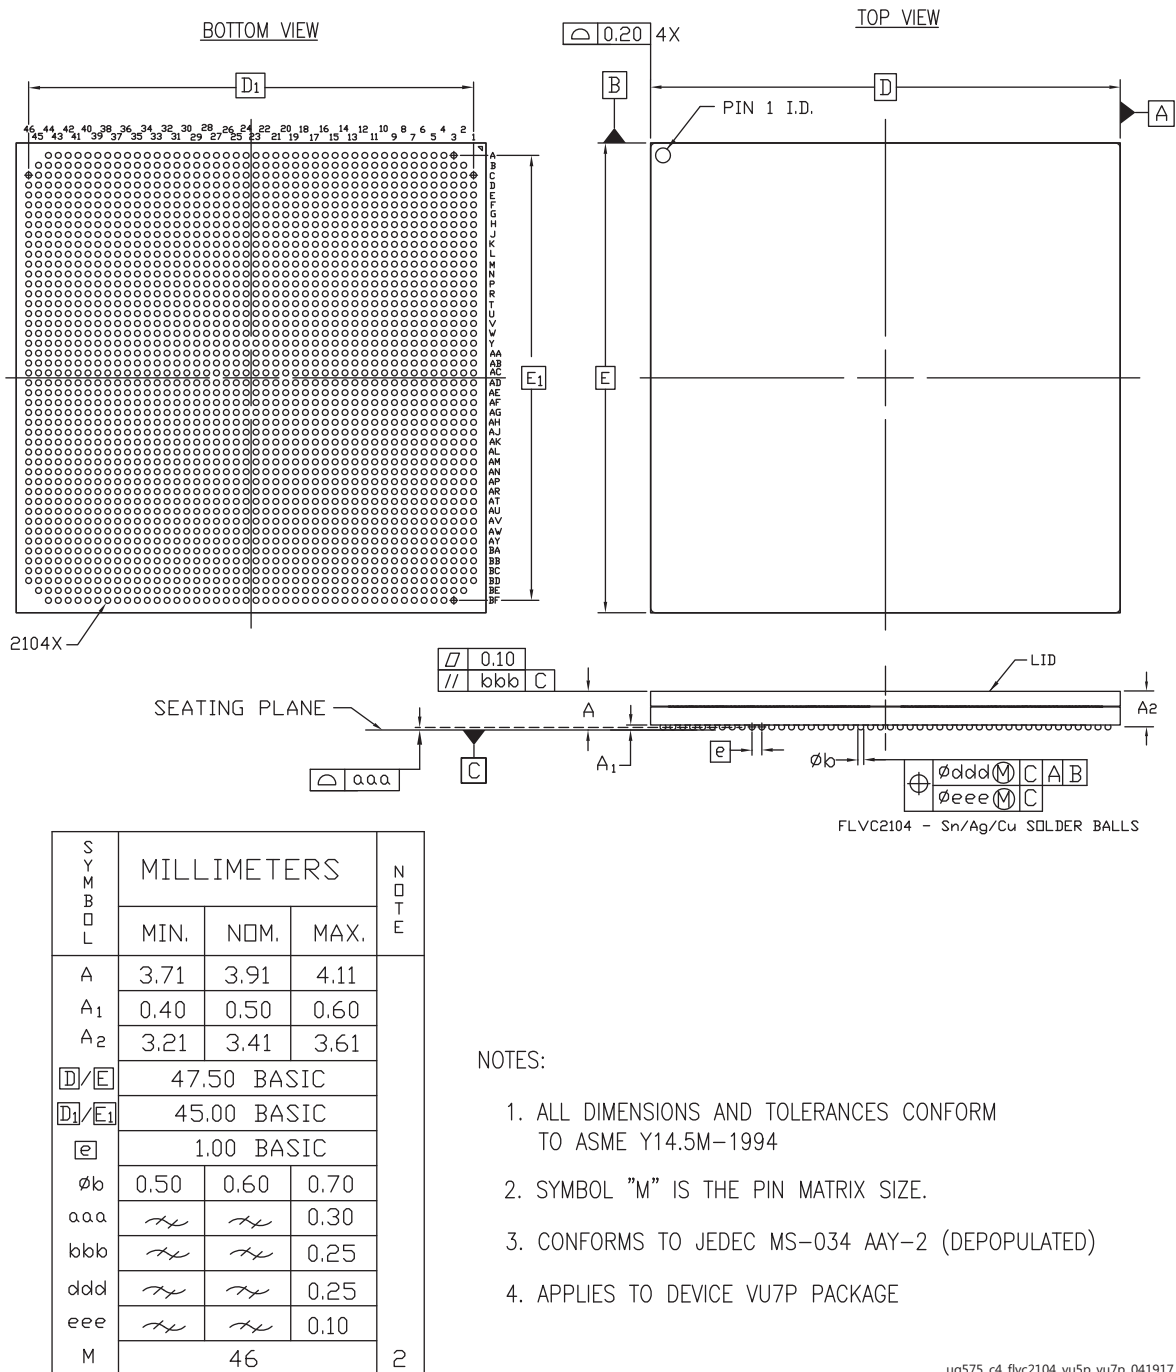


Figure 4-48: Package Dimensions for FLVC2104 (XCVU5P and XCVU7P)

# FIGD2104 (XCVU13P, XCVU27P, and XCVU29P) Flip-Chip, Fine-Pitch BGA

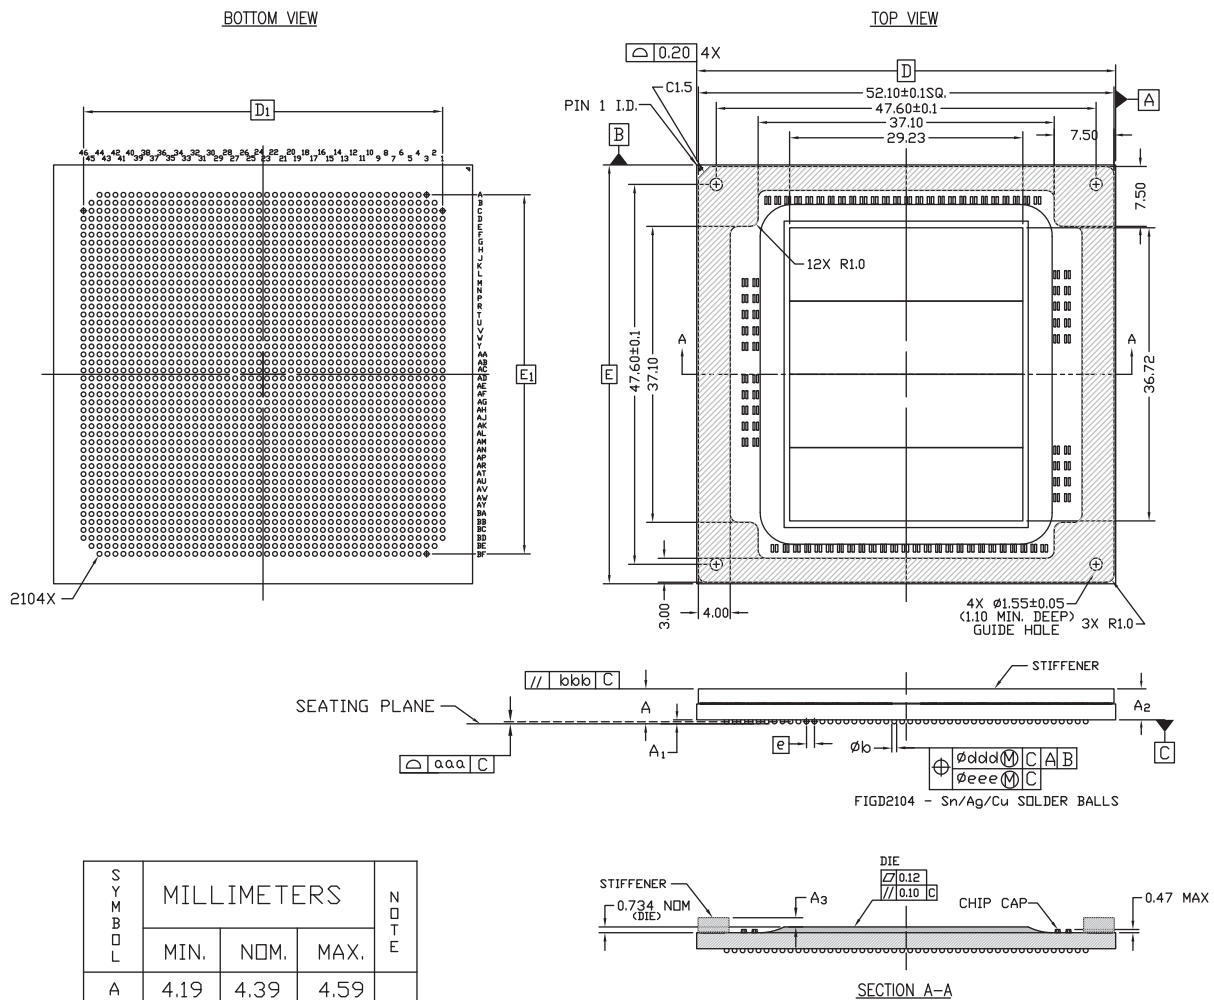

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	4.19	4.39	4.59	2
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	3.69	3.89	4.09	
A <sub>3</sub>	1.06	1.16	1.26	
D/E	52.50 BASIC			
D <sub>1</sub> /E <sub>1</sub>	45.00 BASIC			
E	1.00 BASIC			
φ <sub>b</sub>	0.50	0.60	0.70	
aaa	<i>ℓ</i>	<i>ℓ</i>	0.30	
bbb	<i>ℓ</i>	<i>ℓ</i>	0.25	
ddd	<i>ℓ</i>	<i>ℓ</i>	0.25	
eee	<i>ℓ</i>	<i>ℓ</i>	0.10	
M	46			


**NOTES:**

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS-034-ABF-2 (DEPOPULATED) EXCEPT FOR DIMENSION "aaa"

ug575\_c4\_vu13P\_figd2104\_102517

Figure 4-49: Package Dimensions for FIGD2104 (XCVU13P, XCVU27P, and XCVU29P)

# FSGD2104 (XCVU9P) Flip-Chip, Fine-Pitch BGA

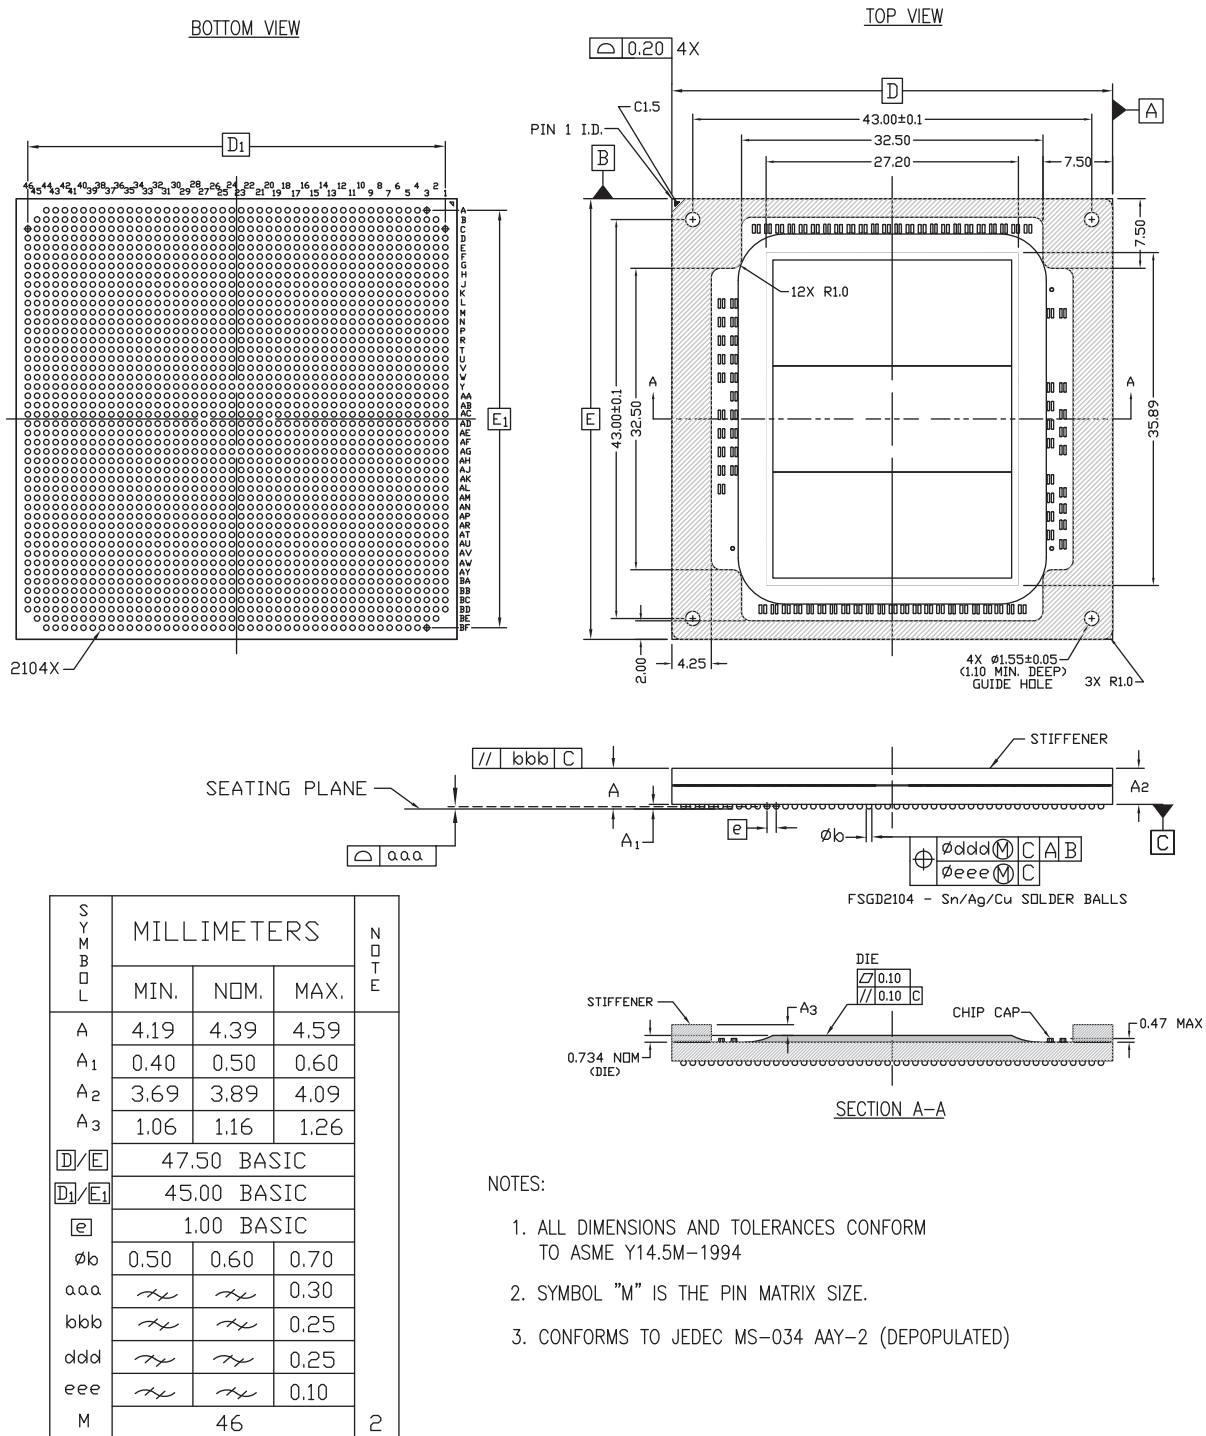

ug575\_c4\_vu9P\_fsgd2104\_100717

Figure 4-50: Package Dimensions for FSGD2104 (XCVU9P)



# FSGD2104 (XCVU11P) Flip-Chip, Fine-Pitch BGA

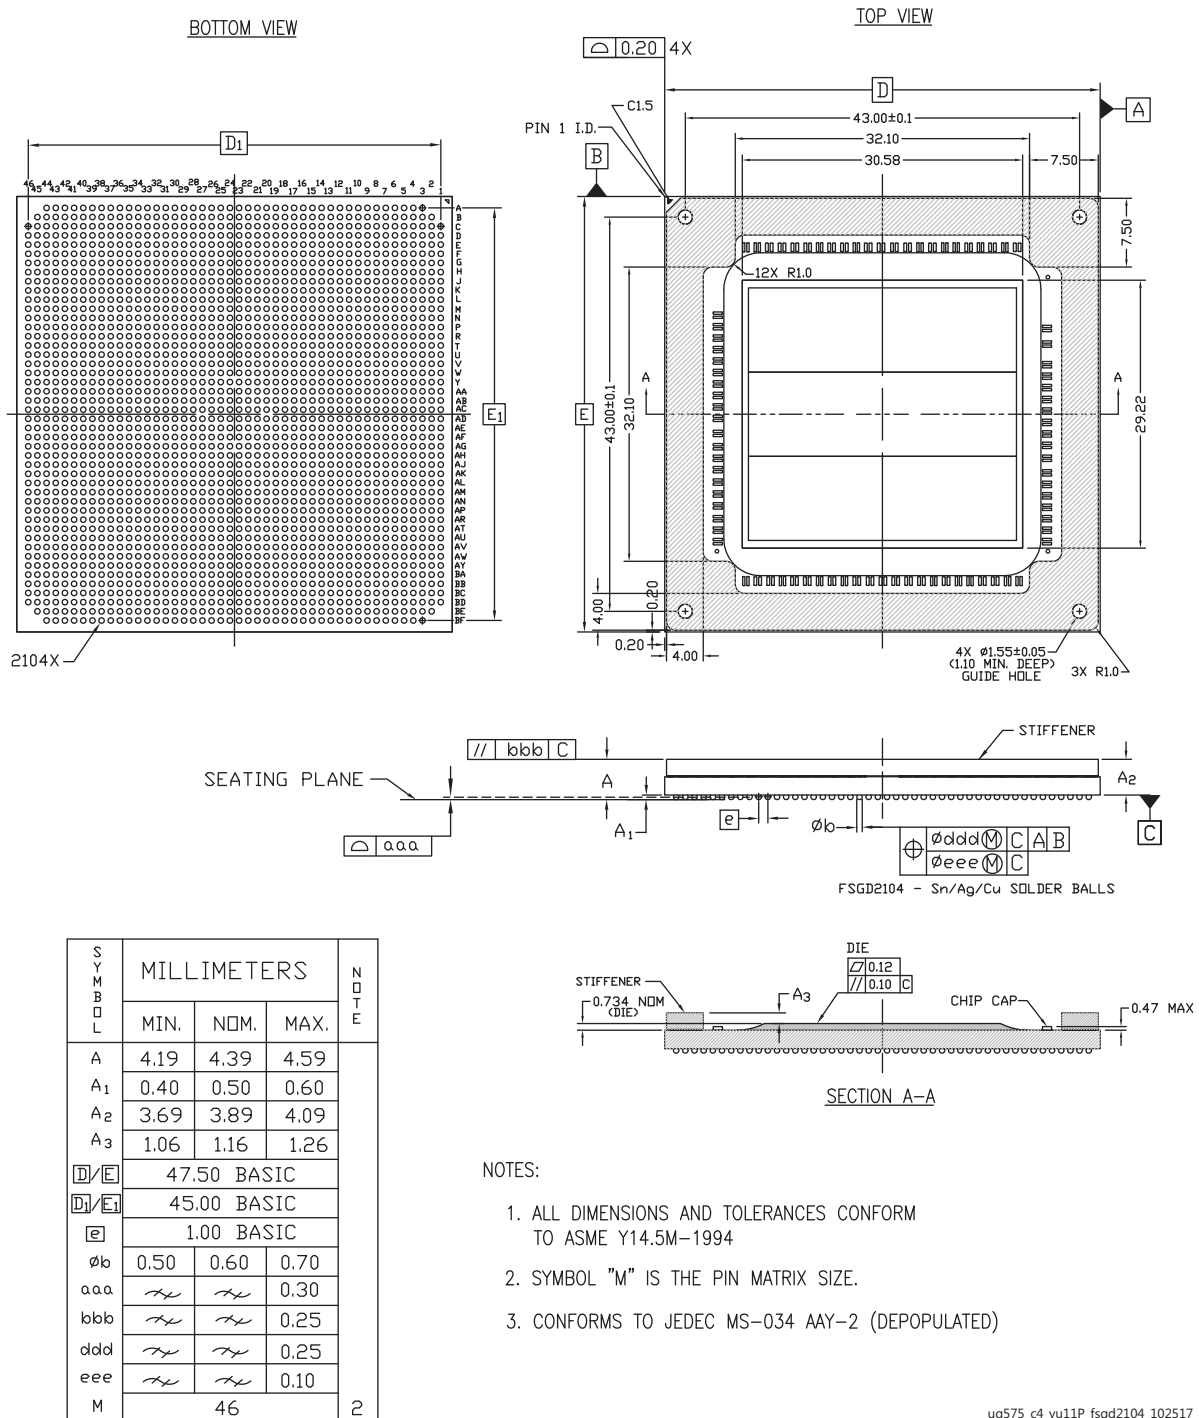


Figure 4-51: Package Dimensions for FSGD2104 (XCVU11P)

# FSVH2104 (XCVU33P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA

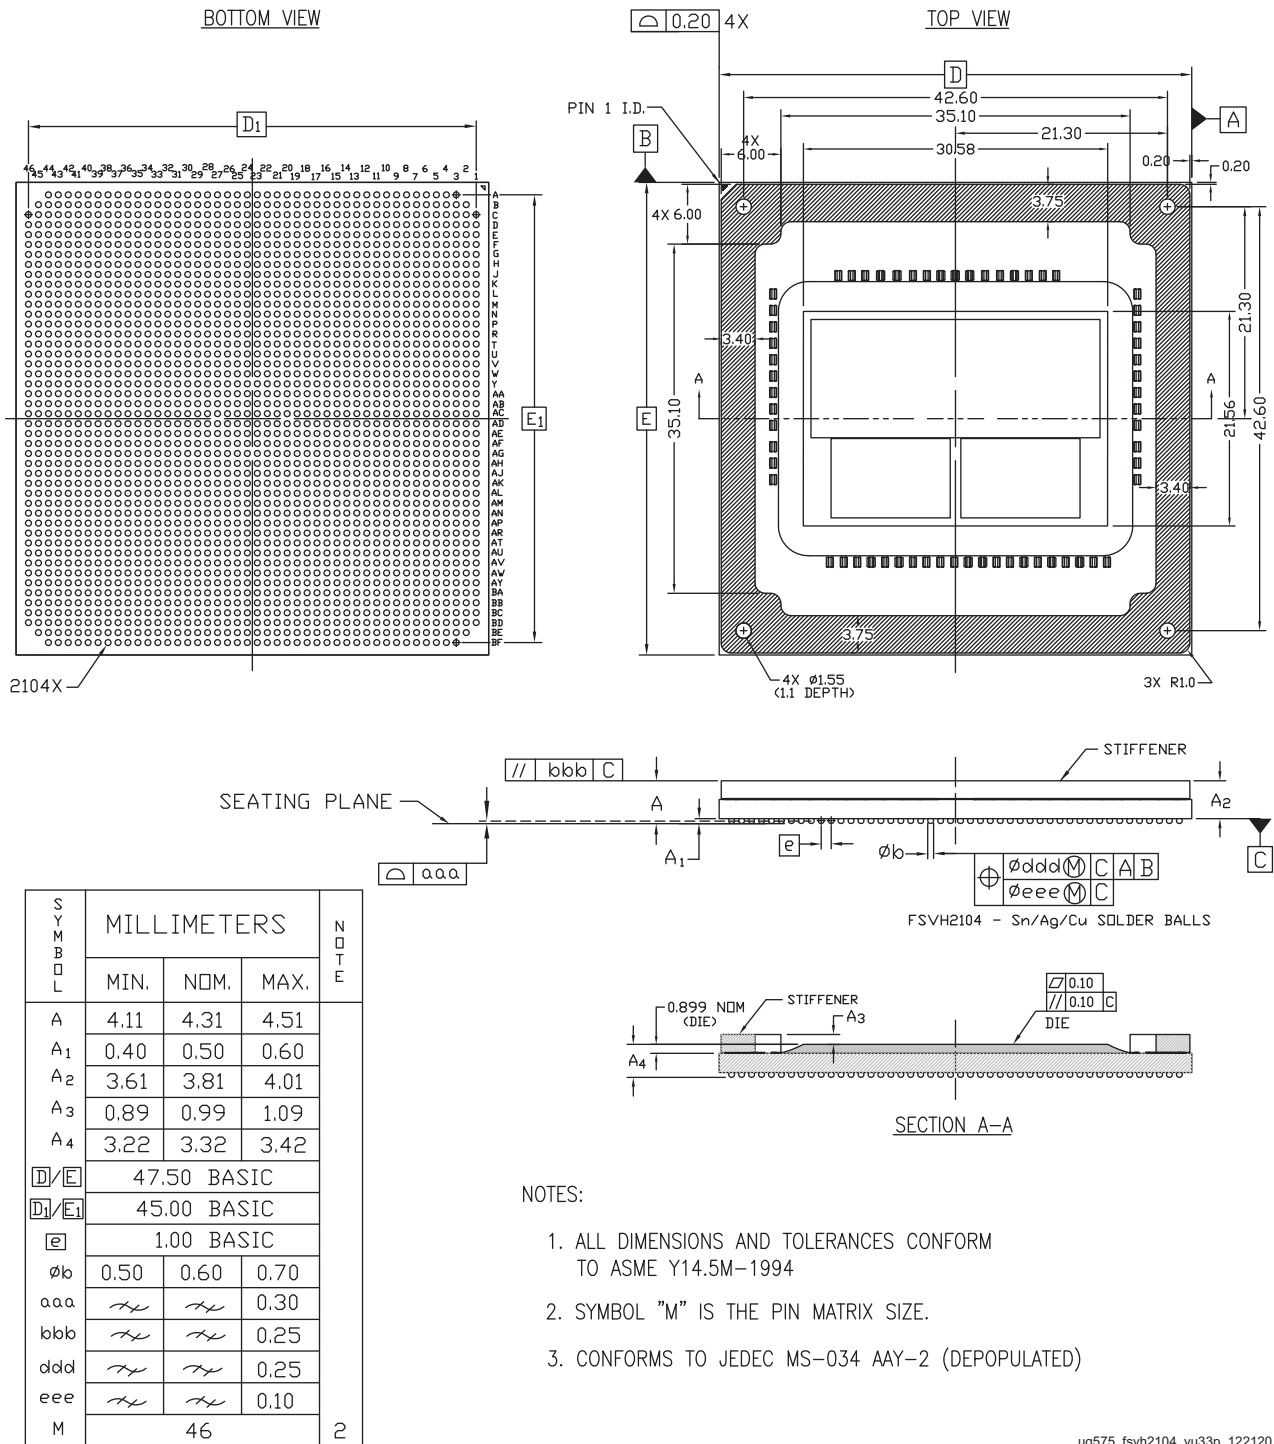


Figure 4-52: Package Dimensions for FSVH2104 (XCVU33P)

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS-034 AAY-2 (DEPOPULATED)

ug575\_fsvh2104\_vu33p\_122120

# FSVH2104 (XCVU35P and XCVU45P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA


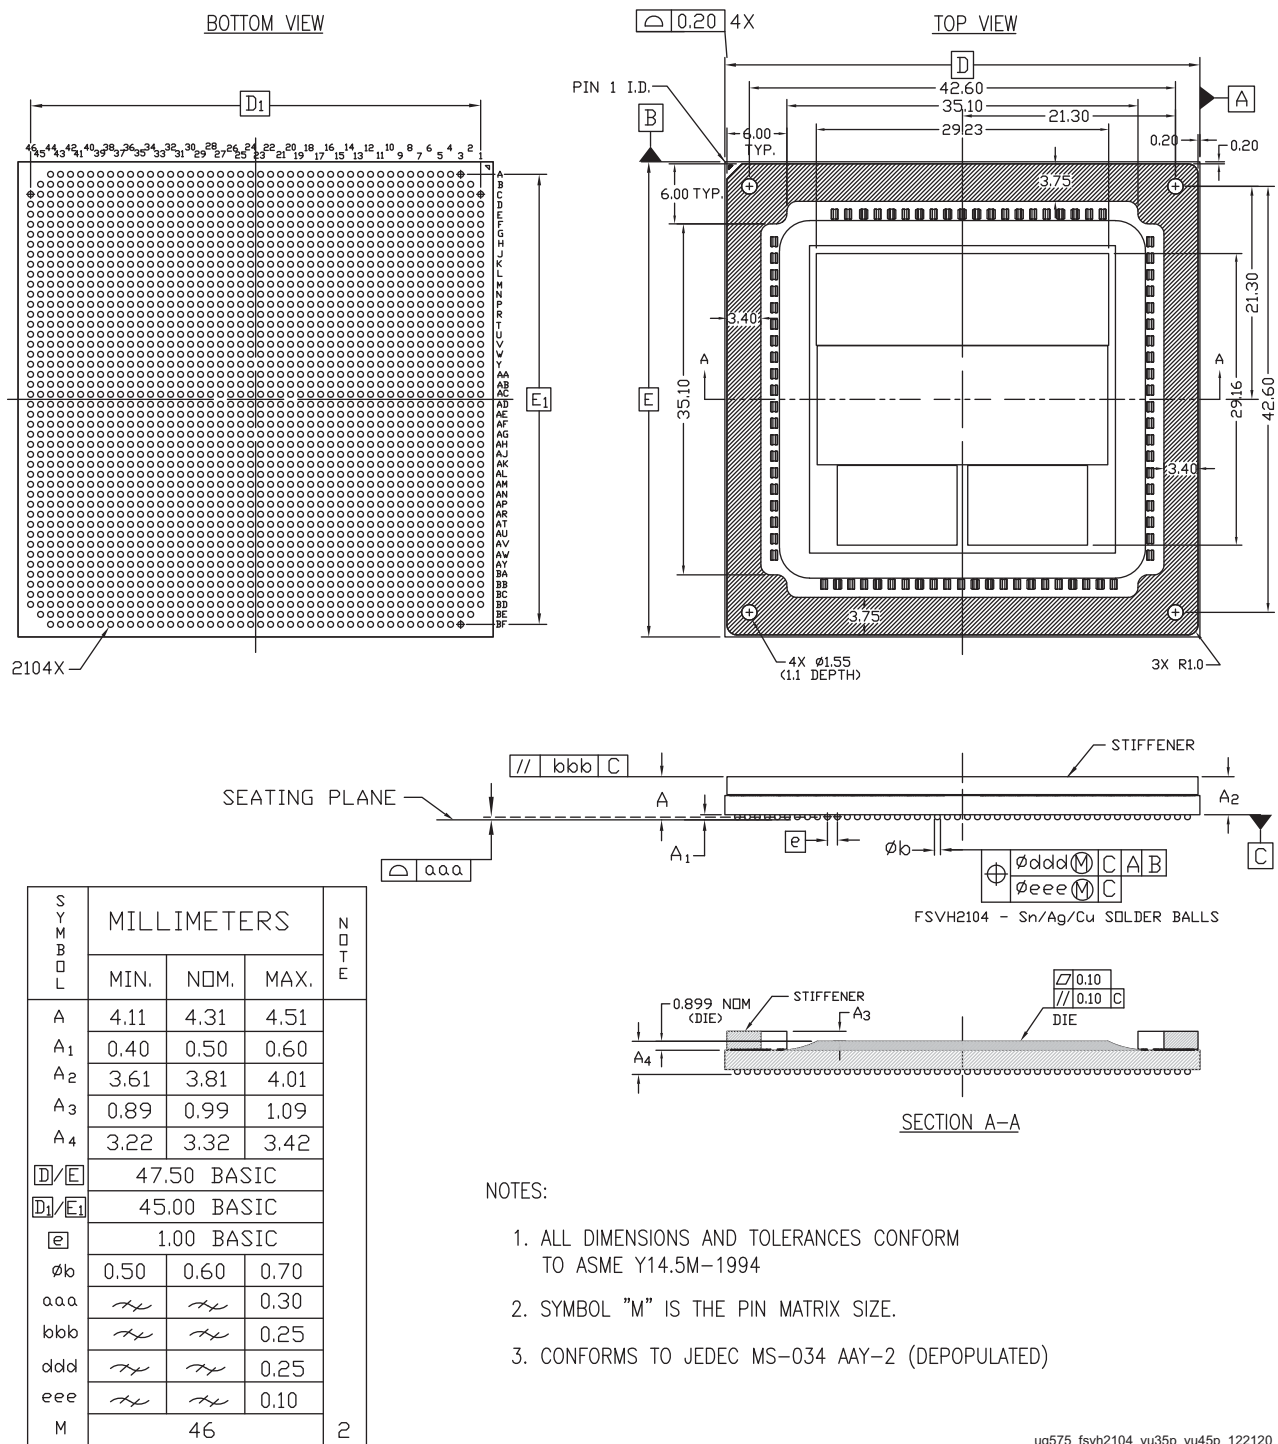


Figure 4-53: Package Dimensions for FSVH2104 (XCVU35P and XCVU45P)

ug575\_fsvh2104\_vu35p\_vu45p\_122120

# FLGB2377 Flip-Chip, Fine-Pitch BGA (XCVU440)

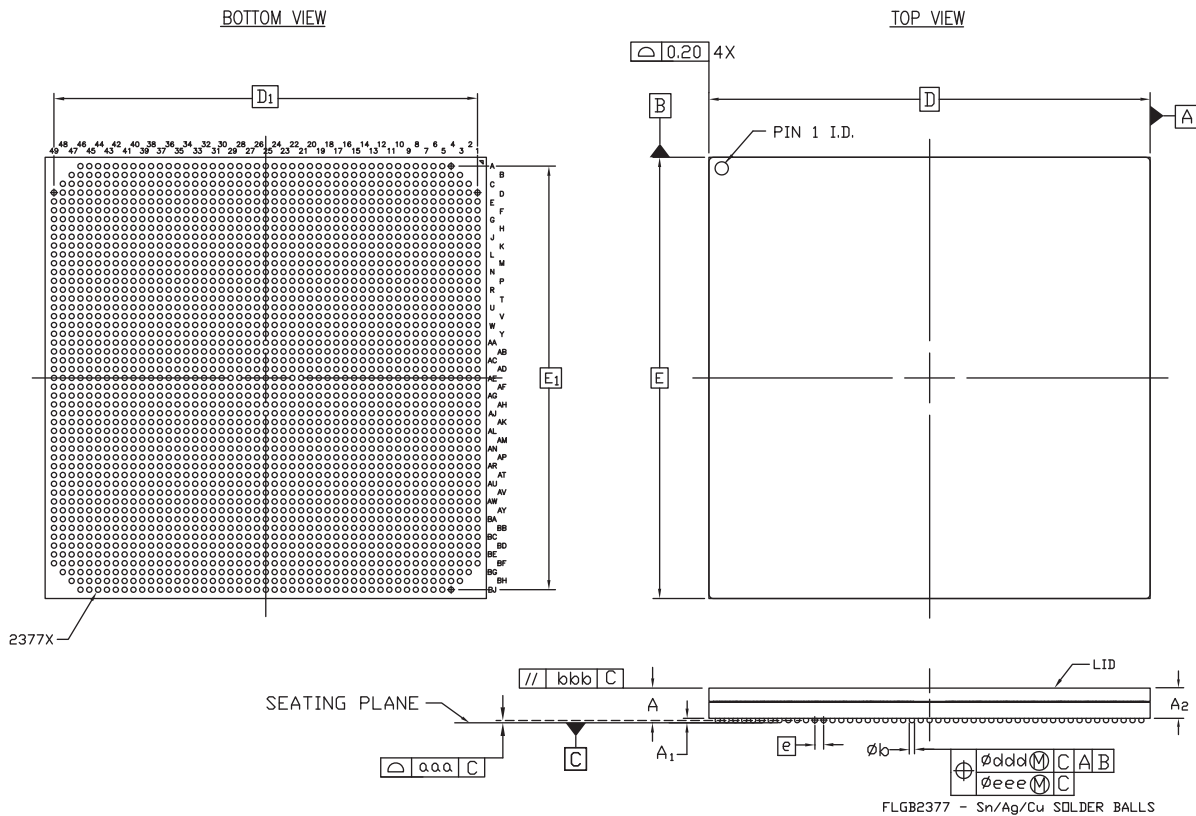

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	3.73	3.93	4.13	
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	3.23	3.43	3.63	
D/E	50.00 BASIC			
D <sub>1</sub> /E <sub>1</sub>	48.00 BASIC			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa	$\cancel{\text{---}}$	$\cancel{\text{---}}$	0.30	
bbb	$\cancel{\text{---}}$	$\cancel{\text{---}}$	0.25	
ddd	$\cancel{\text{---}}$	$\cancel{\text{---}}$	0.25	
eee	$\cancel{\text{---}}$	$\cancel{\text{---}}$	0.10	
M	49			2


NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE
3. CONFORMS TO JEDEC REFERENCE MS-034-ABA-1 (DEPOPULATED) EXCEPT FOR DIMENSION "aaa"

ug575\_c4\_12\_100615

Figure 4-54: Package Dimensions for FLGB2377 (XCVU440)

# FLGA2577 Flip-Chip, Fine-Pitch BGA (XCVU190)

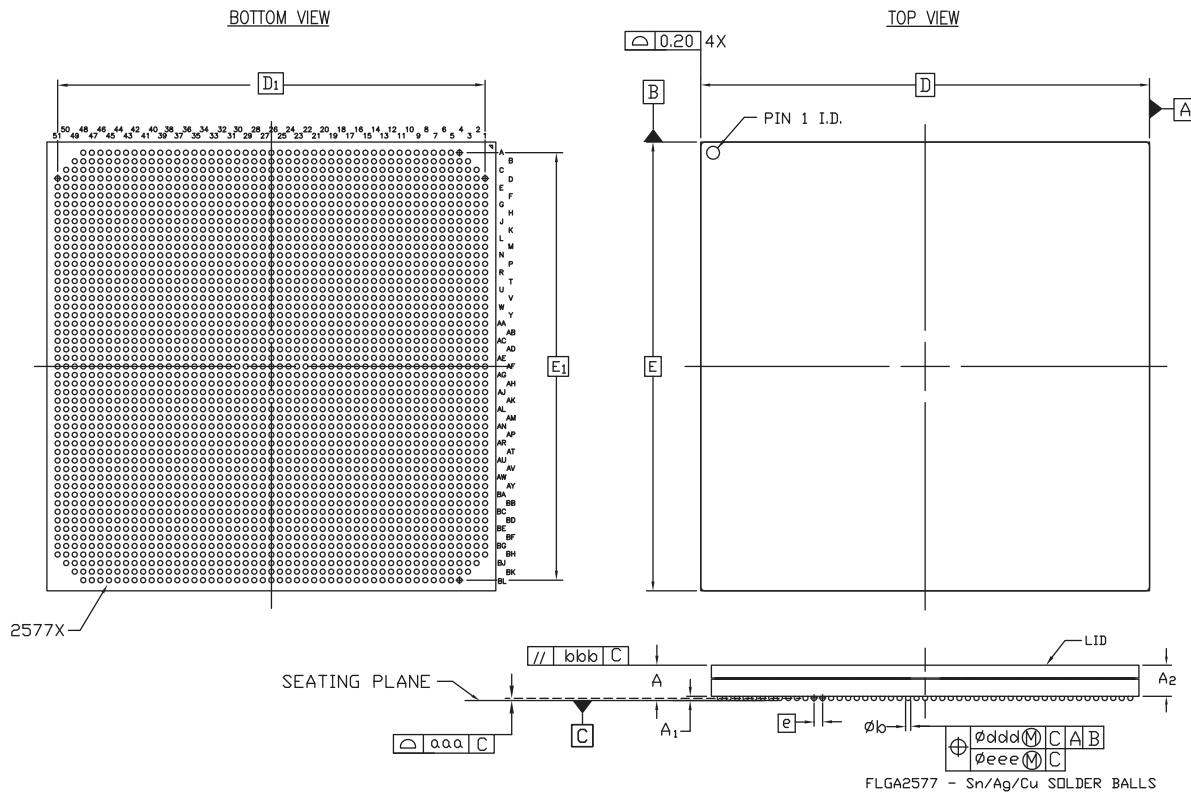

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	3.91	4.11	4.31	
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	3.41	3.61	3.81	
D/E	52.50 BASIC			
D <sub>1</sub> /E <sub>1</sub>	50.00 BASIC			
e	1.00 BASIC			
∅b	0.50	0.60	0.70	
aaa	<del>xxx</del>	<del>xxx</del>	0.30	
bbb	<del>xxx</del>	<del>xxx</del>	0.25	
ddd	<del>xxx</del>	<del>xxx</del>	0.25	
eee	<del>xxx</del>	<del>xxx</del>	0.10	
M	51			


NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS-034-ABF-2 (DEPOPULATED) EXCEPT FOR DIMENSION "aaa"

ug575\_c4\_13\_101215

Figure 4-55: Package Dimensions for FLGA2577 (XCVU190)

# FLGA2577 Flip-Chip, Fine-Pitch BGA (XCVU9P and XCVU13P)

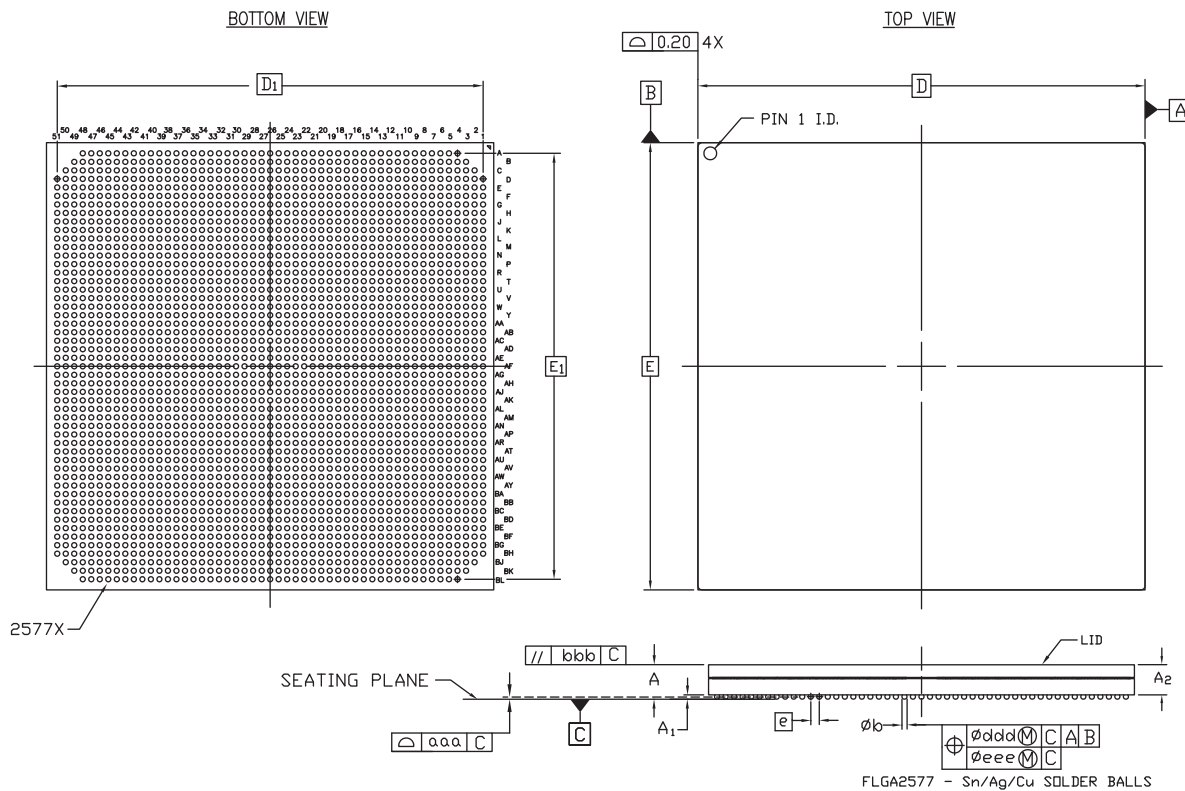

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	3.84	4.04	4.24	
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	3.34	3.54	3.74	
D/E	52.50 BASIC			
D <sub>1</sub> /E <sub>1</sub>	50.00 BASIC			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa	<i>h</i>	<i>h</i>	0.30	
bbb	<i>h</i>	<i>h</i>	0.25	
ddd	<i>h</i>	<i>h</i>	0.25	
eee	<i>h</i>	<i>h</i>	0.10	
M	51			2

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS-034-ABF-2 (DEPOPULATED) EXCEPT FOR DIMENSION "aaa"
4. THIS PACKAGE APPLIES TO UltraScale+ XCVU9P & XCVU13P DEVICES

ug575\_c4\_flg2577\_040217

Figure 4-56: Package Dimensions for FLGA2577 (XCVU9P and XCVU13P)

# FLGA2577 Flip-Chip, Fine-Pitch BGA (XCVU11P)

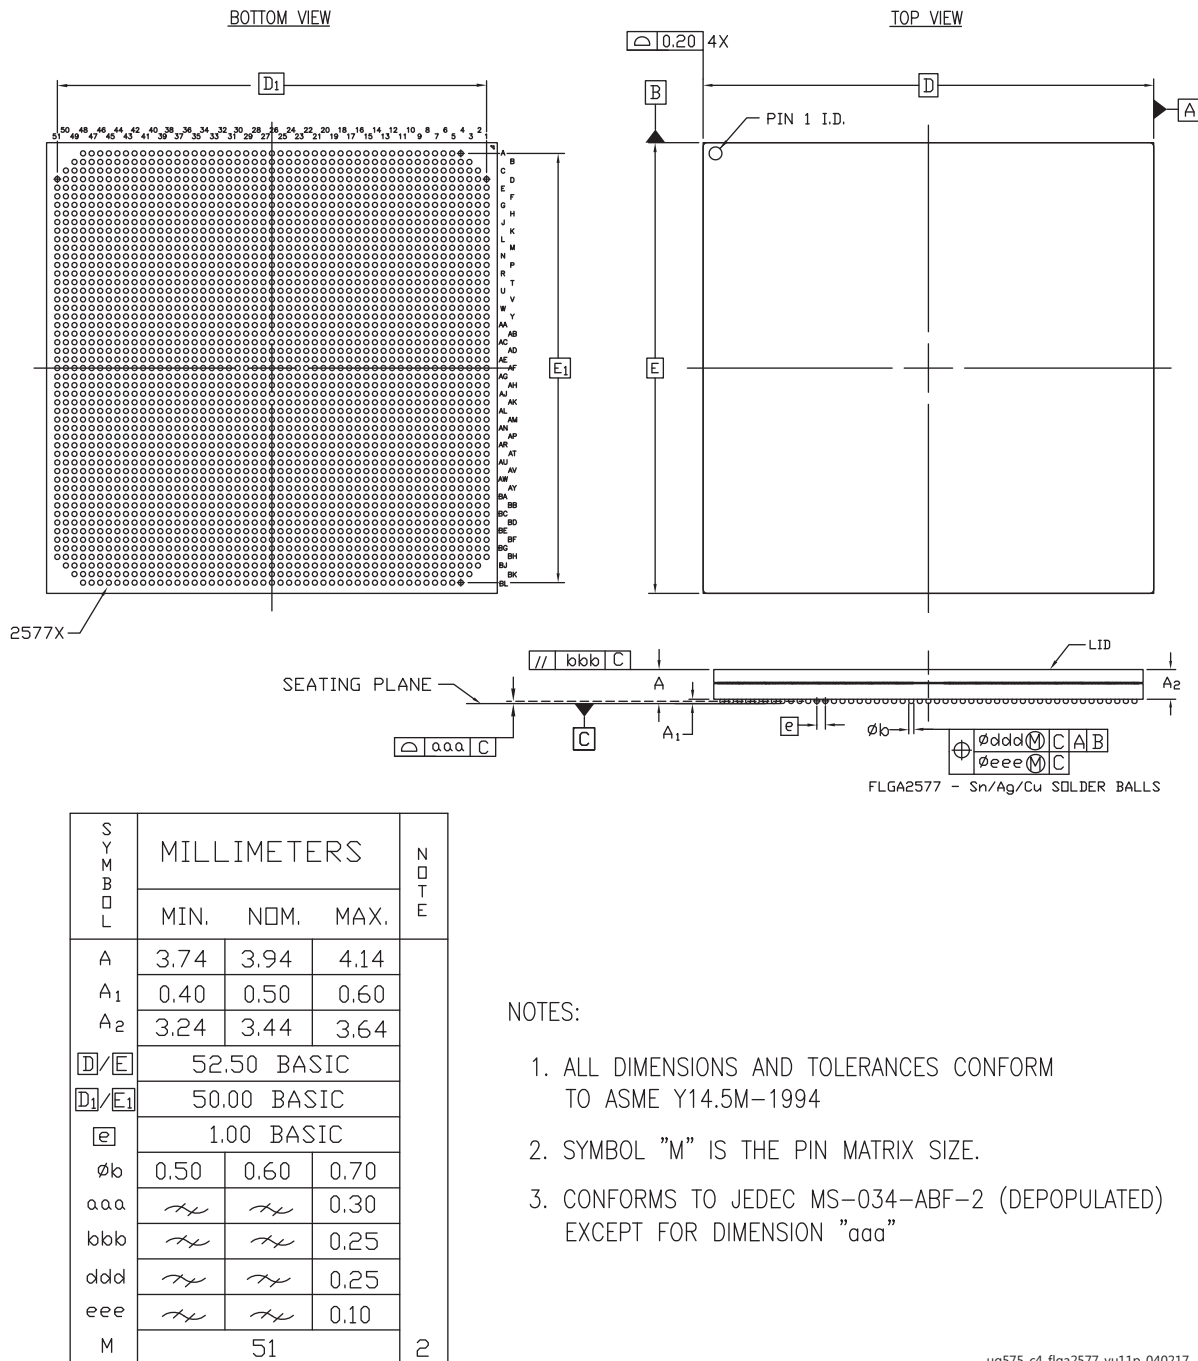


Figure 4-57: Package Dimensions for FLGA2577 (XCVU11P)

# FSGA2577 Flip-Chip, Fine-Pitch BGA (XCVU13P, XCVU27P, and XCVU29P)


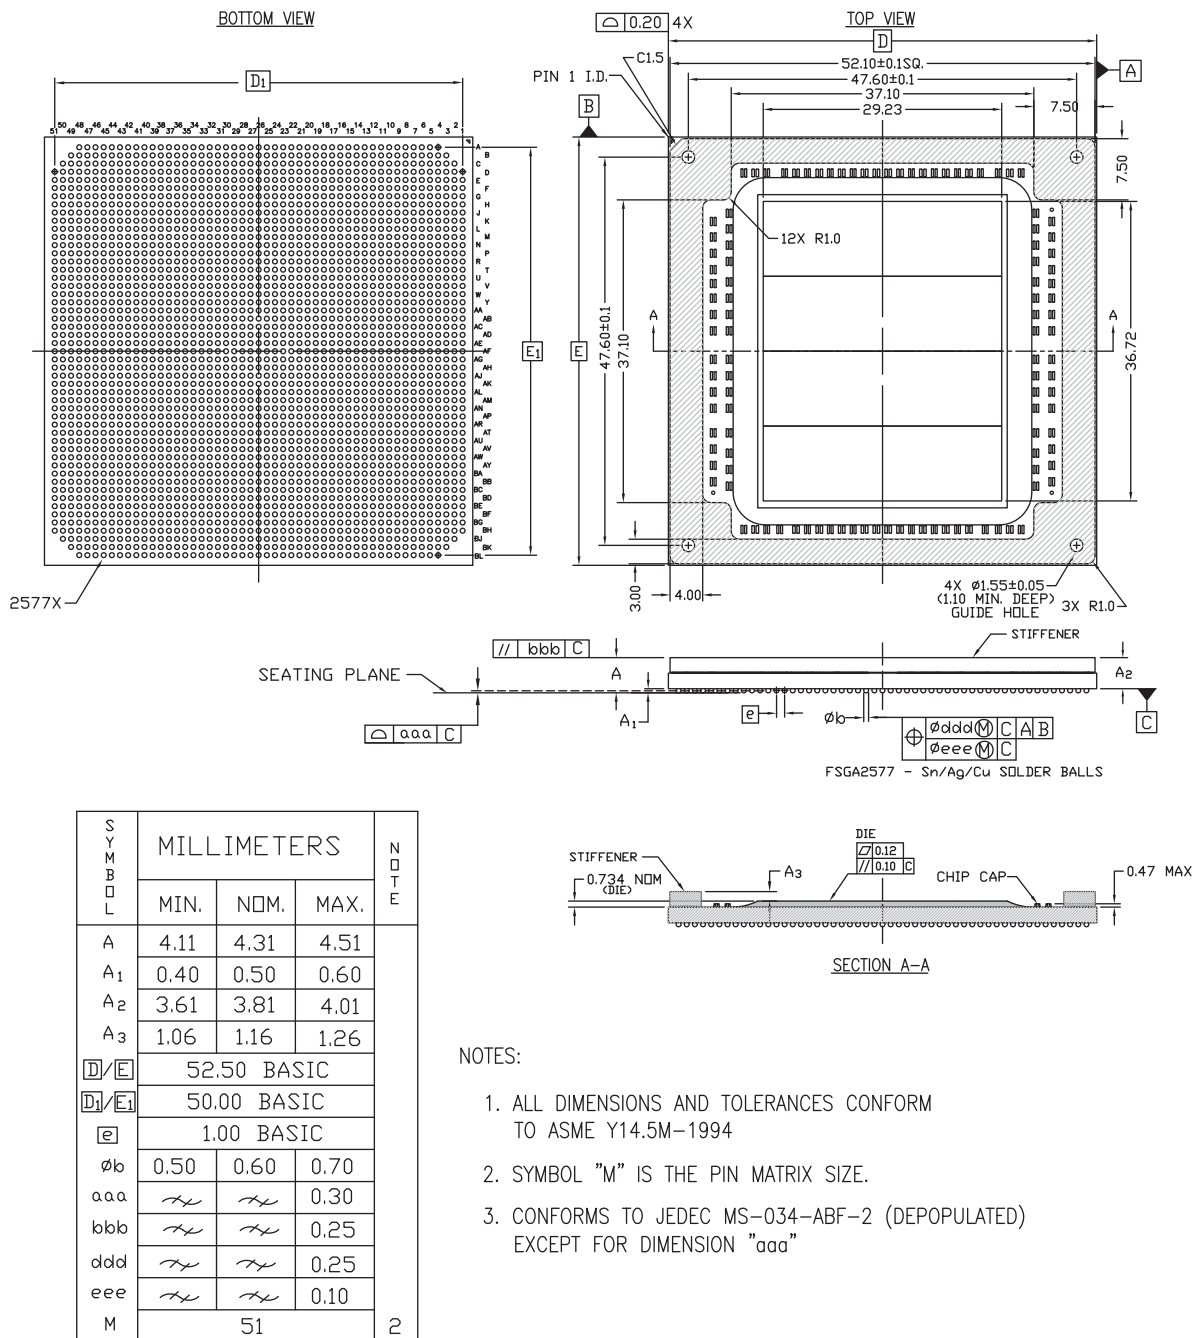


Figure 4-58: Package Dimensions for FSGA2577 (XCVU13P, XCVU27P, and XCVU29P)



# FLGA2892 Flip-Chip, Fine-Pitch BGA (XCVU440)

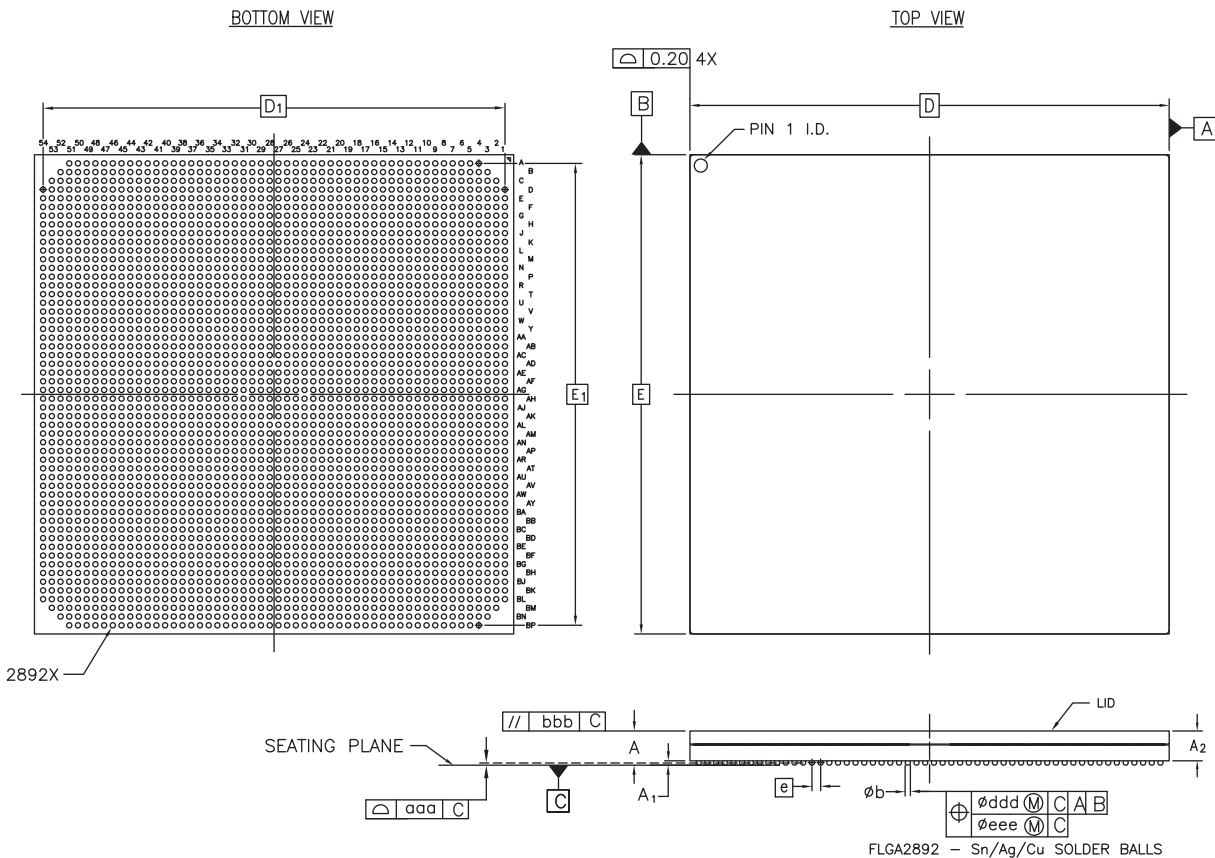

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	3.73	3.93	4.13	2
A <sub>1</sub>	0.40	0.50	0.60	
A <sub>2</sub>	3.23	3.43	3.63	
D/E	55.00 BASIC			
D <sub>1</sub> /E <sub>1</sub>	53.00 BASIC			
e	1.00 BASIC			
φb	0.50	0.60	0.70	
aaa	<i>↗</i>	<i>↗</i>	0.30	
bbb	<i>↗</i>	<i>↗</i>	0.25	
ddd	<i>↗</i>	<i>↗</i>	0.25	
eee	<i>↗</i>	<i>↗</i>	0.10	
M	54			

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE
3. CONFORMS TO JEDEC MS-034 ABG-1 (DEPOPULATED) EXCEPT FOR DIMENSION "aaa"

ug575\_c4\_14\_100615

Figure 4-59: Package Dimensions for FLGA2892 (XCVU440)

# FSVH2892 (XCVU35P and XCVU45P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA

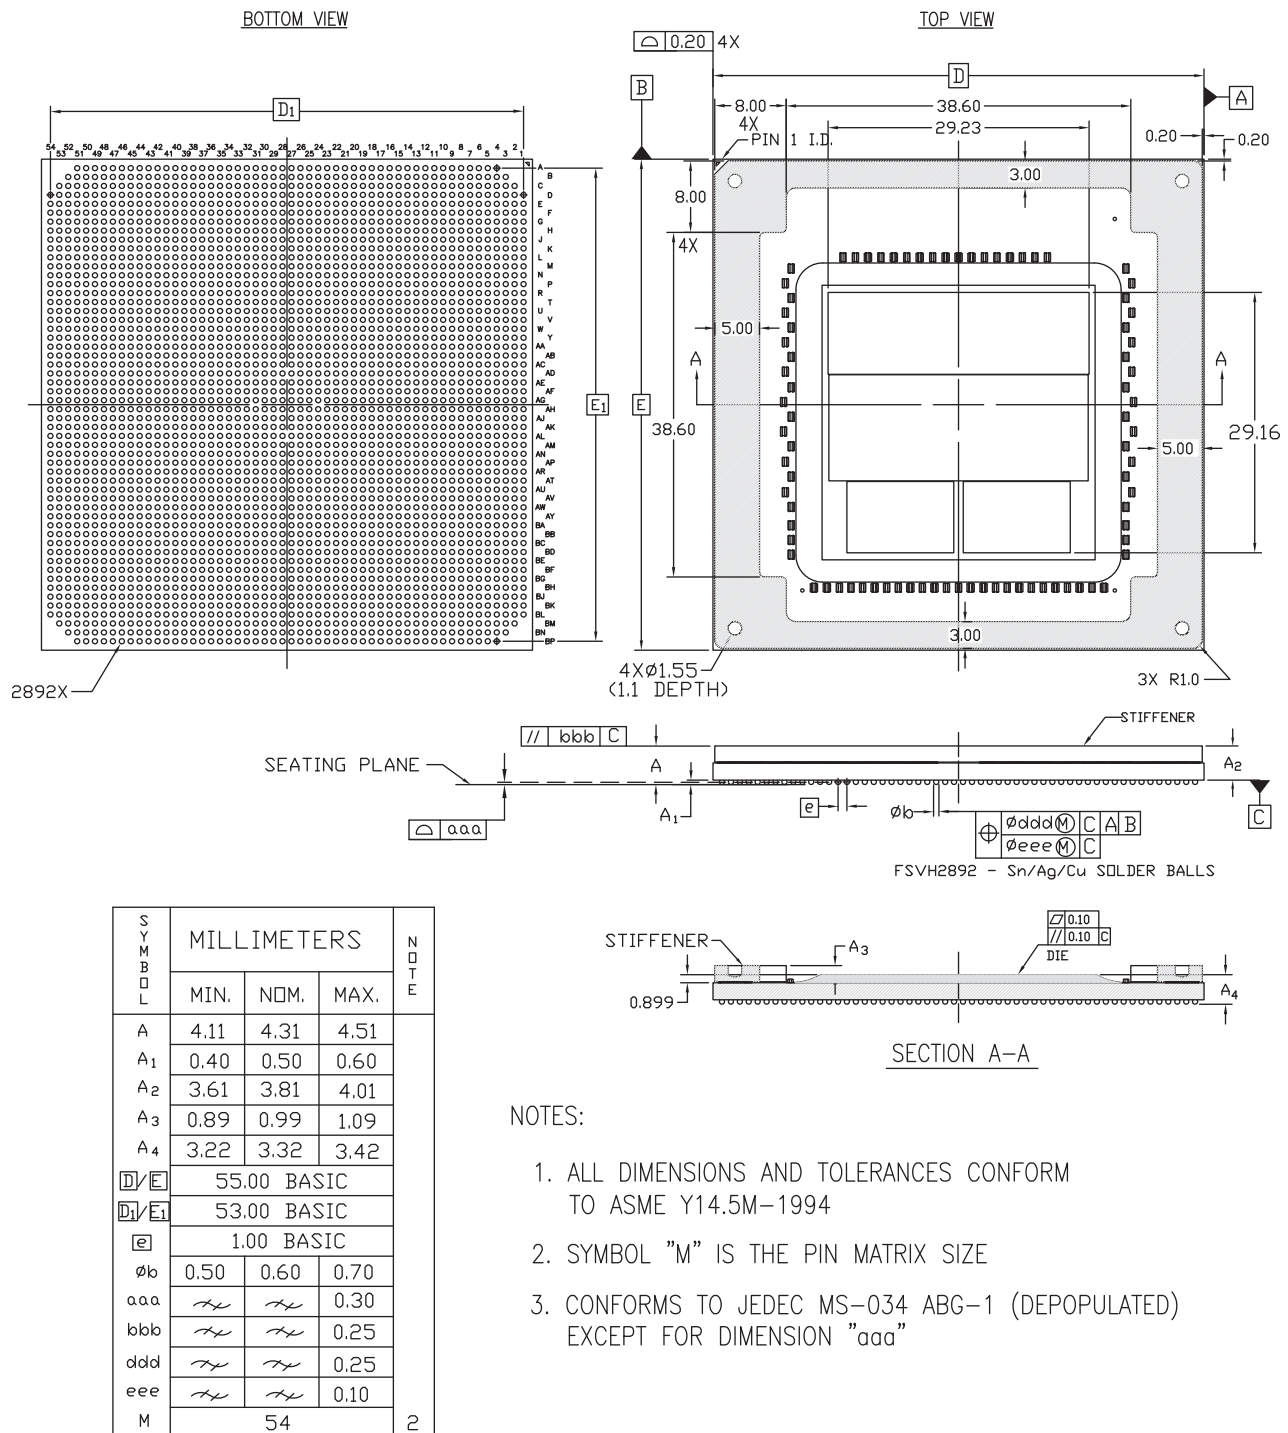


Figure 4-60: Package Dimensions for FSVH2892 (XCVU35P and XCVU45P)

# FSVH2892 (XCVU37P and XCVU47P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA

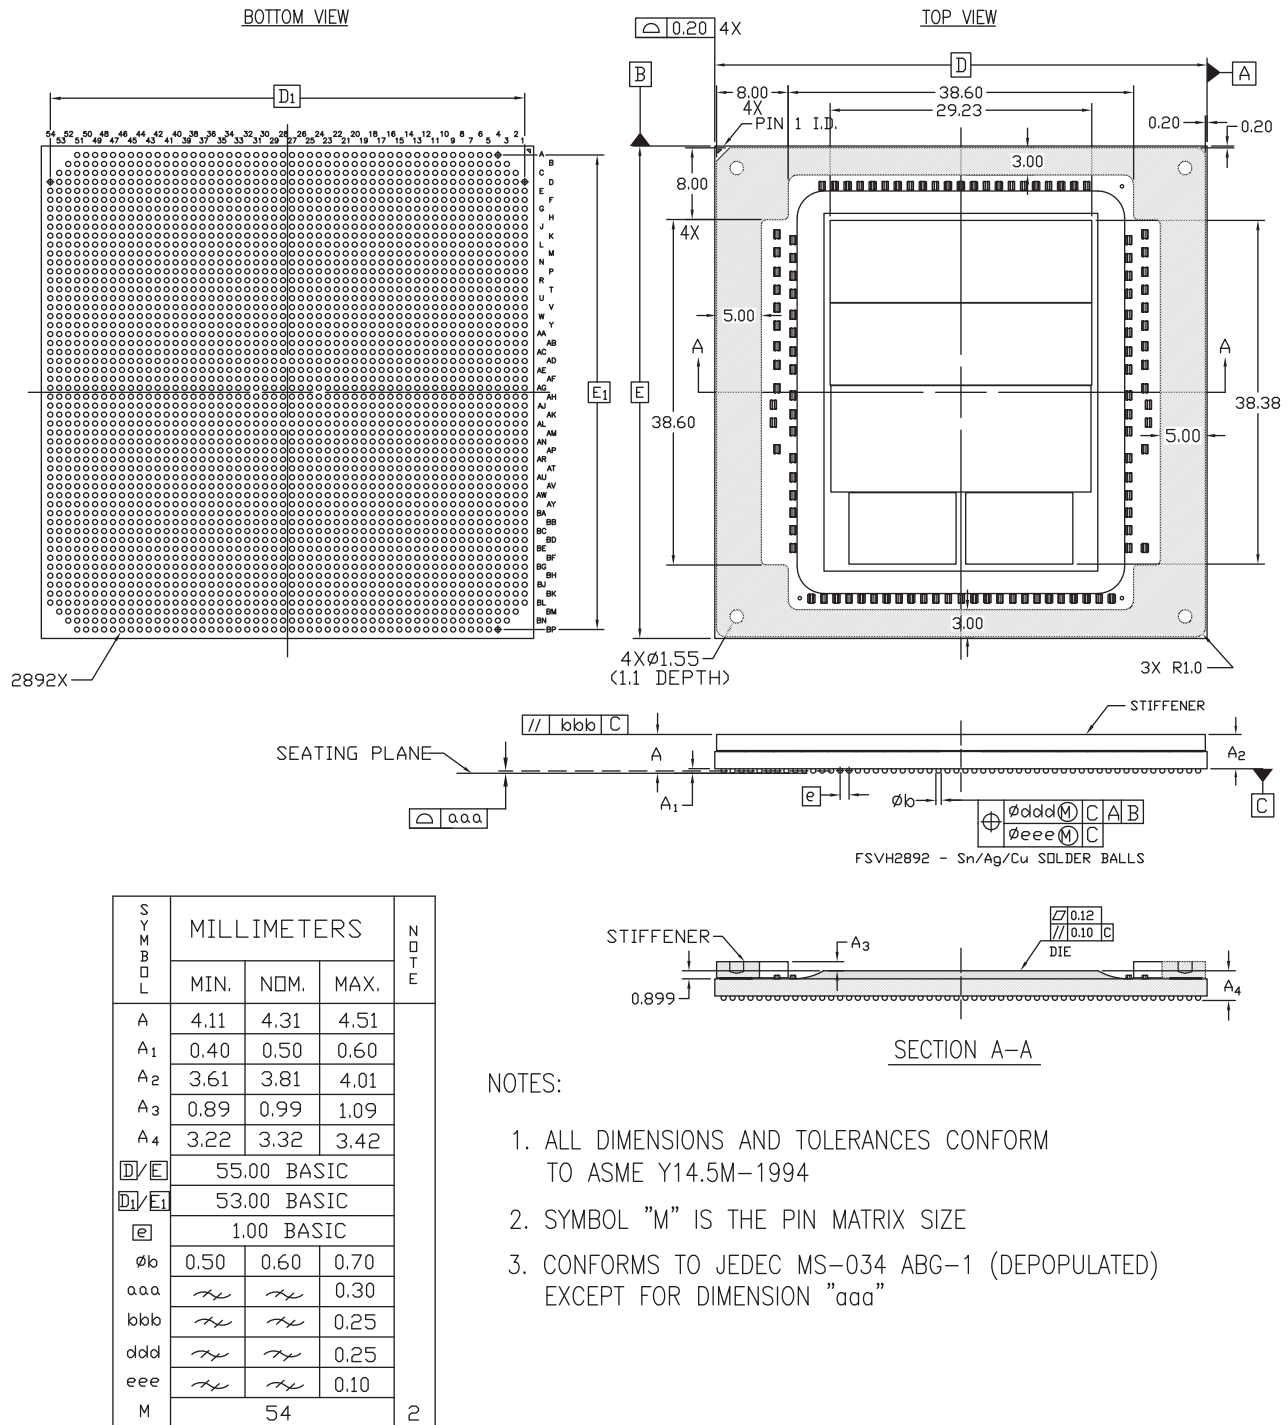


Figure 4-61: Package Dimensions for FSVH2892 (XCVU37P and XCVU47P)

# FSVK2892 (XCVU57P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA

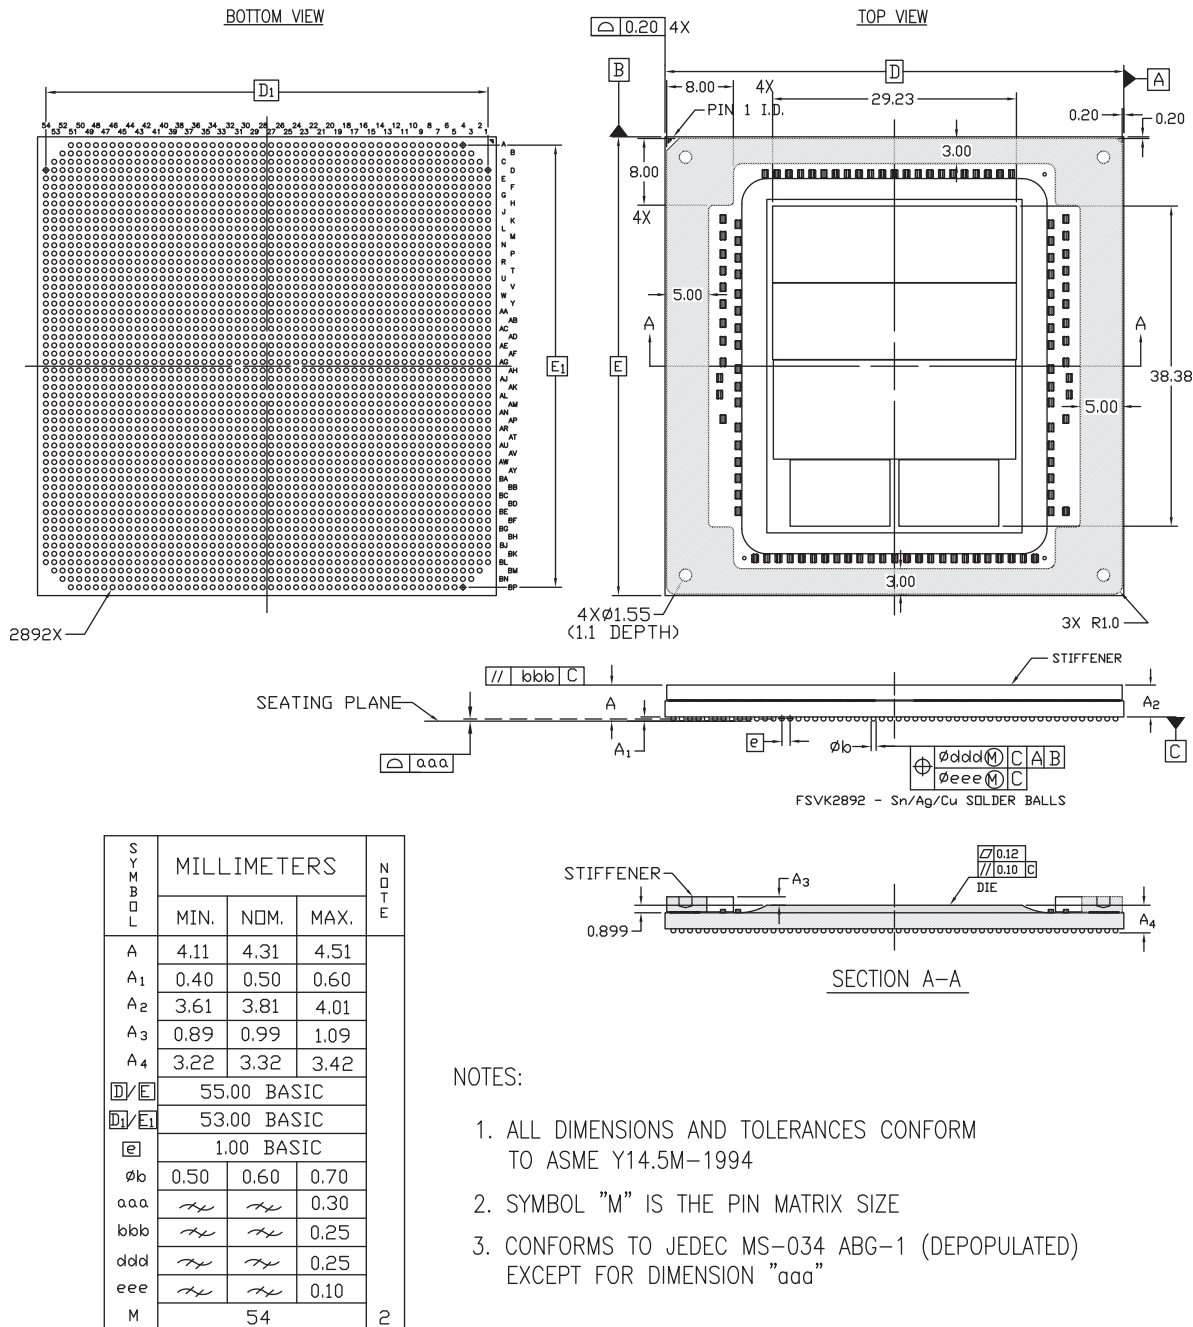


Figure 4-62: Package Dimensions for FSVK2892 (XCVU57P)

# FSVA3824 and FSVB3824 (XCVU19P) Flip-Chip, Fine-Pitch, Lidless with Stiffener Ring, BGA

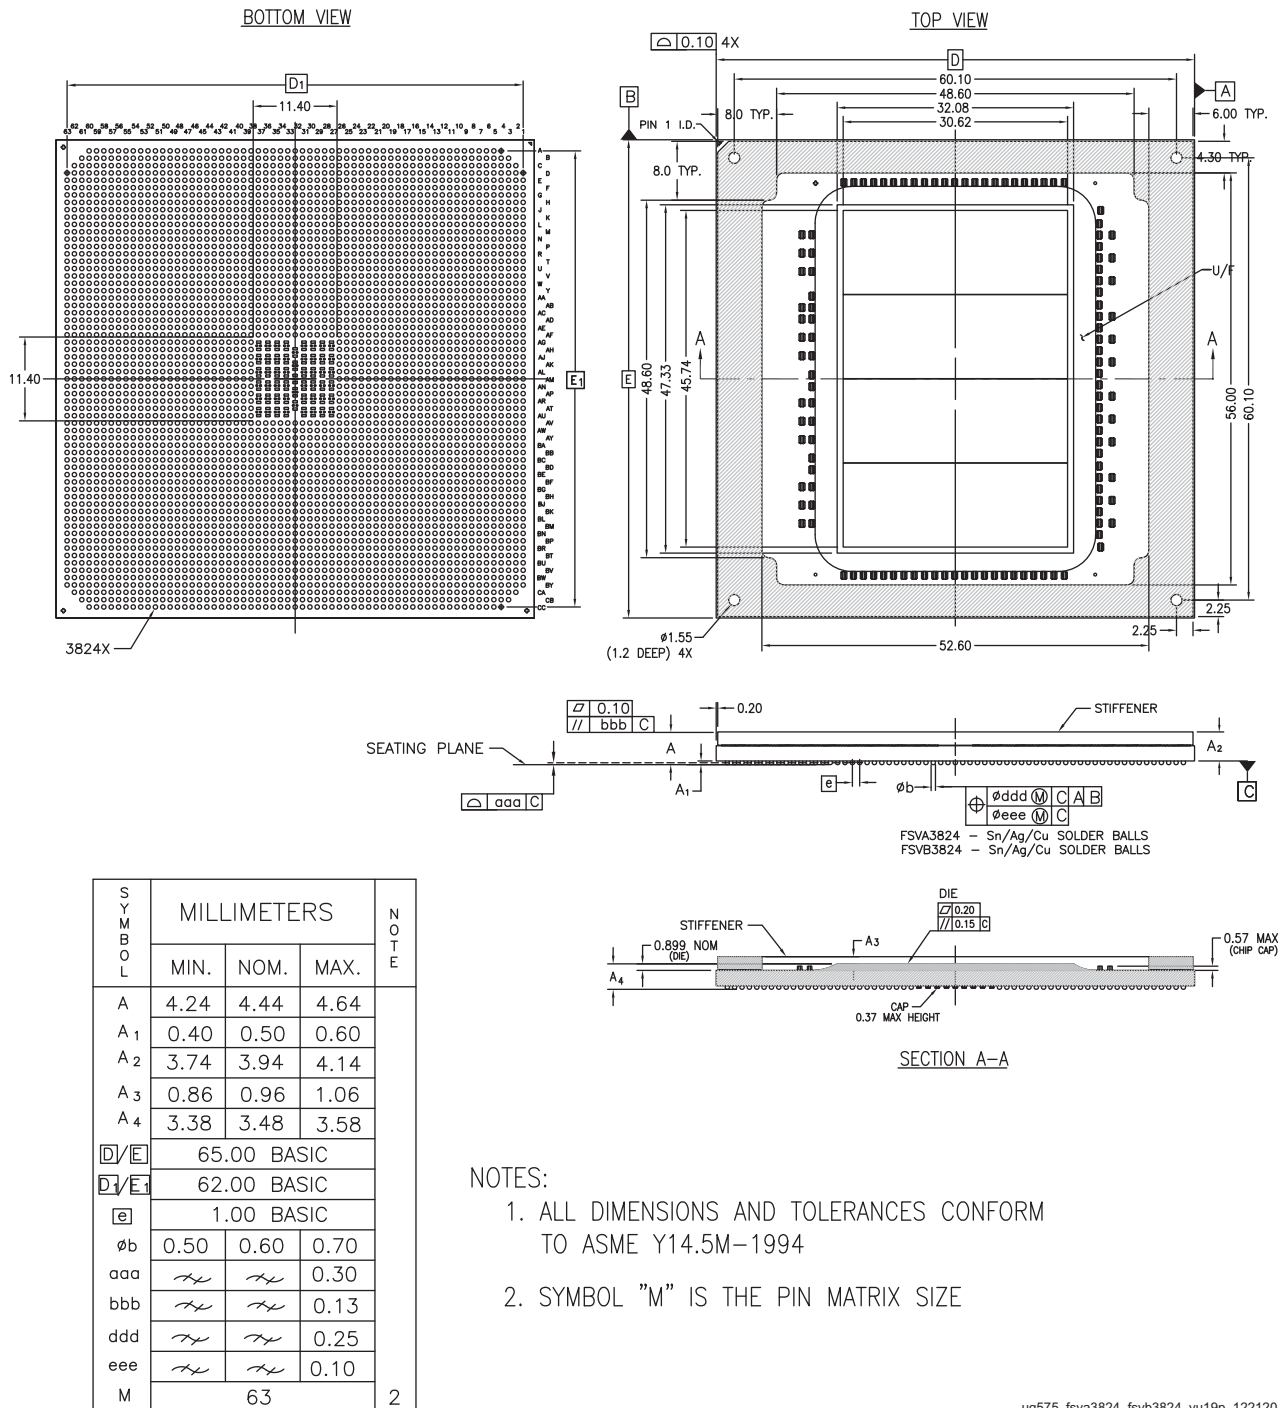


Figure 4-63: Package Dimensions for FSVA3824 and FSVB3824 (XCVU19P)


ug575\_fsva3824\_fsvb3824\_vu19p\_122120

# Package Marking

## Introduction

The package top-markings for the UltraScale™ and UltraScale+™ devices are similar to the examples shown in [Figure 5-2](#), [Figure 5-3](#), [Figure 5-4](#), and [Figure 5-5](#). [Figure 5-2](#) and [Figure 5-3](#) show both old and changed top markings. In addition to the markings explained in [Table 5-1](#), refer to the *FAQ: Top Marking Change for 7 Series, UltraScale, and UltraScale+ Products* (XTP424) [[Ref 12](#)].

The package top-markings for the XQ Kintex® UltraScale+ and XQ Virtex® UltraScale+ devices are as shown in [Figure 5-6](#). On XQ products only the Xilinx logo and the 2D bar code are marked.

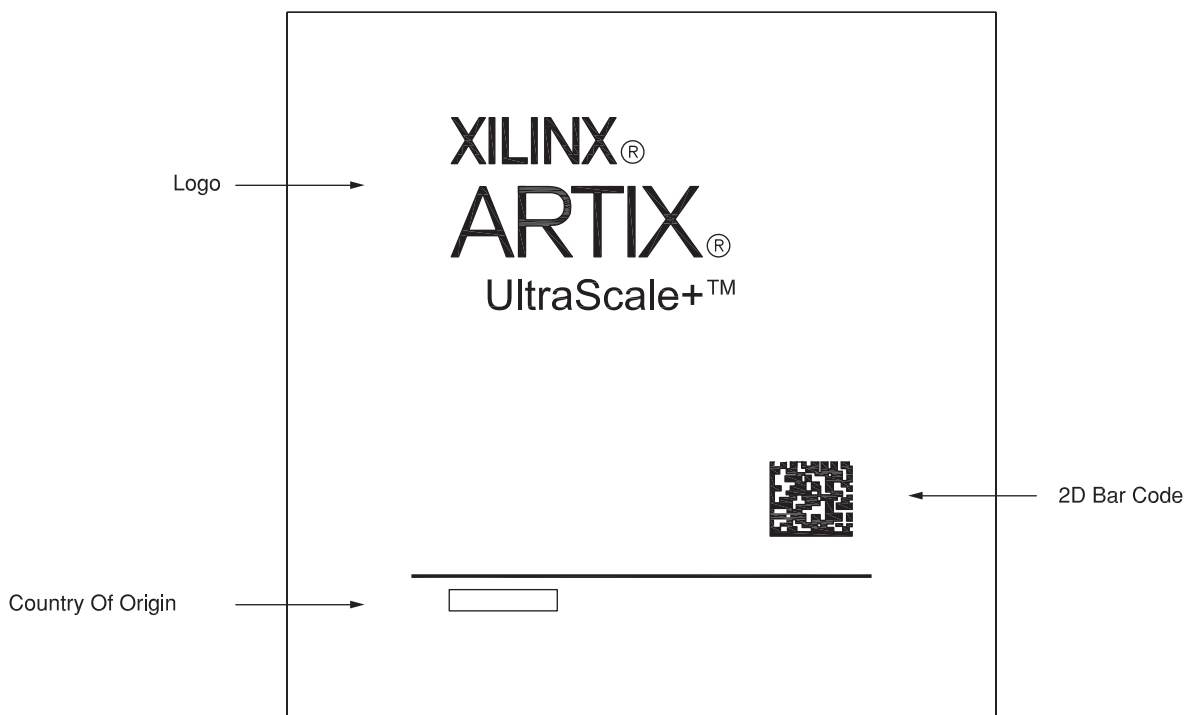

ug575\_e5\_06\_07202021

Figure 5-1: Artix UltraScale+ Device Package Marking

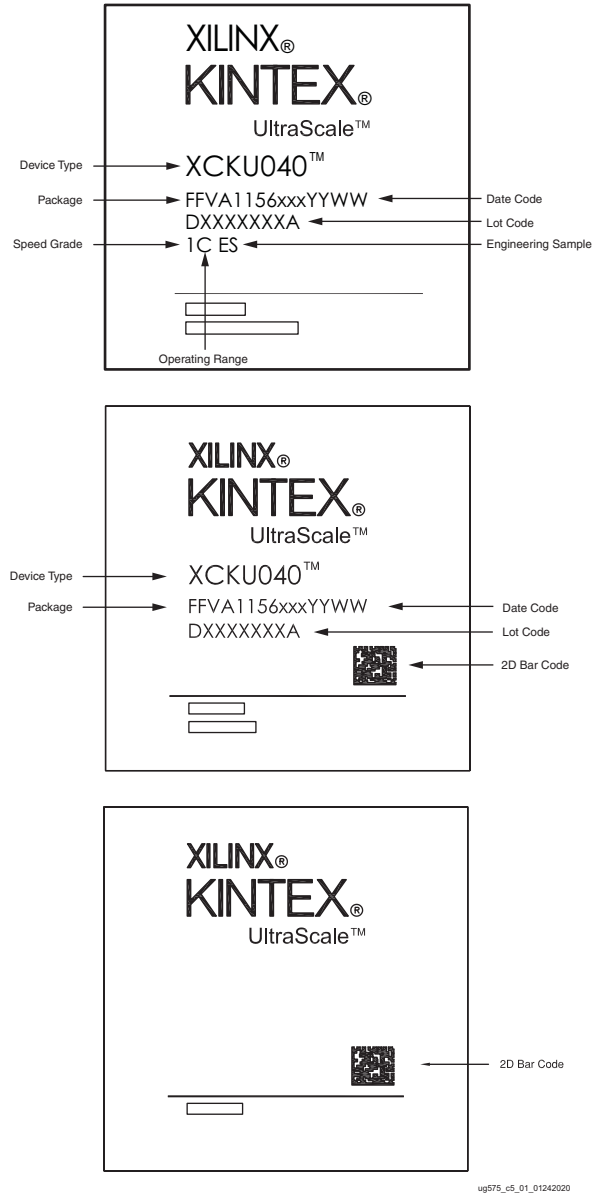


Figure 5-2: Kintex UltraScale Device Package Marking


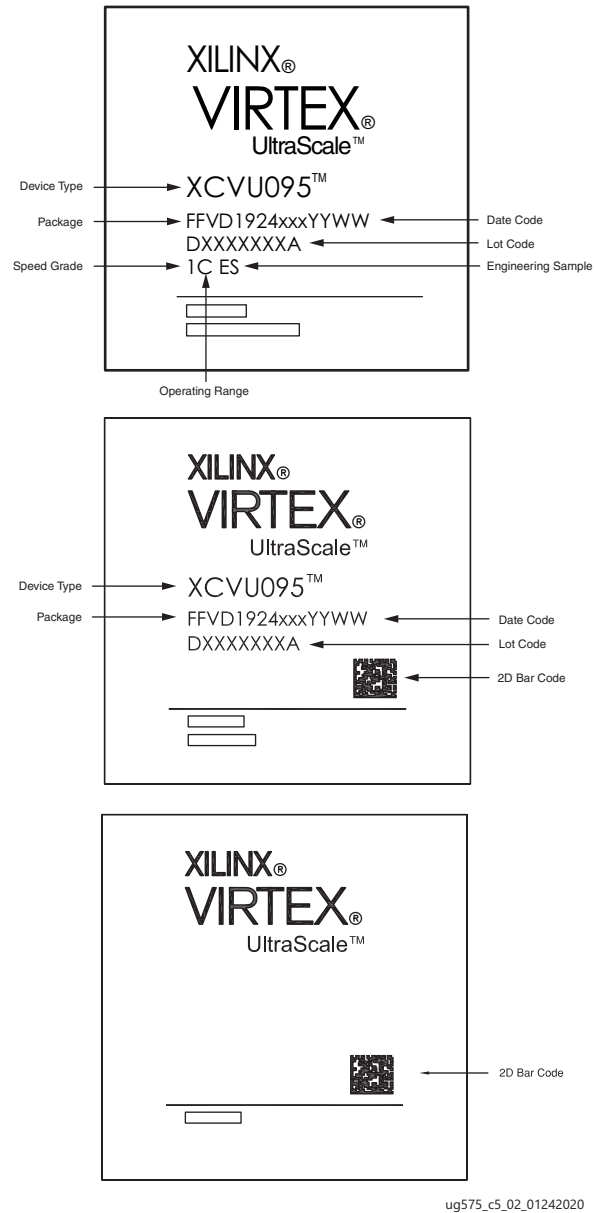


Figure 5-3: Virtex UltraScale Device Package Marking



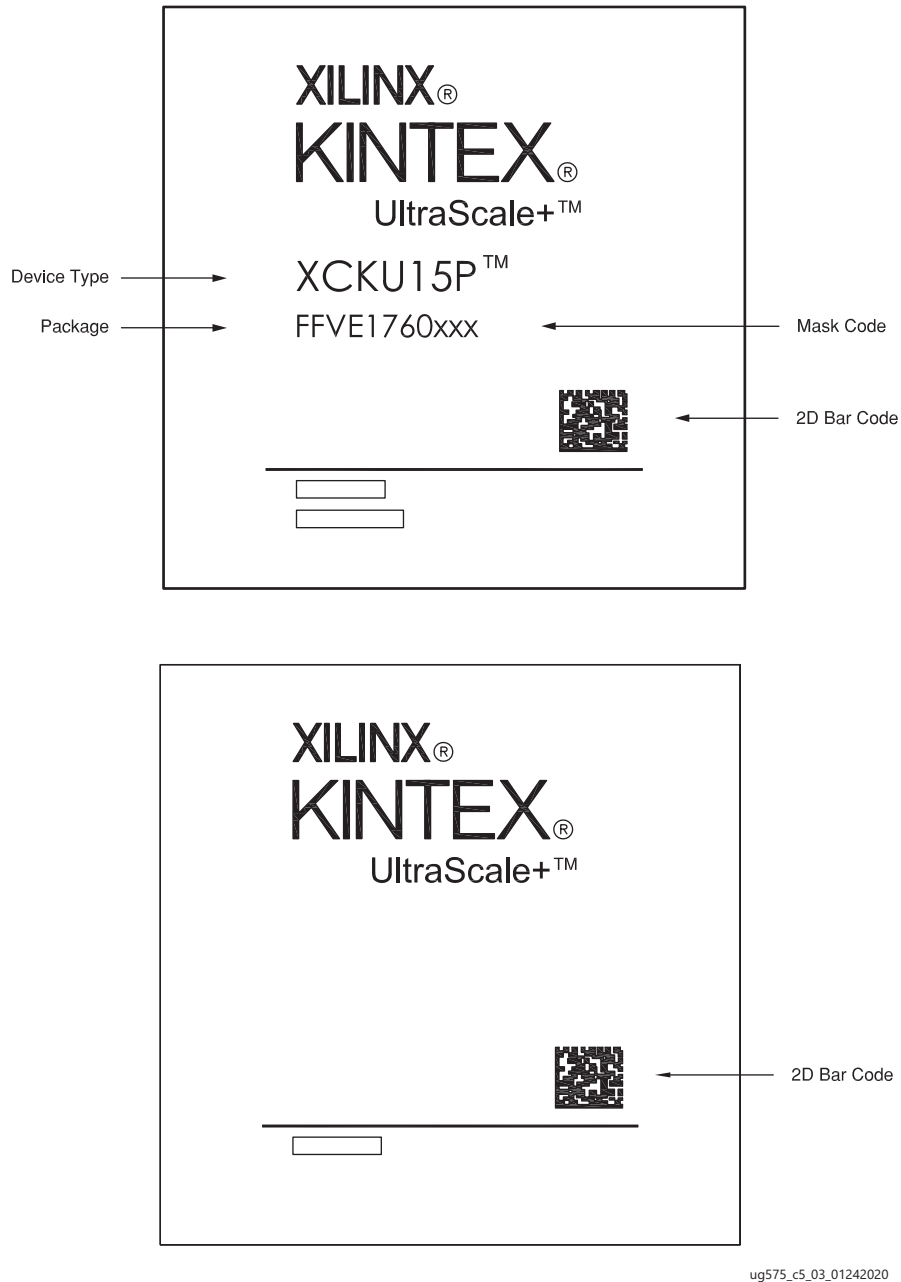

ug575\_c5\_03\_01242020

Figure 5-4: Kintex UltraScale+ Device Package Marking

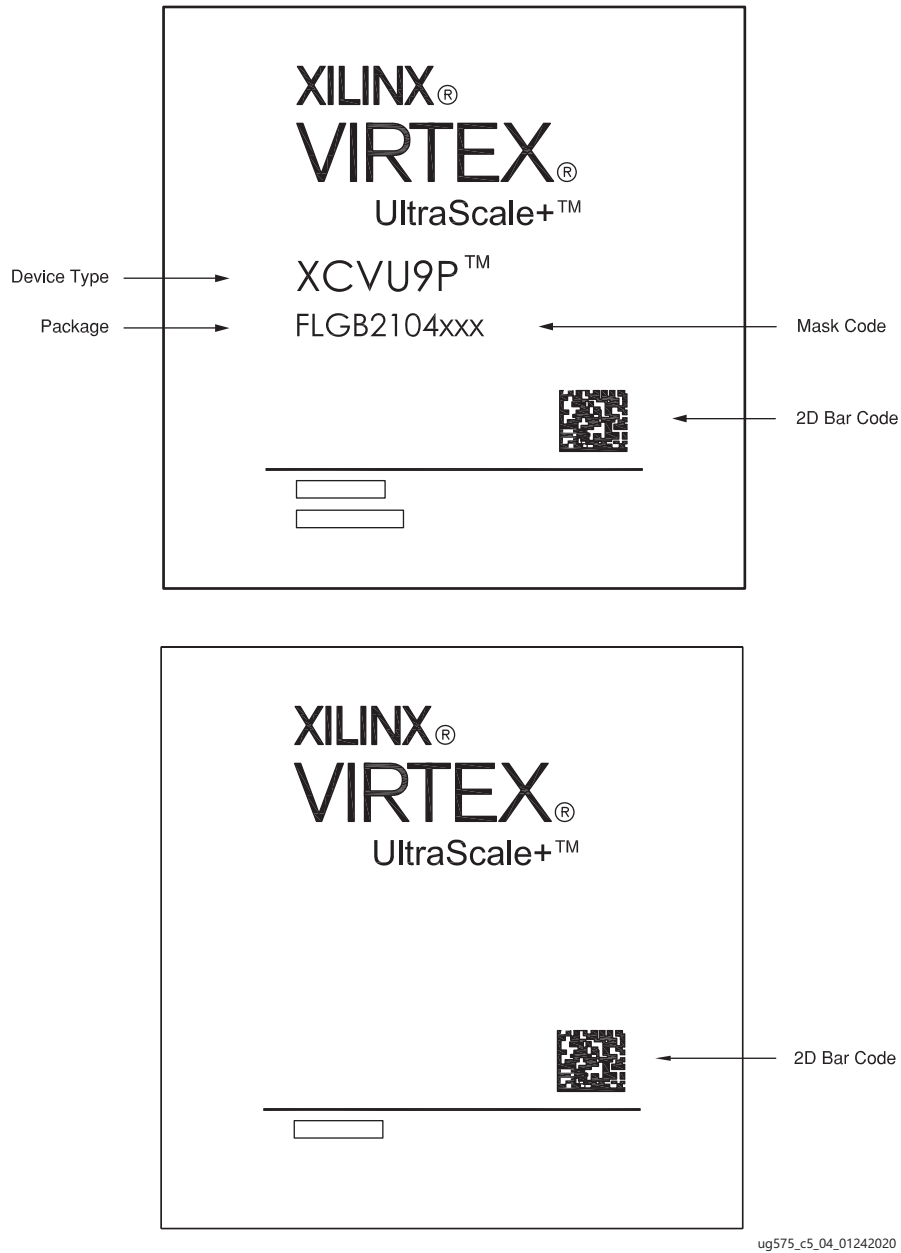


Figure 5-5: Virtex UltraScale+ Device Package Marking

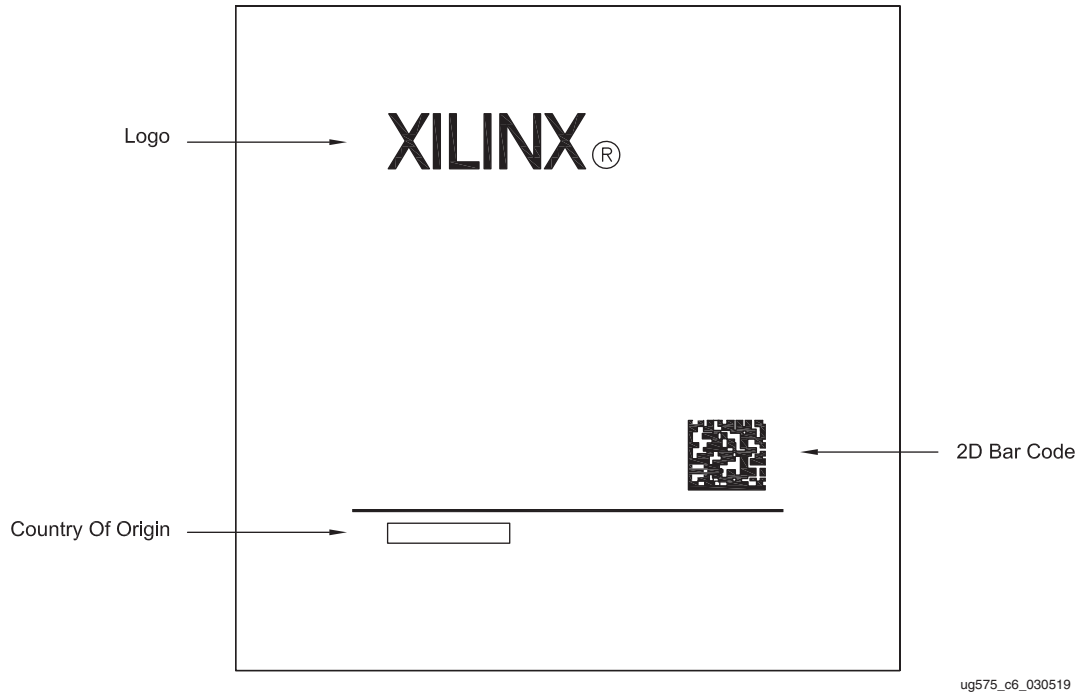


Figure 5-6: XQ Kintex UltraScale+ and XQ Virtex UltraScale+ Device Package Marking

Table 5-1: XC Device Marking Definition—Example

Item	Definition						
Xilinx Logo	Xilinx logo, Xilinx name with trademark, and trademark-registered status.						
Family Brand Logo	Device family name with trademark and trademark-registered status. This line is optional and could appear blank.						
1st Line	Device name. This line is not marked on some devices. Refer to the bar code for device information.						
2nd Line	<p>This line is not marked on some devices. Refer to the bar code for device information.</p> <ul style="list-style-type: none"> <li>Package code: <b>FF</b> 1st digit: F for flip-chip BGA, S for flip-chip BGA with 0.8 mm ball pitch. 2nd digit: F for lidded, L for lidded SSI, B for bare-die, H for overhang SSI, S for lidless SSI stiffener, and I for overhang lidless SSI stiffener.</li> <li>3rd digit: Pb-free code: <b>V</b> for RoHS 6/6, <b>G</b> for RoHS 6/6 with exemption 15, or for packages with eutectic BGA balls (<b>R</b> or <b>Q</b>). All commercial (XC) UltraScale Architecture devices have Pb-free RoHS compliant packaging. For more details on Xilinx Pb-free and RoHS compliant products, see: <a href="http://www.xilinx.com/pbfree">www.xilinx.com/pbfree</a>.</li> <li>4th digit: This is the pin out (net list) identifier.</li> <li>5th–8th digits: These are the physical pin count identifiers: <b>A1156</b> and <b>D1924</b> are shown in the <a href="#">Figure 5-2</a> and <a href="#">Figure 5-3</a> example marking drawings. Example: A package code of FFVA1517 and FFVC1517 means they have a different pinout (net list) but the same physical ball count and physical dimensions.</li> <li>Three letter circuit design revision, the location code for the wafer fab, and the geometry code (<b>xxx</b>). Designated as the mask code in some figures.</li> <li>When marked, the date code: <b>YYWW</b> (two digit year and work week). This code is not marked on some devices. Refer to the bar code for more information.</li> </ul>						
3rd Line	<p>When marked, this line describes ten alphanumeric characters for assembly location, 7-digit lot number, and step information. The last digit is usually an A or an M if a stepping version does not exist.</p> <p>This line is not marked on some devices. Refer to the bar code for more information.</p>						
4th Line	<p>When marked, this line describes the device speed grade (<b>1</b>) and temperature operating range (<b>C</b>). When not marked on the package, the product is considered to operate at the extended (<b>E</b>) temperature range.</p> <p>If a bar code is present on the device, the 4th line might be blank or unmarked. In this case, refer to the bar code for speed grade and temperature range information. For more information on the ordering codes, see the <i>UltraScale Architecture and Product Overview</i> (DS890) <a href="#">[Ref 1]</a>.</p> <p>Other variations for the 4th line:</p> <table border="1" data-bbox="310 1501 1482 1766"> <tbody> <tr> <td data-bbox="310 1501 472 1579">L1I</td> <td data-bbox="472 1501 1482 1579">The L1I indicates a -1LI device. The -1LI speed grade offers reduced maximum power consumption. For more information, see the specific device's data sheet <a href="#">[Ref 3]</a>.</td> </tr> <tr> <td data-bbox="310 1579 472 1656">1C xxxx</td> <td data-bbox="472 1579 1482 1656">The xxxx indicates a 4-digit SCD device option. An SCD is a special ordering code that is not always marked in the device top mark.</td> </tr> <tr> <td data-bbox="310 1656 472 1766">1C ES 2E ES L1I ES</td> <td data-bbox="472 1656 1482 1766">The addition of an ES after the operating temperature range code indicates an engineering sample.</td> </tr> </tbody> </table>	L1I	The L1I indicates a -1LI device. The -1LI speed grade offers reduced maximum power consumption. For more information, see the specific device's data sheet <a href="#">[Ref 3]</a> .	1C xxxx	The xxxx indicates a 4-digit SCD device option. An SCD is a special ordering code that is not always marked in the device top mark.	1C ES 2E ES L1I ES	The addition of an ES after the operating temperature range code indicates an engineering sample.
L1I	The L1I indicates a -1LI device. The -1LI speed grade offers reduced maximum power consumption. For more information, see the specific device's data sheet <a href="#">[Ref 3]</a> .						
1C xxxx	The xxxx indicates a 4-digit SCD device option. An SCD is a special ordering code that is not always marked in the device top mark.						
1C ES 2E ES L1I ES	The addition of an ES after the operating temperature range code indicates an engineering sample.						
Bar Code	A device-specific bar code is marked on each device. Refer to the <i>FAQ: Top Marking Change for 7 Series, UltraScale, and UltraScale+ Products</i> (XTP424) <a href="#">[Ref 12]</a> .						

# Packing and Shipping

## Introduction

The UltraScale™ and UltraScale+™ devices are packed in trays. Trays are used to pack most of Xilinx® surface-mount devices since they provide excellent protection from mechanical damage. In addition, they are manufactured using anti-static material to provide limited protection against ESD damage and can withstand a bake temperature of 125°C.

**Table 6-1: Standard Device Counts per Tray and Box**

Package	Maximum Number of Devices Per Tray	Maximum Number of Units In One Internal Box
FBVA676, RBA676	40	200
FFVA676, FFVB676, RRFB676	40	200
SFVA784, SFVB784, SFRB7784	60	300
FBVA900	27	135
FFVD900, FFVE900	27	135
FFVA1156, RFA1156, FFRA1156	24	120
VSVA1365	24	72
FFVA1517, FFVC1517, FFVD1517, FFVE1517, FFRC1517, FFRE1517	21	105
FLVA1517, FLVD1517, RLD1517	21	63
FFVA1760, FFVB1760, FFVE1760, FFVJ1760	12	60
FLVB1760, FSVJ1760	12	36
FLVD1924, FLVF1924, RLF1924	12	36
FLGF1924	12	36
FSVH1924	12	36
FFVA2104, FLVA2104, FLGA2104, FLRA2104 FFVB2104, FLVB2104, FLGB2104, FLRB2104 FFVC2104, FLVC2104, FLGC2104, FLRC2104	12	36
FHGA2104, FHGB2104, FHGC2104 FIGD2104	10	30
FSGD2104	12	36

Table 6-1: Standard Device Counts per Tray and Box (Cont'd)

Package	Maximum Number of Devices Per Tray	Maximum Number of Units In One Internal Box
FSVH2104	12	36
FLGB2377	10	30
FLGA2577	10	30
FSGA2577	10	30
FLGA2892	10	30
FSVH2892, FSVK2892	10	30
FSVA3824, FSVB3824	4	12



**IMPORTANT:** All packages are available with eutectic BGA balls. To order these packages, the device type starts with an XQ vs. XC, and the third digit in the package name is Q (for example: FFQA1156).

# Soldering Guidelines

---

## Soldering Guidelines

To implement and control the production of surface-mount assemblies, the dynamics of the Pb-free solder reflow process and how each element of the process is related to the end result must be thoroughly understood.



---

**RECOMMENDED:** *Xilinx recommends that customers qualify their custom PCB assembly processes using package samples.*

---

The primary phases of the Pb-free reflow process are:

- Melting the particles in the solder paste
- Wetting the surfaces to be joined
- Solidifying the solder into a strong metallurgical bond

The peak reflow temperature of a plastic surface-mount component (PSMC) body should not be more than 250°C maximum (260°C for dry rework only) for Pb-free packages (220°C for eutectic packages), and is package size dependent. For multiple BGAs in a single board and because of surrounding component differences, Xilinx recommends checking all BGA sites for varying temperatures.

The infrared reflow (IR) process is strongly dependent on equipment and loading. Components might overheat due to lack of thermal constraints. Unbalanced loading can lead to significant temperature variation on the board. These guidelines are intended to assist users in avoiding damage to the components; the actual profile should be determined by those using these guidelines. For complete information on package moisture / reflow classification and package reflow conditions, refer to the Joint IPC/JEDEC Standard J-STD-020C.

## Sn/Pb Reflow Soldering

Figure 7-1 shows typical conditions for solder reflow processing of Sn/Pb soldering using IR/convection. Both IR and convection furnaces are used for BGA assembly. The moisture sensitivity of PSMCs must be verified prior to surface-mount flow.

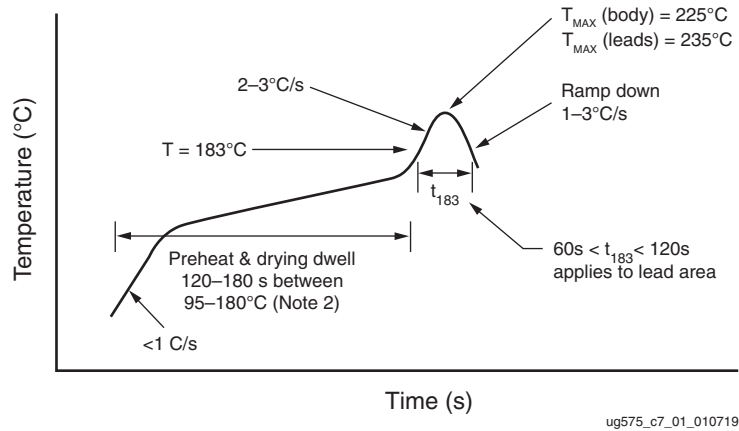


Figure 7-1: Typical Conditions for IR Reflow Soldering of Sn/Pb Solder

Notes for Figure 7-1:

1. Maximum temperature range =  $225\text{ }^\circ\text{C}$  (body). Minimum temperature range =  $205\text{ }^\circ\text{C}$  (leads/balls).
2. Preheat dwell  $95\text{--}180\text{ }^\circ\text{C}$  for  $120\text{--}180$  seconds.
3. IR reflow must be performed on dry packages.



## Pb-Free Reflow Soldering

Xilinx uses SnAgCu solder balls for BGA packages. In addition, suitable package materials are qualified for the higher reflow temperatures (250°C maximum, 260°C for dry rework only) required by Pb-free soldering processes.

Xilinx does not support soldering SnAgCu BGA packages with SnPb solder paste using a Sn/Pb soldering process. Traditional Sn/Pb soldering processes have a peak reflow temperature of 220°C. At this temperature range, the SnAgCu BGA solder balls do not properly melt and wet to the soldering surfaces. As a result, reliability and assembly yields can be compromised.

The optimal profile must take into account the solder paste/flux used, the size of the board, the density of the components on the board, and the mix between large components and smaller, lighter components. Profiles should be established for all new board designs using thermocouples at multiple locations on the component. In addition, if there is a mixture of devices on the board, then the profile should be checked at various locations on the board. Ensure that the minimum reflow temperature is reached to reflow the larger components and at the same time, the temperature does not exceed the threshold temperature that might damage the smaller, heat sensitive components.

[Table 7-1](#) and [Figure 7-2](#) provide guidelines for profiling Pb-free solder reflow for package sizes up to 45 mm x 45 mm. [Table 7-2](#) provides guidelines for package sizes greater than 45 mm x 45 mm and up to 55 mm x 55 mm. [Table 7-3](#) provides guidelines for packages sizes greater than 55 mm x 55 mm. In general, a gradual, linear ramp into a spike has been shown by various sources to be the optimal reflow profile for Pb-free solders ([Figure 7-2](#)). This profile has been shown to yield better wetting and less thermal shock than conventional ramp-soak-spike profile for the Sn/Pb system. SnAgCu alloy reaches full liquidus temperature at 235°C. When profiling, identify the possible locations of the coldest solder joints and ensure that those solder joints reach a minimum peak temperature of 235°C for at least 10 seconds. Reflowing at high peak temperatures of 260°C and above can damage the heat sensitive components and cause the board to warp. Users should reference the latest IPC/JEDEC J-STD-020 standard for the allowable peak temperature on the component body. The allowable peak temperature on the component body is dependent on the size of the component. Refer to [Table 7-4](#) for peak package reflow body temperature information. In any case, use a reflow profile with the lowest peak temperature possible.

**Table 7-1: Pb-Free Reflow Soldering Guidelines for Package Sizes Up to 45 mm x 45 mm**

Reflow Profile	Convection, IR/Convection
Preheat ramp-up rate 30°–150°C	2°C/s maximum 1°C/s maximum for lidless packages with stiffener ring
Preheat temperature soak time 150°–200°C	60–120 seconds
Temperature maintained above 217°C	60–150 seconds (60–90 seconds typical)
Time within 5°C of actual peak temperature	30 seconds maximum
Peak temperature (lead/ball)	230°C—245°C typical (depends on solder paste, board size, component mixture)
Maximum peak temperature (body)	240°C—250°C, package body size dependent (see specific device data sheets <a href="#">[Ref 3]</a> )
Ramp-down rate	2°C/s maximum
Time 25°C to peak temperature	3.5 minutes minimum, 5.0 minutes typical, 8 minutes maximum

**Table 7-2: Pb-Free Reflow Soldering Guidelines for Package Sizes Greater than 45 mm x 45 mm and Up to 55 mm x 55 mm**

Reflow Profile	Convection, IR/Convection
Preheat ramp-up rate 30°–150°C	0.5°C/s–1.5°C/s
Preheat temperature soak time 150°–190°C	65–70 seconds
Temperature maintained above 217°C	50–60 seconds
Maximum peak temperature (body)	234°C—238°C (see specific device data sheets <a href="#">[Ref 3]</a> )
Ramp-down rate 240°–125°C	1°C/s – 2°C/s

**Table 7-3: Pb-Free Reflow Soldering Guidelines for Package Sizes Greater than 55 mm x 55 mm**

Reflow Profile	Convection, IR/Convection
Preheat ramp-up rate 30°–150°C	0.5°C/s–1.5°C/s
Preheat temperature soak time 150°–190°C	76–81 seconds
Temperature maintained above 217°C	77–93 seconds
Maximum peak temperature (body)	231°C—240°C (see specific device data sheets <a href="#">[Ref 3]</a> )
Ramp-down rate 240°–185°C	0.7°C/s – 0.8°C/s
Ramp-down rate 185°–125°C	1.6°C/s – 1.75°C/s

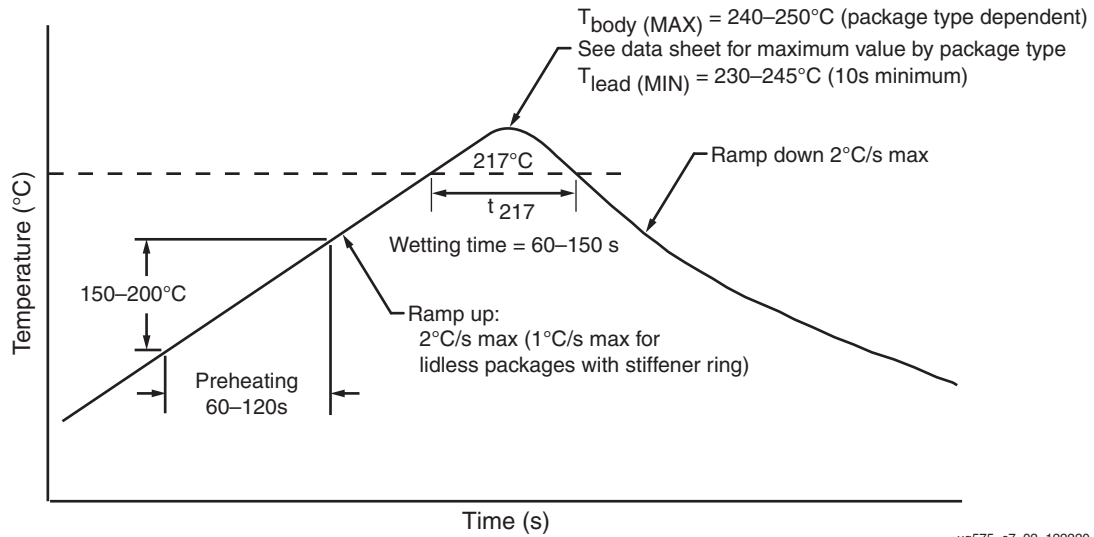


Figure 7-2: Typical Conditions for Pb-Free Reflow Soldering (Package Sizes up to 45 mm x 45 mm)

Table 7-4: Peak Package Reflow Body Temperature for Xilinx Packages (Based on J-STD-020 Standard)

Package	Product Category	Peak Package Reflow Body Temperature <sup>(1)</sup>	JEDEC Moisture Sensitivity Level (MSL)
FBVA676 FFVA676, FFVB676 SFVA784, SFVB784	XC	Mass reflow: 250°C Dry rework: 260°C	4
FBVA900 FFVD900, FFVE900 FFVA1156 FFVA1517, FLVA1517, FFVC1517, FFVD1517, FLVD1517, FFVE1517 FFVA1760, FFVB1760, FLVB1760, FFVE1760, FFVJ1760 FLVD1924, FLVF1924, FLGF1924 FFVA2104, FLVA2104, FLGA2104, FHGA2104 FFVB2104, FLVB2104, FLGB2104, FHGB2104 FFVC2104, FLVC2104, FLGC2104, FHGC2104 FLGB2377 FLGA2577 FLGA2892	All	Mass reflow: 245°C Dry rework: 260°C	4

**Table 7-4: Peak Package Reflow Body Temperature for Xilinx Packages (Based on J-STD-020 Standard) (Cont'd)**

Package	Product Category	Peak Package Reflow Body Temperature <sup>(1)</sup>	JEDEC Moisture Sensitivity Level (MSL)
VSVA1365 FSVJ1760 FSVH1924 FSGD2104, FIGD2104, FSVH2104 FSGA2577 FSVH2892, FSVK2892 FSVA3824, FSVB3824	All	Mass reflow: 240°C Dry rework: 260°C	4
RBA676, RFA1156, RLD1517, RLF1924 FFRB676, SFRB784 FFRA1156, FFRC1517, FFRE1517 FLRA2104, FLRB2104, FLRC2104	XQ <sup>(2)</sup>	Mass reflow: 225°C Dry rework: 235°C	4

**Notes:**

1. See the specific *UltraScale and UltraScale+ device data sheets* [Ref 3] for the most up-to-date specifications.
2. For devices with the Pb-free signifier in the package name (labeled as Q vs. V) use the temperatures and MSL listed for the XQ product category.

For sophisticated boards with a substantial mix of large and small components, it is critical to minimize the  $\Delta T$  across the board ( $<10^{\circ}\text{C}$ ) to minimize board warpage and thus, attain higher assembly yields. Minimizing the  $\Delta T$  is accomplished by using a slower rate in the warm-up and preheating stages.

It is also important to minimize the temperature gradient on the component, between top surface and bottom side, especially during the cooling down phase. The key is to optimize cooling while maintaining a minimal temperature differential between the top surface of the package and the solder joint area. The temperature differential between the top surface of the component and the solder balls should be maintained at less than  $7^{\circ}\text{C}$  during the critical region of the cooling phase of the reflow process. This critical region is in the part of the cooling phase where the balls are not completely solidified to the board yet, usually between the  $200^{\circ}\text{C}$ – $217^{\circ}\text{C}$  range. To efficiently cool the parts, divide the cooling section into multiple zones, with each zone operating at different temperatures.

The optimal profile must take into account the solder paste/flux used, the size of the board, the density of the components on the board, and the mix between large components and smaller, lighter components. Profiles should be established for all new board designs using thermocouples at multiple locations on the component. In addition, if there is a mixture of devices on the board, then the profile should be checked at various locations on the board, as shown in [Figure 7-3](#) and [Figure 7-4](#) (thermocouple pictures). Ensure that the minimum reflow temperature is reached to reflow the larger components and at the same time, the temperature does not exceed the threshold temperature that might damage the smaller, heat sensitive components.

- TOP Profile,
- TC 1 : U17 Edge 1
- TC 2 : U17 Edge 2
- TC 3 : U17 Edge 3
- TC 4 : U17 Edge 4
- TC 5 : U17 Middle 1
- TC 6 : U17 Middle 2
- TC 7 : U17 Body
- TC 8 : Q25
- TC 9 : U25



Figure 7-3: Thermocouple Top

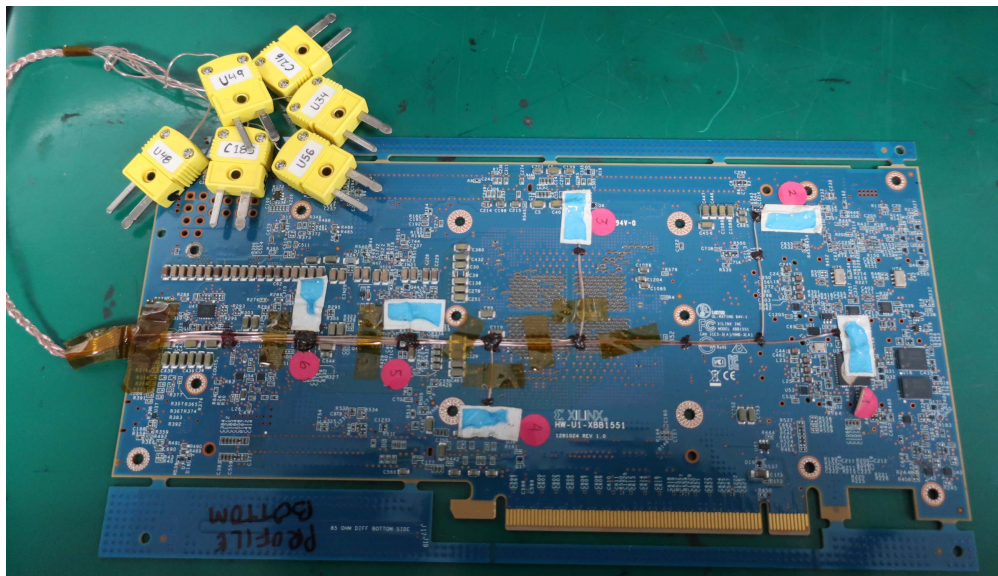


Figure 7-4: Thermocouple Bottom

## Post Reflow/Cleaning/Washing

Many PCB assembly subcontractors use a no-clean process in which no post-assembly washing is required. Although a no-clean process is recommended, if cleaning is required, Xilinx recommends a water-soluble paste and a washer using a deionized-water. Baking after the water wash is recommended to prevent fluid accumulation.

Cleaning solutions or solvents are not recommended because some solutions contain chemicals that can compromise the lid adhesive, thermal compound, or components inside the package.

---

## Conformal Coating

Xilinx does not have information regarding the reliability of flip-chip BGA packages on a board after exposure to any specific conformal coating process. Therefore, any process using conformal coating should be qualified for the specific use case to cover the materials and process steps.

Ruggedized XQ packages are designed to support conformal coating, with vented lids that ensure proper cleaning can occur after the etching process and prior to conformal coating.



---

**RECOMMENDED:** *When a conformal coating is required, Parylene-based material should be used to avoid potential risk of weakening the lid or stiffener ring adhesive used in Xilinx packages.*

---

---

## Strain Gauge Measurement

Strain gauge measurements are recommended to be done at each process step that has the potential to cause excessive board flexing leading to solder joint cracking. Assembly processes where strain gauge measurements are recommended include:

- PCB Router (during PCB loading/unloading into fixture and during the routing process)
- PTH solder assembly during top-catch loading/unloading
- Press fit assembly during press base and tooling loading/unloading and during machine pressing process
- DIMM memory (during PCB loading/unloading and during insertion/removal of DIMM)
- Heat-sink assembly process (during PCB loading/unloading and during entire screw assembly process)
- X-ray fixture (during PCBA loading/unloading)

Strain gauge measurements should be in the range of  $\pm 500$   $\mu$ strain. Dye and pry analysis is required to confirm if the measured strain causes solder joint cracking. It is recommended to conduct dye and pry analysis for any strain reading greater than 500  $\mu$ strain.

To reduce the affects of strain on a device, edge bonding can be used and is recommended for larger packages. See [Edge Bonding Guidelines](#) for implementation details.

---

## Solder Paste

Solder paste consists of solder alloy and a flux system. A typical solder paste composition by volume is split between about 50% alloy and 50% flux. The metal load mass (solder alloy powder) is around 90%, with the remaining 10% mass a flux system. The primary purpose of the flux system is to remove the contaminations from the solder joints during the soldering process. The capability of removing contaminations is determined by the activation level of the type of solder paste. The preferred solder paste metal alloy has a lead-free composition (SnAgCu where Ag is 3–4% and Cu is 0.5–1%). A *no-clean* solder paste is preferred to eliminate any risk of improper cleaning that could leave active residue beneath the device and other BTC components. The paste must be suitable for printing the solder stencil aperture dimensions. Type 4 paste is recommended for better paste release performance. When using a solder paste, you must adhere to the handling recommendations of the paste manufacturer.

---

## Component Placement



**IMPORTANT:** *The following component placement guidelines apply to all package types included in this guide (lidded, lidless, bare-die, etc.).*

---

Xilinx device packages must be placed accurately according to their geometry outline. Positioning packages manually via hand mounting is not recommended.

Typical component placement accuracies of  $\pm 50 \mu\text{m}$  can be achieved using standard pick and placement machine equipment with vision system. The PCB and the components are optically checked and measured and the components are placed on the PCB in specific programmed positions based on the PCB CAD information. The pick and placement machine vision system detects the fiducials on the PCB immediately prior to mounting the FPGA. Recognition of the packages is performed by the vision system, to ensure correct centering of the FPGA placement on the PCB pad array.

BGA packages with solder balls can self-align during the reflow process because of the solder high surface tension that enables the pulling and centering of the device, and where a slight offset of the placement is still allowed. For guidance, the maximum tolerable offset of device placement is around 30% of the pad diameter on the PCB for typical non-solder mask defined pads. This means that for device packages the solder ball to PCB pad misalignment must be better than  $150 \mu\text{m}$  to assure a robust mounting process. Generally, this is achievable using a wide range of modern pick and placement systems. The following setup conditions are important for the pick and placement systems:


- The pick and placement nozzle type should be sized to the dimensions of the Xilinx device. The nozzle needs to firmly hold the device package during the pick and placement stage. The appropriate nozzle type for the device package can be chosen from the manual provided by the pick and placement equipment company.
- The ball recognition capabilities of the placement system should be used and package outline centering should be avoided. This eliminates the solder ball to package edge tolerances of the package. Refer to the specific package outline drawing for details.
- To ensure the proper identification of the device package by the vision system, a suitable lighting system and the correct choice of the features of the measuring method are essential. The most suitable settings can be chosen from the manual provided by the pick and placement equipments company.
- To avoid solder bridging or solder smear, ensure the proper placement force of the device package during placement on the PCB. Excessive placement force can lead to excess solder paste and cause solder bridging. However, a slight placement force can lead to insufficient solder paste contact between the device package solder balls and the solder paste, causing solder defects including open solder joints, badly centered packages, or even head-in-pillow (HIP) defects.



# Recommended PCB Design Rules for BGA Packages

## BGA Packages

Xilinx provides the diameter of a land pad on the package side. This information is required prior to the start of the board layout so the board pads can be designed to match the component-side land geometry. The typical values of these land pads are described in [Figure 8-1](#) and summarized in [Table 8-1](#). PCB pad size is based on the BGA ball size. Typical requirements for the PCB pad size are 80-120% of ball size however, given a large package size and to prevent solder bridging, a pad size closer to 80% of the ball size is recommended. For Xilinx BGA packages, non-solder mask defined (NSMD) pads on the board are suggested to allow a clearance between the land metal (diameter L) and the solder mask opening (diameter M) as shown in [Figure 8-1](#).

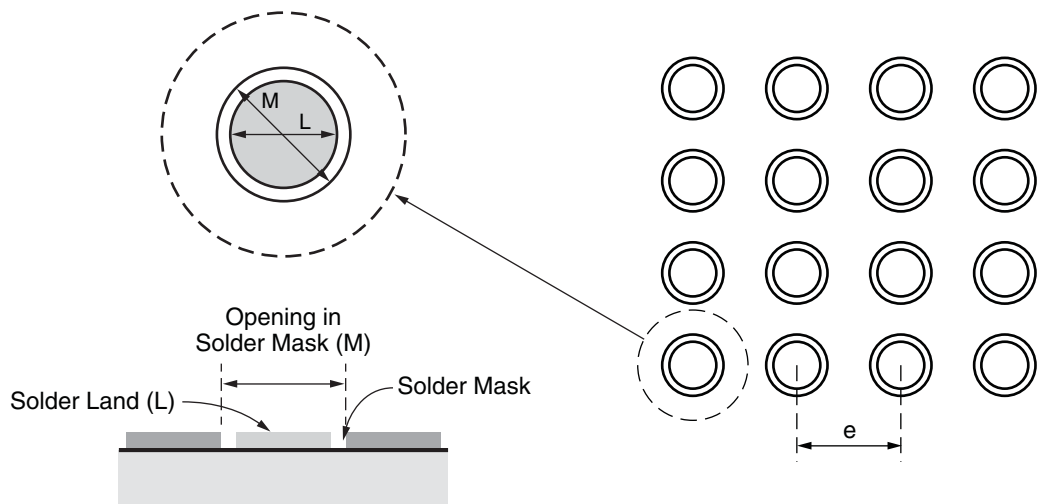

UG575\_c8\_01\_102213

Figure 8-1: Suggested Board Layout of Soldered Pads for BGA Packages


An example of an NSMD PCB pad solder joint is shown in Figure 8-2. The space between the NSMD pad and the solder mask, as well as the actual signal trace widths, depends on the capability of the PCB vendor. The cost of the PCB is higher when the line width and spaces are smaller.



**RECOMMENDED:** Xilinx recommends not mixing PCB pad isolated via-in-pad plated over (VIPPO) and non-VIPPO design styles because they can cause hot tear defects that are related to localized Z-direction thermal expansion coefficient mismatch between VIPPO and non-VIPPO vias. A VIPPO via expands less than a non-VIPPO via.



**RECOMMENDED:** For packages that include land-side capacitors (LSCs), such as the FSVA3824 or FSVB3824, the region underneath the LSCs should be covered by solder mask.

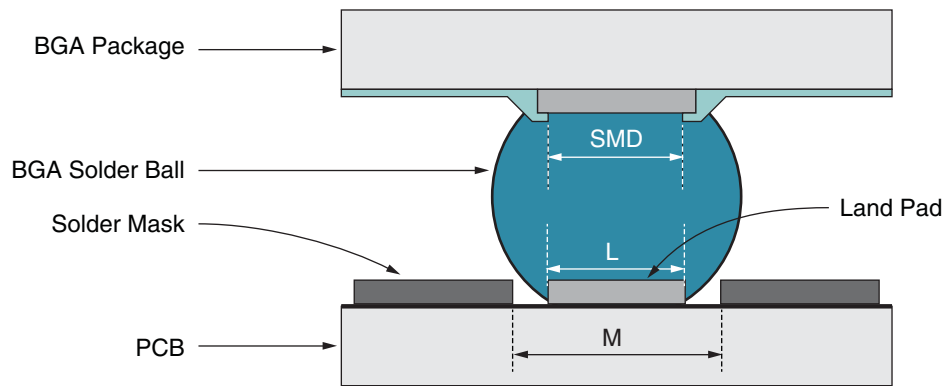

UG358\_aA\_02\_110513

Figure 8-2: Example of an NSMD PCB Pad Solder Joint

Table 8-1: BGA Package Design Rules

Flip-Chip BGA Packages	1.0 mm Pitch	0.92 mm Pitch	0.8 mm Pitch
Design Rule	Dimensions in mm (mils)		
Package land pad opening (SMD)	0.53 mm (20.9 mils)	0.53 mm (20.9 mils)	0.40 mm (15.7 mils)
Maximum PCB solder land (L) diameter	0.50 mm (19.7 mils)	0.51 mm (20.0 mils)	0.40 mm (15.7 mils)
Opening in PCB solder mask (M) diameter	0.65 mm (25.6 mils)	0.61 mm (24.0 mils)	0.50 mm (19.7 mils)
Solder ball land pitch (e)	1.00 mm (39.4 mils)	0.92 mm (36.2 mils)	0.80 mm (31.5 mils)

**Notes:**

1. Controlling dimension in mm.

## Stencil

Solder paste is applied to PCB metal pads by screen printing. The volume of the printed solder paste is determined by the stencil aperture and the stencil thickness. In most cases, the thickness of a stencil must be matched to the needs of all components on the PCB. Stencil apertures should be a circular shape. To ensure a uniform and high-solder paste transfer to the PCB, laser-cut stencil, made from mostly stainless steel, is typically used. Nickel Blank stencils, referring to stencils where the entire foil is laser-cut from a sheet of pure nickel material, can also be used. However, high-quality nano-coated stencils (laser cut from stainless steel) can perform as well as or better than Nickel Blanks.

### Uniform Stencil Aperture Design

- For packages with 0.92 mm ball pitch, a uniform stencil aperture opening of 19.7 mils to 20.0 mils round is recommended, matching the PCB pad size.
- For packages less than 55 mm x 55 mm with 1 mm ball pitch, a uniform stencil aperture opening of 19.7 mils to 20.0 mils round is also recommended.

### Bull's Eye Stencil Recommendation

Another option is to use a *Bull's Eye* stencil aperture, where the board land-pad diameter increases from the center of the device outward, matching the variable aperture diameter of the stencil, at a rate that depends on the warpage as a function of thermal expansion and mechanical attachment. This can vary depending on the PCB. The bull's eye offers a capture margin, because with an increased opening size with respect to the outer BGA balls, more solder paste is printed. A recommended stencil design for the bull's eye design is shown in [Figure 8-3](#). Similar stencil designs are recommended for packages 55 mm x 55 mm and larger with 1 mm ball pitch. The final stencil design should be based on an evaluation of the board design. Designers should work with their CM to optimize the stencil design and assembly process.



---

**RECOMMENDED:** *Xilinx recommends using a 4 mil to 5 mil thick stencil.*

---



---

**RECOMMENDED:** *Xilinx recommends using a uniform stencil aperture opening of 19.7 mils to 20 mils round, matching the PCB pad size for packages less than 55 mm x 55 mm with 1.0 mm ball pitch.*

---



---

**RECOMMENDED:** *Xilinx recommends using a non-uniform (*Bull's Eye*) stencil aperture opening for packages 55 mm x 55 mm and larger with 1.0 mm ball pitch.*

---

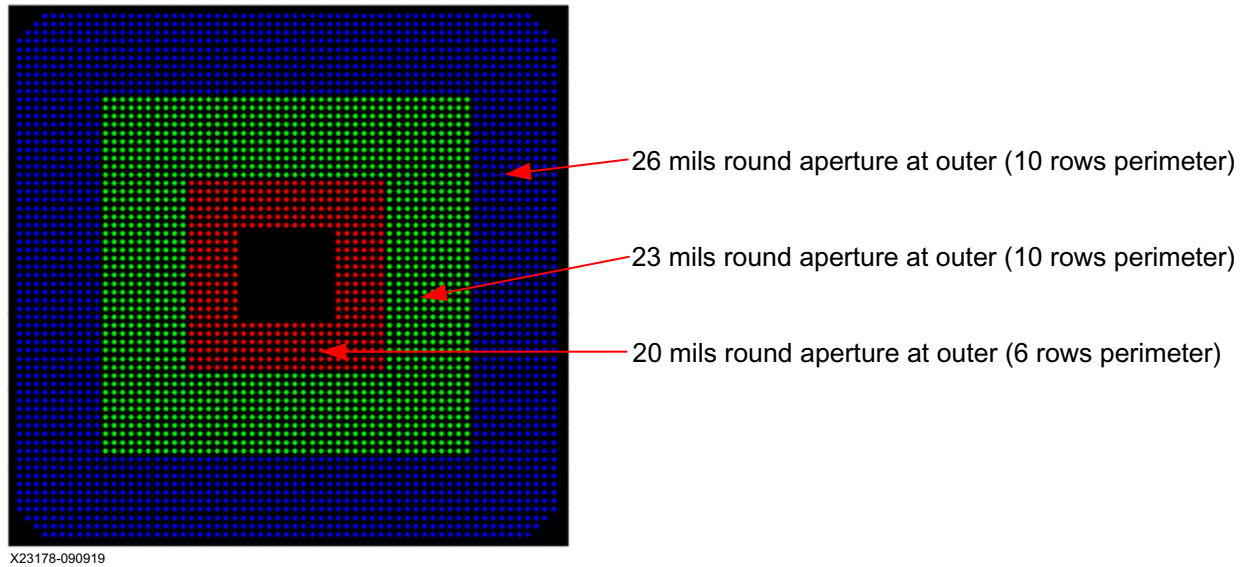



Figure 8-3: Bull's Eye Stencil Aperture

# Edge Bonding Guidelines

---

## Summary

The edge bonding technique uses high-adhesion adhesives dispensed along the periphery of a component, as shown in [Figure 9-1](#). Xilinx® recommends edge bonding larger packages (55 mm x 55 mm or larger) for increased mechanical reliability.

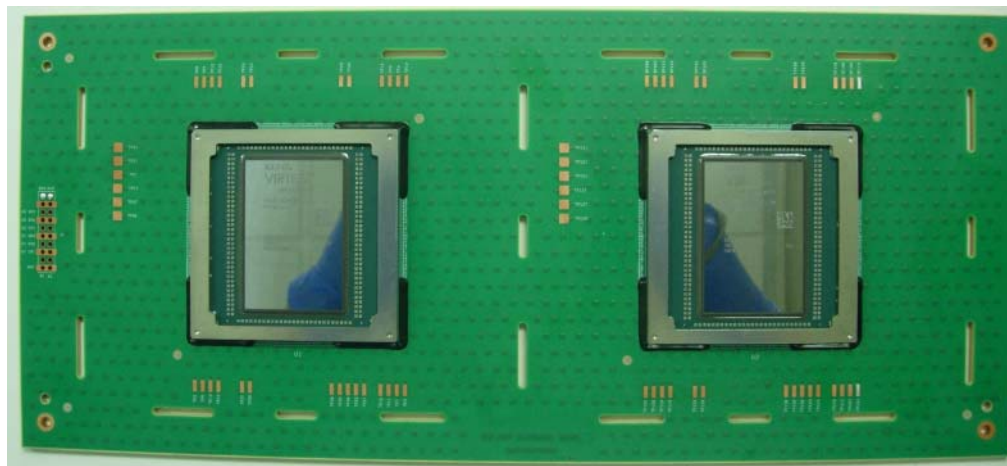

*Figure 9-1: Edge Bonded BGA Packages*


## Edge Bonding Implementation

Edge bonding is the dispensing of an epoxy material around the periphery of the package after board mount. Xilinx requires the use of the [Zymet UA-2605-B](#) edge-bonding material.



Edge bonding is not intended to under fill the package or contact the solder balls. This technique allows for component rework and improves the robustness of the mounted component by controlling the expansion and warpage of the board during normal operating conditions

To place the adhesive while using an in-line soldering robot, Xilinx recommends the parameters shown in [Table 9-1](#).

Table 9-1: Process Parameters for Edge Bonding

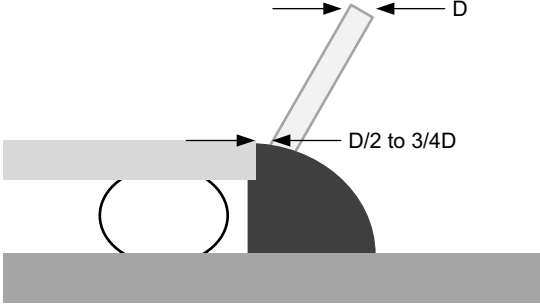Process Parameter	Range Specification
Needle size	25—20 gauge
Needle height	Above the device edge midpoint, or 0 to 1.5 mm below the device top surface
Needle edge spacing	Half to three quarters of the needle outer diameter (D)  <p style="text-align: right; font-size: small;">X23147-090519</p>
Dispense needle speed	0.1 to 200 mm/second (typical 15 mm/sec)
Valve pressure	20 to 60 psi (typical 25 psi)

The adhesive is dispensed along the perimeter of the assembled component at a width of 3 mm and a height of 50% to 90% the substrate height, leaving a small section at the center of each edge unbonded, as illustrated in Figure 9-2. This is to ensure that there is an outlet for any expansion of the air during processing. Xilinx recommends centering the opening on each side with a width of 25–30% the length of the package substrate. The exact locations and size of the openings can be varied depending on the design and rework.

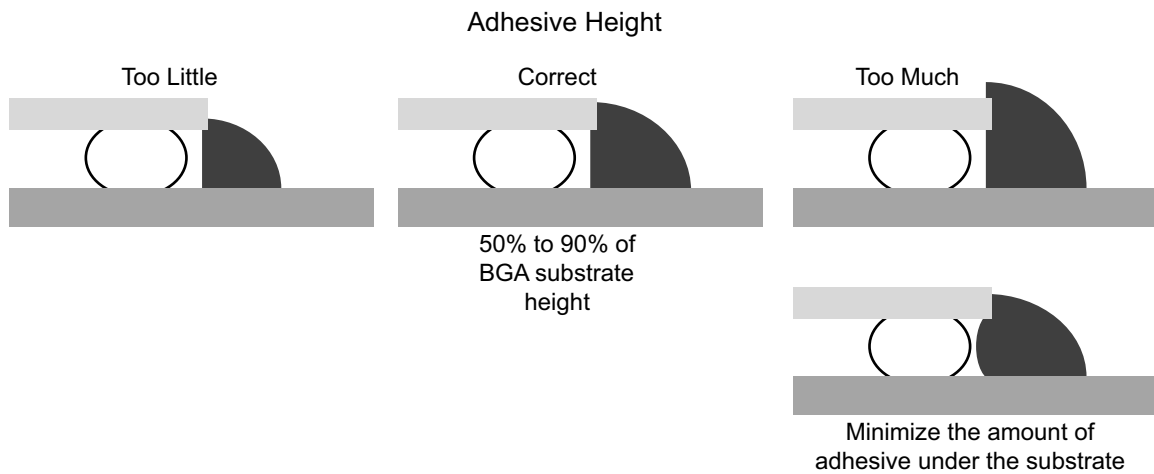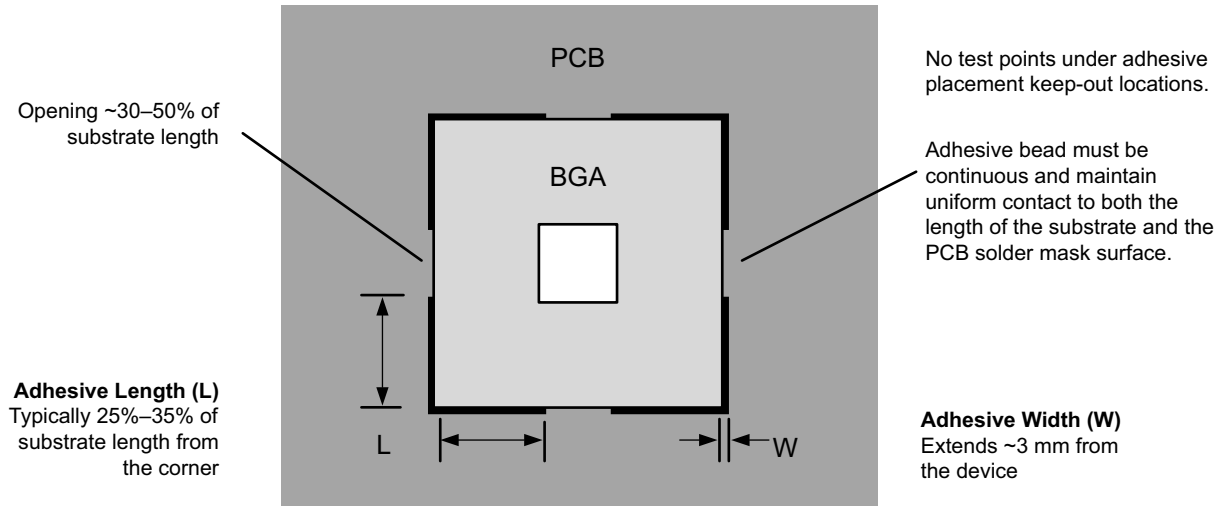

X23146-09091E

Figure 9-2: Edge Bonding Adhesive Placement Parameters



**RECOMMENDED:** Curing conditions are 155°C for 10 minutes.

## Component Clearance Surrounding Edge Bond

An adjacent component clearance surrounding the Xilinx device is necessary to have the 30° to 45° angle required by the for the edge bond dispenser to dispense the edge bond adhesive material. The surrounding component height and distance from the device is validated based on each unique product design layout.

---

## Edge Bond Removal

Edge bond material can be removed by heating to 170–180°C, and scraping using a stiff probe made of stable organic material such as a non-resinous wood or Teflon. Use a hot air blower on the edge bond area and slowly remove the edge bond adhesive from side to side. Do not use force to remove the edge bond adhesive. Excess adhesive on the PCB can be removed using a chisel-tip soldering iron, with sufficient precautions to limit damage to the PCB surface.



# Thermal Specifications

---

## Introduction

UltraScale™ and UltraScale+™ devices are offered exclusively in thermally efficient flip-chip BGA packages. These flip-chip packages range in pin-count from the smaller 23 x 23 mm SFVA784 to the 55 x 55 mm FLGA2892. This suite of packages is used to address the various power requirements of the UltraScale and UltraScale+ devices. UltraScale devices are implemented in the 20 nm process technology. UltraScale+ devices are implemented in the 16 nm process technology.

Unlike features in an ASIC or a microprocessor, the combination of FPGA features used in a user application is not known to the component supplier. Therefore, it remains a challenge for Xilinx to predict the power requirements of a given FPGA when it leaves the factory. Accurate estimates are obtained when the board design takes shape. For this purpose, Xilinx offers and supports a suite of integrated device power analysis tools to help users quickly and accurately estimate their design power requirements. UltraScale and UltraScale+ devices are supported similarly to previous FPGA products. The uncertainty of design power requirements makes it difficult to apply canned thermal solutions to fit all users. Therefore, Xilinx devices do not come with preset thermal solutions. Your design operating conditions dictate the appropriate solution.

---

## Thermal Resistance Data

Table 10-1 shows the thermal resistance data for UltraScale and UltraScale+ devices (grouped in the packages offered). The data includes junction-to-ambient in still air, junction-to-case, and junction-to-board data based on standard JEDEC four-layer measurements.



**IMPORTANT:** *The data in Table 10-1 is for device/package comparison purposes only. Attempts to recreate this data are only valid using the transient 2-phase measurement techniques outlined in JESD51-14. This data is not to be used in place of thermal simulation. Instead, refer to the thermal models provided for each device.*

---



**TIP:** The thermal data query for all available devices by package is available on the Xilinx website: [www.xilinx.com/cgi-bin/thermal/thermal.pl](http://www.xilinx.com/cgi-bin/thermal/thermal.pl).



**IMPORTANT:** All packages are available with eutectic BGA balls. To order these packages, the device type starts with an XQ vs. XC, and the third digit in the package name is Q (for example: FFQA1156). Refer to the XC version of these packages for their thermal resistance data and thermal models.

Table 10-1: Thermal Resistance Data

Package	Package Body Size	Devices	$\theta_{JB}$ (°C/W) <sup>(2)</sup>	$\theta_{JC}$ (°C/W) <sup>(2)</sup>	$\theta_{JA}$ (°C/W) <sup>(2)</sup>	$\theta_{JA}$ -Effective (°C/W) <sup>(1)(2)</sup>		
						@250 LFM	@500 LFM	@750 LFM
<b>Kintex UltraScale Devices</b>								
FBVA676	27 x 27	XCKU035	2.4	0.03	11.7	7.9	6.6	6.2
		XCKU040	2.4	0.03	11.7	7.9	6.6	6.2
RBA676	27 x 27	XQKU040	3.2	0.26	12.4	8.3	6.9	6.5
SFVA784	23 x 23	XCKU035	2.0	0.21	13.1	9.4	7.9	7.3
		XCKU040	2.0	0.21	13.1	9.4	7.9	7.3
FBVA900	31 x 31	XCKU035	2.5	0.03	10.5	6.8	5.7	5.3
		XCKU040	2.5	0.03	10.5	6.8	5.7	5.3
FFVA1156	35 x 35	XCKU025	2.5	0.21	9.5	5.9	5.0	4.6
		XCKU035	2.5	0.21	9.5	5.9	5.0	4.6
		XCKU040	2.5	0.21	9.5	5.9	5.0	4.6
		XCKU060	1.9	0.15	8.9	5.7	4.7	4.5
		XCKU095	1.7	0.10	8.8	5.6	4.7	4.4
RFA1156	35 x 35	XQKU040	3.0	0.26	9.9	6.1	5.1	4.8
		XQKU060	2.6	0.18	9.6	6.0	5.0	4.7
		XQKU095	2.3	0.12	9.3	5.9	4.9	4.6
FFVA1517	40 x 40	XCKU060	1.9	0.15	7.9	4.8	4.1	3.8
FLVA1517	40 x 40	XCKU085	1.7	0.10	7.8	4.8	4.0	3.8
		XCKU115	1.7	0.10	7.8	4.8	4.0	3.8
FFVC1517	40 x 40	XCKU095	1.7	0.10	7.8	4.8	4.0	3.8
FLVD1517	40 x 40	XCKU115	1.7	0.10	7.8	4.8	4.0	3.8
RLD1517	40 x 40	XQKU115	2.1	0.10	7.4	4.3	3.6	3.9
FFVB1760	42.5 x 42.5	XCKU095	1.7	0.10	7.4	4.5	3.7	3.5
FLVB1760	42.5 x 42.5	XCKU085	1.7	0.10	7.4	4.4	3.7	3.5
		XCKU115	1.7	0.10	7.4	4.4	3.7	3.5
FLVD1924	45 x 45	XCKU115	1.7	0.10	7.0	4.2	3.5	3.3
FLVF1924	45 x 45	XCKU085	1.7	0.10	7.0	4.2	3.5	3.3
		XCKU115	1.7	0.10	7.0	4.2	3.5	3.3

Table 10-1: Thermal Resistance Data (Cont'd)

Package	Package Body Size	Devices	$\theta_{JB}$ (°C/W) <sup>(2)</sup>	$\theta_{JC}$ (°C/W) <sup>(2)</sup>	$\theta_{JA}$ (°C/W) <sup>(2)</sup>	$\theta_{JA}$ -Effective (°C/W) <sup>(1)(2)</sup>		
						@250 LFM	@500 LFM	@750 LFM
RLF1924	45 x 45	XQKU115	2.1	0.10	7.4	4.3	3.6	3.4
FLVA2104	47.5 x 47.5	XCKU115	1.7	0.10	6.7	3.9	3.3	3.1
FFVB2104	47.5 x 47.5	XCKU095	1.7	0.10	6.7	3.9	3.3	3.1
FLVB2104	47.5 x 47.5	XCKU115	1.7	0.10	6.7	3.9	3.3	3.1
<b>Virtex UltraScale Devices</b>								
FFVC1517	40 x 40	XCVU065	1.7	0.18	7.8	4.8	4.0	3.8
		XCVU080	1.7	0.10	7.8	4.8	4.0	3.8
		XCVU095	1.7	0.10	7.8	4.8	4.0	3.8
FFVD1517	40 x 40	XCVU080	1.7	0.10	7.8	4.8	4.0	3.8
		XCVU095	1.7	0.10	7.8	4.8	4.0	3.8
FLVD1517	40 x 40	XCVU125	1.6	0.09	7.7	4.7	4.0	3.7
FFVB1760	42.5 x 42.5	XCVU080	1.7	0.10	7.4	4.5	3.7	3.5
		XCVU095	1.7	0.10	7.4	4.5	3.7	3.5
FLVB1760	42.5 x 42.5	XCVU125	1.7	0.09	7.4	4.4	3.7	3.5
FFVA2104	47.5 x 47.5	XCVU080	1.7	0.10	6.7	3.9	3.3	3.1
		XCVU095	1.7	0.10	6.7	3.9	3.3	3.1
FLVA2104	47.5 x 47.5	XCVU125	1.8	0.09	6.8	3.9	3.3	3.1
FFVB2104	47.5 x 47.5	XCVU080	1.7	0.10	6.7	3.9	3.3	3.1
		XCVU095	1.7	0.10	6.7	3.9	3.3	3.1
FLVB2104	47.5 x 47.5	XCVU125	1.8	0.09	6.8	3.9	3.3	3.1
FLGB2104	47.5 x 47.5	XCVU160	1.5	0.06	6.5	3.8	3.2	3.0
		XCVU190	1.5	0.06	6.5	3.8	3.2	3.0
FFVC2104	47.5 x 47.5	XCVU095	1.7	0.10	6.7	3.9	3.3	3.1
FLVC2104	47.5 x 47.5	XCVU125	1.8	0.09	6.8	3.9	3.3	3.1
FLGC2104	47.5 x 47.5	XCVU160	1.5	0.06	6.5	3.8	3.2	3.0
		XCVU190	1.5	0.06	6.5	3.8	3.2	3.0
FLGB2377	50 x 50	XCVU440	1.4	0.05	6.2	3.6	3.0	2.8
FLGA2577	52.5 x 52.5	XCVU190	1.4	0.06	5.9	3.4	2.8	2.7
FLGA2892	55 x 55	XCVU440	1.5	0.04	5.7	3.2	2.7	2.5

Table 10-1: Thermal Resistance Data (Cont'd)

Package	Package Body Size	Devices	$\theta_{JB}$ (°C/W) <sup>(2)</sup>	$\theta_{JC}$ (°C/W) <sup>(2)</sup>	$\theta_{JA}$ (°C/W) <sup>(2)</sup>	$\theta_{JA}$ -Effective (°C/W) <sup>(1)(2)</sup>		
						@250 LFM	@500 LFM	@750 LFM
<b>Artix UltraScale+ Devices</b>								
FFVB676	27 x 27	XCAU20P	2.07	0.25	10.2	7.1	6.0	5.6
		XCAU25P	2.07	0.25	10.2	7.1	6.0	5.6
SFVB784	23 x 23	XCAU20P	2.06	0.25	11.9	8.7	7.3	6.9
		XCAU25P	2.06	0.25	11.9	8.7	7.3	6.9
<b>Kintex UltraScale+ Devices</b>								
FFVA676	27 x 27	XCKU3P	2.07	0.25	10.2	7.1	6.0	5.6
		XCKU5P	2.07	0.25	10.2	7.1	6.0	5.6
FFVB676	27 x 27	XCKU3P	2.07	0.25	10.2	7.1	6.0	5.6
		XCKU5P	2.07	0.25	10.2	7.1	6.0	5.6
FFRB676	27 x 27	XQKU5P	2.26	0.27	10.4	7.3	6.1	5.7
SFVB784	23 x 23	XCKU3P	2.06	0.25	11.9	8.7	7.3	6.9
		XCKU5P	2.06	0.25	11.9	8.7	7.3	6.9
SFRB784	23 x 23	XQKU5P	2.06	0.25	11.9	8.7	7.3	6.9
FFVD900	31 x 31	XCKU3P	2.22	0.26	9.0	6.1	5.1	4.8
		XCKU5P	2.22	0.26	9.0	6.1	5.1	4.8
		XCKU11P	1.83	0.14	8.7	5.9	4.9	4.6
FFVE900	31 x 31	XCKU9P	2.33	0.25	9.2	6.1	5.1	4.9
		XCKU13P	2.25	0.18	9.1	6.1	5.1	4.8
FFVA1156	35 x 35	XCKU11P	1.97	0.14	7.8	5.1	4.2	4.0
		XCKU15P	1.69	0.10	7.6	5.0	4.1	3.9
FFRA1156	35 x 35	XQKU15P	1.92	0.11	7.7	5.1	4.2	4.0
FFVE1517	40 x 40	XCKU11P	1.96	0.14	6.8	4.3	3.6	3.4
		XCKU15P	1.76	0.10	6.6	4.2	3.5	3.4
FFRE1517	40 x 40	XQKU15P	1.90	0.11	6.8	4.3	3.5	3.4
FFVA1760	42.5 x 42.5	XCKU15P	1.77	0.10	6.3	3.9	3.2	3.1
FFVE1760	42.5 x 42.5	XCKU15P	1.77	0.10	6.3	3.9	3.2	3.1
FFVJ1760	42.5 x 42.5	XCKU19P	1.81	0.09	6.3	3.9	3.3	3.1
FFVB2104	47.5 x 47.5	XCKU19P	1.85	0.09	5.7	3.4	2.8	2.7

Table 10-1: Thermal Resistance Data (Cont'd)

Package	Package Body Size	Devices	$\theta_{JB}$ (°C/W) <sup>(2)</sup>	$\theta_{JC}$ (°C/W) <sup>(2)</sup>	$\theta_{JA}$ (°C/W) <sup>(2)</sup>	$\theta_{JA}$ -Effective (°C/W) <sup>(1)(2)</sup>		
						@250 LFM	@500 LFM	@750 LFM
<b>Virtex UltraScale+ Devices</b>								
VSVA1365	35 x 35	XCVU23P	2.33	0.01	8.2	5.3	4.4	4.2
FFVC1517	40 x 40	XCVU3P	1.82	0.14	6.7	4.2	3.5	3.4
FFRC1517	40 x 40	XQVU3P	1.95	0.14	6.8	4.3	3.6	3.4
FSVJ1760	42.5 x 42.5	XCVU23P	2.33	0.09	6.8	4.2	3.5	3.3
FLGF1924	45 x 45	XCVU11P	1.48	0.07	5.7	3.5	2.9	2.8
FSVH1924	45 x 45	XCVU31P	2.10	0.04	6.2	3.8	3.1	3.0
FLVA2104	47.5 x 47.5	XCVU5P	1.69	0.09	5.5	3.3	2.8	2.7
		XCVU7P	1.69	0.09	5.5	3.3	2.8	2.7
FLRA2104	47.5 x 47.5	XQVU7P	1.69	0.09	5.5	3.3	2.8	2.7
FLGA2104	47.5 x 47.5	XCVU9P	1.45	0.06	5.4	3.3	2.7	2.6
FHGA2104	52.5 x 52.5	XCVU13P	1.45	0.05	5.4	3.3	2.7	2.6
FLVB2104	47.5 x 47.5	XCVU5P	1.69	0.09	5.5	3.3	2.8	2.7
		XCVU7P	1.69	0.09	5.5	3.3	2.8	2.7
FLRB2104	47.5 x 47.5	XQVU7P	1.69	0.09	5.5	3.3	2.8	2.7
FLGB2104	47.5 x 47.5	XCVU9P	1.45	0.06	5.4	3.3	2.7	2.6
		XCVU11P	1.53	0.07	5.5	3.3	2.7	2.6
FHGB2104	52.5 x 52.5	XCVU13P	1.45	0.05	5.4	3.3	2.7	2.6
FLVC2104	47.5 x 47.5	XCVU5P	1.69	0.09	5.5	3.3	2.8	2.7
		XCVU7P	1.69	0.09	5.5	3.3	2.8	2.7
FLGC2104	47.5 x 47.5	XCVU9P	1.45	0.06	5.4	3.3	2.7	2.6
		XCVU11P	1.53	0.07	5.5	3.3	2.7	2.6
FLRC2104	47.5 x 47.5	XQVU11P	1.53	0.07	5.5	3.3	2.7	2.6
FHGC2104	52.5 x 52.5	XCVU13P	1.45	0.05	5.4	3.3	2.7	2.6
FIGD2104	52.5 x 52.5	XCVU13P	1.54	0.01	7.6	4.4	3.6	3.3
		XCVU27P	1.54	0.01	7.6	4.4	3.6	3.3
		XCVU29P	1.54	0.01	7.6	4.4	3.6	3.3
FSGD2104	47.5 x 47.5	XCVU9P	1.66	0.01	7.8	4.8	3.9	3.5
		XCVU11P	1.63	0.01	7.9	4.9	4.0	3.7
FSVH2104	47.5 x 47.5	XCVU33P	2.10	0.03	5.9	3.5	2.9	2.8
		XCVU35P	1.78	0.02	5.6	3.4	2.8	2.7
		XCVU45P	1.78	0.02	5.6	3.4	2.8	2.7

Table 10-1: Thermal Resistance Data (Cont'd)

Package	Package Body Size	Devices	$\theta_{JB}$ (°C/W) <sup>(2)</sup>	$\theta_{JC}$ (°C/W) <sup>(2)</sup>	$\theta_{JA}$ (°C/W) <sup>(2)</sup>	$\theta_{JA-Effective}$ (°C/W) <sup>(1)(2)</sup>		
						@250 LFM	@500 LFM	@750 LFM
FLGA2577	52.5 x 52.5	XCVU9P	1.61	0.06	5.0	2.9	2.4	2.3
		XCVU11P	1.70	0.07	5.0	2.9	2.5	2.4
		XCVU13P	1.63	0.05	5.0	2.9	2.4	2.4
FSGA2577	52.5 x 52.5	XCVU13P	1.61	0.01	7.6	4.4	3.6	3.3
FSGA2577	52.5 x 52.5	XCVU27P	1.61	0.01	7.6	4.4	3.6	3.3
		XCVU29P	1.61	0.01	7.6	4.4	3.6	3.3
FSVH2892	55 x 55	XCVU35P	1.91	0.02	4.9	2.9	2.4	2.3
		XCVU37P	1.72	0.01	4.8	2.8	2.2	2.2
		XCVU45P	1.91	0.02	4.9	2.9	2.4	2.3
		XCVU47P	1.72	0.01	4.8	2.8	2.2	2.2
FSVK2892	55 x 55	XCVU57P	1.72	0.01	4.8	2.8	2.2	2.2
FSVA3824	65 x 65	XCVU19P	1.58	0.002	4.0	2.2	1.83	1.78
FSVB3824	65 x 65	XCVU19P	1.58	0.002	4.0	2.2	1.83	1.78

**Notes:**

1. All  $\theta_{JA-Effective}$  values assume no heat sink and include thermal dissipation through a standard JEDEC four-layer board. The Xilinx power estimation tools (Vivado® Power Analysis and Xilinx Power Estimator), which require detailed board dimensions and layer counts, are useful for deriving more precise  $\theta_{JA-Effective}$  values. This data is not to be used in place of thermal simulation. Instead, refer to the thermal models provided for each device.
2. This data is for device/package comparison purposes only. Attempts to recreate this data are only valid using the transient 2-phase measurement techniques outlined in JESD51-14.

## Support for Thermal Models

Table 10-1 provides the traditional thermal resistance data for UltraScale and UltraScale+ devices. These resistances are measured using a prescribed JEDEC standard that might not necessarily reflect your actual board conditions and environment. The quoted  $\theta_{JA}$  and  $\theta_{JC}$  numbers are environmentally dependent, and JEDEC has traditionally recommended that these be used with that awareness. For more accurate junction temperature prediction, these might not be enough, and a system-level thermal simulation might be required.

Though Xilinx continues to support these figure of merit data, for UltraScale and UltraScale+ devices, boundary conditions independent thermal resistor network (Delphi) models are offered for all UltraScale and UltraScale+ devices. These compact models seek to capture the thermal behavior of the packages more accurately at predetermined critical points (junction, case, top, leads, and so on) with the reduced set of nodes as illustrated in Figure 10-1.

Unlike a full 3D model, these are computationally efficient and work well in an integrated system simulation environment. Delphi models are available for download on the Xilinx website (under the [Device Model](#) tab).

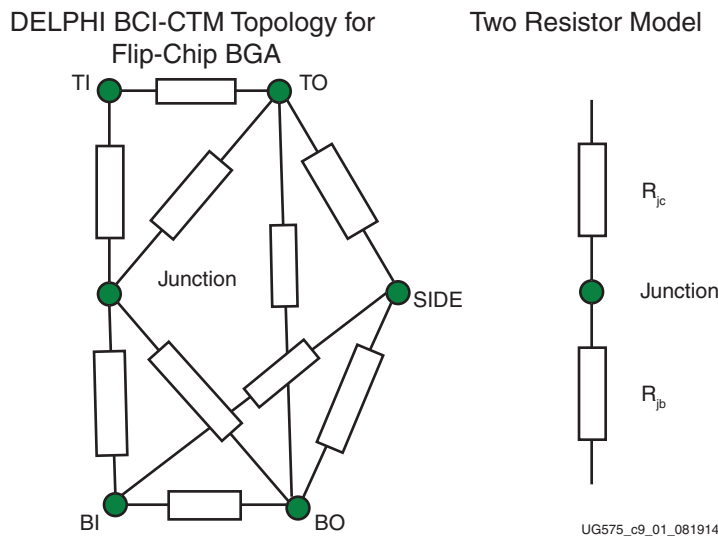


Figure 10-1: Thermal Model Topologies



**RECOMMENDED:** Xilinx recommends use of the Delphi thermal model during thermal modeling of a package. The Delphi thermal model includes consideration of the thermal interface material parameters and the manufacture variation on the thermal solution. Examples of manufacture variations include the tolerance in airflow from a fan, the tolerance on performance of the heat pipe and vapor chamber, and the manufacture variation of the attachment of fins to the heat-sink base and the flatness of the surface.

# Thermal Management Strategy

## Introduction

As described in this section, Xilinx relies on a multi-pronged approach to consuming less power and dissipating heat for systems using UltraScale™ and UltraScale+™ devices.

## Flip-Chip Packages

UltraScale and UltraScale+ devices are offered in flip-chip BGA packages, which present a low thermal path. With the exception of the bare-die packages, the flip-chip BGA packages incorporate a heat spreader with an additional thermal interface material (TIM), as shown in Figure 11-1.

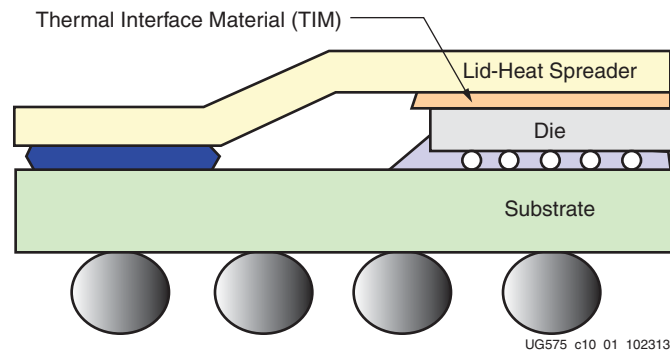


Figure 11-1: Heat Spreader with Thermal Interface Material

Materials with better thermal conductivity and consistent process deliver low thermal resistance to the heat spreader.

A parallel effort to ensure optimized package electrical return paths produces the added benefit of enhanced power and ground plane arrangement in the packages. A boost in copper density on the planes improves the overall thermal conductivity through the laminate. In addition, the extra dense and distributed via fields in the package increase the vertical thermal conductivity.



## System Level Heat Sink Solutions

To complete a comprehensive thermal management strategy, an overall thermal budget that includes custom or OEM heat-sink solutions depends on the physical and mechanical constraints of the system. A heat-sink solution, managed by the system-level designer, should be tailored to the design and specific system constraints. This includes understanding the inherent device capabilities for delivering heat to the surface.

By considering the system's physical, mechanical, and environmental constraints, the overall thermal budget is maintained and does not exceed the device's maximum operating temperature. The heat sink is an integral part of the thermal management solution to maintain a safe operating temperature. As a result, the system-level designer must be aware of the following:

- For lidless packages, the nominal stiffener height can be different from the height of the die. Therefore, the heat sink must have an island to contact the die.
- Especially for lidless packages, Xilinx advises against direct use of the  $\theta_{JC}$  parameters (see [Table 10-1](#)) to determine the thermal performance of the device in your application. The calculation of these parameters are done in accordance with the JEDEC standard JESD51 where system parameters differ greatly from most applications. Instead, run thermal simulations of the system in worst-case environmental conditions using Delphi thermal models, which more accurately represent the device thermal performance under all boundary conditions.
- Consider the mechanical specifications of the package as well as the selection of the thermal interface between the die and the thermal management solution to ensure the lowest thermal contact resistance.
- The total thermal contact of the thermal interface material is determined based on parameters from the thermal interface supplier's data sheet.
- See the applied pressure recommendation on [page 493](#). Lower pressure runs the risk of poor thermal contact and higher pressure runs the risk of damaging the device; therefore, strict control of pressure is required.
- Consider all uncertainties in thermal modeling, including manufacturing variations from the thermal solutions (for example, fan airflow tolerance, heat pipe or vapor chamber performance tolerance, variation of the attachment of fins to heat sink base, and surface flatness).

---

## Thermal Interface Material

When installing heat sinks for UltraScale or UltraScale+ devices, a suitable thermal interface material must be used. This thermal material significantly aids the transfer of heat from the component to the heat sink.

For bare-die flip-chip BGAs, the surface of the silicon contacts the heat sink. For lidded flip-chip BGAs, the lid contacts the heat sink. The surface size of the bare-die flip-chip BGA and lidded flip-chip BGAs are different. Xilinx recommends a different type of thermal material for long-term use with each type of flip-chip BGAs package.

Thermal interface material is needed because even the largest heat sink and fan cannot effectively cool an UltraScale or UltraScale+ device unless there is good physical contact between the base of the heat sink and the top of the UltraScale or UltraScale+ device. The surfaces of both the heat sink and the UltraScale or UltraScale+ device silicon are not absolutely smooth. This surface roughness is observed when examined at a microscopic level. Because surface roughness reduces the effective contact area, attaching a heat sink without a thermal interface material is not sufficient due to inadequate surface contact.

A thermal interface material such as phase-change material, thermal grease, or thermal pads fills these gaps and allows effective transference of heat between the UltraScale or UltraScale+ device die and the heat sink.

The selection of the thermal interface material between the package and the thermal management solution is critical to ensure the lowest thermal contact resistance. Therefore, the following parameters must be considered.

1. The flatness of the lid and the flatness of the contact surface of the thermal solution.
2. The applied pressure of the thermal solution on the package, which must be within the allowable maximum pressure that can be applied on the package.
3. The total thermal contact of the thermal interface material. This value is determined based on the parameters in [step 1](#) and [step 2](#), which are published in the data sheet of the thermal interface supplier.

## Types of TIM

There are many type of TIM available for sale. The most commonly used thermal interface materials are listed.

- Thermal grease
- Thermal pads
- Phase-change material
- Thermal paste
- Thermal adhesives
- Thermal tape

## Guidelines for Thermal Interface Materials

Five factors affect the choice, use, and performance of the interface material used between the processor and the heat sink:

- [Thermal Conductivity of the Material](#)
- [Electrical Conductivity of the Material](#)
- [Spreading Characteristics of the Material](#)
- [Long-Term Stability and Reliability of the Material](#)
- [Ease of Application](#)
- [Applied Pressure from Heat Sink to the Package via Thermal Interface Materials](#)

### Thermal Conductivity of the Material

Thermal conductivity is the quantified ability of any material to transfer heat. The thermal conductivity of the interface material has a significant impact on its thermal performance. The higher the thermal conductivity, the more efficient the material is at transferring heat. Materials that have a lower thermal conductivity are less efficient at transferring heat, causing a higher temperature differential to exist across the interface. To overcome this less efficient heat transfer, a better cooling solution (typically, a more costly solution) must be used to achieve the desired heat dissipation.

### Electrical Conductivity of the Material

Some metal-based TIM compounds are electrically conductive. Ceramic-based compounds are typically not electrically conductive. Manufacturers produce metal-based compounds with low-electrical conductivity, but some of these materials are not completely electrically inert. Metal-based thermal compounds are not hazardous to an UltraScale or UltraScale+ device die itself, but other elements on an UltraScale or UltraScale+ device or the motherboard can be at risk if they become contaminated by the compound. For this reason, Xilinx does not recommend the use of electrically conductive thermal interface material.

### Spreading Characteristics of the Material

The spreading characteristics of the thermal interface material determines its ability, under the pressure of the mounted heat sink, to spread and fill in or eliminate the air gaps between the UltraScale or UltraScale+ device and the heat sink. Because air is a very poor thermal conductor, the more completely the interface material fills the gaps, the greater the heat transference.

## Long-Term Stability and Reliability of the Material

The long-term stability and reliability of the thermal interface material is described as the ability to provide a sufficient thermal conductance even after an extended time or extensive. Low-quality compounds can harden or leak out over time (the pump-out effect), leading to overheating or premature failure of the UltraScale or UltraScale+ device. High-quality compounds provide a stable and reliable thermal interface material throughout the lifetime of the device. Thermal greases with higher viscosities are typically more resistant to pump out effects on bare-die devices.

## Ease of Application

A spreadable thermal grease requires the surface mount supplier to carefully use the appropriate amount of material. Too much or too little material can cause problems. The thermal pad is a fixed size and is therefore easier to apply in a consistent manner.

## *Applied Pressure from Heat Sink to the Package via Thermal Interface Materials*

Measure applied pressure using a calibrated pressure sensor on multiple locations between the device and the heat sink assembly as shown in [Figure 11-2](#).

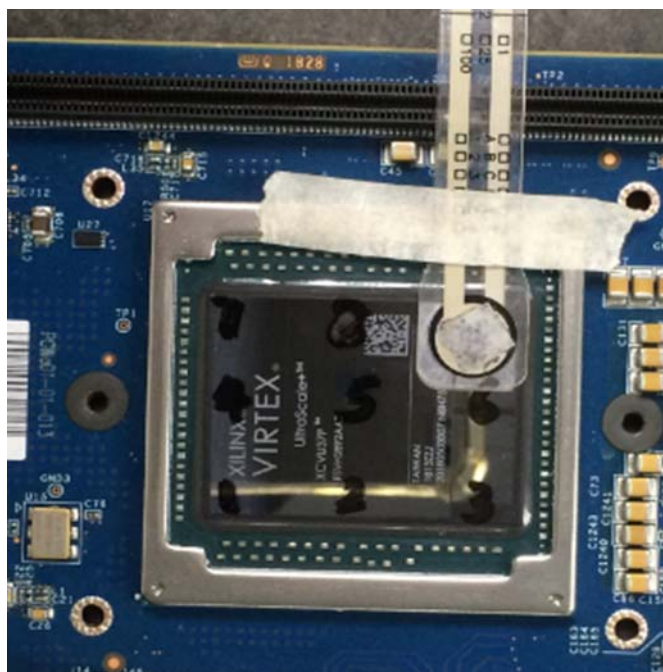


Figure 11-2: Pressure Sensor




**RECOMMENDED:** Xilinx recommends that the applied pressure on the package be in the range of 20 to 50 psi for optimum performance of the thermal interface material (TIM) between the package and the heat sink. Thermocouples should not be present between the package and the heat sink, as their presence will degrade the thermal contact and result in incorrect thermal measurements. The best practice is to select the appropriate pressure (in the 20 to 50 psi range) for the optimum thermal contact performance between the package and the thermal system solution, and the mechanical integrity of the package (with the thermal solution to pass all mechanical stress and vibration qualification tests).



**TIP:** These recommendations and specifications are the same for both lidded and lidless devices.



**RECOMMENDED:** Xilinx recommends using dynamic mounting around the four corners of the device package. On the PCB, use a bracket clip as part of the heat sink attachment to provide mechanical package support. See [Figure 11-3](#).

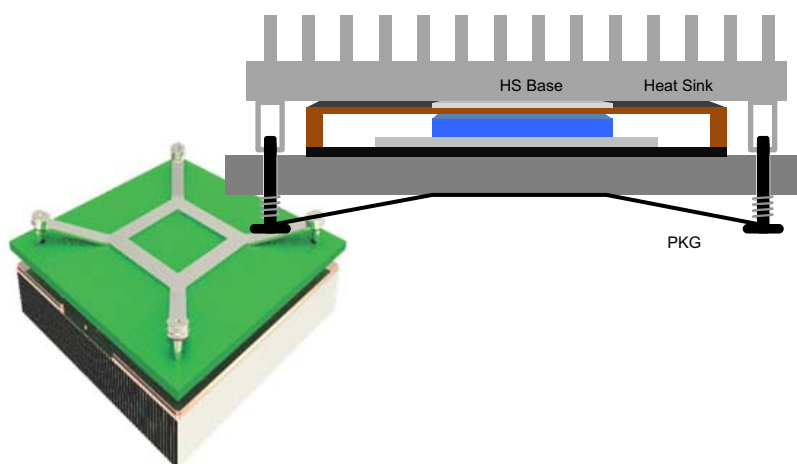

X15431-111316

Figure 11-3: Dynamic Mounting and Bracket Clips on Heat Sink Attachment

## Heat Sink Removal


When removing or reworking heat sinks, the phase-change material residue must be removed from the surface of the die. Laird Technologies, Inc. provides the following guidance for complete removal of the phase-change material from the component.

## Instructions for Removal of Phase-change Material

1. [Separate the Components](#)
2. [Scrape Away Thick Residue](#)
3. [Clean Remaining Residue with Solvent](#)
4. [Working with Laird Material](#)

### ***Separate the Components***

At room temperature, if possible, use a back and forth twisting motion to break the bond between the phase-change thermal interface material and mated components (i.e., heat sink and FPGA). See [Figure 11-4](#).

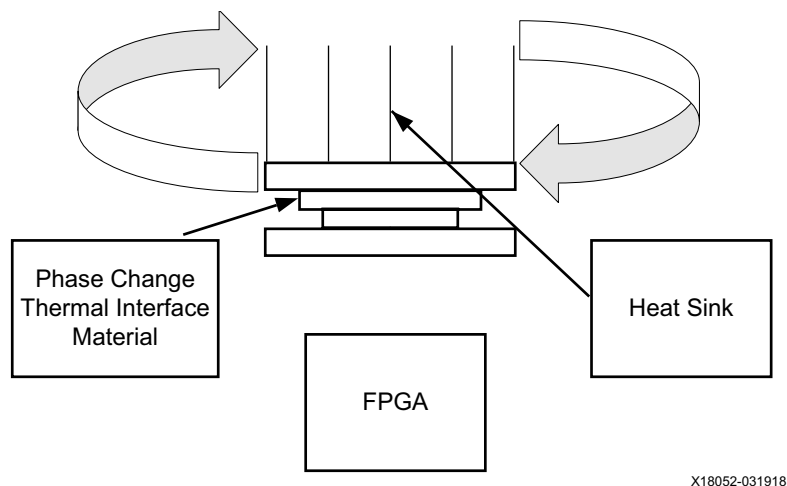

*Figure 11-4: Breaking the Bond between Thermal Interface Material and Mated Components*

For smaller components (typically 15 mm x 15 mm or less), the bond usually breaks free easily at room temperature. For larger components, in situations where minimal movement is available, or if using fragile components, heat the component (preferred) or heat sink to about 40°C–60°C before removal.

The guideline is 40°C–60°C, however, you might find that for your application, heating to 35°C is adequate. You might prefer to heat to 70°C which makes the phase-change thermal interface material very soft and the components can be easily separated.

### ***Scrape Away Thick Residue***

For a faster clean-up once components are separated, scrape away any large residual material amounts with a plastic spatula or a wooden tongue depressor. A clean dry rag can be used to wipe away excess material.

### ***Clean Remaining Residue with Solvent***

Using a clean cloth/wipe, wet it with your choice of solvent (see the following list) and wipe away any remaining residue.

- Toluene (easiest)
- Acetone (very good)
- Isoparaffinic hydrocarbon: Isopar, Soltrol (trade names) (very good)
- Isopropyl alcohol (OK)

### ***Working with Laird Material***

Safe handling, disposal, and first-aid measures for working with phase-change material are included in the Laird Technologies material safety data sheet (MSDS). Read the MSDS before using or handling. See the Laird Technologies, Inc. website, [www.lairdtech.com](http://www.lairdtech.com).

---

## **Measurement Debug**

When performing in-system thermal testing, to ensure accurate data and not incur damage to the device, do not place a thermocouple in between the device and the heat sink. On the extreme side, it might cause additional mechanical and/or thermal stress to the device, leading to damage. Even if damage does not occur, it often leads to a thicker and or uneven thermal interface material thickness, leading to a thermal performance difference from a system without a thermocouple. To obtain the device temperature, use the System Monitor as a non-invasive means to get accurate device measurements while debugging the system.

# Heat Sink Guidelines for Bare-die Flip-Chip Packages

## Heat Sink Attachments for Bare-die FB Packages

Heat sinks can be attached to the package in multiple ways. For heat to dissipate effectively, the advantages and disadvantages of each heat sink attachment method must be considered. Factors influencing the selection of the heat sink attachment method include the package type, contact area of the heat source, and the heat sink type.

### Silicon and Decoupling Capacitors Height Consideration

When designing heat sink attachments for bare-die flip-chip BGA packages, the height of the die above the substrate and also the height of decoupling capacitors must be considered (Figure 12-1). This is to prevent electrical shorting between the heat sink (metal) and the decoupling capacitors.

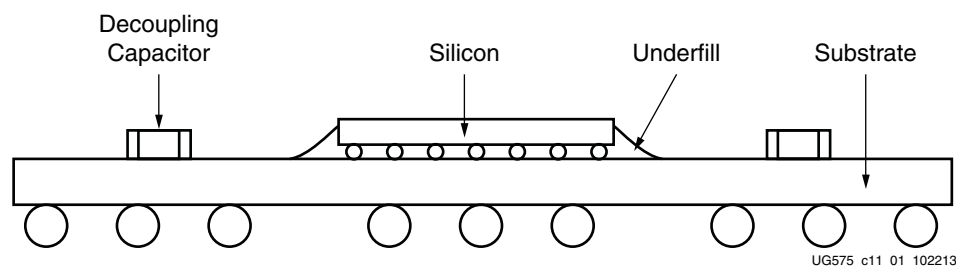


Figure 12-1: Cross Section of Bare-die Flip-chip BGA



## Types of Heat Sink Attachments

There are six main methods for heat sink attachment. [Table 12-1](#) lists their advantages and disadvantages.

- [Thermal tape](#)
- [Thermally conductive adhesive or glue](#)
- [Wire form Z-clips](#)
- [Plastic clip-ons](#)
- [Threaded stand-offs \(PEMs\) and compression springs](#)
- [Push-pins and compression springs](#)

Table 12-1: Heat Sink Attachment Methods

Attachment Method	Advantages	Disadvantages
Thermal tape	<ul style="list-style-type: none"> <li>• Generally easy to attach and is inexpensive.</li> <li>• Lowest cost approach for aluminum heat sink attachment.</li> <li>• No additional space required on the PCB.</li> </ul>	<ul style="list-style-type: none"> <li>• The surfaces of the heat sink and the chip must be very clean to allow the tape to bond correctly.</li> <li>• Because of the small contact area, the tape might not provide sufficient bond strength.</li> <li>• Tape is a moderate to low thermal conductor that could affect the thermal performance.</li> </ul>
Thermally conductive adhesive or glue	<ul style="list-style-type: none"> <li>• Outstanding mechanical adhesion.</li> <li>• Fairly inexpensive, costs a little more than tape.</li> <li>• No additional space required on the PCB.</li> </ul>	<ul style="list-style-type: none"> <li>• Adhesive application process is challenging and it is difficult to control the amount of adhesive to use.</li> <li>• Difficult to rework.</li> <li>• Because of the small contact area, the adhesive might not provide sufficient bond strength.</li> </ul>
Wire form Z-clips	<ul style="list-style-type: none"> <li>• It provides a strong and secure mechanical attachment. In environments that require shock and vibration testing, this type of strong mechanical attachment is necessary.</li> <li>• Easy to apply and remove. Does not cause the semiconductors to be destroyed (epoxy and occasionally tape can destroy the device).</li> <li>• It applies a preload onto the thermal interface material (TIM). Pre-loads actually improve thermal performance.</li> </ul>	<ul style="list-style-type: none"> <li>• Requires additional space on the PCB for anchor locations.</li> </ul>


Table 12-1: Heat Sink Attachment Methods (Cont'd)

Attachment Method	Advantages	Disadvantages
Plastic clip-ons	<ul style="list-style-type: none"> <li>• Suitable for designs where space on the PCB is limited.</li> <li>• Easy to rework by allowing heat sinks to be easily removed and reapplied without damaging the PCB board.</li> <li>• Can provide a strong enough mechanical attachment to pass shock and vibration test.</li> </ul>	<ul style="list-style-type: none"> <li>• Needs a keep out area around the silicon devices to use the clip.</li> <li>• Caution is required when installing or removing clip-ons because localized stress can damage the solder balls or chip substrate.</li> </ul>
Threaded stand-offs (PEMs) and compression springs	<ul style="list-style-type: none"> <li>• Provides stable attachments to heat source and transfers load to the PCB, backing plate, or chassis.</li> <li>• Suitable for high mass heat sinks.</li> <li>• Allows for tight control over mounting force and load placed on chip and solder balls.</li> </ul>	<ul style="list-style-type: none"> <li>• Holes are required in the PCB taking valuable space that can be used for trace lines.</li> <li>• Tends to be expensive, especially since holes need to be drilled or predrilled onto the PCB board to use stand-offs.</li> </ul>
Push-pins and compression springs	<ul style="list-style-type: none"> <li>• Provides a stable attachment to a heat source and transfers load to the PCB.</li> <li>• Allows for tight control over mounting force and load placed on chip and solder balls.</li> </ul>	<ul style="list-style-type: none"> <li>• Requires additional space on the PCB for push-pin locations.</li> </ul>

## Heat Sink Attachment

### Component Pick-up Tool Consideration

For pick-and-place machines to place bare-die flip-chip BGAs onto PCBs, Xilinx recommends using soft tips or suction cups for the nozzles. This prevents chipping, scratching, or even cracking of the bare die (Figure 12-2).

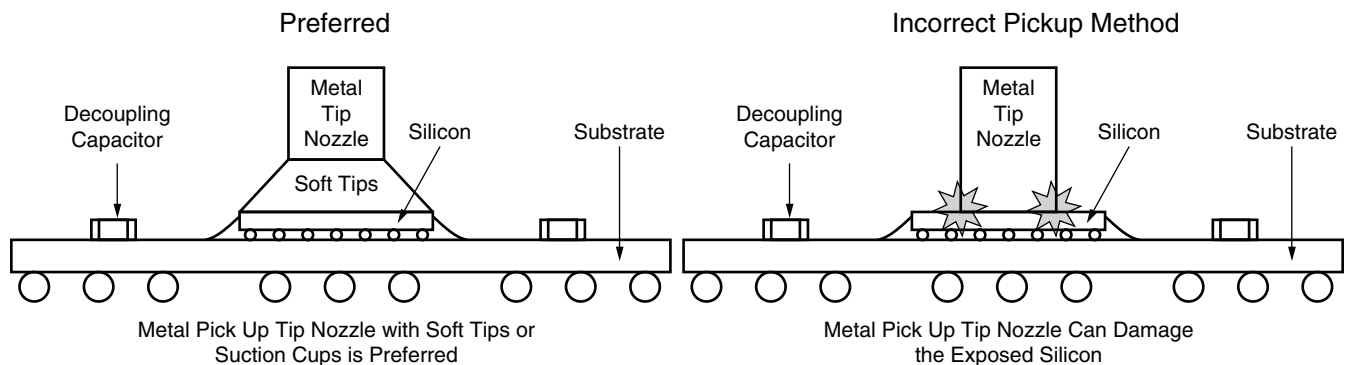

UG575\_c11\_02\_102213


Figure 12-2: Recommended Method For Using Pick-up Tools

### Heat Sink Attachment Process Considerations

After the component is placed onto the PCBs, when attaching a heat sink to the bare-die package, the factors in Table 12-2 must be carefully considered (see Figure 12-3).

Table 12-2: Heat Sink Attachment Considerations

Consideration(s)	Effect(s)	Recommendation(s)
In heat sink attach process, what factors can cause damage to the exposed die and passive capacitors?	<ul style="list-style-type: none"> <li>• Uneven heat sink placement</li> <li>• Uneven TIM thickness</li> <li>• Uneven force applied when placing heat sink placement</li> </ul>	<ul style="list-style-type: none"> <li>• Even heat sink placement</li> <li>• Even TIM thickness</li> <li>• Even force applied when placing heat sink placement</li> </ul>
Does the heat sink tilt or tip the post attachment?	Uneven heat sink placement will damage the silicon and can cause field failures.	<ul style="list-style-type: none"> <li>• Careful handling not to contact the heat sink with the post attachment.</li> <li>• Use a fixture to hold the heat sink in place with post attachment until it is glued to the silicon.</li> </ul>

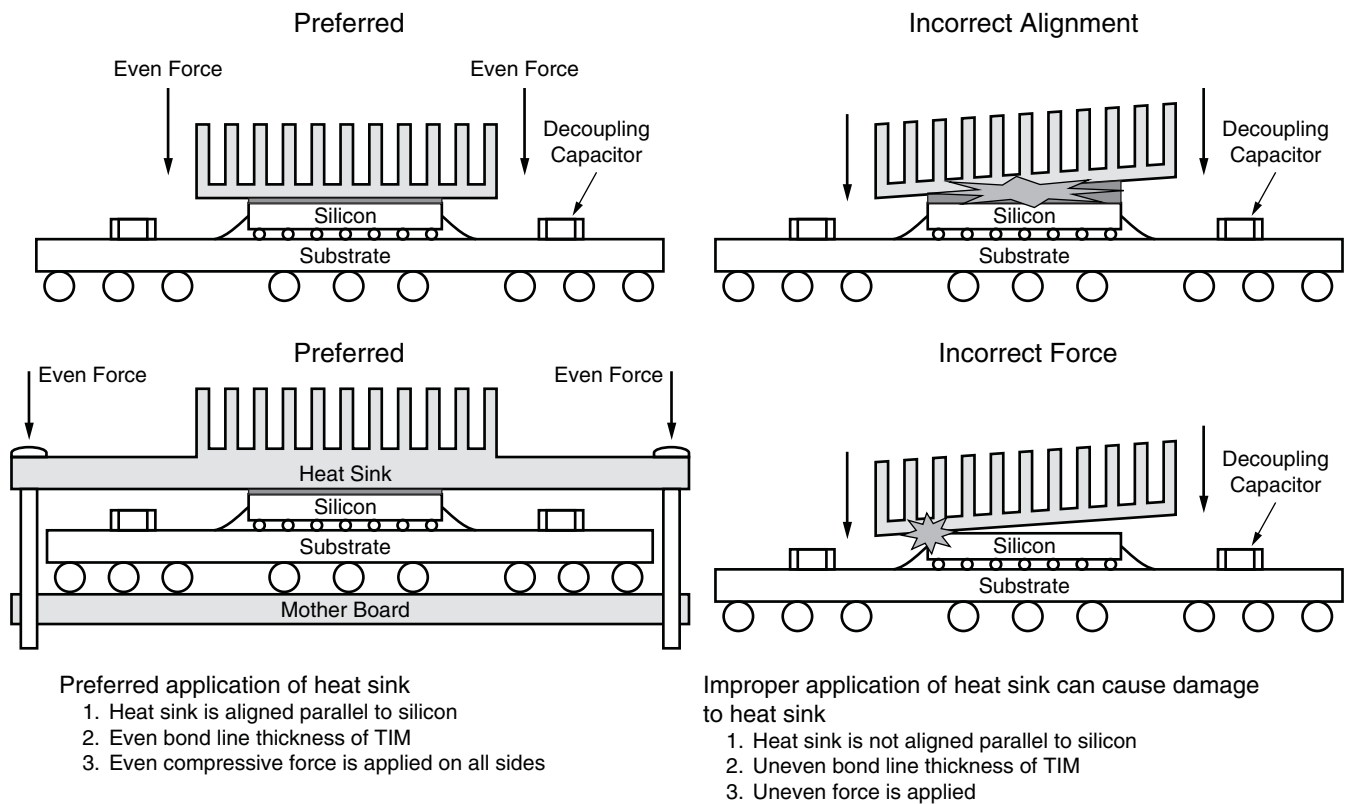

UG575\_c11\_03\_110513

Figure 12-3: Recommended Application of Heat Sink

### Standard Heat Sink Attach Process with Thermal Conductive Adhesive

Prior to attaching the heat sink, the UltraScale or UltraScale+ device needs be surface mounted on the motherboard.

1. Place the motherboard into a jig or a fixture to hold the motherboard steady to prevent any movement during the heat sink attachment process.
2. Thermoset material (electrically non-conductive) is applied over the backside surface of silicon in a pattern using automated dispensing equipment. Automated dispensers are often used to provide a stable process speed at a relatively low cost. The optimum dispensing pattern needs to be determined by the SMT supplier.

**Note:** Minimal volume coverage of the backside of the silicon can result in non-optimum heat transfer.

3. The heat sink is placed on the backside of the silicon with a pick and place machine. A uniform pressure is applied over the heat sink to the backside of the silicon. As the heat sink is placed, the adhesive spreads to cover the backside silicon. A force transducer is normally used to measure and limit the placement force.
4. The epoxy is cured with heat at a defined time.

**Note:** The epoxy curing temperature and time is based on manufacturer's specifications.

### Standard Heat Sink Attach Process with Thermal Adhesive Tape

Prior to attaching the heat sink, the UltraScale or UltraScale+ device needs be surface mounted on the motherboard.

1. Place the motherboard into a jig or a fixture to hold the motherboard steady to prevent any movement during the heat sink attachment process.
2. Thermal adhesive tape cut to the size of the heat sink is applied on the underside of the heat sink at a modest angle with the use of a squeegee rubber roller. Apply pressure to help reduce the possibility of air entrapment under the tape during application.
3. The heat sink is placed on the backside of the silicon with a pick and place machine. A uniform pressure is applied over the heat sink to the backside of the silicon. As the heat sink is placed, the thermal adhesive tape is glued to the backside of the silicon. A force transducer is normally used to measure and limit the placement force.
4. A uniform and constant pressure is applied uniformly over the heat sink and held for a defined time.

**Note:** The thermal adhesive tape hold time is based on manufacturer's specifications.

### Push-Pin and Shoulder Screw Heat Sink Attachment Process with Phase Change Material (PCM) Application

Prior to attaching the heat sink, the UltraScale or UltraScale+ device needs be surface mounted on the motherboard.

1. Place the motherboard into a jig or a fixture to hold the motherboard steady to prevent any movement during the heat sink attachment process.

**Note:** The jig or fixture needs to account for the push pin depth of the heat sink.

2. PCM tape, cut to the size of the heat sink, is applied on the underside of the heat sink at a modest angle with the use of a squeegee rubber roller. Apply pressure to help reduce the possibility of air entrapment under the tape during application.

3. Using the push-pin tool, heat sinks are applied over the packages ensuring a pin locking action with the PCB holes. The compression load from springs applies the appropriate mounting pressure required for proper thermal interface material performance.

**Note:** Heat sinks must not tilt during installation. This process cannot be automated due to the mechanical locking action which requires manual handling. The PCB drill hole tolerances need to be close enough to eliminate any issues concerning the heat sink attachment.

# Mechanical and Thermal Design Guidelines for Lidless Flip-chip Packages

## Introduction

This chapter discusses the challenges of thermal management including reducing device thermal resistance and optimal power dissipation without an increase in junction temperature. The lidless UltraScale+ FPGA packages target the largest devices while allowing for cooler operation temperatures (up to 10°C) with the same power dissipation.

Precise mechanical design and component thermal management is vital for device and system performance. This document presents the unique thermal and mechanical design requirements for lidless devices.

## Lidless Flip-Chip Packages

The Xilinx flip-chip BGA packages exhibit a low-resistance thermal path that adequately cools devices. These packages incorporate a heat spreader lid with additional thermal interface material (Figure 13-1).


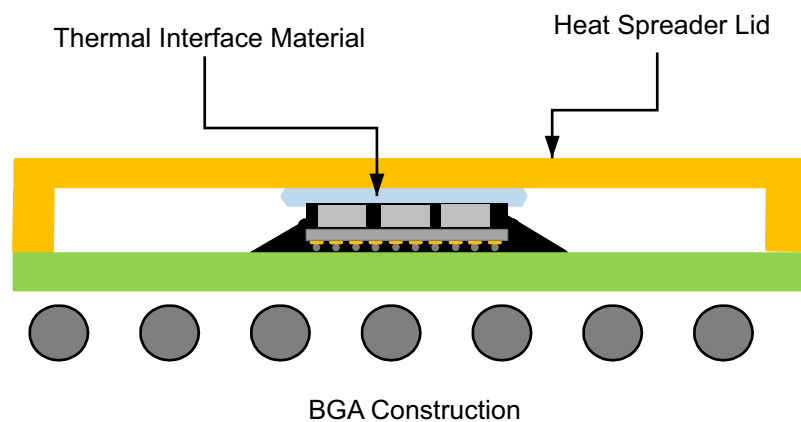


Figure 13-1: Flip-Chip BGA Construction with Heat Spreader and Thermal Interface Material

Materials with high thermal conductivity and consistent process applications deliver low thermal resistance up to the heat spreader. A parallel effort to ensure optimized package electrical return paths produces an enhanced power and ground plane arrangement in the package. A boost in copper density on the planes improves the overall thermal conductivity through the laminate. The extra density and distribution via fields in the package also increases the vertical thermal conductivity.

The lidless packages ([Figure 13-2](#)) offer the same package substrate design with electrical and board thermal conductivity similar to the flip-chip BGA packages. However, removing the lid (heat spreader) and the thermal interface material allows for direct contact between the external heat sink and the die. This further reduces the thermal resistance and exhibits improved thermal behaviors. The use of custom passive or active heat-sink designs is facilitated by incorporating two-phase (heat pipe, vapor chamber, or even liquid) cooling methods directly adjacent to the source of the dissipated heat on the die, which allows for a more efficient means of removing the heat from the device. Consequently, the device can operate at higher ambient temperatures while in area-constrained surroundings resulting in operational power advantages.

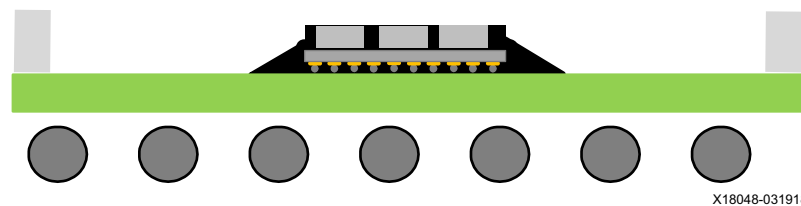

*Figure 13-2: Lidless Flip-Chip BGA Construction*

A unique feature of lidless packages is the addition of a stiffener ring around the periphery of the package substrate, providing additional package rigidity and helping to improve the overall package coplanarity (flatness). It also serves as a guide for the heat sink solution applied to the device. For examples, see [Figure 4-49](#), [Figure 4-50](#), and [Figure 4-51](#).

In the lidless packages, capacitors can be placed in the area surrounding the die. Contact with electrically conductive materials must be avoided because the die-side capacitors, which are only slightly shorter than the die height, could be electrically conductive. Any thermal and mechanical solution higher than the die must not interfere with the package stiffener. Therefore, the thermal solution must have an island, see [System Level Heat Sink Solutions in Chapter 11](#).

For further guidelines on mechanical and thermal designs of lidless packages, refer to *Mechanical and Thermal Design Guidelines for Lidless Flip-Chip Packages Application Note* (XAPP1301) [[Ref 19](#)].

# Additional Resources and Legal Notices

---

## Xilinx Resources

For support resources such as Answers, Documentation, Downloads, and Forums, see [Xilinx Support](#).

---

## Solution Centers

See the [Xilinx Solution Centers](#) for support on devices, software tools, and intellectual property at all stages of the design cycle. Topics include design assistance, advisories, and troubleshooting tips.

---

## Documentation Navigator and Design Hubs

Xilinx<sup>®</sup> Documentation Navigator provides access to Xilinx documents, videos, and support resources, which you can filter and search to find information. To open the Xilinx Documentation Navigator (DocNav):

- From the Vivado<sup>®</sup> IDE, select **Help > Documentation and Tutorials**.
- On Windows, select **Start > All Programs > Xilinx Design Tools > DocNav**.
- At the Linux command prompt, enter `docnav`.

Xilinx Design Hubs provide links to documentation organized by design tasks and other topics, which you can use to learn key concepts and address frequently asked questions. To access the Design Hubs:

- In the Xilinx Documentation Navigator, click the **Design Hubs View** tab.
- On the Xilinx website, see the [Design Hubs](#) page.

**Note:** For more information on Documentation Navigator, see the [Documentation Navigator](#) page on the Xilinx website.



## References

1. *UltraScale Architecture and Product Overview* ([DS890](#))
2. *XQ UltraScale Architecture Data Sheet Overview* ([DS895](#))
3. UltraScale device data sheets:
  - *Kintex UltraScale FPGAs Data Sheet: DC and AC Switching Characteristics* ([DS892](#))
  - *Virtex UltraScale FPGAs Data Sheet: DC and AC Switching Characteristics* ([DS893](#))
  - *Artix UltraScale+ FPGAs Data Sheet: DC and AC Switching Characteristics* ([DS931](#))
  - *Kintex UltraScale+ FPGAs Data Sheet: DC and AC Switching Characteristics* ([DS922](#))
  - *Virtex UltraScale+ FPGAs Data Sheet: DC and AC Switching Characteristics* ([DS923](#))
4. *Zynq UltraScale+ MPSoC Packaging and Pinouts User Guide* ([UG1075](#))
5. *UltraScale Architecture SelectIO Resources User Guide* ([UG571](#))
6. *UltraScale Architecture Clocking Resources User Guide* ([UG572](#))
7. *UltraScale Architecture Configuration User Guide* ([UG570](#))
8. *UltraScale Architecture GTH Transceivers User Guide* ([UG576](#))
9. *UltraScale Architecture GTY Transceivers User Guide* ([UG578](#))
10. *UltraScale Architecture System Monitor User Guide* ([UG580](#))
11. *UltraScale Architecture PCB and Pin Planning User Guide* ([UG583](#))
12. *FAQ: Top Marking Change for 7 Series, UltraScale, and UltraScale+ Products* ([XTP424](#))
13. *UltraScale Architecture FPGAs Memory IP Product Guide* ([PG150](#))
14. *UltraScale Devices Gen3 Integrated Block for PCI Express Product Guide* ([PG156](#))
15. *UltraScale+ Devices Integrated Block for PCI Express Product Guide* ([PG213](#))
16. *Integrated Interlaken 150G Product Guide* ([PG169](#))
17. *UltraScale Devices Integrated Block for 100G Ethernet Product Guide* ([PG165](#))
18. *UltraScale+ Devices Integrated 100G Ethernet Subsystem Product Guide* ([PG203](#))
19. *Mechanical and Thermal Design Guidelines for Lidless Flip-Chip Packages Application Note* ([XAPP1301](#))
20. MDDS files: Click on this link to find the [UltraScale and UltraScale+ FPGA Packaging Specifications](#). In step 2 select the product category: FPGAs and 3D ICs. In step 3, select the product type. In step 4, click on the package specifications selection to find the available MDDS files.

21. The following websites contain additional information on heat management and contact information.

- Wakefield: [www.wakefield-vette.com](http://www.wakefield-vette.com)
- Aavid: [www.aavid.com](http://www.aavid.com)
- Advanced Thermal Solutions: [www.qats.com](http://www.qats.com)
- Radian Thermal Products: [www.radianheatsinks.com](http://www.radianheatsinks.com)
- Thermo Cool: [www.thermoolcorp.com](http://www.thermoolcorp.com)
- CTS: [www.ctscorp.com](http://www.ctscorp.com)

22. Refer to the following websites for interface material sources:

- Henkel: [www.henkel.com](http://www.henkel.com)
- Bergquist Company: [www.bergquistcompany.com](http://www.bergquistcompany.com)
- AOS Thermal Compound: [www.aosco.com](http://www.aosco.com)
- Chomerics: [www.chomerics.com](http://www.chomerics.com)
- Kester: [www.kester.com](http://www.kester.com)

23. Refer to the following websites for CFD tools Xilinx supports with thermal models.

- Mentor Flotherm: [www.mentor.com/products/mechanical/flotherm/flotherm/](http://www.mentor.com/products/mechanical/flotherm/flotherm/)
- ANSYS Icepak: [www.ansys.com](http://www.ansys.com)

24. Refer to the [thermal device models](#) on xilinx.com.

25. The following papers are referenced for more information on thermal modelling.

- Lemczyk, T.F., Mack, B., Culham, J.R. and Yovanovich, M.M., 1992, "Printed Circuit Board Trace Thermal Analysis and Effective Conductivity", ASME J. Electronic Packaging, Vol. 114, pp. 413 - 419.50.
- Refai-Ahmed, G. and Karimanal, K., 2003, "Validation of Compact Conduction Models of BGA Under Realistic Boundary," J. of Components and Packaging Technology, Vol. 26, No. 3, pp. 610-615.
- Sansoucy, E, Refai-Ahmed, G., and Karimanal, K., 2002, "Thermal Characterization of TBGA Package for an integration in Board Level Analysis," Eighth Intersociety on Thermal Conference Phenomena in Electronic Systems, San Diego., USA.
- Karimanal,K and Refai-Ahmed, G., and., 2002, "Validation of Compact Conduction Models of BGA Under Realistic Boundary Conditions," Eighth Intersociety on Thermal Conference Phenomena in Electronic Systems, San Diego, USA.
- Karimanal, K. and Refai-Ahmed, G., 2001, "Compact conduction Model (CCM) of Microelectronic Packages- A BGA Validation Study," APACK Conference on Advance in Packaging, Singapore.

## Please Read: Important Legal Notices

The information disclosed to you hereunder (the "Materials") is provided solely for the selection and use of Xilinx products. To the maximum extent permitted by applicable law: (1) Materials are made available "AS IS" and with all faults, Xilinx hereby DISCLAIMS ALL WARRANTIES AND CONDITIONS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, OR FITNESS FOR ANY PARTICULAR PURPOSE; and (2) Xilinx shall not be liable (whether in contract or tort, including negligence, or under any other theory of liability) for any loss or damage of any kind or nature related to, arising under, or in connection with, the Materials (including your use of the Materials), including for any direct, indirect, special, incidental, or consequential loss or damage (including loss of data, profits, goodwill, or any type of loss or damage suffered as a result of any action brought by a third party) even if such damage or loss was reasonably foreseeable or Xilinx had been advised of the possibility of the same. Xilinx assumes no obligation to correct any errors contained in the Materials or to notify you of updates to the Materials or to product specifications. You may not reproduce, modify, distribute, or publicly display the Materials without prior written consent. Certain products are subject to the terms and conditions of Xilinx's limited warranty, please refer to Xilinx's Terms of Sale which can be viewed at [www.xilinx.com/legal.htm#tos](http://www.xilinx.com/legal.htm#tos); IP cores may be subject to warranty and support terms contained in a license issued to you by Xilinx. Xilinx products are not designed or intended to be fail-safe or for use in any application requiring fail-safe performance; you assume sole risk and liability for use of Xilinx products in such critical applications, please refer to Xilinx's Terms of Sale which can be viewed at [www.xilinx.com/legal.htm#tos](http://www.xilinx.com/legal.htm#tos).

### **AUTOMOTIVE APPLICATIONS DISCLAIMER**

AUTOMOTIVE PRODUCTS (IDENTIFIED AS "XA" IN THE PART NUMBER) ARE NOT WARRANTED FOR USE IN THE DEPLOYMENT OF AIRBAGS OR FOR USE IN APPLICATIONS THAT AFFECT CONTROL OF A VEHICLE ("SAFETY APPLICATION") UNLESS THERE IS A SAFETY CONCEPT OR REDUNDANCY FEATURE CONSISTENT WITH THE ISO 26262 AUTOMOTIVE SAFETY STANDARD ("SAFETY DESIGN"). CUSTOMER SHALL, PRIOR TO USING OR DISTRIBUTING ANY SYSTEMS THAT INCORPORATE PRODUCTS, THOROUGHLY TEST SUCH SYSTEMS FOR SAFETY PURPOSES. USE OF PRODUCTS IN A SAFETY APPLICATION WITHOUT A SAFETY DESIGN IS FULLY AT THE RISK OF CUSTOMER, SUBJECT ONLY TO APPLICABLE LAWS AND REGULATIONS GOVERNING LIMITATIONS ON PRODUCT LIABILITY.

© Copyright 2013–2021 Xilinx, Inc. Xilinx, the Xilinx logo, Alveo, Artix, Kintex, Spartan, Versal, Virtex, Vivado, Zynq, and other designated brands included herein are trademarks of Xilinx in the United States and other countries. PCI, PCIe, and PCI Express are trademarks of PCI-SIG and used under license. AMBA, AMBA Designer, Arm, ARM1176JZ-S, CoreSight, Cortex, PrimeCell, Mali, and MPCore are trademarks of Arm Limited in the EU and other countries. All other trademarks are the property of their respective owners.